



**National
Construction
Code**

Volume One Building Code of Australia



**Australian
Building
Codes Board**

2025

This document is part of a preview draft of NCC 2025, which may be adopted by Australian states and territories from 1 May 2026.

The preview draft contains national technical provisions approved for inclusion in NCC 2025 and is useful for practitioners seeking to familiarise themselves with the next edition of the NCC.


It is to be noted that the preview draft does not contain adoption information or state and territory variations and additions. Accordingly, it is not to be used for the regulation of building and plumbing design and construction.

Also, some sections in the body of the preview draft are omitted because publication of NCC 2025 is yet to be completed. Where an omission occurs, readers are directed to a supplementary document where omitted content is provided. When available, a preview draft without omission will be issued.

PREVIEW DRAFT

Copyright, Licence Notice and Acknowledgment of Country

© Commonwealth of Australia and the States and Territories of Australia 2025, published by the Australian Building Codes Board

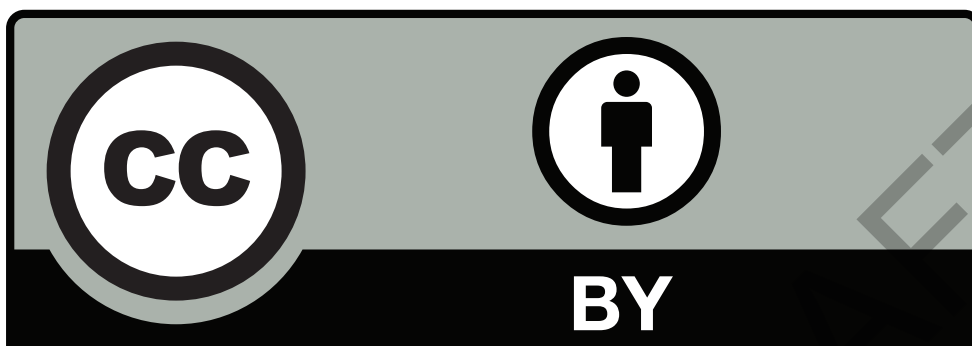

The material in this publication is licensed under a Creative Commons Attribution 4.0 International licence, with the exception of:

- any third party material
- any trade marks, and
- any images or photographs.

More information on this CC BY license is set out at the [Creative Commons Website](https://creativecommons.org/).

Enquiries about this publication can be sent to:

Australian Building Codes Board

GPO Box 2013, Canberra ACT 2601

Phone: 1300 134 631

Email: ncc@abcb.gov.au

Web: abcb.gov.au

Attribution

Use of all or part of this publication must include the following attribution: The National Construction Code 2025 was provided by the [Australian Building Codes Board](http://abcb.gov.au) under the [CC BY 4.0](https://creativecommons.org/licenses/by/4.0/) licence.

Disclaimer

By accessing or using this publication, you agree to the following:

While care has been taken in the preparation of this publication, it may not be complete or up-to-date. You can ensure that you are using a complete and up-to-date version by checking the Australian Building Codes Board website (abcb.gov.au).

The Australian Building Codes Board, the Commonwealth of Australia and States and Territories of Australia do not accept any liability, including liability for negligence, for any loss (howsoever caused), damage, injury, expense or cost incurred by any person as a result of accessing, using or relying upon this publication, to the maximum extent permitted by law. No representation or warranty is made or given as to the currency, accuracy, reliability, merchantability, fitness for any purpose or completeness of this publication or any information which may appear on any linked websites, or in other linked information sources, and all such representations and warranties are excluded to the extent permitted by law.

This publication is not legal or professional advice. Persons rely upon this publication entirely at their own risk and must take responsibility for assessing the relevance and accuracy of the information in relation to their particular circumstances.

Acknowledgment of Country

The Australian Building Codes Board acknowledges First Nations peoples as the Traditional Custodians and Lore Keepers of the oldest living culture. We recognise First Nations peoples as the first builders on this land and acknowledge their continuing connection to country. We pay respects to their Elders past and present and extend that respect to all First Nations peoples.

PREVIEW DRAFT

General table of contents

Preface

Copyright, Licence Notice and Acknowledgment of Country	2
Introduction to the National Construction Code (NCC)	48
Introduction to NCC Volume One	50
List of NCC Specifications	51
History of adoption of NCC Volume One	53
List of amendments—NCC 2025—Volume One	63

Section A Governing Requirements

Part A1	Interpreting the NCC	78
A1G1	Scope of NCC Volume One.....	78
A1G2	Scope of NCC Volume Two.....	78
A1G3	Scope of NCC Volume Three.....	78
A1G4	Interpretation	78
Part A2	Compliance with the NCC	81
A2G1	Compliance.....	81
A2G2	Performance Solution	81
A2G3	Deemed-to-Satisfy Solution	82
A2G4	A combination of solutions	83
Part A3	Application of the NCC in States and Territories	85
A3G1	State and Territory compliance	85
Part A4	Referenced documents	86
A4G1	Referenced documents	86
A4G2	Differences between referenced documents and the NCC.....	87
A4G3	Adoption of referenced documents.....	87
Part A5	Documentation of design and construction	89
A5G1	Suitability	89
A5G2	Evidence of suitability – Volumes One, Two and Three	90
A5G3	Evidence of suitability – Volumes One and Two (BCA)	90
A5G4	Evidence of suitability – Volume Three (PCA)	92
A5G5	Fire-resistance of building elements.....	95
A5G6	Fire hazard properties and combustibility	95
A5G7	Resistance to the incipient spread of fire.....	96
A5G8	Labelling of Aluminium Composite Panels	96
A5G9	NatHERS.....	96
Part A6	Building classification	97
A6G1	Determining a building classification.....	97

A6G2	Class 1 buildings	98
A6G3	Class 2 buildings	101
A6G4	Class 3 buildings	102
A6G5	Class 4 buildings	103
A6G6	Class 5 buildings	103
A6G7	Class 6 buildings	103
A6G8	Class 7 buildings	104
A6G9	Class 8 buildings	104
A6G10	Class 9 buildings	105
A6G11	Class 10 buildings and structures	106
A6G12	Multiple classifications	107
Part A7	United buildings	109
A7G1	United buildings	109
A7G2	Alterations in a united building	109
Specification 1	Fire-resistance of building elements	111
S1C1	Scope	111
S1C2	Rating	111
S1C3	FRLs determined by calculation	115
S1C4	Interchangeable materials	116
S1C5	Columns covered with lightweight construction	116
S1C6	Non-loadbearing elements	116
Specification 2	Descriptions of elements referred to in Specification 1	117
S2C1	Scope	117
S2C2	Mortar for masonry	117
S2C3	Gypsum blocks	117
S2C4	Gypsum-sand mortar and plaster	117
S2C5	Gypsum-perlite and gypsum-vermiculite plaster	117
S2C6	Plaster of cement and sand or cement, lime and sand	117
S2C7	Plaster reinforcement	117
S2C8	Ashlar stone masonry	118
S2C9	Dimensions of masonry	118
S2C10	Solid units	118
S2C11	Hollow units	118
S2C12	Equivalent thickness	118
S2C13	Height-to-thickness ratio of certain walls	118
S2C14	Increase in thickness by plastering — walls	119
S2C15	Increase in thickness by plastering — columns	119
S2C16	Gypsum-perlite or gypsum-vermiculite plaster or metal lath — walls	119
S2C17	Gypsum-perlite or gypsum-vermiculite plaster or metal lath — columns	119

S2C18	Gypsum-perlite or gypsum-vermiculite plaster or metal lath — beams	119
S2C19	Exposure of columns	119
S2C20	Exposure of beams	120
S2C21	Filling of column spaces	120
S2C22	Hollow terracotta blocks	120
S2C23	Reinforcing for column and beam protection — masonry	120
S2C24	Reinforcing for column and beam protection — gypsum blocks and hollow terracotta blocks	120
S2C25	Reinforcing for column and beam protection — structural concrete and poured gypsum	120
S2C26	Reinforcing for column and beam protection — gypsum-perlite or gypsum-vermiculite plaster sprayed to contour	121
S2C27	Measurement of thickness of column and beam protection	121
Specification 3	Fire hazard properties	123
S3C1	Scope	123
S3C2	General requirement	123
S3C3	Form of test	123
S3C4	Test specimens	123
S3C5	Concession	123
S3C6	Smaller specimen permitted	123
Section B	Structure	
Part B1	Structural provisions	125
B1O1	Objective	125
B1F1	Structure	125
B1F2	Glazing	125
B1P1	Structural reliability	125
B1P2	Glass installations at risk of human impact	128
B1P3	Buildings in flood areas	129
B1V1	Structural reliability of components	129
B1V2	Structural robustness	131
B1D1	Deemed-to-Satisfy Provisions	131
B1D2	Resistance to actions	131
B1D3	Determination of individual actions	131
B1D4	Determination of structural resistance of materials and forms of construction ..	133
B1D5	Structural software	135
B1D6	Construction of buildings in flood hazard areas	136
Specification 4	Design of buildings in cyclonic areas	137
S4C1	Scope	137
S4C2	Roof cladding	137

Section C	Fire resistance	
Part C1	Fire resistance	142
C1O1	Objective	142
C1F1	Structural stability during a fire	142
C1F2	Prevention of fire spread	142
C1P1	Structural stability during a fire	143
C1P2	Spread of fire	143
C1P3	Spread of fire and smoke in health and residential care buildings	144
C1P4	Safe conditions for evacuation	144
C1P5	Behaviour of concrete external walls in a fire	144
C1P6	Fire protection of service equipment	144
C1P7	Fire protection of emergency equipment	144
C1P8	Fire protection of openings and penetrations	145
C1P9	Fire brigade access	145
C1V1	Fire spread between buildings on adjoining allotments	145
C1V2	Fire spread between buildings on the same allotment	145
C1V3	Fire spread via external walls	146
C1V4	Fire Safety Verification Method	147
Part C2	Fire resistance and stability	149
C2D1	Deemed-to-Satisfy Provisions	149
C2D2	Type of construction required	149
C2D3	Calculation of rise in storeys	150
C2D4	Buildings of multiple classification	150
C2D5	Mixed types of construction	150
C2D6	Two storey Class 2, 3 or 9c buildings	150
C2D7	Class 4 parts of buildings	151
C2D8	Open spectator stands and indoor sports stadiums	151
C2D9	Lightweight construction	151
C2D10	Non-combustible building elements	151
C2D11	Fire hazard properties	153
C2D12	Performance of external walls in fire	154
C2D13	Fire-protected timber: Concession	155
C2D14	Ancillary elements	155
C2D15	Fixing of bonded laminated cladding panels	156
Part C3	Compartmentation and separation	157
C3D1	Deemed-to-Satisfy Provisions	157
C3D2	Application of Part	157
C3D3	General floor area and volume limitations	157
C3D4	Large isolated buildings	158

C3D5	Requirements for open spaces and vehicular access.....	158
C3D6	Class 9 buildings.....	159
C3D7	Vertical separation of openings in external walls	160
C3D8	Separation by fire walls.....	161
C3D9	Separation of classifications in the same storey	161
C3D10	Separation of classifications in different storeys.....	162
C3D11	Separation of lift shafts	162
C3D12	Stairways and lifts in one shaft	162
C3D13	Separation of equipment	162
C3D14	Electricity supply system	163
C3D15	Public corridors in Class 2 and 3 buildings	164
Part C4	Protection of openings	165
C4D1	Deemed-to-Satisfy Provisions	165
C4D2	Application of Part	165
C4D3	Protection of openings in external walls.....	166
C4D4	Separation of external walls and associated openings in different fire compartments.....	166
C4D5	Acceptable methods of protection	166
C4D6	Doorways in fire walls	167
C4D7	Sliding fire doors	167
C4D8	Protection of doorways in horizontal exits	167
C4D9	Openings in fire-isolated exits	168
C4D10	Service penetrations in fire-isolated exits	168
C4D11	Openings in fire-isolated lift shafts	168
C4D12	Bounding construction: Class 2 and 3 buildings and Class 4 parts.....	169
C4D13	Openings in floors and ceilings for services.....	170
C4D14	Openings in shafts	170
C4D15	Openings for service installations.....	170
C4D16	Construction joints	171
C4D17	Columns protected with lightweight construction to achieve an FRL	171
Specification 5	Fire-resisting construction	172
S5C1	Scope	172
S5C2	Exposure to fire-source features	172
S5C3	Fire protection for a support of another part.....	172
S5C4	Lintels	173
S5C5	Method of attachment not to reduce the fire-resistance of building elements....	173
S5C6	General concessions.....	173
S5C7	Mezzanine floors: Concession	174
S5C8	Enclosure of shafts	174

S5C9	Carparks and ancillary uses for Class 2 and 3 buildings	175
S5C10	Residential care building: Concession	175
S5C11	Type A fire-resisting construction — fire-resistance of building elements	176
S5C12	Type A fire-resisting construction — concessions for floors	178
S5C13	Type A fire-resisting construction — floor loading of Class 5 and 9b buildings: Concession	179
S5C14	Type A fire-resisting construction — roof superimposed on concrete slab: Concession	179
S5C15	Type A fire-resisting construction — roof: Concession	179
S5C16	Type A fire-resisting construction — roof lights	179
S5C17	Type A fire-resisting construction — internal columns and walls: Concession ...	180
S5C18	Type A fire-resisting construction — open spectator stands and indoor sports stadiums: Concession	180
S5C19	Type A fire-resisting construction — carparks	180
S5C20	Type A fire-resisting construction — Class 2 and 3 buildings: Concession	181
S5C21	Type B fire-resisting construction — fire-resistance of building elements	182
S5C22	Type B fire-resisting construction — carparks	185
S5C23	Type B fire-resisting construction — Class 2 and 3 buildings: Concession	186
S5C24	Type C fire-resisting construction — fire-resistance of building elements	187
S5C25	Type C fire-resisting construction — carparks	189
Specification 6	Structural tests for lightweight construction.....	191
S6C1	Scope	191
S6C2	Application.....	191
S6C3	Walls of certain Class 9b buildings	191
S6C4	Walls of shafts and fire-isolated exits generally.....	191
S6C5	Additional requirements for lift shafts	192
S6C6	Walls generally	192
S6C7	General requirements for testing	192
S6C8	Testing in-situ	192
S6C9	Testing of specimens.....	192
S6C10	Test methods	193
S6C11	Criteria for compliance	193
Specification 7	Fire hazard properties	195
S7C1	Scope.....	195
S7C2	Application	195
S7C3	Floor linings and floor coverings	195
S7C4	Wall and ceiling linings	196
S7C5	Air-handling ductwork	197
S7C6	Lift cars.....	198
S7C7	Other materials	198

Specification 8	Performance of external walls in fire	200
S8C1	Scope	200
S8C2	Application.....	200
S8C3	General requirements for external wall panels	200
S8C4	Additional requirements for vertically spanning external wall panels adjacent to columns.....	201
Specification 9	Cavity barriers for fire-protected timber	202
S9C1	Scope	202
S9C2	Requirements.....	202
Specification 10	Fire-protected timber	204
S10C1	Scope	204
S10C2	General requirements	204
S10C3	Massive timber	204
S10C4	Form of test.....	205
S10C5	Smaller specimen permitted	205
S10C6	Acceptance criteria	205
Specification 11	Smoke-proof walls in health-care and residential care buildings	206
S11C1	Scope	206
S11C2	Class 9a health-care buildings.....	206
S11C3	Class 9c buildings	206
S11C4	Doorways in smoke-proof walls	207
Specification 12	Fire doors, smoke doors, fire windows and shutters	208
S12C1	Scope	208
S12C2	Fire doors.....	208
S12C3	General requirements for smoke doors.....	208
S12C4	Construction Deemed-to-Satisfy for smoke doors	208
S12C5	Fire shutters	208
S12C6	Fire windows.....	209
Specification 13	Penetration of walls, floors and ceilings by services.....	210
S13C1	Scope.....	210
S13C2	Application	210
S13C3	Metal pipe systems.....	210
S13C4	Pipes penetrating sanitary compartments	210
S13C5	Wires and cables.....	210
S13C6	Electrical switches and outlets.....	211
S13C7	Fire-stopping	211
Section D	Access and egress	
Part D1	Access and egress.....	216
D1O1	Objective	216

D1F1	Access	216
D1F2	Egress	216
D1P1	Access for people with a disability	217
D1P2	Safe movement to and within a building	217
D1P3	Fall prevention barriers	217
D1P4	Exits	218
D1P5	Fire-isolated exits	218
D1P6	Paths of travel to exits	219
D1P7	Evacuation lifts	219
D1P8	Carparking for people with a disability	219
D1P9	Communication systems for people with hearing impairment	219
D1P10	Wayfinding	220
D1V1	Wire barriers	220
D1V2	Access to and within a building	221
D1V3	Ramp gradient, crossfall, surface profile and slip resistance for ramps used by wheelchairs	222
D1V4	Fire Safety Verification Method	223
Part D2	Provision for escape	225
D2D1	Deemed-to-Satisfy Provisions	225
D2D2	Application of Part	225
D2D3	Number of exits required	225
D2D4	When fire-isolated stairways and ramps are required	226
D2D5	Exit travel distances	227
D2D6	Distance between alternative exits	228
D2D7	Height of exits, paths of travel to exits and doorways	228
D2D8	Width of exits and paths of travel to exits	228
D2D9	Width of doorways in exits or paths of travel to exits	229
D2D10	Exit width not to diminish in direction of travel	229
D2D11	Determination and measurement of exits and paths of travel to exits	229
D2D12	Travel via fire-isolated exits	230
D2D13	External stairways or ramps in lieu of fire-isolated exits	230
D2D14	Travel by non-fire-isolated stairways or ramps	231
D2D15	Discharge from exits	232
D2D16	Horizontal exits	232
D2D17	Non-required stairways, ramps or escalators	233
D2D18	Number of persons accommodated	233
D2D19	Measurement of distances	235
D2D20	Method of measurement	235
D2D21	Plant rooms, lift machine rooms and electricity network substations: Concession	236

D2D22	Access to lift pits.....	236
D2D23	Egress from primary schools	237
Part D3	Construction of exits.....	238
D3D1	Deemed-to-Satisfy Provisions	238
D3D2	Application of Part.....	238
D3D3	Fire-isolated stairways and ramps	238
D3D4	Non-fire-isolated stairways and ramps	239
D3D5	Separation of rising and descending stair flights.....	239
D3D6	Open access ramps and balconies.....	239
D3D7	Smoke lobbies	239
D3D8	Installations in exits and paths of travel.....	240
D3D9	Enclosure of space under stairs and ramps.....	240
D3D10	Width of required stairways and ramps	240
D3D11	Pedestrian ramps	241
D3D12	Fire-isolated passageways.....	241
D3D13	Roof as open space.....	241
D3D14	Goings and risers	241
D3D15	Landings	243
D3D16	Thresholds.....	244
D3D17	Barriers to prevent falls.....	244
D3D18	Height of barriers	244
D3D19	Openings in barriers.....	245
D3D20	Barrier climbability	245
D3D21	Wire barriers.....	246
D3D22	Handrails.....	248
D3D23	Fixed platforms, walkways, stairways and ladders	249
D3D24	Doorways and doors	249
D3D25	Swinging doors.....	250
D3D26	Operation of latch.....	250
D3D27	Re-entry from fire-isolated exits.....	251
D3D28	Signs on doors	252
D3D29	Protection of openable windows	252
D3D30	Timber stairways: Concession	253
D3D31	Wayfinding signage.....	253
Part D4	Access for people with a disability.....	256
D4D1	Deemed-to-Satisfy Provisions	256
D4D2	General building access requirements.....	256
D4D3	Access to buildings	258
D4D4	Parts of buildings to be accessible.....	259

D4D5	Exemptions	260
D4D6	Accessible carparking.....	260
D4D7	Signage.....	261
D4D8	Hearing augmentation.....	262
D4D9	Tactile indicators	262
D4D10	Wheelchair seating spaces in Class 9b assembly buildings.....	263
D4D11	Swimming pools	263
D4D12	Ramps	264
D4D13	Glazing on an accessway.....	264
Specification 14	Non-required stairways, ramps and escalators.....	265
S14C1	Scope	265
S14C2	Requirements.....	265
Specification 15	Braille and tactile signs	267
S15C1	Scope	267
S15C2	Location of braille and tactile signs	267
S15C3	Braille and tactile sign specification.....	267
S15C4	Luminance contrast.....	268
S15C5	Lighting	268
S15C6	Braille	268
Specification 16	Accessible water entry/exit from swimming pools	269
S16C1	Scope	269
S16C2	Fixed or moveable ramp.....	269
S16C3	Zero depth entry.....	269
S16C4	Platform swimming pool lift	269
S16C5	Sling-style swimming pool lift.....	270
S16C6	Aquatic wheelchair	271
Section E	Services and equipment	
Part E1	Fire fighting equipment	277
E1O1	Objective	277
E1F1	Fire-fighting equipment	277
E1P1	Fire hose reels.....	277
E1P2	Fire extinguishers	278
E1P3	Fire hydrants	278
E1P4	Automatic fire suppression systems	278
E1P5	Fire-fighting services in buildings under construction	278
E1P6	Fire control centres.....	278
E1V1	Fire Safety Verification Method	279
E1D1	Deemed-to-Satisfy Provisions.....	279
E1D2	Fire hydrants	279

E1D3	Fire hose reels	280
E1D4	Sprinklers	281
E1D5	Where sprinklers are required: all classifications	281
E1D6	Where sprinklers are required: Class 2 and 3 buildings other than residential care buildings	281
E1D7	Where sprinklers are required: Class 3 building used as a residential care building	282
E1D8	Where sprinklers are required: Class 6 building	282
E1D9	Where sprinklers are required: Class 7a building	282
E1D10	Where sprinklers are required: Class 9a health-care building used as a residential care building and Class 9c buildings	282
E1D11	Where sprinklers are required: Class 9b buildings	282
E1D12	Where sprinklers are required: additional requirements	283
E1D13	Where sprinklers are required: occupancies of excessive hazard	283
E1D14	Portable fire extinguishers	283
E1D15	Fire control centres	285
E1D16	Fire precautions during construction	285
E1D17	Provision for special hazards	285
Part E2	Smoke hazard management	286
E2O1	Objective	286
E2F1	Adequate safeguards	286
E2P1	Automatic warning for sleeping occupants	286
E2P2	Safe evacuation routes	286
E2V1	Fire Safety Verification Method	287
E2D1	Deemed-to-Satisfy Provisions	287
E2D2	Application of part	287
E2D3	General requirements	288
E2D4	Fire-isolated exits	288
E2D5	Buildings more than 25 m in effective height: Class 2 and 3 buildings and Class 4 parts of a building	289
E2D6	Buildings more than 25 m in effective height: Class 5, 6, 7b, 8 and 9b buildings	289
E2D7	Buildings more than 25 m in effective height: Class 9a buildings	289
E2D8	Buildings not more than 25 m in effective height: Class 2 and 3 buildings and Class 4 part of a building	290
E2D9	Buildings not more than 25 m in effective height: Class 5, 6, 7b, 8 and 9b buildings	290
E2D10	Buildings not more than 25 m in effective height: large isolated buildings subject to C3D4	291
E2D11	Buildings not more than 25 m in effective height: Class 9a and 9c buildings	291
E2D12	Class 7a buildings	292
E2D13	Basements (other than Class 7a buildings)	292

E2D14	Class 6 buildings – in fire compartments more than 2000 m2: Class 6 building (not containing an enclosed common walkway or mall serving more than one Class 6 sole-occupancy unit)	293
E2D15	Class 6 buildings – in fire compartments more than 2000 m2: Class 6 building (containing an enclosed common walkway or mall serving more than one Class 6 sole-occupancy unit)	293
E2D16	Class 9b – assembly buildings: nightclubs, discotheques and the like	294
E2D17	Class 9b – assembly buildings: exhibition halls	294
E2D18	Class 9b – assembly buildings: theatres and public halls	294
E2D19	Class 9b – assembly buildings: theatres and public halls (not listed in E2D18) including lecture theatres and cinema/auditorium complexes	295
E2D20	Class 9b assembly buildings: other assembly buildings (not listed in E2D16 to E2D19)	295
E2D21	Provision for special hazards	296
Part E3	Lift installations	297
E3O1	Objective	297
E3F1	Passenger lifts	297
E3F2	Emergency lifts	297
E3F3	Emergency alerts	297
E3P1	Stretcher facilities	298
E3P2	Emergency lifts	298
E3P3	Emergency alerts	298
E3P4	Lift access for people with a disability	298
E3V1	Fire Safety Verification Method	298
E3V2	Emergency alerts on the use of lifts	298
E3D1	Deemed-to-Satisfy Provisions	299
E3D2	Lift installations	299
E3D3	Stretcher facility in lifts	299
E3D4	Warning against use of lifts in fire	299
E3D5	Emergency lifts	300
E3D6	Landings	301
E3D7	Passenger lift types and their limitations	301
E3D8	Accessible features required for passenger lifts	301
E3D9	Fire service controls	302
E3D10	Residential care buildings	302
E3D11	Fire service recall control switch	302
E3D12	Lift car fire service drive control switch	303
Part E4	Visibility in an emergency, exit signs and warning systems	305
E4O1	Objective	305
E4F1	Visibility in an emergency, exit signs and warning systems	305
E4P1	Visibility in an emergency	305

E4P2	Identification of exits	306
E4P3	Emergency warning and intercom systems.....	306
E4V1	Emergency lighting	306
E4V2	Fire Safety Verification Method	307
E4D1	Deemed-to-Satisfy Provisions.....	307
E4D2	Emergency lighting requirements.....	307
E4D3	Measurement of distance	308
E4D4	Design and operation of emergency lighting.....	308
E4D5	Exit signs	308
E4D6	Direction signs.....	308
E4D7	Class 2 and 3 buildings and Class 4 parts: exemptions.....	309
E4D8	Design and operation of exit signs.....	309
E4D9	Emergency warning and intercom systems.....	309
Specification 17	Fire sprinkler systems	310
S17C1	Scope.....	310
S17C2	Application of automatic fire sprinkler standards.....	310
S17C3	Separation of sprinklered and non-sprinklered areas	310
S17C4	Protection of openings	310
S17C5	Quick response sprinklers	311
S17C6	Sprinkler valve enclosures.....	311
S17C7	Water supply.....	311
S17C8	Building occupant warning system	311
S17C9	Connection to other systems	311
S17C10	Anti-tamper devices.....	311
S17C11	Sprinkler systems in carparks.....	312
S17C12	Residential care buildings	312
S17C13	Sprinkler systems in lift installations	312
S17C14	Early childhood centres	312
Specification 18	Class 2 and 3 buildings not more than 25 m in effective height	313
S18C1	Scope.....	313
S18C2	Application	313
S18C3	System requirements	313
S18C4	Permitted concessions.....	314
Specification 19	Fire control centres.....	316
S19C1	Scope.....	316
S19C2	Application	316
S19C3	Purpose and content of fire control centre	316
S19C4	Location of fire control centre.....	316
S19C5	Equipment not permitted within a fire control centre	316

S19C6	Ambient sound level for a fire control centre	316
S19C7	Construction of a fire control room	317
S19C8	Protection of openings in a fire control room	317
S19C9	Doors to a fire control room	317
S19C10	Size and contents of a fire control room	317
S19C11	Ventilation and power supply for a fire control room	318
S19C12	Sign for a fire control room	318
S19C13	Lighting for a fire control room	318
Specification 20	Smoke detection and alarm systems	319
S20C1	Scope	319
S20C2	Type of system	319
S20C3	Smoke alarm system	319
S20C4	Smoke detection system	320
S20C5	Combined smoke alarm and smoke detection system	321
S20C6	Smoke detection for smoke control systems	321
S20C7	Building occupant warning system	322
S20C8	System monitoring	323
Specification 21	Smoke exhaust systems	324
S21C1	Scope	324
S21C2	Smoke exhaust capacity	324
S21C3	Smoke exhaust fans	325
S21C4	Smoke reservoirs	326
S21C5	Smoke exhaust fan and vent location	326
S21C6	Make-up air	326
S21C7	Smoke exhaust system control	326
S21C8	Smoke detection	327
Specification 22	Smoke-and-heat vents	328
S22C1	Scope	328
S22C2	Adoption of AS 2665	328
S22C3	Controls	328
Specification 23	Residential fire safety systems	329
S23C1	Scope	329
S23C2	Application	329
S23C3	General requirements	329
S23C4	Local fire indicator panel	330
S23C5	Smoke alarms	330
S23C6	Signal isolation interface units	330
S23C7	Wiring	331
S23C8	Connection to monitoring service	332

S23C9	Indication at the fire indicator panel.....	332
Specification 24	Lift installations.....	333
S24C1	Scope	333
S24C2	Lift cars exposed to solar radiation	333
S24C3	Lift car emergency lighting	333
S24C4	Cooling of lift shaft.....	333
S24C5	Lift foyer access	333
S24C6	Emergency access doors in enclosed lift shafts	333
Specification 25	Passive photoluminescent exit signs.....	335
S25C1	Scope	335
S25C2	Application.....	335
S25C3	Illumination	335
S25C4	Pictorial elements.....	335
S25C5	Viewing distance.....	335
S25C6	Smoke control systems.....	335
Section F	Health and amenity	
Part F1	Water management	341
F1O1	Objective	341
F1F1	Protection from water.....	341
F1F2	Resistance to rising damp and ground water	341
F1P1	Managing rainwater impact on the building and adjoining properties.....	341
F1V1	Weatherproofing	342
F1D1	Deemed-to-Satisfy Provisions	345
F1D2	Application of Part.....	345
F1D3	Stormwater drainage	345
F1D4	Provision of drainage and grading to external areas	346
F1D5	Substrate materials.....	346
F1D6	Exposed joints	346
F1D7	External waterproofing membranes	347
F1D8	Damp-proofing	347
F1D9	Damp-proofing of floors on the ground	347
F1D10	Surface finishes	348
F1D11	Subfloor ventilation.....	348
F1D12	Roof coverings.....	350
F1D13	Sarking.....	350
F1D14	Glazed assemblies	350
F1D15	Wall cladding	350
Part F2	Wet areas and overflow protection	352
F2O1	Objective.....	352

F2F1	Wet areas	352
F2F2	Overflow from bathrooms and laundries.....	352
F2P1	Wet area overflows.....	352
F2P2	Wet areas	353
F2V1	Overflow protection	353
F2D1	Deemed-to-Satisfy Provisions	353
F2D2	Wet area construction.....	353
F2D3	Rooms containing urinals.....	354
F2D4	Floor wastes	354
	Part F3.....	* * *
	*	355
Part F4	Sanitary and other facilities	356
F4O1	Objectives.....	356
F4F1	Sanitary facilities.....	356
F4F2	Laundry facilities	356
F4F3	Food preparation facilities	357
F4F4	Removal of unconscious occupant.....	357
F4P1	Personal hygiene facilities	357
F4P2	Laundry facilities	357
F4P3	Kitchen facilities.....	358
F4P4	Disposal of contaminated water from containers.....	358
F4P5	Construction of sanitary compartments to allow removal of unconscious people	358
F4P6	Microbial control for water systems.....	358
F4V1	Sanitary facilities.....	359
F4D1	Deemed-to-Satisfy Provisions	359
F4D2	Facilities in residential buildings	359
F4D3	Calculation of number of occupants and facilities	360
F4D4	Facilities in Class 3 to 9 buildings.....	361
F4D5	Accessible sanitary facilities	368
F4D6	Accessible unisex sanitary compartments.....	369
F4D7	Accessible unisex showers.....	370
F4D8	Construction of sanitary compartments.....	370
F4D9	Interpretation: urinals and washbasins.....	371
F4D10	Microbial (legionella) control.....	371
F4D11	Waste management	371
F4D12	Accessible adult change facilities	372
Part F5	Room heights.....	373
F5O1	Objective	373
F5F1	Room or space heights.....	373

F5P1	Room or space heights.....	373
F5V1	Room or space heights.....	373
F5D1	Deemed-to-Satisfy Provisions.....	374
F5D2	Height of rooms and other spaces.....	374
Part F6	Light and ventilation.....	376
F6O1	Objective.....	376
F6F1	Natural light	376
F6F2	Artificial light	376
F6F3	Ventilation	376
F6P1	Natural lighting	376
F6P2	Artificial lighting	377
F6P3	Outdoor air supply	377
F6P4	Mechanical ventilation to control odours and contaminants	377
F6P5	Disposal of contaminated air	377
F6V1	Verification of suitable indoor air quality	377
F6V2	Verification of suitable indoor air quality for carparks	378
F6V3	Verification of suitable provision of natural light	378
F6D1	Deemed-to-Satisfy Provisions.....	379
F6D2	Provision of natural light	379
F6D3	Methods and extent of natural light	379
F6D4	Natural light borrowed from adjoining room	380
F6D5	Artificial lighting	380
F6D6	Ventilation	381
F6D7	Natural ventilation.....	381
F6D8	Ventilation borrowed from adjoining room	381
F6D9	Restriction on location of sanitary compartments	382
F6D10	Airlocks	382
F6D11	Carparks	382
F6D12	Kitchen local exhaust ventilation	382
Part F7	Sound transmission and insulation	384
F7O1	Objective.....	384
F7F1	Sound transmission and insulation	384
F7P1	Sound transmission through floors.....	384
F7P2	Sound transmission through walls	385
F7P3	Sound transmission through floors in a residential care building.....	385
F7P4	Sound transmission through walls in a residential care building.....	385
F7V1	Sound transmission through floors [F7P1]	386
F7V2	Sound transmission through walls [F7P2(a)]	386
F7V3	Sound transmission through floors [F7P3]	386

F7V4	Sound transmission through walls [F7P4(1)(a) and (2)]	386
F7D1	Deemed-to-Satisfy Provisions.....	387
F7D2	Application of Part.....	387
F7D3	Determination of airborne sound insulation ratings	387
F7D4	Determination of impact sound insulation ratings.....	387
F7D5	Sound insulation rating of floors	388
F7D6	Sound insulation rating of walls	388
F7D7	Sound insulation rating of internal services	388
F7D8	Sound isolation of pumps	389
Part F8	Condensation management	390
F8O1	Objective.....	390
F8F1	Condensation	390
F8P1	Condensation and water vapour management	390
F8V1	Condensation management	391
F8D1	Deemed-to-Satisfy Provisions	391
F8D2	Application of Part	391
F8D3	External wall construction.....	391
F8D4	Exhaust systems	393
F8D5	Ventilation of a roof space with the primary insulation layer not parallel to the roof plane	393
F8D6	Ventilation of a roof space with the primary insulation layer parallel to the roof plane.....	397
Specification 26	Waterproofing and water-resistance requirements for building elements in wet areas	400
S26C1	Scope.....	400
S26C2	Application	400
S26C3	Shower area (enclosed and unenclosed)	400
S26C4	Area outside shower area	400
S26C5	Areas adjacent to baths and spas without showers	400
S26C6	Other areas	401
Specification 27	Accessible adult change facilities.....	403
S27C1	Scope.....	403
S27C2	General requirements	403
S27C3	Hoist.....	405
S27C4	Toilet pan, seat, backrest and grabrails	405
S27C5	Washbasin and tap.....	406
S27C6	Fixtures and fittings	407
S27C7	Change table	407
S27C8	Changing rails.....	408
S27C9	Door and door controls	408

S27C10	Signage	409
S27C11	Operating instructions	409
Specification 28	Sound insulation for building elements	410
S28C1	Scope	410
S28C2	Discontinuous construction	410
S28C3	Construction Deemed-to-Satisfy	410
S28C4	Acceptable forms of construction for walls — masonry	411
S28C5	Acceptable forms of construction for walls — concrete	414
S28C6	Acceptable forms of construction for walls — autoclaved aerated concrete	417
S28C7	Acceptable forms of construction for walls — timber and steel framing	419
S28C8	Acceptable forms of construction for floors — concrete	422
S28C9	Acceptable forms of construction for floors — autoclaved aerated concrete	423
S28C10	Acceptable forms of construction for floors — timber	423
Specification 29	Impact sound – test of equivalence	425
S29C1	Scope	425
S29C2	Construction to be tested	425
S29C3	Method	425
Section G	Ancillary provisions	
Part G1	Minor structures and components	430
G1O1	Objective	430
G1F1	Swimming pool drainage	430
G1F2	Swimming pools — access by young children and safety of recirculation systems	430
G1F3	Accidental locking in small spaces	431
G1F4	Early childhood centres	431
G1P1	Swimming pool drainage	431
G1P2	Swimming pool access and water recirculation systems	431
G1P3	Cool rooms	432
G1P4	Vaults	432
G1P5	Outdoor play spaces in early childhood centres	432
G1D1	Deemed-to-Satisfy Provisions	432
G1D2	Swimming pools	433
G1D3	Refrigerated chambers, strong-rooms and vaults	433
G1D4	Outdoor play spaces	433
G1D5	Swimming pool drainage	434
Part G2	Boilers, pressure vessels, heating appliances, fireplaces, chimneys and flues ...	435
G2O1	Objective	435
G2F1	Combustion appliances	435
G2F2	Boilers and pressure vessels	435

G2P1	Combustion heating appliances	435
G2P2	Boilers and pressure vessels	436
G2V1	Combustion appliances	436
G2D1	Deemed-to-Satisfy Provisions	436
G2D2	Installation of appliances	437
G2D3	Open fireplaces	437
G2D4	Incinerator rooms	437
Part G3	Atrium construction	438
G3D1	Application of Part	438
G3D2	Dimensions of atrium well.....	438
G3D3	Separation of atrium by bounding walls.....	438
G3D4	Construction of bounding walls	438
G3D5	Construction at balconies.....	439
G3D6	Separation at roof.....	439
G3D7	Means of egress	439
G3D8	Fire and smoke control systems.....	439
Part G4	Construction in alpine areas.....	440
G4O1	Objective	440
G4F1	Construction in alpine areas.....	440
G4P1	External doorways	440
G4P2	Structures forming pathways in snow conditions.....	440
G4P3	Control of falling ice and snow	441
G4P4	Fire safety systems in alpine areas.....	441
G4D1	Deemed-to-Satisfy Provisions.....	441
G4D2	Application of Part	441
G4D3	External doors	442
G4D4	Emergency lighting	442
G4D5	External trafficable structures.....	442
G4D6	Clear space around buildings	443
G4D7	Fire-fighting services and equipment.....	443
G4D8	Fire orders	443
Part G5	Construction in bushfire prone areas	444
G5O1	Objective	444
G5F1	Construction in bushfire prone areas	444
G5P1	Bushfire resistance	445
G5P2	Additional bushfire requirements for certain Class 9 buildings	446
G5V1	Buildings in bushfire prone areas	446
G5D1	Deemed-to-Satisfy Provisions	448
G5D2	Application of Part	448

G5D3	Protection — residential buildings	449
G5D4	Protection — certain Class 9 buildings	449
Part G6	Occupiable outdoor areas	450
G6D1	Application of Part	450
G6D2	Fire hazard properties.....	450
G6D3	Fire separation.....	450
G6D4	Provision for escape	451
G6D5	Construction of exits	451
G6D6	Fire fighting equipment	451
G6D7	Lift installations.....	451
G6D8	Visibility in an emergency, exit signs and warning systems	451
G6D9	Light and ventilation	451
G6D10	Fire orders	451
Part G7	Livable housing design	452
G7O1	Objective.....	452
G7F1	Livable housing design	452
G7P1	Livable housing design	452
G7D1	Deemed-to-Satisfy Provisions	453
G7D2	Livable housing design	453
Specification 30	Installation of boilers and pressure vessels	454
S30C1	Scope	454
S30C2	Explosion relief	454
S30C3	Floors and drainage	454
S30C4	Protection from heat	454
Specification 31	Fire and smoke control systems in buildings containing atriums.....	456
S31C1	Scope	456
S31C2	General requirement — automatic fire sprinkler system.....	456
S31C3	Roof protection.....	456
S31C4	Atrium floor protection.....	456
S31C5	Sprinkler systems to glazed walls	456
S31C6	Stop valves	457
S31C7	General requirements — smoke control system.....	457
S31C8	Operation of atrium mechanical air-handling systems	457
S31C9	Activation of smoke control system.....	458
S31C10	Smoke exhaust system	458
S31C11	Upward air velocity	459
S31C12	Exhaust fans	460
S31C13	Smoke-and-heat vents	460
S31C14	Make-up air supply	460

S31C15	General requirements—fire detection and alarm system	460
S31C16	Smoke detection system	461
S31C17	Smoke detection in spaces separated from the atrium by bounding walls	461
S31C18	Alarm systems	461
S31C19	Emergency warning and intercom systems	461
S31C20	Standby power system	462
S31C21	System for excluding smoke from fire-isolated exits	462
Specification 43	Bushfire protection for certain Class 9 buildings	463
S43C1	Scope	463
S43C2	Separation from classified vegetation	463
S43C3	Separation between buildings	463
S43C4	Separation from allotment boundaries and carparking areas	464
S43C5	Separation from hazards	464
S43C6	Non-combustible path around building	464
S43C7	Access pathways	464
S43C8	Exposed external areas	464
S43C9	Internal tenability	465
S43C10	Building envelope	465
S43C11	Supply of water for fire-fighting purposes	465
S43C12	Emergency power supply	465
S43C13	Signage	466
S43C14	Vehicular access	466
Section I	Special use buildings	
Part I1	Class 9b buildings	469
I1D1	Application of Part	469
I1D2	Separation	469
I1D3	Proscenium wall construction	469
I1D4	Seating area	469
I1D5	Exits from stages	470
I1D6	Access to platforms and lofts	470
I1D7	Aisle lights	470
Part I2	Public transport buildings	471
I2D1	Application of Part	471
I2D2	Accessways	471
I2D3	Ramps	472
I2D4	Handrails and grabrails	472
I2D5	Doorways and doors	472
I2D6	Lifts	472
I2D7	Stairways	472

I2D8	Unisex accessible toilet	472
I2D9	Location of accessible toilets	472
I2D10	Symbols and signs.....	472
I2D11	Tactile ground surface indicators.....	473
I2D12	Lighting	473
I2D13	Hearing augmentation.....	473
I2D14	Emergency warning systems.....	473
I2D15	Controls	473
Part I3	Farm buildings and farm sheds.....	474
I3D1	Application of Part.....	474
I3D2	Fire resistance and separation.....	474
I3D3	Provision for escape	474
I3D4	Construction of exits.....	474
I3D5	Fixed platforms, walkways, stairways and ladders	474
I3D6	Thresholds	475
I3D7	Swinging doors	475
I3D8	Fire fighting equipment	475
I3D9	Fire hydrants and water supplies.....	475
I3D10	Fire hose reels	476
I3D11	Portable fire extinguishers.....	476
I3D12	Emergency lighting requirements.....	476
I3D13	Exit signs.....	476
I3D14	Direction signs.....	476
I3D15	Design and operation of exit signs	477
I3D16	Sanitary facilities	477
I3D17	Height of rooms and other spaces	477
I3D18	Artificial lighting	477
Specification 32	Construction of proscenium walls.....	478
S32C1	Scope	478
S32C2	Separation of stage areas, etc	478
S32C3	Proscenium wall construction	478
S32C4	Combustible materials not to cross proscenium wall.....	478
S32C5	Protection of openings in proscenium wall	478
S32C6	Proscenium curtains	479
Section J	Energy efficiency	
Part J1	Energy efficiency performance requirements.....	484
J1O1	Objective	484
J1F1	Energy efficiency	484
J1P1	Operational energy use and greenhouse gas emissions	484

J1P2	Thermal performance of a Class 4 part of a building	485
J1P3	Energy usage of a Class 4 part of a building	485
J1P4	Renewable energy, energy storage and electric vehicle charging	485
J1V1	NABERS Energy	485
J1V2	Green Star.....	486
J1V3	Verification using a reference building.....	487
J1V4	Verification of building envelope sealing	487
Part J2	Energy efficiency	490
J2D1	Deemed-to-Satisfy Provisions	490
J2D2	Application of Section J	490
Part J3	Elemental provisions for a Class 4 part of a building	492
J3D1	Deemed-to-Satisfy Provisions	492
J3D2	Application of Part.....	492
J3D3	Reducing heating and cooling loads of a Class 4 part of a building using house energy rating software.....	492
J3D4	Ceiling fans in a Class 4 part of a building	493
J3D5	Roof thermal breaks of a Class 4 part of a building.....	493
J3D6	* * * * *	494
J3D7	Roofs and ceilings of a Class 4 part of a building.....	494
J3D8	External walls of a Class 4 part of a building	505
J3D9	Wall-glazing construction of a Class 4 part of a building	506
J3D10	Floors of a Class 4 part of a building	507
J3D11	External winter glazing of a Class 4 part of a building	508
J3D12	External summer glazing of a Class 4 part of a building.....	514
J3D13	Shading of a Class 4 part of a building	518
J3D14	Net equivalent energy usage of a Class 4 part of a building	519
J3D15	Net equivalent energy usage for Class 4 part of building – home energy rating software	523
Part J4	Building fabric.....	524
J4D1	Deemed-to-Satisfy Provisions	524
J4D2	Application of Part.....	524
J4D3	Thermal construction — general	524
J4D4	Roof and ceiling construction	525
J4D5	Roof lights	526
J4D6	Walls and glazing.....	526
J4D7	Floors.....	527
Part J5	Building sealing	529
J5D1	Deemed-to-Satisfy Provisions	529
J5D2	Application of Part.....	529
J5D3	Chimneys and flues.....	530

J5D4	Roof lights.....	530
J5D5	Windows and doors	530
J5D6	Exhaust fans	530
J5D7	Construction of roofs, ceilings, walls and floors	531
J5D8	Evaporative coolers	531
Part J6	Air-conditioning and ventilation	532
J6D1	Deemed-to-Satisfy Provisions	532
J6D2	Application of Part.....	532
J6D3	Air-conditioning system control	532
J6D4	Mechanical ventilation system control	534
J6D5	Fans and duct systems	535
J6D6	Ductwork insulation	539
J6D7	Ductwork sealing.....	539
J6D8	Pump systems	540
J6D9	Pipework insulation	542
J6D10	Space heating.....	543
J6D11	Refrigerant chillers.....	545
J6D12	Unitary air-conditioning equipment	547
J6D13	Heat rejection equipment	548
Part J7	Artificial lighting and power	549
J7D1	Deemed-to-Satisfy Provisions	549
J7D2	Application of Part.....	549
J7D3	Artificial lighting.....	549
J7D4	Interior artificial lighting and power control.....	553
J7D5	Interior decorative and display lighting.....	554
J7D6	Exterior artificial lighting.....	554
J7D7	Boiling water and chilled water storage units.....	555
J7D8	Lifts	555
J7D9	Escalators and moving walkways.....	556
Part J8	Heated water supply and swimming pool and spa pool plant	557
J8D1	Deemed-to-Satisfy Provisions.....	557
J8D2	Application of Part.....	557
J8D3	Heated water supply	557
J8D4	Swimming pool heating and pumping	558
J8D5	Spa pool heating and pumping	559
Part J9	Energy monitoring and on-site distributed energy resources.....	560
J9D1	Deemed-to-Satisfy Provisions	560
J9D2	Application of Part.....	560
J9D3	Facilities for energy monitoring.....	560

J9D4	Facilities for electric vehicle charging equipment	562
J9D5	Facilities for solar photovoltaic and battery systems	563
Specification 33	Additional requirements	565
S33C1	Scope	565
S33C2	Additional requirements — general	565
S33C3	Additional requirements — Green Star	566
Specification 34	Modelling parameters for J1V3	567
S34C1	Scope	567
S34C2	Reference building	567
S34C3	Proposed building and reference building	567
S34C4	Services — proposed and reference building	569
Specification 35	Modelling profiles for J1V3	571
S35C1	Scope	571
S35C2	Modelling profiles	571
Specification 36	Material properties	582
S36C1	Scope	582
S36C2	Construction Deemed-to-Satisfy	582
Specification 37	Calculation of U-Value and solar admittance	587
S37C1	Scope	587
S37C2	General	587
S37C3	U-Value — Method 1 (Single Aspect)	587
S37C4	U-Value — Method 2 (Multiple Aspects)	587
S37C5	Solar admittance — Method 1 (Single Aspect)	587
S37C6	Solar admittance — Method 2 (Multiple Aspects)	588
S37C7	Shading	589
Specification 38	Spandrel panel thermal performance	593
S38C1	Scope	593
S38C2	Spandrel panel R-Value: Calculation method 1	593
S38C3	Spandrel panel R-Value: Calculation method 2	594
Specification 39	Sub-floor and soil thermal performance	595
S39C1	Scope	595
S39C2	Sub-floor space and soil thermal performance	595
Specification 40	Lighting and power control devices	597
S40C1	Scope	597
S40C2	Manual switch	597
S40C3	Time switch	597
S40C4	Demand-operated control	597
S40C5	Daylight sensor and dynamic lighting control device	598
Specification 44	Calculation of heating load limit, cooling load limit and thermal energy load limit	599

S44C1	Scope	599
S44C2	Heating load limit.....	599
S44C3	Cooling load limit.....	599
S44C4	Thermal energy load limit	600
	Specification 45	* * * *
	*	602
Specification 46	Determination of peak efficiency and fan power ratio	603
S46C1	Scope	603
S46C2	Determination of peak efficiency and fan power ratio	603
Specification 47	Calculation of climate specific part load value for chillers	605
S47C1	Scope	605
S47C2	Calculation of climate specific part load value for chillers	605
Specification 48	Comparison of zone loads in proposed building and reference building	608
S48C1	Scope	608
S48C2	Comparison of zone loads in proposed building and reference building	608
Schedule 1	Definitions	
	Abbreviations.....	610
	Symbols.....	612
	Glossary	614
Schedule 2	Referenced documents	
	Referenced documents.....	652
Schedule 3	Commonwealth of Australia	
	Footnote: Other legislation and policies affecting buildings.....	670
Schedule 4	Australian Capital Territory	
ACT	Introduction	676
ACT	Footnote: Other legislation affecting buildings	677
Schedule 5	New South Wales	
NSW	Introduction	685
Section A	Governing Requirements	686
Part A6	Building classification	686
NSW A6G7	Class 6 buildings	686
Section C	Fire resistance	687
Part C2	Fire resistance and stability	687
NSW C2D11	Fire hazard properties	687
Part C3	Compartmentation and separation	688
C3D6	Class 9 buildings	688
Part C4	Protection of openings.....	689
C4D12	Bounding construction: Class 2 and 3 buildings and Class 4 parts	689

Specification 7	Fire hazard properties.....	689
S7C7	Other materials.....	689
Section D	Access and egress	692
Part D2	Provision for escape.....	692
D2D3	Number of exits required	692
D2D8	Width of exits and paths of travel to exits	692
NSW D2D9	Width of doorways in exits or paths of travel to exits	692
D2D15	Discharge from exits	693
D2D18	Number of persons accommodated.....	693
Part D3	Construction of exits.....	695
NSW D3D2	Application of Part.....	695
D3D14	Goings and risers	695
NSW D3D16	Thresholds.....	696
D3D18	Height of barriers	696
D3D24	Doorways and doors	697
D3D26	Operation of latch.....	697
NSW D3D31	Doors in paths of travel to an entertainment venue	698
Section E	Services and equipment	699
Part E2	Smoke hazard management	699
NSW E2D10	Buildings not more than 25 m in effective height: large isolated buildings subject to C3D4	699
NSW E2D16	Class 9b – assembly buildings: all.....	699
NSW E2D17	Class 9b – assembly buildings: night clubs, discotheques and the like.....	700
NSW E2D18	Class 9b – assembly buildings: exhibition halls, museums and art galleries	700
NSW E2D19	Class 9b – assembly buildings: theatres and public halls (not listed in E2D18) including lecture theatres and cinema/auditorium complexes	701
NSW E2D20	Class 9b assembly buildings: other assembly buildings (not listed in E2D16 to E2D19)	701
Part E4	Visibility in an emergency, exit signs and warning systems.....	701
NSW E4D6	Direction signs	701
Specification 20	Smoke detection and alarm systems	701
NSW S20C8	System monitoring.....	701
Section F	Health and amenity	703
Part F4	Sanitary and other facilities	703
NSW F4P6	Microbial control for water systems.....	703
F4D4	Facilities in Class 3 to 9 buildings	703
NSW F4D10	Microbial (legionella) control	704
Part F6	Light and ventilation.....	704
NSW F6D6	Ventilation of rooms	704
Section G	Ancillary provisions	705

Part G1	Minor structures and components	705
NSW G1P2	Swimming pool access and water recirculation systems.....	705
NSW G1D2	Swimming pools	705
NSW G1D5	Provision for cleaning windows	706
Part G5	Construction in bushfire prone areas	706
NSW G5P1	Bushfire resistance.....	706
NSW G5P2	Additional bushfire requirements for Class 9 buildings that are a special fire protection purpose	706
NSW G5D2	Application of Part	707
NSW G5D3	Protection.....	707
NSW G5D4	Protection – Class 9 buildings used as a special fire protection purpose	708
NSW Part G7	Livable housing design.....	708
Specification 43	Bushfire protection for certain Class 9 buildings	708
NSW S43C2	Separation from classified vegetation.....	708
NSW S43C11	Supply of water for fire-fighting purposes.....	708
Section I	Special use buildings	709
Part I1	Class 9b buildings	709
NSW I1D1	Application of Part.....	709
NSW Part I4	Entertainment venues other than temporary structures and drive-in theatres ...	710
NSW I4D1	Application of Part	710
NSW I4D2	Fire separation	710
NSW I4D3	Foyer space	710
NSW I4D4	Sprinkler systems for common foyers	710
NSW I4D5	Conventional stages: application.....	710
NSW I4D6	Conventional stages: extent of stage area.....	711
NSW I4D7	Conventional stages: small stages	711
NSW I4D8	Conventional stages: large stages	711
NSW I4D9	Conventional stages: fire separation of stages	711
NSW I4D10	Non-conventional stages: application.....	711
NSW I4D11	Non-conventional stages: small stages	711
NSW I4D12	Non-conventional stages: large stages.....	711
NSW I4D13	Flying scenery.....	711
NSW I4D14	Load notice	712
NSW I4D15	Safety curtains	712
NSW I4D16	Safety curtains — additional requirements	713
NSW I4D17	Seating in rows: application	713
NSW I4D18	Seating in rows: number of seats	713
NSW I4D19	Seating in rows: chairs used for seating	713
NSW I4D20	Seating in rows: chairs in auditoriums — level floors.....	713

NSW I4D21	Seating in rows: chairs in auditoriums — sloping floors	713
NSW I4D22	Seating in rows: radiating aisles in seating areas.....	713
NSW I4D23	Seating in rows: aisles and cross-overs	714
NSW I4D24	Seating in rows: platforms and steps.....	714
NSW I4D25	Seating in rows: stepped platforms	714
NSW I4D26	Continental seating: application	714
NSW I4D27	Continental seating: seating to be fastened.....	715
NSW I4D28	Continental seating: maximum seats per row	715
NSW I4D29	Continental seating: depth of seating.....	715
NSW I4D30	Continental seating: clearance between rows	715
NSW I4D31	Continental seating: chairs used for seating	715
NSW I4D32	Continental seating: egress doorways	715
NSW I4D33	Continental seating: clear areas.....	716
NSW I4D34	Continental seating: minimum clear space.....	716
NSW I4D35	Continental seating: doors	716
NSW I4D36	Provision of guardrails: location	716
NSW I4D37	Provision of guardrails: fixed back seats	716
NSW I4D38	Provision of guardrails: steps between platforms.....	716
NSW I4D39	Guardrails for seating areas: application	717
NSW I4D40	Guardrails for seating areas: continental seating.....	717
NSW I4D41	Guardrails for seating areas: balconies and boxes.....	717
NSW I4D42	Guardrails for seating areas: cross-overs.....	717
NSW I4D43	Dressing rooms	717
NSW I4D44	Storerooms	718
NSW I4D45	Projection suites: Application.....	718
NSW I4D46	Projection suites: rooms to be provided	718
NSW I4D47	Projection suites: fire separation	718
NSW I4D48	Projection suites: concession for protection of some openings	718
NSW I4D49	Basement storeys	718
NSW I4D50	Basement storeys: more than two	719
NSW I4D51	Electric mains installation: main switchboard	719
NSW I4D52	Electric mains installation: circuit protection	719
NSW I4D53	Electric mains installation: separate sub-mains.....	719
NSW I4D54	Lighting: lighting switches.....	719
NSW I4D55	Lighting: lighting levels	720
NSW I4D56	Lighting: provision of aisle lighting	720
NSW I4D57	Lighting: aisle lighting power supply	720
NSW I4D58	Lighting: aisle lighting alternative lighting supply	720
NSW I4D59	Automatic smoke-and-heat vents for stages	720

NSW I4D60	Solid fuel burning stoves and open fire places	720
NSW I4D61	Fuel gas cylinders: general	721
NSW I4D62	Fuel gas cylinders: enclosures	721
NSW Part I5	Temporary structures.....	722
NSW I5D1	Application of Part	722
NSW I5D2	Exits — exclusions	722
NSW I5D3	Location of exits	722
NSW I5D4	Exits to be provided	722
NSW I5D5	Vertical clearance for exits	723
NSW I5D6	Curtains across exits.....	723
NSW I5D7	Curtains and blinds	723
NSW I5D8	Fabrics.....	723
NSW I5D9	Guardrails.....	723
NSW I5D10	Seating	723
NSW I5D11	Sanitary accommodation	724
NSW I5D12	Projection suites	724
NSW I5D13	Fireplaces and heating	724
NSW I5D14	Electrical services	724
NSW I5D15	Artificial lighting: general.....	724
NSW I5D16	Emergency lighting.....	724
NSW I5D17	Emergency lighting power supply	724
NSW I5D18	Exit signs.....	724
NSW I5D19	Fire-fighting services.....	725
NSW Part I6	Drive-in theatres.....	726
NSW I6D1	Application of Part.....	726
NSW I6D2	Speaker standards.....	726
NSW I6D3	Lines of speaker standards.....	726
NSW I6D4	Electrical services	726
NSW I6D5	Vehicular entrances.....	726
NSW I6D6	Lighting	726
Section J	Energy efficiency	727
Part J2	Energy efficiency	727
J2D1	Deemed-to-Satisfy Provisions.....	727
NSW J2D2	Application of Section J.....	727
Part J3	Elemental provisions for a Class 4 part of a building.....	728
J3D1	Deemed-to-Satisfy Provisions.....	728
NSW J3D2	Application of Part.....	728
NSW J3D3	Reducing heating and cooling loads of a Class 4 part of a building using house energy rating software	728

NSW J3D4	Ceiling fans in a Class 4 part of a building	728
NSW J3D7	Roofs and ceilings of a Class 4 part of a building	728
NSW J3D8	External walls of a Class 4 part of a building	728
NSW J3D9	Wall-glazing construction of a Class 4 part of a building.....	729
J3D10	Floors of a Class 4 part of a building	729
NSW J3D11	External winter glazing of a Class 4 part of a building	729
NSW J3D12	External summer glazing of a Class 4 part of a building	729
NSW J3D13	Shading of a Class 4 part of a building.....	729
NSW J3D14	Net equivalent energy usage of a Class 4 part of a building.....	729
NSW J3D15	Net equivalent energy usage for Class 4 part of building – home energy rating software.....	729
Part J4	Building fabric.....	730
J4D1	Deemed-to-Satisfy Provisions.....	730
NSW J4D2	Application of Part.....	730
NSW J4D3	Thermal construction—general.....	730
NSW J4D6	Walls and glazing	731
Part J5	Building sealing.....	732
J5D1	Deemed-to-Satisfy Provisions.....	732
NSW J5D2	Application of Part.....	733
NSW J5D5	Windows and doors.....	733
Part J6	Air-conditioning and ventilation	733
J6D1	Deemed-to-Satisfy Provisions.....	733
NSW J6D2	Application of Part.....	734
J6D10	Space heating.....	734
Part J7	Artificial lighting and power	734
J7D1	Deemed-to-Satisfy Provisions.....	734
NSW J7D2	Application of Part.....	734
J7D3	Artificial lighting	735
Part J8	Heated water supply and swimming pool and spa pool plant	735
J8D1	Deemed-to-Satisfy Provisions.....	735
NSW J8D3	Swimming pool heating and pumping	735
NSW J8D4	Spa pool heating and pumping	736
Part J9	Energy monitoring and on-site distributed energy resources	737
J9D1	Deemed-to-Satisfy Provisions.....	737
NSW Part J1	Energy efficiency.....	738
NSW J1O1	Objective	738
NSW J1F1	Energy efficiency.....	739
NSW J1P1	Energy use	739
NSW	740	

NSW	740	
NSW J1P4	Renewable energy and electric vehicle charging	740
NSW J1P5	Building fabric—Class 2 building and Class 4 parts of a building	740
NSW J1P6	Building sealing—Class 2 building and Class 4 parts of a building	740
NSW J1P7	Services—Class 2 building and Class 4 parts of a building	740
NSW J1V1	NABERS Energy	741
NSW J1V2	Green star	742
NSW J1V3	Verification using a reference building	742
NSW J1V4	Verification of building envelope sealing	742
NSW	743	
Schedule 1	Definitions	745
Schedule 2	Referenced documents	747
NSW	Footnote: Other legislation affecting buildings	749
Schedule 6 Northern Territory		
NT	Introduction	757
Section B	Structure	758
Part B1	Structural provisions	758
NT B1D4	Determination of structural resistance of materials and forms of construction ..	758
Specification 4	Design of buildings in cyclonic areas	760
NT S4C3	Strengthened area	760
Section E	Services and equipment	761
Part E1	Fire fighting equipment	761
NT E1D10	Where sprinklers are required: Class 9a and 9c buildings	761
Section F	Health and amenity	762
Specification 28	Sound insulation for building elements	762
NT S28C1	Scope	762
NT S28C2	Construction deemed-to-satisfy	762
NT S28C3	RW applicable to construction	762
Specification 29	Impact sound – test of equivalence	764
NT S29C1	Scope	764
NT S29C2	Construction to be tested	764
NT S29C3	Method	764
NT Part F7	Sound transmission and insulation	765
NT F7P1	Sound transmission through floors	765
NT F7P2	Sound transmission through walls	765
NT F7P3	Sound transmission through wall and floor penetrations	765
NT F7P4	Sound transmission through walls in residential care buildings	765
NT F7D1	Deemed-to-Satisfy Provisions	766
NT F7D2	Application of Part	766

NT F7D3	Weighted sound reduction index: interpretation	766
NT F7D4	Sound insulation of floors between units	766
NT F7D5	Sound insulation of walls between units	766
NT F7D6	Walls between a bathroom, sanitary compartment, laundry or kitchen and a habitable room in adjoining unit	766
NT F7D7	Soil and waste pipes to be separated	767
NT F7D8	Isolation of pumps	768
NT F7D9	Walls between a bedroom and kitchen or laundry in a Class 9c building	768
Section G	Ancillary provisions	769
Part G1	Minor structures and components	769
NT G1P1	Swimming pool drainage	769
NT G1P2	Swimming pool access and water recirculation systems	769
NT G1D2	Swimming pools	769
Section J	Energy efficiency	770
NT Part J1	Energy efficiency performance requirements	770
NT Part J2	Energy efficiency	770
NT Part J3	Elemental provisions for a Class 4 part of a building	770
NT Part J4	Building fabric	770
NT Part J5	Building sealing	770
NT Part J6	Air-conditioning and ventilation	770
NT Part J7	Artificial lighting and power	770
NT Part J8	Heated water supply and swimming pool and spa pool plant	770
NT Part J9	Energy monitoring and on-site distributed energy resources	770
Schedule 2	Referenced documents	771
NT	Footnote: Other legislation affecting buildings	772
Schedule 7	Queensland	
QLD	Introduction	776
Section B	Structure	777
Part B1	Structural provisions	777
QLD B1P3	Buildings in flood areas	777
QLD B1D4	Determination of structural resistance of materials and forms of construction ..	777
QLD B1D6	Construction of buildings in flood hazard areas	779
Section G	Ancillary provisions	780
Part G1	Minor structures and components	780
QLD G1P2	Swimming pool access and water recirculation systems	780
QLD G1D2	Swimming pools	780
Part G5	Construction in bushfire prone areas	780
QLD G5P1	Bushfire resistance	780
QLD G5D2	Application of Part	781

Schedule 1	Definitions.....	782
Schedule 2	Referenced documents.....	783
QLD	Footnote: Other legislation affecting buildings	784
Schedule 8 South Australia		
SA	Introduction	788
Section A	Governing Requirements	789
Part A6	Building classification	789
SA A6G7	Class 6 buildings	789
Section B	Structure.....	790
Part B1	Structural provisions	790
SA B1P3	Buildings in flood areas	790
SA B1D6	Construction of buildings in flood hazard areas	790
Section C	Fire resistance.....	791
Part C2	Fire resistance and stability.....	791
C2D2	Type of construction required	791
SA C2D16	Class 7b bulk grain storage facilities	791
Part C3	Compartmentation and separation	791
SA C3D16	Class 2 external walls exposed to brush fences	791
SA C3D17	Bulk grain storage facilities.....	792
Part C4	Protection of openings	792
SA C4D18	Protection of openings – bulk grain storage facilities.....	792
Section D	Access and egress	793
Part D2	Provision for escape	793
D2D3	Number of exits required.....	793
D2D4	When fire-isolated stairways and ramps are required	793
D2D5	Exit travel distances	793
SA D2D6	Distance between alternative exits	794
D2D14	Travel by non-fire-isolated stairways or ramps	794
D2D21	Plant rooms, lift machine rooms and electricity network substations: Concession	794
Part D3	Construction of exits.....	794
SA D3D16	Thresholds	794
SA D3D23	Fixed platforms, walkways, stairways and ladders	795
D3D25	Swinging doors	795
Part D4	Access for people with a disability	795
D4D2	General building access requirements	795
SA D4D5	Exemptions	796
Section E	Services and equipment.....	797
Part E1	Fire fighting equipment	797

E1D2	Fire hydrants	797
E1D3	Fire hose reels.....	799
E1D14	Portable fire extinguishers.....	799
Part E2	Smoke hazard management	799
E2D1	Deemed-to-Satisfy Provisions.....	799
SA E2D22	Smoke venting in bulk grain storage facilities	799
Part E4	Visibility in an emergency, exit signs and warning systems.....	800
SA E4D2	Emergency lighting requirements	800
SA E4D5	Exit signs	801
SA E4D8	Design and operation of exit signs	801
Section F	Health and amenity	802
Part F1	Water management.....	802
F1D1	Deemed-to-Satisfy Provisions	802
F1D8	Damp-proofing	802
SA F1D7	Damp-proofing of floors on the ground	802
Part F2	Wet areas and overflow protection.....	802
SA F2P1	Wet area overflows	802
SA F2P3	Prevention of surface water accumulation.....	802
F2D2	Wet area construction.....	803
SA F2D4	Provision of floor wastes	803
Part F4	Sanitary and other facilities	803
F4D6	Accessible unisex sanitary compartments.....	803
F4D7	Accessible unisex showers	804
Part F6	Light and ventilation	804
SA F6D6	Ventilation of rooms	804
Section G	Ancillary provisions.....	805
Part G1	Minor structures and components	805
SA G1P2	Swimming pool access and water recirculation systems	805
SA G1D2	Swimming pools	805
Part G5	Construction in bushfire prone areas.....	805
G5D1	Deemed-to-Satisfy Provisions	805
SA G5D5	Bushfire attack levels.....	806
SA Part G8	Access for maintenance	807
SA G8O1	Objective.....	807
SA G8F1	Window cleaning	807
SA G8F2	Hazardous conditions	807
SA G8P1	Window cleaning	807
SA G8P2	Hazardous conditions	807
SA G8D1	Deemed-to-Satisfy Provisions	808

SA G8D2	Application of Part	808
SA G8D3	Access for window cleaning	808
SA G8D4	Access for inspection and maintenance between buildings	808
SA Part G9	Miscellaneous provisions	809
SA G9P1	Attachments to buildings.....	809
SA G9D1	Deemed-to-Satisfy Provisions	809
SA G9D2	Application of Part	809
SA G9D3	Attachments to buildings.....	809
Section I	Special use buildings.....	810
SA Part I3	Farm buildings	811
SA I3D1	Application of Part.....	811
Schedule 1	Definitions	812
Schedule 2	Referenced documents	814
SA	Footnote: Other legislation affecting buildings.....	815
Schedule 9	Tasmania	
TAS	Introduction	826
Section A	Governing Requirements.....	827
Part A1	Interpreting the NCC	827
A1G4	Interpretation.....	827
Part A4	Referenced documents	827
A4G1	Referenced documents	827
Part A5	Documentation of design and construction.....	827
A5G4	Evidence of suitability – Volume Three (PCA)	827
Section D	Access and egress	829
Part D1	Access and egress	829
TAS D1P10	Standards made under the Disability Discrimination Act.....	829
Part D4	Access for people with a disability	829
D4D1	Deemed-to-Satisfy Provisions	829
TAS D4D5	Exemptions	829
TAS D4D14	Compliance with Premises Standards.....	829
Section E	Services and equipment	830
Part E1	Fire fighting equipment.....	830
TAS E1P7	Automatic fire detection system	830
TAS E1D1	Deemed-to-Satisfy Provisions	830
TAS E1D17	Fire detection and alarm system	830
Section F	Health and amenity	831
Part F4	Sanitary and other facilities	831
TAS F4D13	Non-flushed urinals	831
TAS F4D14	Installation of closet fixtures.....	831

Part F8	Condensation management	831
TAS F8P1	Condensation and water vapour management	831
Section G	Ancillary provisions	832
Part G1	Minor structures and components	832
TAS G1P2	Swimming pool access and water recirculation systems	832
TAS G1P6	Swimming pools	832
G1D1	Deemed-to-Satisfy Provisions	832
TAS G1D2	Swimming pools	832
Part G5	Construction in bushfire prone areas.....	834
TAS G5P1	Bushfire resistance	834
TAS G5P2	Additional bushfire requirements for certain Class 9 buildings	834
Section I	Special use buildings	836
TAS Part I4	Food premises	837
TAS I4O1	Objective.....	837
TAS I4F1	Food premises	837
TAS I4P1	Application of Part.....	837
TAS I4P2	Design and construction.....	838
TAS I4P3	Water supply.....	838
TAS I4P4	Sewage and waste water disposal	838
TAS I4P5	Storage of garbage and recyclables	839
TAS I4P6	Ventilation.....	839
TAS I4P7	Lighting	839
TAS I4P8	Floors	839
TAS I4P9	Walls and ceilings.....	839
TAS I4P10	Hand washing facilities.....	840
TAS I4P11	Fixtures, fittings and equipment	840
TAS I4P12	Storage facilities	841
TAS I4P13	Refrigerated and cooling chambers.....	841
TAS I4D1	Application of Part	841
TAS I4D2	Deemed-to-Satisfy Provisions	842
TAS I4D3	General requirements.....	842
TAS I4D4	Pests and contaminants.....	842
TAS I4D5	Drains and pipes.....	843
TAS I4D6	Offensive material and trade waste	843
TAS I4D7	Ventilation.....	843
TAS I4D8	Lighting	843
TAS I4D9	Floors, walls and ceilings	843
TAS I4D10	Separation of work place	843
TAS I4D11	Washbasins	844

TAS I4D12	Sinks	844
TAS I4D13	Design, construction and installation of fixtures, fittings and equipment	844
TAS I4D14	Storage of materials and equipment	844
TAS I4D15	Food store	844
TAS I4D16	Meat premises	845
TAS I4D17	Dairy produce	845
TAS I4D18	Refrigerated and cooling chambers	845
TAS Part I5	Dining rooms and bar rooms	847
TAS I5D1	Application of Part	847
TAS I5D2	Sanitary facilities	847
TAS I5D3	Separation from other areas	847
TAS Part I6	Meat premises	848
TAS I6D1	Application of Part	848
TAS I6D2	Premises processing animals and meat	848
TAS Part I7	Farm dairy premises	849
TAS I7D1	Application of Part	849
TAS I7D2	Milking sheds and holding yards	849
TAS I7D3	Milk receiving area and milk storage room	849
TAS I7D4	Water supply	850
TAS Part I8	Pharmacies	851
TAS I8D1	Application of Part	851
TAS I8D2	Definition	851
TAS I8D3	Pharmacy premises	851
TAS I8D4	Dispensary	851
TAS I8D5	Security of dispensary	852
TAS Part I9	Health service establishments	853
TAS I9D1	Application of Part	853
TAS I9D2	Design and construction of health service establishments	853
TAS Part I10	Mortuaries	854
TAS I10D1	Application of Part	854
TAS I10D2	Layout of mortuary	854
TAS I10D3	Construction of body preparation room	854
TAS I10D4	Water supply and sewerage	854
TAS Part I11	Foundries	856
TAS I11D1	Application of Part	856
TAS I11D2	General	856
TAS I11D3	Cupola charging platform	856
TAS I11D4	Deep moulds and pits	856
TAS I11D5	Pot furnaces	857

TAS Part I12	Premises for manufacture or processing of glass reinforced plastics	858
TAS I12D1	Application of Part.....	858
TAS I12D2	Separation from other buildings	858
TAS I12D3	Rise in storeys	858
TAS I12D4	Maximum floor areas.....	858
TAS I12D5	Required exits	858
TAS I11D6	Hand laminating and spray depositing.....	859
TAS I12D7	Ventilation.....	859
TAS I12D8	Smoke and heat roof vents	859
TAS Part I13	Premises for production of processing of isocyanates.....	860
TAS I13D1	Application of Part	860
TAS I13D2	Areas of work places.....	860
TAS I13D3	Separation from other areas and buildings.....	860
TAS I13D4	Rise in storeys	860
TAS I13D5	Maximum floor areas.....	860
TAS I13D6	Required exits	861
TAS I13D7	Bulk stores for polyols and isocyanates	861
TAS I13D8	Curing room.....	861
TAS Part I14	Premises for electro-plating, electro-polishing, anodising or etching	862
TAS I14D1	Application of Part.....	862
TAS I14D2	Floors	862
TAS I14D3	Height of plating area.....	862
TAS I14D4	Air space	862
TAS I14D5	Ceiling construction	862
TAS Part I15	Premises for lead processing	863
TAS I15D1	Application of Part.....	863
TAS I15D2	Floors	863
TAS I15D3	Height of lead processing areas	863
TAS I15D4	Air space and floor space	863
TAS I15D5	Interior of lead processing areas.....	863
TAS I15D6	Dust collection.....	864
TAS I15D7	Isolation of certain processes	864
TAS I15D8	Drying room shelves	864
TAS I15D9	Washing facilities	864
TAS I15D10	Change rooms	864
TAS Part I16	Early childhood centres and school age care facilities	865
TAS I16O1	Objective.....	865
TAS I16F1	Early childhood centres and school age care facilities	865
TAS I16P1	Design and construction.....	865

TAS I16P2	Health and amenity	865
TAS I16P3	Perimeter fencing and barriers	866
TAS I16D1	Application of Part.....	866
TAS I16D2	Deemed-to-Satisfy Provisions	866
TAS Part I18	Temporary structures	867
TAS I18P1	Application of Part.....	867
TAS I18P2	Safety and serviceability.....	867
TAS I18P3	Resistance to the spread of fire	867
TAS I18P4	Access.....	867
TAS I18P5	Exits.....	867
TAS I18P6	Fall prevention	868
TAS I18P7	Lighting	868
TAS I18P8	Identification of exits	868
TAS I18P9	Fire-fighting equipment	868
TAS I18P10	Sanitary facilities.....	868
TAS I18P11	Artificial lighting	869
TAS I18P12	Ventilation.....	869
TAS I18P13	Electrical services	869
TAS I18P14	Heating appliances.....	869
TAS I18P15	Tiered seating.....	869
TAS I18P16	Safe environment	869
TAS I18D1	Application of Part.....	870
TAS I18D2	Deemed-to-Satisfy Provisions.....	870
TAS I18D3	Access	870
TAS I18D4	Lighting	870
TAS I18D5	Ventilation.....	870
TAS I18D6	Electrical.....	871
TAS I18D7	Heating appliances	871
TAS Part I17	Premises where work is undertaken on gas-fuelled vehicles.....	872
TAS I17D1	Application of Part.....	872
TAS I17D2	Working areas	872
Section J	Energy efficiency.....	873
TAS Part J3	Elemental provisions for a Class 4 part of a building.....	873
Schedule 1	Definitions.....	874
Schedule 2	Referenced documents	875
TAS	Footnote: Other legislation affecting buildings	879
Schedule 10	Victoria	
VIC	Introduction	882
Section A	Governing Requirements	883

Part A2	Compliance with the NCC.....	883
A2G2	Performance Solution	883
Section B	Structure.....	884
Part B1	Structural provisions.....	884
VIC B1D6	Construction of buildings in flood hazard areas.....	884
Section C	Fire resistance	885
Part C2	Fire resistance and stability	885
C2D11	Fire hazard properties.....	885
Section D	Access and egress	886
Part D2	Provision for escape.....	886
D2D5	Exit travel distances	886
VIC D2D9	Width of doorways in exits or paths of travel to exits.....	886
Part D3	Construction of exits.....	886
D3D26	Operation of latch.....	886
Section E	Services and equipment	887
Part E1	Fire fighting equipment	887
VIC E1D7	Where sprinklers are required: Class 3 building	887
E1D13	Where sprinklers are required: occupancies of excessive hazard	887
Specification 17	Fire sprinkler systems.....	888
VIC S17C2	Application of automatic fire sprinkler standards	888
Specification 18	Class 2 and 3 buildings not more than 25 m in effective height.....	888
S18C3	System requirements	888
Specification 20	Smoke detection and alarm systems	889
S20C4	Smoke detection system	889
VIC S20C8	System monitoring	889
Section F	Health and amenity	890
Part F4	Sanitary and other facilities	890
VIC F4P2	Laundry facilities.....	890
F4D1	Deemed-to-Satisfy Provisions	890
F4D4	Facilities in Class 3 to 9 buildings	890
F4D8	Construction of sanitary compartments	891
VIC F4D13	First aid rooms	891
Part F5	Room heights.....	892
VIC F5P1	Room or space heights.....	892
F5V1	Room or space heights.....	892
VIC F5D1	Deemed-to-Satisfy Provisions	892
VIC F5D3	Class 3, 9a and 9c residential aged care buildings – size of rooms.....	892
Section G	Ancillary provisions.....	893
Part G1	Minor structures and components	893

VIC G1P2	Swimming pool access and water recirculation systems	893
VIC G1D2	Swimming pools	893
Part G5	Construction in bushfire prone areas.....	893
VIC G5O1	Objective.....	893
VIC G5F1	Construction in bushfire prone areas.....	894
VIC G5P1	Bushfire resistance	894
VIC G5P2	Additional bushfire requirements for certain Class 9 buildings	895
VIC G5D2	Application of Part.....	896
VIC G5D4	Protection — certain Class 9 buildings	896
Section I	Special use buildings	897
VIC Part I4	Class 3 and 9a residential aged care buildings and Class 9c buildings.....	898
VIC I4P1	Communication systems	898
VIC I4P2	Electrical power outlets	898
VIC I4D1	Deemed-to-Satisfy Provisions	898
VIC I4D2	Application of Part.....	898
VIC I4D3	Doorway width	898
VIC I4D4	Windows	899
VIC I4D5	Grab rails.....	899
VIC I4D6	Electronic communication system	899
VIC I4D7	Electrical power outlets	899
VIC Part I5	Places of public entertainment	900
VIC I5P1	Temporary tiered seating, concourses and embankments	900
VIC I5P2	Motor vehicle racing	900
VIC I5P3	Sanitary and amenity facilities	900
VIC I5D1	Deemed-to-Satisfy Provisions	900
VIC I5D2	Application of Part	901
VIC I5D3	Temporary tiered seating, concourses and embankments	901
VIC I5D4	Motor vehicle racing	901
VIC I5D5	Sanitary and amenity facilities	902
VIC Part I6	Class 9b children's services	903
VIC I6P1	Doorways to a children's room	903
VIC I6D1	Deemed-to-Satisfy Provisions	903
VIC I6D2	Application of Part	903
VIC I6D3	Doorways to a children's room	903
Schedule 1	Definitions	904
Schedule 2	Referenced documents.....	906
VIC	Footnote: Other legislation affecting buildings.....	912
Schedule 11	Western Australia	
WA	Introduction.....	919

Section B	Structure.....	920
Part B1	Structural provisions.....	920
WA	920	
WA B1D4	Determination of structural resistance of materials and forms of construction..	920
WA Part		924
WA B2D1	Regional wind speeds	924
WA	924	
WA	924	
Section G	Ancillary provisions.....	925
Part G1	Minor structures and components	925
G1D2	Swimming pools	925
Section I	Special use buildings	926
WA Part I4	Public buildings	927
WA I4D1	Deemed-to-Satisfy Provisions.....	927
WA I4D2	Application of Part.....	927
WA I4D3	Additional exits	927
WA I4D4	Goings and risers.....	927
WA I4D5	Handrails to ramps, flights and landings	927
WA I4D6	Artificial lighting	928
WA I4D7	Fixed seating	928
Schedule 1	Definitions	929
Schedule 2	Referenced documents.....	930
WA	Footnote: Other legislation affecting buildings.....	931

Introduction to the National Construction Code (NCC)

About the NCC

The NCC is Australia's primary set of technical design and construction provisions for buildings. As a performance-based code, it sets the minimum required level for the safety, health, amenity, accessibility and sustainability of certain buildings. It primarily applies to the design and construction of new buildings, and plumbing and drainage systems in new and existing buildings. In some cases it may also apply to structures associated with buildings and new building work or new plumbing and drainage work in existing buildings.

The Australian Building Codes Board (ABCB), on behalf of the Australian Government and each State and Territory government, produces and maintains the NCC. When determining the content of the NCC, the ABCB seeks to—

- ensure requirements have a rigorously tested rationale; and
- effectively and proportionally address applicable issues; and
- create benefits to society that outweigh costs; and
- consider non-regulatory alternatives; and
- consider the competitive effects of regulation; and
- not be unnecessarily restrictive.

The primary users of the NCC include architects, builders, plumbers, building surveyors, hydraulic consultants, engineers and other building and plumbing related professions and trades.

Format of the NCC

The NCC is published in three volumes. The Building Code of Australia (BCA) is Volumes One and Two of the NCC and the Plumbing Code of Australia (PCA) is Volume Three of the NCC.

Components of the NCC

The NCC provides the technical provisions for the design and construction of buildings and other structures, and plumbing and drainage systems.

NCC Volume One primarily covers the design and construction of multi-residential, commercial, industrial and public assembly buildings and some associated structures.

NCC Volume Two primarily covers the design and construction of smaller scale buildings including houses, small sheds, carports and some associated structures.

NCC Volume Three covers the design, construction and maintenance of plumbing and drainage systems in new and existing buildings.

Each volume contains—

- Governing Requirements; and
- Performance Requirements; and
- compliance options to meet the NCC requirements; and
- State and Territory variations and additions.

The NCC uses building classifications to identify requirements for different intended purposes of buildings or parts of buildings. A building classification relates to the characteristics and the intended use of the building. Information on building classifications is found in [Part A6](#) of the Governing Requirements.

Legislative arrangements and the NCC

The NCC is given legal effect through State and Territory, or other statutory authority, building and plumbing legislation. These Acts and Regulations set out the legal framework and administration mechanisms for the NCC to support the design and construction of buildings.

The dates of adoption of the NCC are determined by State and Territory building and plumbing administrations.

How to use the NCC

Each volume of the NCC is split into two main sections:

- Administrative requirements contained within the Governing Requirements.
- Technical requirements contained within the remaining sections of the NCC.

The Governing Requirements provide the rules and instructions for using and complying with the NCC. They are vital in understanding how the technical requirements of the NCC should be applied to any particular situation. The Governing Requirements are also important in understanding how the NCC fits with the building and plumbing regulatory framework within Australia.

NCC clause numbering system

The NCC uses a uniform clause numbering system across each of its three volumes. This system is called Section-Part-Type-Clause (SPTC). In each clause number—

- The first letter indicates which NCC Section sits within, or if the letter S is used, that the clause is part of a Specification. The letter S is used in place of a Section indicator because the same Specification may be called up in several different Sections of the NCC.
- The first number indicates the number of each Part within a Section, or the number of a Specification. Parts are numbered sequentially within each Section, starting at 1. Specifications are numbered sequentially across all three volumes, also starting at 1.
- The second letter indicates the clause Type. It will be G, O, F, P, V, D or C and these are explained below.
- The second number is the clause number within each Part or Specification.

The clause Types used in the NCC are as follows:

- G = Governing requirement (mandatory)
- O = Objective (guidance)
- F = Functional Statement (guidance)
- P = Performance Requirement (mandatory)
- V = Verification Method (optional)
- D = Deemed-to-Satisfy Provision (optional)
- C = Clause in a Specification (clauses in Specifications may be mandatory or optional, depending on how the Specification is called up by the NCC).

Informative parts of the NCC (e.g. Introduction to the NCC) are not numbered and do not have numbered paragraphs. This helps make it easy to see that their content is information only and does not contain any regulatory requirements.

Introduction to NCC Volume One

About NCC Volume One

NCC Volume One contains technical design and construction requirements for all Class 2 to 9 buildings (multi-residential, commercial, industrial, and public assembly buildings) and their associated structures.

NCC Volume One contains the requirements for—

- all Class 2 to 9 buildings; and
- access requirements for people with a disability in Class 1b and 10a buildings; and
- certain Class 10b structures including access requirements for people with a disability in Class 10b swimming pools.

Components of NCC Volume One

NCC Volume One contains the following Sections:

- Section A – Governing Requirements
- Section B – Structure
- Section C – Fire resistance
- Section D – Access and egress
- Section E – Services and equipment
- Section F – Health and amenity
- Section G – Ancillary provisions
- Section I – Special use buildings
- Section J – Energy efficiency
- Schedules—
 - Abbreviations and symbols
 - Definitions
 - Referenced documents
 - State and Territory variations and additions

Section A contains the mandatory Governing Requirements for the NCC. Sections B to G and I to J contain the mandatory Performance Requirements and the pathways that can be used to comply with the NCC.

There is no Section H in NCC Volume One because the letter 'H' is used in NCC Volume Two. This avoids number clashes between NCC Volume One and NCC Volume Two.

List of NCC Specifications

Table 1 sets out the number and title of each NCC Specification, along with the clauses in each NCC Volume that refer to the Specification.

Table 1: List of NCC Specifications

Spec no.	Title	References	
		Vols. One, Two and Housing Provisions	Vol. Three
1	Fire resistance of building elements	A5G5; A5G6; C4D15; S2C1; S9C2	A5G5; A5G6
2	Description of materials referred to in Specification 1	A5G5; A5G6; C4D15; S1C2; S9C2	A5G5; A5G6
3	Fire hazard properties (determination)	A5G6	A5G6
4	Design of buildings in cyclonic areas	B1D3	-
5	Fire-resisting construction	C2D2; C2D10; C3D6; C3D8; C3D9; C3D10; C3D11; C3D13; C4D6; C4D8; C4D13; C4D15; D2D13; E1D5; G3D6; S17C11; S18C4; S31C3	-
6	Structural tests for lightweight construction	B1D4; C2D9; S5C23; S14C2; S32C2; S32C3; Housing Provisions 9.3.1	-
7	Fire hazard properties (requirements)	C2D11; C2D14; S3C2; S14C2; S19C7; S32C6	-
8	Performance of external walls in fire	C2D12	-
9	Cavity barriers for fire-protected timber	C2D13; C4D16; S5C11; S5C20	-
10	Fire protected timber	S1C2	-
11	Smoke-proof walls in health-care and residential care buildings	C3D6; C3D15; C4D12; E2D11	-
12	Fire doors, smoke doors, fire windows and shutters	C4D5; G3D4; S11C2; S11C3	-
13	Penetration of walls, floors and ceilings by services	C4D15	-
14	Non-required stairways, ramps and escalators	C2D11; D2D17	-
15	Braille and tactile signs	D4D7; S27C10	-
16	Accessible water entry/exit for swimming pools	D4D11	-
17	Fire sprinkler systems	C1V3; C2D6; C2D13; C3D2; C3D4; C3D7; C3D8; C4D6; C4D7; C4D8; C4D9; C4D12; D2D4; D2D17; E1D4; E2D8; E2D9; E2D10; E2D11; E2D13; E2D14; E2D15; E2D16; E2D17; E2D19; E2D20; G3D1; G3D6; G6D6; I1D2; S5C10; S5C11; S5C14; S5C18; S5C19; S5C20; S5C21; S5C22; S5C24; S7C3; S7C4; S19C11; S20C3; S20C4; S20C5; S31C2	-

Preface

Spec no.	Title	References	
		Vols. One, Two and Housing Provisions	Vol. Three
18	Class 2 and 3 buildings not more than 25 m in effective height	E1D4; S17C2; S23C1; S23C3	-
19	Fire control centres	E1D14	-
20	Smoke detection and alarm systems	E2D3; E2D5; E2D7; E2D8; E2D9; E2D11; E2D13; E2D14; E2D15; E2D16; E2D17; E2D18; E2D19; E2D20; S5C19; S5C22; S17C8; S18C3; S21C7; S21C8; S22C3	-
21	Smoke exhaust systems	C3D13; E2D10; E2D14; E2D15; E2D16; E2D17; E2D18; E2D19; E2D20; S20C6; S20C8	-
22	Smoke-and-heat vents	E2D10; E2D14; E2D15; E2D16; E2D17; E2D18; E2D19; E2D20; S20C8	-
23	Residential fire safety systems	S18C3; S18C4	-
24	Lift installations	E3D2	-
25	Photoluminescent exit signs	E4D8	-
26	Waterproofing and water resistance requirements for building elements in wet areas	F1D6	-
27	Accessible adult change facilities	F4D12; S15C1	-
28	Sound insulation for building elements	F5D3; F5D4	-
29	Impact sound — Test of equivalence	F5D4; S28C2	-
30	Installation of boilers and pressure vessels	G2D2	-
31	Fire and smoke control in buildings containing atriums	G3D4; G3D8; S14C2	-
32	Construction of proscenium walls	C2D11; I1D3	-
33	Additional requirements	J1V1; J1V2; J1V3	-
34	Modelling parameters	J1V3; S35C1	-
35	Modelling profiles	S34C3	-
36	Material properties	J4D3	-
37	Calculation of U-Value and solar admittance	J3D9; J3D13; J4D3; J4D6	-
38	Spandrel panel thermal performance	S37C3; S37C4	-
39	Sub-floor thermal performance	J4D3	-
40	Lighting and power control devices	J7D3; J7D4; J7D5; J7D6; J7D7	-
41	Cross-connection hazards	-	B5D2; B5D3; B5D4
42	House energy rating software	H6D2	-
43	Bushfire protection for certain Class 9 buildings	G5D4	-
44	Calculation of heating load limit, cooling load limit and thermal energy load limit	J1P2; H6P1	-

List of amendments—NCC 2025—Volume One

This list has been prepared by the Australian Building Codes Board to assist National Construction Code (NCC) users in identifying changes incorporated in the 2025 edition of NCC Volume One.

The notes provide a description of major changes made from the previous edition of Volume One. If additional information is required to assist in understanding, interpreting or applying the provisions of the 2025 edition of Volume One, reference should be made to supporting information on the ABCB website (www.abcb.gov.au), including 'Guide' material accessed through NCC online (ncc.abcb.gov.au).

While the Australian Building Codes Board has attempted to include all major changes made from the previous edition of Volume One, the Board does not give any warranty nor accept any liability in relation to the contents of this list of amendments.

Table 1: List of amendments - NCC 2025 Volume One

Section A—Governing requirements	
A2G2	A new sub-clause has been added to specify that Performance Solutions for the structural reliability of components must be at least equivalent to solutions developed using the Deemed-to-Satisfy Provisions. A Note has been included to outline transitional arrangements.
A2G2	A limitations statement has been added that prohibits the use of A2G2(2)(c)—Expert Judgement—in Performance Solutions for certain Performance Requirements, to the extent these Performance Requirements relate to structural or fire safety.
A4G1	Multiple amendments, including new Notes and Exemptions, to permit the use of an edition of a document found on the register of alternative referenced documents as an alternative to the edition listed in Schedule 2.
A5G6(1) & (3)	Multiple amendments to allow a building material, component or assembly to be deemed to have a fire hazard property where it differs in a minor degree to a tested prototype, as confirmed by an Accredited Testing Laboratory.
A5G6(2)	A new sub-clause has been added to specify methods for determining combustibility.
Section B—Structure	
B1P1	Various amendments are included that improve the robustness of Performance Solutions regarding structural reliability by necessitating use of B1V1 and appropriate allowances to demonstrate achievement of specific reliability levels. A Note has been included to outline transitional arrangements.
B1P2	This Performance Requirement has been deleted as a consequence of amendments to B1P1. Following Performance Requirements of Part B1 have been renumbered accordingly.
B1V1	Revised to incorporate component variability factors, specify further design actions and align with amendments to B1P1.

Section A—Governing requirements	
B1D2(b)	Amended to include accommodation of 10-year deflection for when designing structural substrates so that surface falls required by Part F1 are maintained.
B1D3	Amended to reflect revised wind regions.
B1D4(k)	New subclause included referencing AS 1562.1 and Specification 4 for metal roofing for roof construction in cyclonic areas.
B1D4(n)(i)(C)	Reference to 'small sized, low speed automatic lifts' has been removed.
S4C1(2)	Amended to reflect revised wind regions.
Section C—Fire resistance	
C1V3	Amended to require that EW classification testing be undertaken by an Accredited Testing Laboratory. A Note has been included to outline transitional arrangements.
C3D13(2)(b)	Amended to clarify reference to pressurising equipment for all parts of an exit.
C4D3(1)	Amended to clarify extent of external walls to which this provision applies.
C4D10(d)	Amended to extend concession to wiring, sensors and the like for stair pressurisation systems.
C4D15(2)(b)	Amended to clarify reference to opening protection methods specified in AS 1668.1.
S5C9	Amended to clarify when Class 7 parts may be regarded as Class 2 and/or Class 3 parts for the purpose of determining fire-resistance requirements.
S5C11	New provisions included to allow the use of fire-protected steel in Type A construction in certain circumstances.
S5C19(1)	Amended such that open-deck car parks that are part of multi-classified buildings no longer receive concession unless adequately sprinkler protected.
S5C20	Amended to clarify the use and class of the lowest and remaining storeys and that the requirements of (c) only apply to the storey's loadbearing elements.
S5C22(1)	Amended such that open-deck car parks that are part of multi-classified buildings no longer receive concession unless adequately sprinkler protected.
S5C23	Amended to clarify the use and class of the lowest and remaining storeys and that the requirements of (c) only apply to the storey's loadbearing elements.
S7C4	Amended to require that testing to determine the fire hazard properties listed be undertaken by an Accredited Testing Laboratory. A Note has been included to outline transitional arrangements.
S11C2	Amended to clarify smoke-proof wall specifications, including specification for smoke dampers.
S11C3	Amended to clarify the specification for smoke dampers.
S11C4	The concession from smoke reservoir provision for doors serving zone pressurised fire compartments has been removed.
Section D—Access and egress	

Section A—Governing requirements	
D1P2	A limitation has been introduced to clarify the types of ramps for which handrails and other features must be provided.
D1P10	A new Performance Requirement has been introduced to require the provision of wayfinding signage.
D2D8	Amended to include fire compartments served by horizontal exit.
D3D11(3)	Amended to provide concession for threshold ramps.
D3D16	Reference to Class 9a and Class 9c buildings has been removed.
D3D22	Concessions have been introduced for step ramps, threshold ramps, kerb ramps and handrails provided under D3D22.
D3D27	Amended to extend application to Class 2, 3, 6 and 7a buildings and enhance re-entry provision.
D3D31	A new requirement has been introduced for the identification of stairways, floor levels and sole-occupancy units through wayfinding signage.
Section E—Services and equipment	
E1D2(2)	Amended to include reference to AS 2118.6.
E1D2(3)	Amended to require that above ground pipes and fittings meet certain material requirements.
E1D3(1)	New subclause to exempt fire-separated areas less than 100 m ² where certain conditions are met.
E1D5	Due amendment to E1D9, reference to open deck carparks that are within multi-classified buildings has been removed.
E1D6	Amended to remove concession for open deck carparks that are within multi-classified buildings.
E1D9	Amended to remove concession for open deck carparks that are within multi-classified buildings and require sprinklers in fire compartments where carstackers are installed.
E2D3	Clarification amendments, including specification for smoke dampers.
E2D11	'Miscellaneous exhaust air systems' changed to 'ventilation systems' to align with terminology in AS 1668.1.
E2D12	Amended to clarify that requirements apply to carpark ventilation systems.
E2D19(2)(a)	'Miscellaneous exhaust air systems' changed to 'ventilation systems' to align with terminology in AS 1668.1.
E2D19(2)(b)	Amended to clarify extent of application.
E2D20(2)	Amended to clarify application of the floor area threshold to the Class 9b part.
E3D4(3)	Amended to require contrast between lettering and background.
E3D5	Amended to clarify that the requirement to distribute emergency lifts among available shafts does not increase the number of required emergency lifts.

Section A—Governing requirements	
E3D7(1)(e)	Small sized, low speed automatic lifts are no longer permitted.
E3D11(1)	Amended to prevent multiple fire service recall switches.
E3D11(9) and (10)	New requirements added for on-site storage of fire service lift keys.
E3D12(7)	New requirement added for on-site storage of fire service lift keys.
E4D8(a)	Amended to include reference to SA TS 5367 for hybrid photoluminescent exit signs. Specification 25 remains applicable for passive photoluminescent exit signs.
S17C2(c)(ii)	Reference to open deck carparks is removed on account of amendment to E1D9.
S19C10(1)(b)	Amended to reflect contemporary terminology.
S19C11(1)(b)(i)	Amended to clarify application of nominated air change rate.
S20C6(1)(a) and (3)(b)(i)	Amended to clarify application of AS 1670.1.
S21C7(2), (5) and (7)	'Miscellaneous exhaust air systems' changed to 'ventilation systems' and other amendments to align with and clarify application of AS 1668.1.
S24C6	Dimensions amended to align with other standards and clarification amendments.
Specification 25	Amended to align with changes to E4D8.
Section F—Health and amenity	
Part F1 title	Part F1 has been re-named as a consequence of Section F restructuring.
F1O1	Amended to incorporate the new defined term 'water'.
F1F1	Revised to reflect the outcomes of project work.
F1F2	Revised to reflect the outcomes of project work.
F1P1	Re-written following project work that improved water management provisions. F1P1 now incorporates requirements previously found in F1P2 and F1P3.
F1P2	F1P4 of NCC 2022 has been rewritten and relocated to F1P2.
F1P3	Deleted on account of amendments to F1P1.
F1P4	Re-located to F1P2.
F1V1	F3V1 of NCC 2022 has been relocated to F1V1.
F1D2	Amended following project work that improved water management provisions.
F1D4 (new)	A new clause has been inserted to require falls and drainage for concrete roofs, balconies, podiums and the like.
F1D5 (new)	A new clause has been inserted to specify construction of concrete roofs, balconies, podiums and the like.
F1D6	F1D4 of NCC 2022 has been relocated to F1D6 and amended to include further location requirements.
F1D7	F1D5 of NCC 2022 has been relocated to F1D7 and amended to include membrane installation requirements.
F1D8	F1D6 of NCC 2022 has been relocated to F1D8 and amended to remove concession for certain Class 7 and 8 buildings.

Section A—Governing requirements	
F1D10 (new)	A new clause has been included to specify surface finish requirements.
F1D12	F3D2 of NCC 2022 has been relocated to F1D12.
F1D13	F3D3 of NCC 2022 has been relocated to F1D13.
F1D14	F3D4 of NCC 2022 has been relocated to F1D14 and amended to remove concession for certain Class 7 and 8 buildings.
F1D15	F3D5 of NCC 2022 has been relocated to F1D8 and amended to remove concession for certain Class 7 and 8 buildings and replace 'garage' with the defined term 'private garage'.
Part F3	Part F3 has been deleted as a consequence of incorporation of requirements in Part F1.
F4D4(6)	Amended to extend the requirement for a means of disposal of sanitary products to all sanitary facilities. Also, amended to require a dispenser for sanitary products in facilities for use by females.
F4D4(12), (13) & (14)	New provisions included to allow, under a Deemed-to-Satisfy Solution, the provision of all gender sanitary facilities in lieu of sanitary facilities for males and females.
Table F4D4i	Amended to require additional closet pans for female patrons.
F4D8(1)(a)	Amended to specify the construction of all gender facilities.
F6D6	Amended to clarify application and to include reference to AS 1668.4 as an optional specification for natural ventilation provision.
F6D12	The word 'commercial' has been deleted so that all kitchens meeting the equipment power threshold require exhaust hood systems.
F8D3	Amended to provide further membrane vapour permeance specifications, dependent on wall construction, and further details for cavity construction.
F8D5	In NCC 2022, F8D5 applied to all roof spaces. In NCC 2025, F8D5 is amended and applies to roof spaces where the primary insulation layer is not parallel to the roof plane.
F8D6	Added to specify requirements for roof spaces where the primary insulation layer is parallel to the roof plane.
Section G—Ancillary provisions	
G1D2(1)	Amended such that clause 2.3.1 of AS 1926.1 applies to boundary barriers.
G1D5	New provision included to provide a Deemed-to-Satisfy Solution for discharge of swimming pool drainage.
S31C7	Amended to clarify the application of AS 1668.1.
Section J—Energy efficiency	
Section J	A new Note is introduced referring to Section J of NCC 2022 Amendment 2 for Class 2 buildings. Accordingly, references to Class 2 buildings throughout Section J of NCC 2025 are removed.
J1P1	Amended, following project work, to reflect updated performance targets.

Section A—Governing requirements	
J1P4	Amended to allow for scenarios where the full extent of on-site renewable energy generation or storage is already realised.
J1V1	Amended to reflect updated performance targets and include further specifications for the energy model.
J1V2(1)(a) and Explanatory Information (new)	Amended to remove the 'Design & As Built' option.
J1V3	Amended to include further specifications for the proposed and reference buildings.
J1V4(1)	Amended on account of changes to J1P1.
J2D2	Amended on account of changes in Part J4 and new requirements regarding onsite renewable energy systems.
J3D5(1)	Amended to specify application to metal-framed flat, skillion and cathedral roofs.
J3D6	J3D6 of NCC 2022 has been deleted on account of thermal bridging control being inherent in compliance with wall-glazing U-value requirements.
J3D9(6)	Amended to clarify solar admittance calculation method.
J3D10(3) & (4)	Amended to clarify the application of slab-edge insulation.
J3D14	Amended to include more detailed specifications for net equivalent energy usage calculations.
J4D3(1)	Amended to provide further specification for the installation of insulation.
J4D4	Amended to specify various Total R-Values for various scenarios.
J4D6	Total system U-Values, solar admittance values and R-values for walls and glazing have been updated.
J5D2	Amended to incorporate reference to the external building fabric of Class 4 parts.
J5D4	Concession for non-conditioned spaces and climate zones 1-3 has been removed.
J5D5(1)	Concession for climate zones 1-3 has been removed.
J5D5(4)	Extended to apply to external fabric of Class 4 parts of buildings, and include concessions for certain temporary unconditioned spaces.
J5D6	Concession for conditioned spaces and climate zones 1-3 removed. Also, concession introduced for continuously operating fans.
J5D7	Concession for climate zones 1-3 removed.
J5D8	Concession for non-heated spaces removed.
J6D3	Various amendments, including limiting of heating and cooling at zone level, to improve efficiency through air-conditioning system control.
J6D4	Various amendments, including introduction of further scenarios where modulating control is required, to improve efficiency through mechanical ventilation system control.
J6D5	Various amendments, including removal of concessions for low static pressure systems and low supply air volume systems, to improve efficiency of fans and ductwork.
J6D6(3)(f)	Concession for MEPS certified systems removed.

Section A—Governing requirements	
J5D5(4)	Scope of application clarified.
J6D8	Additional efficiency requirements added for certain pump systems. Change in terminology from constant and variable speed to constant and variable flow.
J6D10	Various amendments for improving efficiency of air-conditioning systems. Addition of requirements for electrical system readiness where gas space heating is used.
J6D11	Updated to include further specification for the efficiency of refrigerant chillers.
J6D12	Updated to include further specification for the efficiency of unitary air-conditioning systems.
J6D13	Various amendments, including variable speed operation requirements for three-phase motor fans, for the efficiency of heat rejection equipment.
J7D3(4)	Lighting timers removed and motion detectors replaced with demand-operated controls.
J7D4	Various amendments, including further situations for which demand operated control must be provided, for the efficiency of lighting control.
J8D2	A new clause added to specify this part does not apply a Class 4 part of a building.
J8D3	New requirements for heated water pipework insulation and electrical system readiness where gas heated water systems are installed.
J8D4	Various gas heater minimum gross thermal efficiencies are replaced with a single value of 90%. New requirements for electrical system readiness for buildings with gas heated swimming pools.
J8D5	Various gas heater minimum gross thermal efficiencies are replaced with a single value of 90%. New requirements for electrical system readiness for buildings with gas heated spa pools.
J9D3	Amended to require and specify an Environmental Management Information System facility for energy monitoring.
J9D5	Amended to require installation of on-site solar photovoltaic systems, or equivalent renewable energy generation systems.
S33C2	Amended to include future electrification readiness where gas systems are installed and require installation of on-site renewable generation systems.S34C2
S34C2	Further specifications for the reference building have been included.
S34C3	Amended to require the use of climatic data and specify air-conditioning parameters. Greenhouse gas emission factors for electricity in Table S34C3 have been updated.
S34C4(h)	Amended to include electric vehicle charging.
S35C2	Various operation and operation profiles have been revised.
S37C7	Amended to allow for shading of glazing by vertical projections.

Section A—Governing requirements	
S40C1	Amended to include the scope for manual switches, time switches and demand-operated controls.
S40C2	Specifications for lighting timers, included in previous editions, have been removed. Manual switch specifications have been introduced for NCC 2025.
S40C3	Amended to require the ability to program public holidays into time switches. Manual switch specifications have been removed.
S40C4	Specifications for motion detectors, included in previous editions, have been removed.
S40C5	Time delay for on/off operation has been removed, as has differential lux specifications for sensor control.
Specification 46	A new specification has been included for specifying the method of calculating fan power ratio for assessing compliance with J6D5.
Specification 47	A new specification has been included for specifying the method of calculating the climate specific part load value for chillers for assessing compliance with J6D11.
Specification 48	A new specification has been included for specifying the method of comparison of zone loads in a proposed building and its corresponding reference building.
Schedule 1—Definitions	
Abbreviations	Diameter Nominal (DN) has been added.
Symbols	Carbon dioxide equivalent per square metre hour (CO ₂ -e/m ² .hr) has been added.
Symbols	Watt peak per meter squared output of a solar photovoltaic panel (Wp/m ²) has been added.
Allotment	A new defined term, 'allotment', has been added.
Ancillary components	A defined term, 'ancillary components', has been added.
Cavity	The defined term 'cavity' has been amended to cover additional wall types.
Climate specific art load value	A new defined term, 'climate specific part load value', has been added.
Figure 2	Figure 2 has been updated.
Collected	A new defined term, 'collected', has been added.
Combustible	The defined term 'combustible' has been amended to require that determination using AS 1530.1 is to be undertaken by an Accredited Testing Laboratory. A transition period has been included for this amendment.
Condensation	The defined term 'condensation' has been amended to replace 'moisture' with 'liquid water'.
Control layer	A defined term, 'control layer', has been added.
Critical radiant flux	The defined term 'critical radiant flux' has been amended to require that determination using AS ISO 9239.1 is to be undertaken by an Accredited Testing Laboratory. A transition period has been included for this amendment.
Table 4	Amended to reflect updated wind classes B1 and B2.
Drainage system	A new defined term, 'drainage system', has been added.
Drained	A defined term, 'drained', has been added.
Envelope	The defined term 'envelope' has been amended.

Section A—Governing requirements	
Fire hazard properties	The defined term 'fire hazard properties' has been amended to align methods of determination.
Fire protected steel	A new defined term, 'fire-protected steel', has been added.
Fire-source feature	The defined term 'fire-source feature' has been amended to include the construction edge or perimeter of another building on the allotment, which is not a Class 10 building, which has a use that constitutes a fire load.
Flammability index	The defined term 'flammability Index' has been amended to require that determination using AS 1530.2 is to be made by an Accredited Testing Laboratory. A transition period has been included for this amendment.
Kerb ramp	A new defined term, 'kerb ramp', has been added.
Mezzanine	The defined term 'mezzanine' has been amended for clarity.
Non-combustible	The defined term 'non-combustible' has been amended to require that determination using AS 1530.1 is to be made by an Accredited Testing Laboratory. A transition period has been included for this amendment.
Occupiable outdoor area	Explanatory information has been provided to assist with interpretation.
Point of connection	The defined term, 'Point of connection', has been amended to incorporate rainwater storage.
Rainwater	A new defined term, 'rainwater', has been added.
Redirected	A new defined term, 'redirected', has been added.
Rising damp	A new defined term, 'rising damp', has been added.
Self-draining	A new defined term, 'self-draining', has been added.
Small sized, low-speed automatic lift	The defined term 'small sized, low-speed automatic lift' has been deleted.
Smoke-Developed Index	The defined term 'Smoke-Developed Index' has been amended to require that determination using AS/NZS 1530.3 is to be made by an Accredited Testing Laboratory. A transition period has been included for this amendment.
Smoke development rate	The defined term 'smoke development rate' has been amended to require that determination using AS ISO 9239.1 is to be made by an Accredited Testing Laboratory. A transition period has been included for this amendment.
Solar Reflectance Index	A new defined term, 'Solar Reflectance Index', has been added.
Spread-of-Flame Index	The defined term 'Spread-of-Flame Index' has been amended to require that determination using AS 1530.3 is to be made by an Accredited Testing Laboratory. A transition period has been included for this amendment.
Step ramp	A new defined term, 'step ramp', has been added.
Stormwater	A new defined term, 'stormwater', has been added.
Structural substrate	A new defined term, 'structural substrate', has been added.
Sub-surface water	A new defined term, 'sub-surface water', has been added.
Surface finish	A new defined term, 'surface finish', has been added.
Surface water	The defined term 'surface water' has been amended for clarity.

Section A—Governing requirements	
Surface water seepage	A new defined term, 'surface water seepage', has been added.
Threshold ramp	A new defined term, 'threshold ramp', has been added.
Total Solar Reflectance	A new defined term, 'Total Solar Reflectance (TSR)', has been added.
Water	A new defined term, 'water', has been added.
Water services overflow	A new defined term, 'water services overflow', has been added.
AS ISO 717 Part 1	The 2024 edition of AS ISO 717 Part 1 'Acoustics — Rating of sound insulation in buildings and of building elements — Airborne sound insulation' has been referenced. The associated note (Note 1) has been updated accordingly.
AS ISO 717 Part 2	The 2024 edition of AS ISO 717 Part 2 'Acoustics — Rating of sound insulation in buildings and of building elements — Impact sound insulation' has been referenced.
AS/NZS 1170 Part 2	Amdts 1 and 2 of the 2021 edition of AS/NZS 1170 Part 2 'Structural design actions — Wind actions' have been referenced.
AS/NZS 1170 Part 4	The 2024 edition of AS/NZS 1170 Part 4 'Structural design actions — Earthquake actions in Australia' has been referenced.
AS 1530 Part 1	The 2024 edition of AS/NZS 1530 Part 1 'Methods for fire tests on building materials, components and structures — Combustibility test for materials (ISO 1182:2020, NEQ)' has been referenced. A note concerning existing tests (Note 2) has been incorporated accordingly.
AS 1530 Part 8.1	Amdt 1 of the 2018 edition of AS 1530 Part 8.1 'Methods for fire tests on building materials, components and structures — Tests on elements of construction for buildings exposed to simulated bushfire attack — Radiant heat and small flaming sources' has been referenced. A note concerning existing tests (Note 2) has been incorporated accordingly.
AS 1668 Part 2	The 2024 edition of AS 1668 Part 2 'The use of ventilation and air conditioning in buildings — Mechanical ventilation in buildings' has been referenced.
AS 1668 Part 4	The 2024 edition of AS 1668 Part 4 'The use of ventilation and air conditioning in buildings — Natural ventilation of buildings' has been referenced.
AS 1670 Part 1	The 2024 edition of AS 1670 Part 1 'Fire detection, warning, control and intercom systems — System design, installation and commissioning — Fire' has been referenced.
AS 1670 Part 3	The 2024 edition of AS 1670 Part 3 'Fire detection, warning, control and intercom systems — System design, installation and commissioning — Fire alarm monitoring' has been referenced.
AS 1670 Part 4	The 2024 edition of AS 1670 Part 4 'Fire detection, warning, control and intercom systems — System design, installation and commissioning — Emergency warning and intercom systems' has been referenced.

Section A—Governing requirements	
AS 1682.1	The 2015 edition of AS 1682.1 'Fire, smoke and air dampers — Specification' has been referenced.
AS 1682.2	The 2015 edition of AS 1682.2 'Fire, smoke and air dampers — Installation' has been referenced.
AS 1684 Part 2	Amdt 1 of the 2021 edition of AS 1684 Part 2 'Residential timber-framed construction — Non-cyclonic areas' has been referenced.
AS 1684 Part 3	Amdt 1 of the 2021 edition of AS 1684 Part 3 'Residential timber-framed construction — Cyclonic areas' has been referenced.
AS 1684 Part 4	The 2024 edition of AS 1684 Part 4 'Residential timber-framed construction — Simplified — Non-cyclonic areas' has been referenced.
AS 1926 Part 1	The 2024 edition of AS 1926 Part 1 'Swimming pool safety — Safety barriers for swimming pools' has been referenced.
AS 2118 Part 6	The 2024 edition of AS 2118 Part 6 'Automatic fire sprinkler systems — Combined sprinkler and hydrant systems in multistorey buildings' has been referenced.
AS 2200	The 2006 edition of AS 2200 'Design charts for water supply and sewerage (incorporating amendment 1)' has been referenced.
AS/NZS 3500 Part 1	The 2025 edition of AS/NZS 3500 Part 1 'Plumbing and drainage — Water services' has been referenced.
AS/NZS 3500 Part 2	The 2025 edition of AS/NZS 3500 Part 2 'Plumbing and drainage — Sanitary plumbing and drainage' has been referenced.
AS/NZS 3500 Part 3	The 2025 edition of AS/NZS 3500 Part 3 'Plumbing and drainage — Stormwater drainage' has been referenced.
AS/NZS 3500 Part 4	The 2025 edition of AS/NZS 3500 Part 4 'Plumbing and drainage — Heated water services' has been referenced.
AS 3786	The 2023 edition of AS 3786 'Smoke alarms using scattered light, transmitted light or ionization' has been referenced. The note regarding existing tests (Note 7) has been updated accordingly.
AS/NZS 3823.1.4	The 2012 edition of AS 3823.1.4 'Performance of electrical appliances — Airconditioners and heat pumps' has been referenced.
AS/NZS 4020	Amdt 1 of the 2018 edition of AS/NZS 4020 'Testing of products for use in contact with drinking water' has been referenced.
AS 4055	The 2024 edition of AS 4055 'Wind loads for housing' has been referenced.
AS/NZS 4859 Part 1	Amdt 1 of the 2018 edition of AS/NZS 4859 Part 1 'Thermal insulation materials for buildings — General criteria and technical provisions' has been referenced.
AS 5346	The 2023 edition of AS 5346 'Exterior insulation and finish cladding systems' has been referenced.
AS/NZS 5601 Part 1	The 2022 edition of AS/NZS 5601 Part 1 'Gas installations — General installations (incorporating amendments 1 and 2)' has been referenced.

Section A—Governing requirements	
AS/NZS ISO 5151	The 2023 edition of AS/NZS ISO 5151 'Non-ducted air conditioners and heat pumps — Testing and rating for performance' has been referenced.
AS/NZS ISO 13256.1	The 2023 edition of AS/NZS ISO 13256.1 'Water source heat pumps — Testing and rating for performance — Water-to-air and brine-to-air heat pumps' has been referenced.
ASTM-E1980-11	The 2019 edition of ASTM-E1980-11 'Standard Practice for Calculating Solar Reflectance Index of Horizontal and Low Sloped Opaque Surfaces' has been referenced.
EN14511-2	The 2022 edition of EN14511-2 'Air-conditioners, liquid chilling packages and heat pumps for space heating and cooling and process chillers, with electricity driven compressors — Test conditions' has been referenced.
EN14825	The 2022 edition of EN14825 'Air conditioners, liquid chilling packages and heat pumps, with electrically driven compressors, for space heating and cooling, commercial and process cooling — Testing and rating at part load conditions and calculation of seasonal performance' has been referenced.
NSF/ANSI/CAN 372	The 2024 edition of NSF/ANSI/CAN 372 'Drinking Water System Components — Lead Content' has been referenced. A note regarding existing tests (Note 10) has been incorporated.
SA TS 5367	The 2021 edition of SA TS 5367 'Photoluminescent exit signage — Product specification, installation and operation' has been referenced.

Section A Governing Requirements

Part A1 Interpreting the NCC

Governing Requirements

A1G1	Scope of NCC Volume One
A1G2	Scope of NCC Volume Two
A1G3	Scope of NCC Volume Three
A1G4	Interpretation

Part A2 Compliance with the NCC

Governing Requirements

A2G1	Compliance
A2G2	Performance Solution
A2G3	Deemed-to-Satisfy Solution
A2G4	A combination of solutions

Part A3 Application of the NCC in States and Territories

Governing Requirements

A3G1	State and Territory compliance

Part A4 Referenced documents

Governing Requirements

A4G1	Referenced documents
A4G2	Differences between referenced documents and the NCC
A4G3	Adoption of referenced documents

Part A5 Documentation of design and construction

Governing Requirements

A5G1	Suitability
A5G2	Evidence of suitability – Volumes One, Two and Three
A5G3	Evidence of suitability – Volumes One and Two (BCA)
A5G4	Evidence of suitability – Volume Three (PCA)
A5G5	Fire-resistance of building elements
A5G6	Fire hazard properties and combustibility
A5G7	Resistance to the incipient spread of fire
A5G8	Labelling of Aluminium Composite Panels
A5G9	NatHERS

Part A6 Building classification

Governing Requirements

A6G1	Determining a building classification
A6G2	Class 1 buildings
A6G3	Class 2 buildings
A6G4	Class 3 buildings
A6G5	Class 4 buildings
A6G6	Class 5 buildings
A6G7	Class 6 buildings
A6G8	Class 7 buildings

A6G9	Class 8 buildings
A6G10	Class 9 buildings
A6G11	Class 10 buildings and structures
A6G12	Multiple classifications

Part A7

United buildings

Governing Requirements

A7G1	United buildings
A7G2	Alterations in a united building

Specification 1

Fire-resistance of building elements

S1C1	Scope
S1C2	Rating
S1C3	FRLs determined by calculation
S1C4	Interchangeable materials
S1C5	Columns covered with lightweight construction
S1C6	Non-loadbearing elements

Specification 2

Descriptions of elements referred to in Specification 1

S2C1	Scope
S2C2	Mortar for masonry
S2C3	Gypsum blocks
S2C4	Gypsum-sand mortar and plaster
S2C5	Gypsum-perlite and gypsum-vermiculite plaster
S2C6	Plaster of cement and sand or cement, lime and sand
S2C7	Plaster reinforcement
S2C8	Ashlar stone masonry
S2C9	Dimensions of masonry
S2C10	Solid units
S2C11	Hollow units
S2C12	Equivalent thickness
S2C13	Height-to-thickness ratio of certain walls
S2C14	Increase in thickness by plastering — walls
S2C15	Increase in thickness by plastering — columns
S2C16	Gypsum-perlite or gypsum-vermiculite plaster or metal lath — walls
S2C17	Gypsum-perlite or gypsum-vermiculite plaster or metal lath — columns
S2C18	Gypsum-perlite or gypsum-vermiculite plaster or metal lath — beams
S2C19	Exposure of columns
S2C20	Exposure of beams
S2C21	Filling of column spaces
S2C22	Hollow terracotta blocks
S2C23	Reinforcing for column and beam protection — masonry
S2C24	Reinforcing for column and beam protection — gypsum blocks and hollow terracotta blocks
S2C25	Reinforcing for column and beam protection — structural con

crete and poured gypsum

S2C26 Reinforcing for column and beam protection — gypsum-perlite or
gypsum-vermiculite plaster sprayed to contour

S2C27 Measurement of thickness of column and beam protection

Specification 3 Fire hazard properties

S3C1 Scope

S3C2 General requirement

S3C3 Form of test

S3C4 Test specimens

S3C5 Concession

S3C6 Smaller specimen permitted

PREVIEW DRAFT

Part A1 Interpreting the NCC

Introduction to this Part

This Part explains important concepts on how the NCC must be interpreted and applied. There are certain conventions and approaches that need to be taken into account when using the NCC. This includes interpreting specific language and terms. This is critical to understanding the intended technical and legal meaning of the NCC. This Part also explains the difference between the mandatory Parts of the NCC and the Parts that are only explanatory or guidance in nature.

Governing Requirements

A1G1 Scope of NCC Volume One

NCC Volume One contains the requirements for—

- (a) all Class 2 to 9 buildings; and
- (b) access requirements for people with a disability in Class 1b and 10a buildings; and
- (c) certain Class 10b structures including access requirements for people with a disability in Class 10b *swimming pools*.

A1G2 Scope of NCC Volume Two

NCC Volume Two contains the requirements for—

- (a) Class 1 and 10a buildings (other than access requirements for people with a disability in Class 1b and 10a buildings); and
- (b) certain Class 10b structures (other than access requirements for people with a disability in Class 10b *swimming pools*); and
- (c) Class 10c *private bushfire shelters*.

A1G3 Scope of NCC Volume Three

- (1) NCC Volume Three contains technical requirements for the design, construction, installation, replacement, repair, alteration and maintenance for *plumbing* and *drainage* systems in new and existing buildings.
- (2) NCC Volume Three applies to these systems in all classes of buildings whenever *plumbing* and *drainage* work is carried out.
- (3) NCC Volume Three additionally applies to *sites* where services are designed, constructed, installed, replaced, repaired, altered and maintained independently of buildings.
- (4) NCC Volume Three applies from the *point of connection* to the point of discharge.

A1G4 Interpretation

- (1) The following components of the NCC are non-mandatory and informative:
 - (a) Content identified as “explanatory information”.
 - (b) The “Introduction” information, located at the beginning of each Volume, Section or Part.

- (2) Words in italics must be interpreted in accordance with—
- (a) definitions provided in Schedule 1, unless the contrary intention appears; and
 - (b) additional definitions in State or Territory appendices, as appropriate.
- (3) The NCC must be interpreted and applied in accordance with the following:
- (a) A reference to a building is a reference to an entire building or part of a building (as the case requires).
 - (b) A reference to *plumbing or drainage solution*, or *product* in Volume Three is a reference to an entire installation, system or *product*, or part of an installation, system or *product* (as the case requires).
 - (c) A reference in a *Performance Requirement* to “the degree necessary” means—
 - (i) that consideration of all the criteria referred to in the *Performance Requirement* will determine the outcome appropriate to the circumstances; and
 - (ii) that in certain cases it may not be necessary to incorporate any specific measures to meet the relevant *Performance Requirement*.
 - (d) An “Application” statement is mandatory and is provided to specify where and when a requirement or provision applies.
 - (e) A “Limitation” statement is mandatory and is provided to specify where and when the application of a requirement or provision is limited to a certain circumstance.
 - (f) An “Exemption” statement is mandatory and is provided to specify where or when a requirement or provision does not need to be complied with.
 - (g) A “Note” is part of a provision or requirement and provides additional mandatory instructions.
 - (h) Figures in the NCC—
 - (i) are used to illustrate specific issues referenced in the associated text; and
 - (ii) are not to be construed as containing all design information that is *required* for that particular building element or situation.
 - (i) The definitions, symbols and abbreviations listed in Schedule 1.
- (4) A reference to a building class is a reference to all the sub-classifications of that class.
- (5) The following sub-classifications apply:
- (a) Classes 1a and 1b are sub-classifications of Class 1.
 - (b) Classes 7a and 7b are sub-classifications of Class 7.
 - (c) Classes 9a, 9b and 9c are sub-classifications of Class 9.
 - (d) Classes 10a, 10b and 10c are sub-classifications of Class 10.
- (6) A reference to a sub-classification is solely to that sub-classification.

TAS A1G4(7)

Notes

For Volume Three, if a word is not defined in Schedule 1, the meaning (if any) attributed to it under AS/NZS 3500.0 should be used unless the contrary intention appears.

Explanatory Information

Explanatory information and Introduction information contained in the NCC is non-mandatory and is provided for guidance purposes only. This informative material should be read in conjunction with the technical provisions of the NCC. Any statements made in the informative and guidance components of the NCC should not be taken to override the NCC. Unlike the NCC, which is adopted by legislation, the informative and guidance components are not called up into legislation and they do not cover State and Territory variations and additions. Because informative and guidance components of the NCC do not have regulatory force, the ABCB accepts no responsibility for its contents when applied to specific buildings or any liability which may result from its use.

Defined words provide the precise meaning and expressions of key words used for understanding and complying with the NCC. Where a word is not defined in the NCC, the relevant common meaning of the word should be used.

Generally, a reference to a building is a reference to the whole building, regardless of classification. However, when a

provision is applicable to a specific class or classes of building, that reference to a building may be a reference to the whole building or part of the building depending on how the building is classified.

Classes 1a and 1b, 7a and 7b, 9a, 9b and 9c, and 10a, 10b and 10c are separate classifications. In the NCC, when the designation 'a', 'b' or 'c' is not applied, the reference is to all buildings of the general class. For example, 'Class 9b' refers only to Class 9b buildings, but 'Class 9' refers to Classes 9a, 9b and 9c.

Whether a provision applies or not depends on the circumstances of the case and the circumstances in which the reference is made. For example, where a building has a single classification, a reference to a building in the NCC is understandably a reference to a whole building. However, where a building has parts of different classification, unless the contrary intention appears (i.e. there is a specific reference to the whole building), a reference to a building in the NCC is a reference to the relevant part of the building. This means that each part of the building must comply with the relevant provisions for its classification.

A number of the *Performance Requirements* of the NCC use the expression "to the degree necessary" or "appropriate to". These expressions provide flexibility by allowing appropriate authorities to determine the degree of compliance necessary in a particular case. Therefore, any part of the NCC that uses these expressions should be referenced against the requirements of the *appropriate authority*. For example, an *appropriate authority* might judge that an item need not be installed, or a particular level of performance be achieved.

Application, Limitation, and Exemption statements are used to identify provisions that may or may not apply in certain situations, to varying degrees.

Figures are used to explain the requirements of a particular clause. To ensure the context of the requirement is clearly understood, adjacent construction elements of the building that would normally be required in that particular situation are not always shown. Accordingly, aspects of figures that are not shown should not be interpreted as meaning these construction details are not *required*. Therefore a figure must not be used as an indication of the full construction requirements in a given situation, as the only available option, or a substitute for referencing appropriate construction requirements (in other sources) for a given clause.

Part A2 Compliance with the NCC

Introduction to this Part


This Part explains the possible methods of demonstrating compliance with the NCC. It explains the various compliance pathways within the NCC and the appropriate steps that must be taken for each of these pathways.

Governing Requirements

A2G1 Compliance

- (1) Compliance with the NCC is achieved by complying with—
 - (a) the Governing Requirements of the NCC; and
 - (b) the *Performance Requirements*.
- (2) *Performance Requirements* are satisfied by one of the following, as shown in Figure A2G1:
 - (a) *Performance Solution*.
 - (b) *Deemed-to-Satisfy Solution*.
 - (c) A combination of (a) and (b).

Figure A2G1: NCC compliance structure

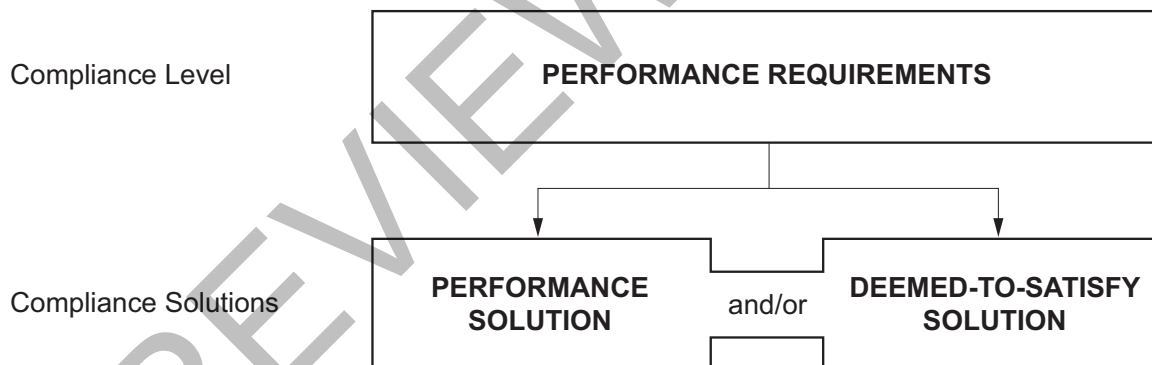

A2G2 Performance Solution

- (1) Subject to (5), a *Performance Solution* is achieved by demonstrating—
 - (a) compliance with all relevant *Performance Requirements*; or
 - (b) the solution is at least *equivalent* to the *Deemed-to-Satisfy Provisions*.
- (2) Subject to (5), a *Performance Solution* must be shown to comply with the relevant *Performance Requirements* through one or a combination of the following *Assessment Methods*:
 - (a) Evidence of suitability in accordance with Part A5 that shows the use of a material, product, *plumbing* and *drainage product*, form of construction or design meets the relevant *Performance Requirements*.
 - (b) A *Verification Method* including the following:
 - (i) The *Verification Methods* provided in the NCC.
 - (ii) Other *Verification Methods*, accepted by the *appropriate authority* that show compliance with the relevant *Performance Requirements*.

- (c) *Expert Judgement*.
 - (d) Comparison with the *Deemed-to-Satisfy Provisions*.
- (3) Where a *Performance Requirement* is satisfied entirely by a *Performance Solution*, in order to comply with (1) the following method must be used to determine the *Performance Requirement* or *Performance Requirements* relevant to the *Performance Solution*:
- (a) Identify the relevant *Performance Requirements* from the Section or Part to which the *Performance Solution* applies.
 - (b) Identify *Performance Requirements* from other Sections or Parts that are relevant to any aspects of the *Performance Solution* proposed or that are affected by the application of the *Performance Solution*.
- (4) Where a *Performance Requirement* is proposed to be satisfied by a *Performance Solution*, the following steps must be undertaken:
- (a) Prepare a *performance-based design brief* in consultation with relevant stakeholders.
 - (b) Carry out analysis, as proposed by the *performance-based design brief*.
 - (c) Evaluate results from (4)(b) against the acceptance criteria in the *performance-based design brief*.
 - (d) Prepare a final report that includes—
 - (i) all *Performance Requirements* and/or *Deemed-to-Satisfy Provisions* identified through A2G2(3) or A2G4(3) as applicable; and
 - (ii) identification of all *Assessment Methods* used; and
 - (iii) details of steps (4)(a) to (4)(c); and
 - (iv) confirmation that the *Performance Requirement* has been met; and
 - (v) details of conditions or limitations, if any exist, regarding the *Performance Solution*.
- (5) Where compliance with B1P1(2) or H1P1(2) is proposed to be satisfied by a *Performance Solution* for materials included in B1D4(a) to (f) or clauses 2.2.4(d) and 2.2.4(g) to (k) of the ABCB Housing Provisions, the *Performance Solution* must be achieved by demonstrating the solution is at least equivalent to the *Deemed-to-Satisfy Provisions*.

VIC A2G2(5)

Limitations

A2G2(2)(c) does not apply to demonstrating compliance with Volume One *Performance Requirements* B1P1(2), C1P1, C1P2, C1P3, C1P4, C1P5, C1P6, C1P7, C1P8, C1P9, D1P1, D1P2, D1P3, D1P4, D1P5, D1P6, D1P7, D1P8, D1P9, D1P10, E1P1, E1P2, E1P3, E1P4, E1P5, E1P6, E2P1, E2P2, E3P1, E3P2, E3P3, E3P4, E4P1, E4P2, E4P3 and Volume Two Performance Requirement H1P1(2), to the extent they relate to structural or fire safety.

Notes

A2G2(5) does not take effect until 1 year after the adoption date for NCC 2025.

A2G3 Deemed-to-Satisfy Solution

- (1) A solution that complies with the *Deemed-to-Satisfy Provisions* is deemed to have met the *Performance Requirements*.
- (2) A *Deemed-to-Satisfy Solution* can show compliance with the *Deemed-to-Satisfy Provisions* through one or more of the following *Assessment Methods*:
 - (a) Evidence of suitability in accordance with Part A5 that shows the use of a material, product, *plumbing* and *drainage product*, form of construction or design meets a *Deemed-to-Satisfy Provision*.
 - (b) *Expert Judgement*.

A2G4 A combination of solutions

- (1) *Performance Requirements* may be satisfied by using a combination of *Performance Solutions* and *Deemed-to-Satisfy Solutions*.
- (2) When using a combination of solutions, compliance can be shown through the following, as appropriate:
 - (a) A2G2 for assessment against the relevant *Performance Requirements*.
 - (b) A2G3 for assessment against the relevant *Deemed-to-Satisfy Provisions*.
- (3) Where a *Performance Requirement* is satisfied by a *Performance Solution* in combination with a *Deemed-to-Satisfy Solution*, in order to comply with (1), the following method must be used to determine the *Performance Requirement* or *Performance Requirements* relevant to the *Performance Solution*:
 - (a) Identify the relevant *Deemed-to-Satisfy Provisions* of each Section or Part that are to be the subject of the *Performance Solution*.
 - (b) Identify the *Performance Requirements* from the same Sections or Parts that are relevant to the identified *Deemed-to-Satisfy Provisions*.
 - (c) Identify *Performance Requirements* from other Sections or Parts that are relevant to any aspects of any *Performance Solution* proposed or that are affected by the application of the *Deemed-to-Satisfy Provisions* that are the subject of the *Performance Solution*.

Explanatory Information

To comply with the NCC, a solution must achieve compliance with the Governing Requirements and the *Performance Requirements*. The Governing Requirements contain requirements about how the *Performance Requirements* must be met.

Performance Requirements outline the minimum necessary standards different buildings or building elements must attain. The *Performance Requirements* are the only NCC technical provisions that must be satisfied.

In some instances, State and Territory variations and additions may also be applicable to certain *Performance Requirements*.

A solution may be partly a *Performance Solution* and partly a *Deemed-to-Satisfy Solution*. However, no matter what method is chosen, building proponents need to always meet the *Performance Requirements* of the NCC.

A2G2(2)(b)(ii) provides for the use of *Verification Methods* that are not listed in the NCC. A *Verification Method* may include—

- a calculation, using analytical methods or mathematical models; or
- a test, using a technical procedure, either on-site or in a laboratory, to directly measure the extent to which the *Performance Requirements* have been met; or
- an inspection (and inspection report); or
- any other acceptable form of certification.

Any *Verification Method* used must be acceptable to the *appropriate authority*.

A *Performance Solution* must comply with all applicable *Performance Requirements* of the NCC. A *Performance Solution* provides a tailored solution to meet the intended objective of the *Performance Requirements*. A *Performance Solution* must comply with all relevant *Performance Requirements* and must be verified using one or a combination of the following *Assessment Methods*:

- Evidence of suitability.
- *Verification Method*.
- *Expert Judgement*.
- Comparison with the *Deemed-to-Satisfy Provisions*.

For example, building proponents who wish to know what has to be done to satisfy the fire safety *Performance Requirements* for a particular building can either follow the *Deemed-to-Satisfy Provisions* or develop a *Performance Solution*. Guidance on how to develop *Performance Solutions* can be found on the ABCB website at: www.abcb.gov.au. The ABCB Resource Library contains information on the development of *Performance Solutions* for both building and plumbing.

A *Deemed-to-Satisfy Solution* is achieved by following all appropriate *Deemed-to-Satisfy Provisions* in the NCC. The *Deemed-to-Satisfy Provisions* are prescriptive (i.e. like a recipe book, they tell you how, what and in which location things must be done). They include materials, components, design factors, and construction methods that, if used, are deemed to meet the *Performance Requirements*, hence the term “Deemed-to-Satisfy”.

A *Deemed-to-Satisfy Solution* may be verified using one or a combination of the following *Assessment Methods*:

- Evidence of suitability.
- *Expert Judgement*.

Some *Performance Requirements* are without *Deemed-to-Satisfy Solutions*. Compliance with these *Performance Requirements* must be achieved by using a *Performance Solution*.

When designing a building or *plumbing* or *drainage* system, both *Performance Solutions* and *Deemed-to-Satisfy Solutions* can be used to achieve compliance with *Performance Requirements*. A combination of solutions may be used to satisfy a single *Performance Requirement*. This may include occasions where a specific *Performance Requirement* covers a number of elements of a building or *plumbing* or *drainage* system.

No NCC provision can be considered in isolation. Any departure from the *Deemed-to-Satisfy Provisions* for a *Performance Solution* needs to be assessed against the relevant *Performance Requirements* within the relevant NCC Section or Part. Additionally, the proposed *Performance Solution* may also impact on other *Performance Requirements* in other Sections or Parts. Thus, these additional *Performance Requirements* need to be considered in relation to the subject *Performance Solution*. A2G2(3) and A2G4(3) set out the methods for determining which *Performance Requirements* are relevant.

It is important that a holistic approach is used when determining the appropriate *Performance Requirements*.

A2G4(2)(a) references A2G2. Therefore, when using a combination of *Performance Solutions* and *Deemed-to-Satisfy Solutions* it is necessary to comply with A2G2(4) where a *Performance Requirement* is proposed to be satisfied by a *Performance Solution*.

More information on NCC compliance methods is located at www.abcb.gov.au.

Part A3 Application of the NCC in States and Territories

Introduction to this Part

This Part explains applying the NCC in accordance with State or Territory legislation. The NCC has legal effect through references in relevant State or Territory building and plumbing legislation.

Although the NCC is a nationally consistent code, there are some situations where a State or Territory enforces a variation, addition or deletion to it. This Part also explains how these variations, additions and deletions apply.

Governing Requirements

A3G1 State and Territory compliance

- (1) For application within a particular State or Territory, the volumes of the NCC comprise inclusively of—
 - (a) Sections A to G, I and J and associated schedules of Volume One; and
 - (b) Sections A and H and associated schedules of Volume Two; and
 - (c) Sections A to E and associated schedules of Volume Three.
- (2) State and Territory variations, additions and deletions must be complied with in conjunction with the NCC.
- (3) The NCC is subject to, and may be overridden by, State or Territory legislation.
- (4) State and Territory variations, additions and deletions are contained in the following Schedules:
 - (a) Schedule 3: Commonwealth of Australia.
 - (b) Schedule 4: Australian Capital Territory.
 - (c) Schedule 5: New South Wales.
 - (d) Schedule 6: Northern Territory.
 - (e) Schedule 7: Queensland.
 - (f) Schedule 8: South Australia.
 - (g) Schedule 9: Tasmania.
 - (h) Schedule 10: Victoria.
 - (i) Schedule 11: Western Australia.
- (5) State and Territory variations and deletions are identified throughout the NCC.

Explanatory Information

The NCC is given legal effect by building regulatory legislation in each State and Territory. This legislation consists of an Act of Parliament and subordinate legislation which empowers the regulation of certain aspects of building and plumbing, and contains the administrative provisions necessary to give effect to the legislation.

Although the NCC is a national code, in some instances it is necessary for a State or Territory to vary or apply additional requirements specific to their jurisdiction. A3G1(2) highlights that these variations, additions or deletions must be applied in conjunction with the NCC provisions. Typically, these variations, additions or deletions override the requirements contained within the NCC.

Any provision of the NCC may be overridden by, or subject to, State or Territory legislation. The NCC must therefore be read in conjunction with that legislation. Any queries on such matters should be referred to the State or Territory authority responsible for building and plumbing regulatory matters.

Where a requirement or provision of the NCC is subject to a State or Territory variation, addition, or deletion, a reference to the appropriate provision in the applicable State or Territory schedule is included with that requirement or provision.

Part A4 Referenced documents

Introduction to this Part

This Part explains how documents referenced in the NCC are adopted and applied. The NCC itself does not contain details of every design and construction requirement for a building or *plumbing* or *drainage* system. As such, the NCC calls upon or “references” other documents with this information. These are called NCC referenced documents. Examples of such documents are Australian Standards, ABCB protocols, ABCB standards and other publications.

There are multiple types of referenced documents. A primary referenced document is one referenced in Schedule 2 of the NCC or included in the Register of Alternative Referenced Documents on the ABCB website. A secondary referenced document is one referenced in a primary referenced document. Other referenced documents are referenced by secondary and subsequently referenced documents.

Governing Requirements

A4G1 Referenced documents

- (1) A reference in the NCC to a document refers to the edition or issues and any amendment listed in—
 - (a) Schedule 2; or
 - (b) the register of alternative referenced documents.
- (2) A document referenced in the NCC is only applicable in the context in which the document is quoted.

TAS A4G1(3)

- (3) Where a new edition, issue or amendment of a primary referenced document is not listed in Schedule 2 or the register of alternative referenced documents, the new edition, issue or amendment is not referenced for the purposes of the NCC.
- (4) Any document described in (1) is a primary referenced document.
- (5) Any document referenced in a primary referenced document is known as a secondary referenced document.
- (6) A reference in a primary referenced document to a secondary or other referenced document is a reference to the document as it existed at the time of publication of the primary referenced document.

Notes

- (1) The register of alternative referenced documents is maintained by the ABCB and is available on the ABCB website at www.abcb.gov.au.
- (2) A document listed in Schedule 2 cannot be used simultaneously with a different edition, issue or amendment of that same document included in the register of alternative referenced documents for the purposes of a *Deemed-to-Satisfy Provision* or *Verification Method* provided in the NCC.
- (3) For the purposes of a State or Territory variation to the NCC, a document listed in the register of alternative referenced documents cannot be used where—
 - (i) an edition, issue or amendment of that document appears in a State or Territory variation to Schedule 2, unless permitted by the register of alternative referenced documents.; or
 - (ii) a State or Territory variation refers to another document that amends, varies or alters the application or scope of a document listed in Schedule 2.

Applications

A4G1 applies to documents referenced in the ABCB Housing Provisions in the same way as for documents referenced within any other part of the NCC.

Exemptions

- (1) Where the primary referenced document is listed in Schedule 2, if the secondary or other referenced document is also a primary referenced document listed in Schedule 2, A4G1(6) does not apply.
- (2) Where the primary referenced document is listed in the register of alternative referenced documents, if the secondary or other referenced document is listed in Schedule 2, A4G1(6) does not apply unless the register of alternative referenced documents indicates otherwise.

Explanatory Information

The use of referenced documents and alternative referenced documents should be documented in building permits, occupancy certificates and other relevant project documentation and include the edition of the document used, such as the publication date.

A4G2 Differences between referenced documents and the NCC

The NCC overrules any difference between the NCC (including the ABCB Housing Provisions) and a primary referenced document, including any secondary referenced document.

Applications

A4G2 applies to documents referenced in the ABCB Housing Provisions in the same way as for other documents referenced by Volumes One, Two or Three of the NCC.

A4G3 Adoption of referenced documents

The NCC does not require compliance with requirements in relation to the following matters where they are prescribed in a referenced document:

- (a) The rights, responsibilities or obligations between the manufacturer, supplier or purchaser.
- (b) The responsibilities of any tradesperson or other building operative, architect, engineer, authority, or other person or body.
- (c) The submission for approval of any material, building component, form or method of construction, to any person, authority or body other than those empowered under State or Territory legislation to give that approval.
- (d) The submission of a material, product, form of construction or design to any person, authority or body for opinion.
- (e) Any departure from the NCC, rule, specification or provision at the sole discretion of the manufacturer or purchaser, or by arrangement or agreement between the manufacturer and purchaser.

Applications

A4G3 applies to documents referenced in the ABCB Housing Provisions in the same way as for documents referenced within Volumes One, Two or Three of the NCC.

Explanatory Information

Schedule 2 is only mandatory to *Deemed-to-Satisfy Provisions*, Specifications and *Verification Methods*. Where the register of alternative referenced documents is used, the documents listed are only mandatory to *Deemed-to-Satisfy Provisions*, Specifications and *Verification Methods* in lieu of editions included in Schedule 2. However, referenced documents are only applicable to the NCC provision that references that document.

A proponent undertaking a *Performance Solution* can use any element or edition of any document, if they help satisfy the *Performance Requirements*. They do not need to use the documents listed in Schedule 2 or the register of alternative referenced documents.

Schedule 2 and the register of alternative referenced documents list the specific edition (or editions) of the Standard or

other document adopted, including any amendments considered appropriate for Schedule 2, the register of alternative referenced documents, the *Deemed-to-Satisfy Provisions*, Specifications or *Verification Methods*. Other editions of (or amendments to) the referenced document are not adopted and have no standing under the NCC.

A primary referenced document may refer to a secondary referenced document. A4G1(6) stipulates that the secondary referenced document is the edition of the document that existed at the time of publication of the primary referenced document. When another edition of (or amendment to) a secondary referenced document is released, subject to the exemption to A4G1, that edition (or amendment) is not adopted for the purposes of the primary referenced document.

A4G3 means that contractual matters or clauses defining responsibilities of various parties, and matters not appropriate for adoption in the NCC are not included when a document is called up in the NCC.

Note 2 to A4G1 prevents simultaneous use of various editions of a referenced document for a given project under a *Deemed-to-Satisfy Solution* or a *Performance Solution* using a *Verification Method* found in the NCC. Never-the-less, it is possible to use various editions of a referenced document under a different *Performance Solution* where it is demonstrated that the relevant *Performance Requirements* are met.

Note 3 to A4G1 prevents the use of a document included in the register of alternative referenced documents for a State or Territory variation to the NCC.

PREVIEW DRAFT

Part A5 Documentation of design and construction

Introduction to this Part

This Part explains the evidence needed to show that the NCC requirements are met and the solution is “fit for purpose”. It covers the use of materials, products, forms of construction and designs. It details separate requirements for the BCA and PCA.

Examples of evidence to be prepared and retained include certificates, reports, calculations and any other documents or information showing compliance with the NCC requirements.

Governing Requirements

A5G1 Suitability

- (1) A building and *plumbing* or *drainage* installation must be constructed using materials, products, *plumbing products*, forms of construction and designs fit for their intended purpose to achieve the relevant requirements of the NCC.
- (2) For the purposes of (1), a material, product, *plumbing product*, form of construction or design is fit for purpose if it is—
 - (a) supported by evidence of suitability in accordance with—
 - (i) *A5G2*; and
 - (ii) *A5G3* or *A5G4* as appropriate; and
 - (b) constructed or installed in an appropriate manner.

Explanatory Information

A5G1 relates to the quality of work and materials needed to construct a building to meet NCC requirements.

This means that—

- all people involved with construction must work skillfully in accordance with good trade practice; and
- all materials must be of a quality to fulfil their function/s within the building.

A5G1 only applies to matters normally covered by the NCC.

While A5G1 outlines quality of work and material demands, sometimes additional conditions may be required by—

- other Commonwealth, State or Territory legislation; and
- contracts that include either specific quality requirements, or requirements for specific materials and the like.

Explanatory Information: Example

Permit authorities would ordinarily not apply A5G1 to such matters as—

- plastering — other than for fire rating, waterproofing of *wet areas*, and sound insulation; or
- painting — other than that required for weatherproofing an *external wall*.

When determining which form of evidence will be used, it is important to consider the appropriateness of the evidence, as some forms of evidence may be more suitable to materials and products and others to designs and forms of construction. The requirement to consider appropriateness of the evidence is specified in *A5G2(1)*.

A5G2 Evidence of suitability – Volumes One, Two and Three

- (1) The form of evidence used must be appropriate to the use of the material, product, *plumbing product*, form of construction or design to which it relates.
- (2) Any copy of documentary evidence submitted must be a complete copy of the original certificate, report or document.

Explanatory Information

For further guidance, refer to the ABCB Handbook for Evidence of Suitability.

All copies of documents provided as evidence must be unabridged copies of the originals. No part can be left incomplete.

A5G3 Evidence of suitability – Volumes One and Two (BCA)

- (1) Subject to A5G5, A5G6, A5G7 and A5G9, evidence to support that the use of a material, product, form of construction or design meets a *Performance Requirement* or a *Deemed-to-Satisfy Provision* may be in the form of any one, or any combination of the following:
 - (a) A current CodeMark Australia or CodeMark *Certificate of Conformity*.
 - (b) A current *Certificate of Accreditation*.
 - (c) A current certificate, other than a certificate described in (a) and (b), issued by a *certification body* stating that the properties and performance of a material, product, form of construction or design fulfil specific requirements of the BCA.
 - (d) A report issued by an *Accredited Testing Laboratory* that—
 - (i) demonstrates that a material, product or form of construction fulfils specific requirements of the BCA; and
 - (ii) sets out the tests the material, product or form of construction has been subjected to and the results of those tests and any other relevant information that has been relied upon to demonstrate it fulfils specific requirements of the BCA.
 - (e) A certificate or report from a *professional engineer* or other *appropriately qualified person* that—
 - (i) certifies that a material, product, form of construction or design fulfils specific requirements of the BCA; and
 - (ii) sets out the basis on which it is given and the extent to which relevant standards, specifications, rules, codes of practice or other publications have been relied upon to demonstrate it fulfils specific requirements of the BCA.
 - (f) Another form of documentary evidence, such as but not limited to a *Product Technical Statement*, that—
 - (i) demonstrates that a material, product, form of construction or design fulfils specific requirements of the BCA; and
 - (ii) sets out the basis on which it is given and the extent to which relevant standards, specifications, rules, codes of practice or other publications have been relied upon to demonstrate it fulfils specific requirements of the BCA.
- (2) Evidence to support that a calculation method complies with an ABCB protocol may be in the form of any one, or any combination of the following:
 - (a) A certificate from a *professional engineer* or other *appropriately qualified person* that—
 - (i) certifies that the calculation method complies with a relevant ABCB protocol; and
 - (ii) sets out the basis on which it is given and the extent to which relevant standards, specifications, rules, codes of practice and other publications have been relied upon.
 - (b) Another form of documentary evidence that correctly describes how the calculation method complies with a relevant ABCB protocol.

Applications

A5G3 is only applicable to NCC Volumes One and Two (BCA).

Notes

Current documentary evidence, such as a certificate or report, containing references to NCC 2019 provisions remains valid despite amended provision references in NCC 2022 and subsequent editions, subject to technical requirements remaining the same between editions.

Explanatory Information

A5G3 represents the minimum level of documentary evidence needed to show that a material, product, form of construction or design meets the relevant NCC requirements. The evidence can be required by:

- an *appropriate authority*;
- a party to a construction contract; or
- a person certifying compliance with the NCC.

If a building proponent does not produce exactly what is required, the evidence may be rejected.

It should be noted that 'design' may refer to engineering design, architectural design as well as product and material design.

A5G3(1)(f) allows for the use of alternative forms of documentary evidence to those included in A5G3(1)(a) to (e), as long as they comply with certain specified conditions.

An example of this arises when an authority carries out an inspection of a building site. The inspection alone would not be acceptable as evidence. However, if the authority compiled a written report detailing findings and conclusions from the inspection, then it may comply with the requirements of A5G3(1)(f).

A *Product Technical Statement* detailing the characteristics and merits of a particular product or system is also an example of another form of documentary evidence.

There is significant reliance by industry on the use of calculation methods, including software programs, for demonstrating compliance with the NCC. While there is no formal recognition of specific methods, A5G3(2) allows suitable evidence to be submitted to demonstrate that a calculation method (including a software program) complies with a relevant ABCB protocol that establishes the characteristics of a suitable calculation method.

If under a *Deemed-to-Satisfy Provision* a building element is *required* to have an FRL, it is necessary that the FRL is determined in accordance with *Specification 1* and *2* as applicable (see A5G5). With the FRL thus determined, A5G3 may be used for producing evidence to document that the FRL has been determined in accordance with *Specifications 1* and *2*.

Where the FRL of a building element is determined using *S1C2(b)* or *(c)*, an applicable form of evidence described by A5G3 is a report from an *Accredited Testing Laboratory* (see A5G3(1)(d)). For this form of evidence, the following applies:

- Please refer to NCC 2025 Preview Draft Omissions for missing text
 - the test report referred to in clause 2.16.2 of AS 1530.4 (also referred to as a full report); or
 - the regulatory information report referred to in clause 2.16.3 of AS 1530.4 (also referred to as a short-form report).
- For documenting a FRL determined under *S1C2(c)*, the *Accredited Testing Laboratory* will issue a report (sometimes referred to as an 'assessment report') that certifies the building element achieves the FRL.

Reports are to be unabridged. This is in order to—

- fulfill the description in A5G3(d) (i.e. 'A report issued by an *Accredited Testing Laboratory*'); and
- comply with A5G2(2).

If a proposal uses a *Deemed-to-Satisfy Provision* that requires a building element to have *fire hazard properties*, then A5G3 may be used to provide evidence to support the proposal and show that the *fire hazard properties* have been determined in accordance with A5G6.

In some circumstances, in order to meet the requirements of the NCC, it is necessary for a test to be undertaken by an *Accredited Testing Laboratory*. These circumstances include:

- The *Standard Fire Test*.
- When determining (by test) if a material is *combustible*.
- When discovering (by test) a material's *fire hazard properties*.

- Classification of an *external wall* system using AS 5113.

In such circumstances a report as specified in A5G3(1)(d) would be suitable evidence. However, A5G3(1) does not require that this form of evidence be used; A5G3(1) permits various forms of evidence independent of how compliance was determined.

Refer to 'Guide' material accessed through NCC online (ncc.abcb.gov.au) for further information on *fire hazard properties*, including—

- *Flammability Index*; and
- *Spread-of-Flame Index*; and
- *Smoke-Developed Index*; and
- a material's *group number*; and
- *smoke growth rate index*.

The *Deemed-to-Satisfy Provisions* of the BCA contain a number of provisions requiring a ceiling to have a *resistance to the incipient spread of fire* to the space above itself. A5G7 sets out the method of determining the incipient spread of fire. The method is based on the method of determining the FRL of a building element and use of the *Standard Fire Test*.

A5G4 Evidence of suitability – Volume Three (PCA)

- (1) Any *product* that is intended for use in contact with *drinking water* must comply with the relevant requirements of AS/NZS 4020, verified in the form of either—
 - (a) a test report provided by an *Accredited Testing Laboratory*, in accordance with AS/NZS 4020; or
 - (b) a *WaterMark Licence* issued in accordance with (3), if it includes compliance with AS/NZS 4020.
- (2) Any *product* that contains copper alloy and is intended for use in contact with *drinking water* must have a *weighted average* lead content of not more than 0.25% verified in the form of either—
 - (a) a test report provided by an *Accredited Testing Laboratory*, in accordance with NSF/ANSI/CAN 372; or
 - (b) a *WaterMark Licence* issued in accordance with (3), if it includes compliance with NSF/ANSI/CAN 372.
- (3) A *product* of a type listed on the *WaterMark Schedule of Products* is deemed to be fit for its intended purpose if it has a *WaterMark Licence* issued in accordance with the WaterMark Scheme Rules.
- (4) A *product* of a type listed on the *Watermark Schedule of Excluded Products* requires evidence of suitability in the form of—
 - (a) a current certificate issued by a *certification body* stating that the properties and performance of a *product* can meet the requirements of the PCA; or
 - (b) a report issued by an *Accredited Testing Laboratory* that—
 - (i) demonstrates that the *product* complies with the relevant requirements of the PCA; and
 - (ii) sets out the tests the *product* has been submitted to and the results of those tests and any other relevant information that has been relied upon to demonstrate suitability for use in a *plumbing* or *drainage* installation.
- (5) Any *product* that is not covered by (3) or (4) must be subjected to a risk assessment in accordance with the WaterMark Scheme Rules.
- (6) Evidence to support that a design or system meets the relevant PCA *Performance Requirements* must be in the form of any one or any combination of the following:
 - (a) The design or system complies with a *Deemed-to-Satisfy Provision*.
 - (b) The design or system is a *Performance Solution* from a *professional engineer* or a *recognised expert* that—
 - (i) certifies that the design or system complies with the relevant requirements of the PCA; and
 - (ii) sets out the basis on which it is given and the extent to which relevant standards, specifications, rules, codes of practice or other publications have been relied upon.
 - (c) Any other form of documentary evidence that—
 - (i) demonstrates that a design or system complies with the relevant requirements of the PCA; and

- (ii) sets out the basis on which it is given and the extent to which relevant standards, specifications, rules, codes of practice or other publications have been relied upon.

TAS A5G4(10)

TAS A5G4(7)

TAS A5G4(8)

TAS A5G4(9)

Notes

On-site wastewater management systems larger than covered by the standards are exempt and a *Performance Solution* is required.

Notes

- (1) A5G4(2) does not take effect until the completion of the transition period specified by WaterMark Notice of Direction 2021/4.
- (2) Note 1 does not prevent the use of *products* certified in accordance with A5G4(2) prior to the completion of the transition period specified by the WaterMark Notice of Direction 2021/4.

Applications

Products subject to the requirements of A5G4(2) are specifically nominated in the *WaterMark Schedule of Products* and the *WaterMark Schedule of Excluded Products*.

Exemptions

- (1) *Products* that are used exclusively for non-drinking uses such as manufacturing, industrial processing, irrigation or any other uses where water is not anticipated to be used for human consumption are excluded from the requirements of A5G4(2).

Explanatory Information

Some examples of products subject to A5G4(2) include the following:

- Copper alloy fittings.
- Stainless-steel braided hoses.
- Valves (such as valves for isolation, backflow prevention, alteration of pressure and temperature).
- Taps and mixers.
- Water meters.
- Pumps (for use with cold and heated water services).
- Water heaters.
- Residential water filtration equipment.
- Water dispensers (such as boiling and cooling units, drinking fountains and bottle fillers).
- Fire sprinkler systems connected to the cold water service that are not isolated from fixtures and fittings intended to supply water for human consumption.

Some examples of products excluded from the requirements of A5G4(2) include the following:

- Shower heads for bathing.
- Emergency showers, eye wash and/or face wash equipment.
- Pumps used for irrigation, fire-fighting or other non-drinking water purposes.
- Fire-fighting water services and equipment including residential fire sprinklers.
- Appliances, including washing machines and dishwashers.
- Commercial boilers associated with heating, ventilation and air-conditioning systems.

- Sanitary fixtures (such as toilets, cistern inlet valves, bidets and urinals).
- Non-drinking water systems (such as recycled water systems).

Product certification transition arrangements are outlined in Notices of Direction issued through the [WaterMark Certification Scheme](#).

Lead is currently permitted in small proportions in the raw materials used to manufacture some [plumbing products](#). Whilst the allowable lead levels permitted in [products](#) manufactured prior to 1 May 2026 ensures compliance with the Australian Drinking Water Guidelines, the use of products compliant with the lead levels in A5G4(2) is encouraged, to avoid the potential for adverse effects on human health.

A5G4(1) requires any [product](#) intended for use in contact with [drinking water](#) to comply with AS/NZS 4020. Compliance is achieved by passing the relevant tests set out in the Standard.

Evidence of compliance must then be provided in accordance with A5G4(1), under which there are two options. The first, at A5G4(1)(a), recognises test reports and certificates that cover compliance with AS/NZS 4020 only. The second, at A5G4(1)(b), recognises [WaterMark Licences](#) where compliance with AS/NZS 4020 is a requirement of the relevant [product](#) Standard or WaterMark Technical Specification.

For [products](#) that are of a type listed on the [WaterMark Schedule of Products](#), A5G4(2) requires that these [products](#) have a [WaterMark Licence](#). A [WaterMark Licence](#) reflects that the [product](#) has been certified and authorised in accordance with the WaterMark Scheme Rules.

For [products](#) that are not subject to WaterMark certification (i.e. excluded [products](#)), evidence that can be used to support that the [product](#) is fit for its intended purpose is provided in A5G4(3). This may include demonstrating compliance with a [product](#) specification referenced in the [WaterMark Schedule of Excluded Products](#), where one is available.

A5G4(4) provides that any [product](#) that is not listed on the [WaterMark Schedule of Products](#) or the [WaterMark Schedule of Excluded Products](#) must be subjected to a risk assessment in accordance with the WaterMark Scheme Rules. The risk assessment will determine whether the [product](#) in question requires certification and authorisation, or if it should be listed as an “excluded product”. This in turn will determine the form of evidence of suitability applicable to the [product](#).

Explanatory Information: What is WaterMark?

The [WaterMark Certification Scheme](#) is a mandatory certification scheme for [plumbing](#) and [drainage products](#) to ensure that these [products](#) are fit for purpose and appropriately authorised for use in a [plumbing](#) or [drainage](#) system.

The PCA, through Part A5, requires certain [plumbing](#) and [drainage products](#) to be certified and authorised for use in a [plumbing](#) or [drainage](#) system. These products are certified through the [WaterMark Certification Scheme](#) and listed on the WaterMark Product Database.


The [WaterMark Certification Scheme](#) is governed by the WaterMark Scheme Rules, which are available for download from the ABCB website at: www.abcb.gov.au. These rules set out the requirements for risk assessments, evaluation, certification, and the drafting of WaterMark Technical Specifications.

When a [product](#) is listed on the [WaterMark Schedule of Products](#) then, for it to be certified and authorised, the [product](#) must—

- be tested by an [Accredited Testing Laboratory](#); and
- comply with an approved [product](#) specification (either a relevant existing [product](#) Standard or a WaterMark Technical Specification); and
- be manufactured in accordance with an approved Quality Assurance Program; and
- carry a scope of use.

[Products](#) that comply fully with the applicable requirements of the [WaterMark Certification Scheme](#) are then eligible to be certified by a [WaterMark Conformity Assessment Body](#) and listed on the WaterMark Product Database. Certified [products](#) are identifiable by the WaterMark certification trade mark, shown in [Figure A5G4](#) below, that must be displayed on the [product](#) upon granting of a [WaterMark Licence](#).

Figure A5G4 (explanatory): WaterMark Certification Scheme Trademarks

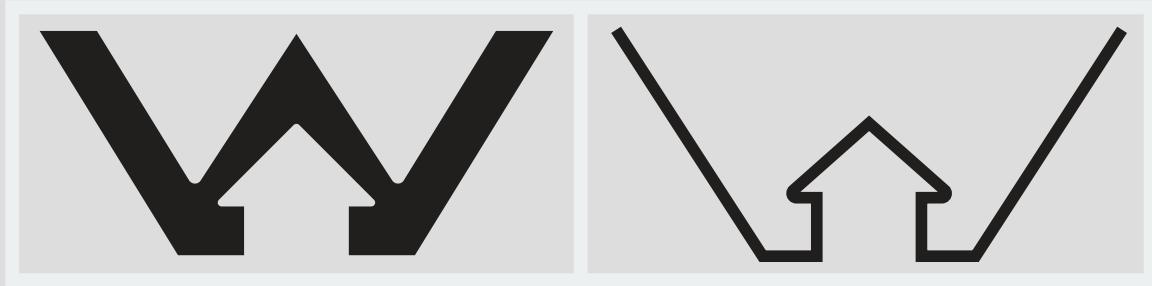

A5G5 Fire-resistance of building elements

Where a *Deemed-to-Satisfy Provision* requires a building element to have an FRL, it must be determined in accordance with *Specifications 1* and *2*.

A5G6 Fire hazard properties and combustibility

- (1) Subject to (3), where a *Deemed-to-Satisfy Provision* requires a building material, component, or assembly to have a *fire hazard property* it must be determined as follows:
 - (a) For *critical radiant flux* and *smoke development rate*, in accordance with AS ISO 9239.1.
 - (b) For *Smoke-Developed Index* and *Spread-of-Flame Index*, in accordance with AS/NZS 1530.3.
 - (c) For *group number*, *average specific extinction area* and *smoke growth rate index* (SMOGR_{RC}), in accordance with AS 5637.1.
 - (d) For *Flammability Index*, in accordance with AS 1530.2.
- (2) Subject to (4) and (5), where a *Deemed-to-Satisfy Provision* requires a building material, component, or assembly to be *non-combustible*, its combustibility may be determined in accordance with AS 1530.1 or C2D10(5).
- (3) A building material, component, or assembly is deemed to have a *fire hazard property* if—
 - (a) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (i) describes the method and conditions of the test and form of construction of the tested prototype in full; and
 - (ii) confirms that the application of restraint to the prototype complies with the test standard; or
 - (b) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (i) confirms that the building product, component, or assembly can achieve the *fire hazard property* despite the minor departures from the tested prototype; and
 - (ii) describes the materials, construction, conditions of restraint and other limitations which are necessary to achieve the *fire hazard property*.
- (4) A building material is deemed to be non-combustible if—
 - (a) it is identical with a material that has been tested in accordance with AS 1530.2 and has not been deemed *combustible*, as confirmed in a report issued from an *Accredited Testing Laboratory*; or
 - (b) it is deemed *non-combustible* in accordance with C2D10(5); or
 - (c) Please refer to NCC 2025 Preview Draft Omissions for missing text
- (5) A building component or assembly is deemed to be if it is constructed wholly of materials that are deemed to be *non-combustible*.

Notes

Until adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

A5G7 Resistance to the incipient spread of fire

A ceiling is deemed to have a *resistance to the incipient spread of fire* to the space above itself if—

- (a) it is identical with a prototype that has been submitted to the *Standard Fire Test* and the *resistance to the incipient spread of fire* achieved by the prototype is confirmed in a report from an *Accredited Testing Laboratory* that—
 - (i) describes the method and conditions of the test and form of construction of the tested prototype in full; and
 - (ii) certifies that the application of restraint to the prototype complies with the *Standard Fire Test*; or
- (b) it differs in only a minor degree from a prototype tested under (a) and the *resistance to the incipient spread of fire* attributed to the ceiling is confirmed in a report from an *Accredited Testing Laboratory* that—
 - (i) certifies that the ceiling is capable of achieving the *resistance to the incipient spread of fire* despite the minor departures from the tested prototype; and
 - (ii) describes the materials, construction and conditions of restraint that are necessary to achieve the *resistance to the incipient spread of fire*.

A5G8 Labelling of Aluminium Composite Panels

An *Aluminium Composite Panel* must be labelled in accordance with SA TS 5344.

A5G9 NatHERS

Where *house energy rating software* is *required* to be used, evidence of the *house energy rating software* output must be in the form of a NatHERS certificate issued in accordance with the NatHERS scheme.

Part A6 Building classification

Introduction to this Part

The NCC groups buildings and structures by the purpose for which they are designed, constructed or adapted to be used, assigning each type of building or structure with a classification. This Part explains how each building classification is defined and used in the NCC.

The building classifications are labelled “Class 1” through to “Class 10”. Some classifications also have sub-classifications, referred to by a letter after the number (e.g. Class 1a).

The technical building requirements for Class 2 to 9 buildings are mostly covered by Volume One of the NCC and those for Class 1 and 10 are mostly covered by Volume Two of the NCC. Volume Three of the NCC covers *plumbing* and *drainage* requirements for all building classifications.

A building may have parts that have been designed, constructed or adapted for different purposes. In most cases, each of these parts is a separate classification. A building (or part of a building) may also have more than one such purpose and may be assigned more than one classification.

Governing Requirements

A6G1 Determining a building classification

- (1) The classification of a building or part of a building is determined by the purpose for which it is designed, constructed or adapted to be used.
- (2) Each part of a building must be classified according to its purpose and comply with all the appropriate requirements for its classification.
- (3) A room that contains a mechanical, thermal or electrical facility or the like that serves the building must have the same classification as the major part or principal use of the building or *fire compartment* in which it is situated.
- (4) Unless another classification is more suitable, an *occupiable outdoor area* must have the same classification as the part of the building to which it is associated.

Exemptions

- (1) For A6G1(1) where a part of a building has been designed, constructed or adapted for a different purpose and is less than 10% of the *floor area* of the *storey* it is situated on, the classification of the other part of the *storey* may apply to the whole *storey*.
- (2) A6G1(3) does not apply to an *electricity network substation*.

Limitations

Exemption (1) does not apply where the minor use of a building is a laboratory, a Class 9b *early childhood centre*, or a Class 2, 3 or 4 part of a building.

Explanatory Information

Classification is a process for understanding risks in a building or part, according to its use. It must be correctly undertaken to achieve NCC aims as appropriate to each building in each circumstance.

It is possible for a single building to have parts with different classifications. Part of a building can also have more than one classification. Where there is any conflict between what requirements the part should comply with, the more stringent requirement applies.

Where it is unclear which classification should apply, *appropriate authorities* have the discretion to decide. They base their decision on an assessment of the building proposal.

They will look at what classification the building most closely resembles. They will also take into account the likely **fire load**, plus, the likely consequences of any risks to the safety, health and amenity of people using the building.

Appropriate authorities will also look at any relevant court decisions or determinations of the State or Territory body responsible for considering appeals on building classification matters.

It should be noted that appeals body determinations and, in some States and Territories, certain court decisions are usually not precedent creating. Such decisions are determined on a case-by-case basis.

It should also be noted that State and Territory authorities responsible for building regulatory matters may have issued advice, interpretations or guidelines to assist practitioners in applying the correct classification to a building or part. Advice on such matters should be sought from the relevant authority.

Under Exemption (1) to A6G1, if 10% or less of the **floor area** of a **storey** is used for a purpose which could be classified differently to the remainder of that **storey**, that part may be classified as being the same as the remainder. Laboratories, **sole-occupancy units** in Class 2, 3 or 4 parts, and Class 9b **early childhood centres** are excluded from this concession (see Limitation to A6G1). The reason is that laboratories are considered to have a high **fire hazard** potential and classifying them with the remainder of the building could, in a majority of cases, endanger occupants of the other parts of the building which have a lower **fire hazard** potential. In relation to Class 9b **early childhood centres**, the intent is to ensure that these facilities cannot be regarded as another class and that the specific fire safety requirements applicable to Class 9b **early childhood centres** are implemented. Also, the intent is not to allow **sole-occupancy units** in Class 2, 3 or 4 parts to be regarded as another Class such as Class 6 and then not have any fire or sound insulation between the units and any other classification which may have a high **fire load** and could endanger the occupants of the Class 2, 3 or 4 part.

If Exemption (1) to A6G1 is used, it should be remembered that it will still be necessary to use the occupant numbers in Volume One **Table D2D18** for the particular use of the area. Likewise, the lighting and equipment levels, people occupancy and load profiles for the area of minor use for the purposes of Volume One Section J must be in accordance with the use of the area.

If the **storey** has a very large **floor area**, the 10% or less concession area may also be large, even though the rest of the building is classifiable as a building which ordinarily has a lower risk potential. An example of the application of this area concession could be as follows:

- If a single **storey** factory has an office that takes up 8% of the whole **storey's floor area**, the entire building (including the office) can be classified as being Class 8.
- However, if that office area takes up 12% of the **storey's floor area**, that area must be classified as Class 5, and the remainder of the building as Class 8.

Under A6G1(3) a plant room, machinery room, lift motor room or **boiler** room, have the same classification as the part of the building they are in. These kinds of rooms do not need to be ancillary or subordinate to the part of the building they are in, that is, the 10% criterion is not applicable.

There are specific provisions for these kinds of rooms. For example, Volume One Section C requires some of them to be fire separated from the remainder of the building (e.g. see **C3D14** with regard to elements of the electricity supply system).

A6G2 Class 1 buildings

- (1) A Class 1 building is a dwelling.
- (2) Class 1 includes the following sub-classifications:
 - (a) Class 1a is one or more buildings, which together form a single dwelling including the following:
 - (i) A detached house.
 - (ii) One of a group of two or more attached dwellings, each being a building, separated by a **fire-resisting wall**, including a row house, terrace house, town house or villa unit.
 - (b) Class 1b is one or more buildings which together constitute—
 - (i) a boarding house, guest house, hostel or the like that—
 - (A) would ordinarily accommodate not more than 12 people; and
 - (B) have a total area of all floors not more than 300 m² (measured over the enclosing walls of the building or buildings); or

- (ii) four or more single dwellings located on one allotment and used for short-term holiday accommodation.

Figure A6G2a: Identification of Class 1 buildings

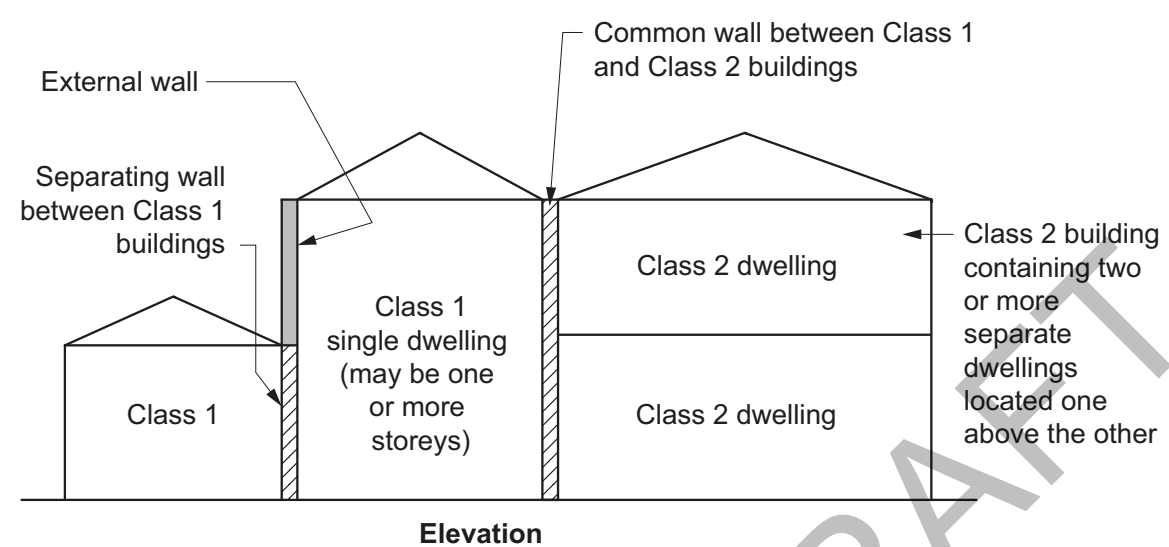


Figure A6G2b: Typical Class 1 building configurations


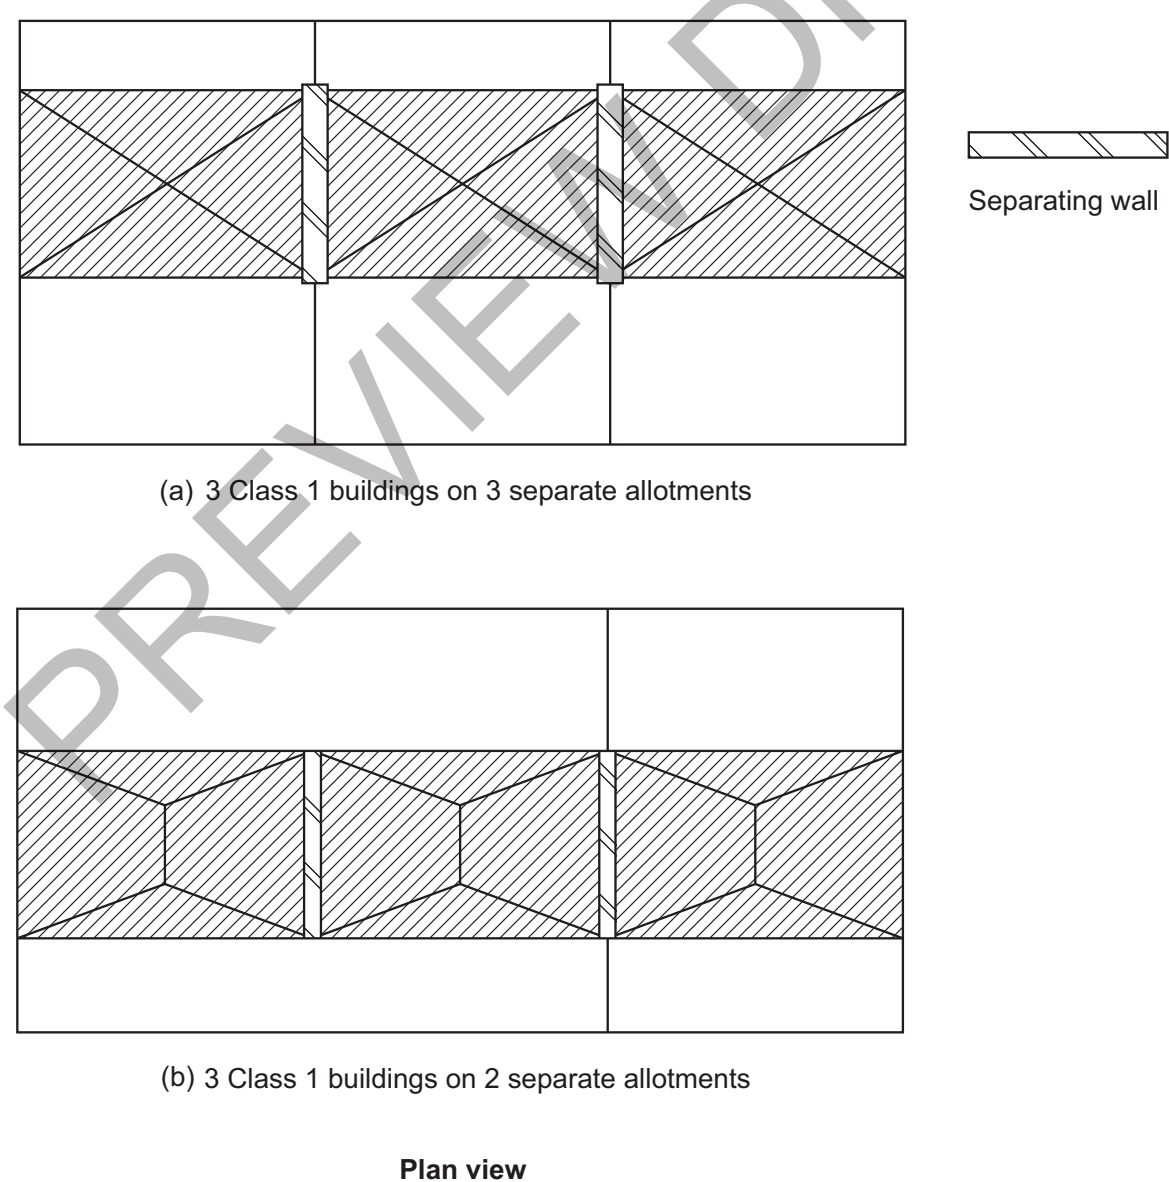


Figure A6G2c: Domestic allotment — classification of buildings and structures

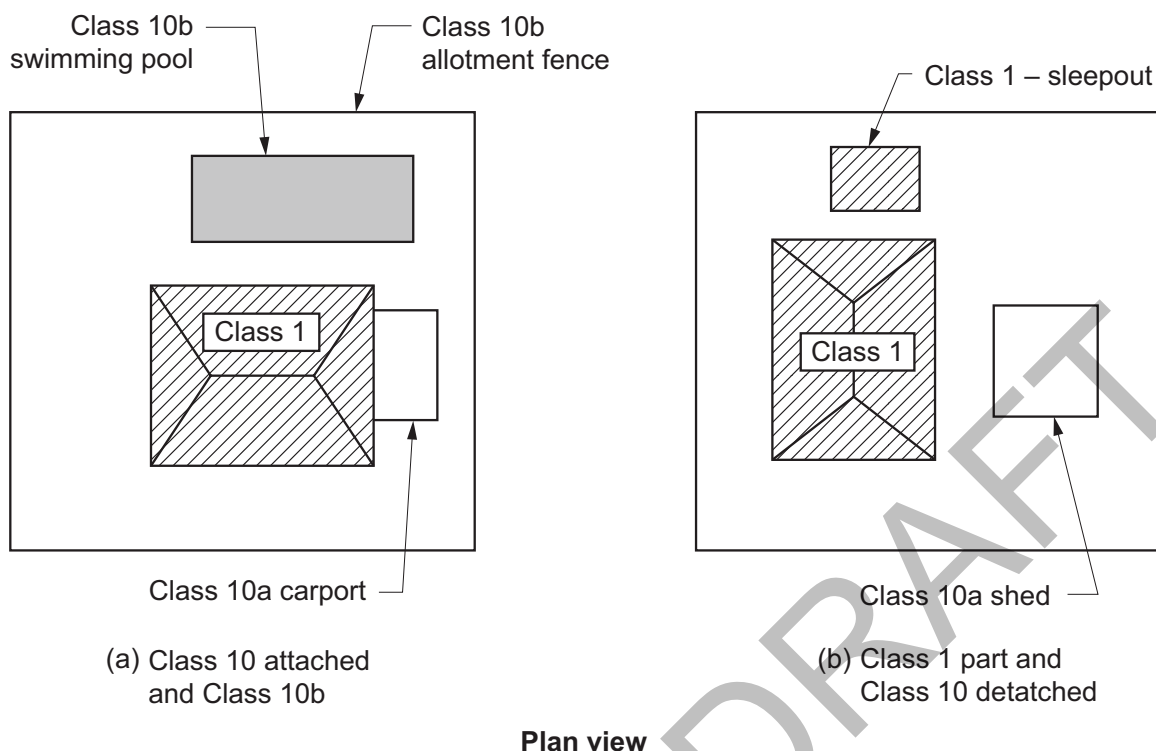

Notes

Figures A6G2a, A6G2b and A6G2c illustrate requirements of this provision.

Limitations

For A6G2, a Class 1 building cannot be located above or below another dwelling or another class of building, other than a *private garage*.

Explanatory Information

Class 1 buildings are primarily covered in Volumes Two and Three of the NCC. Class 1 buildings are not located above or below another dwelling, or another class of building other than a *private garage*.

A *sole-occupancy unit* used for residential purposes located over another *sole-occupancy unit* used for residential purposes will always be a Class 2 or Class 3 building (depending on the circumstances). It cannot be a Class 1 building.

A single Class 1 dwelling can be made up of more than one building. For example, it may include what is ordinarily called a house, plus one or more habitable 'outbuildings' such as sleepouts. Note that a habitable building such as a sleepout cannot be classified as a Class 10 building.

The height or number of storeys of a Class 1 building makes no difference to its classification.

Class 1b buildings used for short-term holiday accommodation include cabins in caravan parks, tourist parks, farm stay, holiday resorts and similar tourist accommodation. This accommodation itself is typically rented out on a commercial basis for short periods and generally does not require the signing of a lease agreement. Short-term accommodation can also be provided in a boarding house, guest house, hostel, bed and breakfast accommodation or the like.

Unlike a Class 1a building described in A6G2(2)(a), a Class 1b building described in A6G2(2)(b) does not have any *floor area* limitation. Therefore, if 4 or more single dwellings are located on the one allotment and used for short-term holiday accommodation, each single dwelling would be classified as a Class 1b building regardless of the *floor area* of each dwelling or the combined *floor area* of all of the dwellings.

See also Volume One D4D2(3) which contains an explanation of what is considered to be "one allotment".

The Class 1b classification can attract concessions applicable to Class 3 buildings. These concessions allow people to rent out rooms in a house, or run a bed and breakfast, without having to comply with the more stringent Class 3 requirements. The reasoning is that the smaller size of the building and its lower number of occupants represents reduced fire risks.

Apart from their use, the primary difference between Class 1a and Class 1b buildings is that the latter is required to have a greater number of smoke alarms and in some circumstances, access and features for people with a disability.

A6G3 Class 2 buildings

- (1) A Class 2 building is a building containing two or more *sole-occupancy units*.
- (2) Each *sole-occupancy unit* in a Class 2 building must be a separate dwelling.

Explanatory Information

A Class 2 building is one that includes more than one dwelling, each of which is generally solely occupied by one or more people to the exclusion of others.

Such buildings must not be otherwise classified as a Class 1 or Class 3 building or Class 4 part. See [Explanatory Figure A6G3a](#) for a typical configuration of Class 1 and Class 2 buildings.

Where a sole-occupancy residential unit is located above another sole-occupancy residential unit, the building containing the units can be either a Class 2 or a Class 3 building, depending on the other circumstances of the building proposal.

Class 2 buildings can be single *storey* attached dwellings. Where there is any common space below such dwellings, they are Class 2 (and cannot be Class 1) irrespective of whether the space below is a *storey* or not (see [Explanatory Figure A6G3b](#)).

Class 2 buildings can be attached to buildings of another class. The attached Class 2 buildings need not be attached to one another, and need not be more than a single *storey*.

When two or more dwellings are attached to another class, they cannot be Class 4 parts, as any building can only contain one Class 4 dwelling.

Figure A6G3a (explanatory): Section showing a typical configuration of Class 1 and Class 2 buildings (with non-combustible roof coverings)


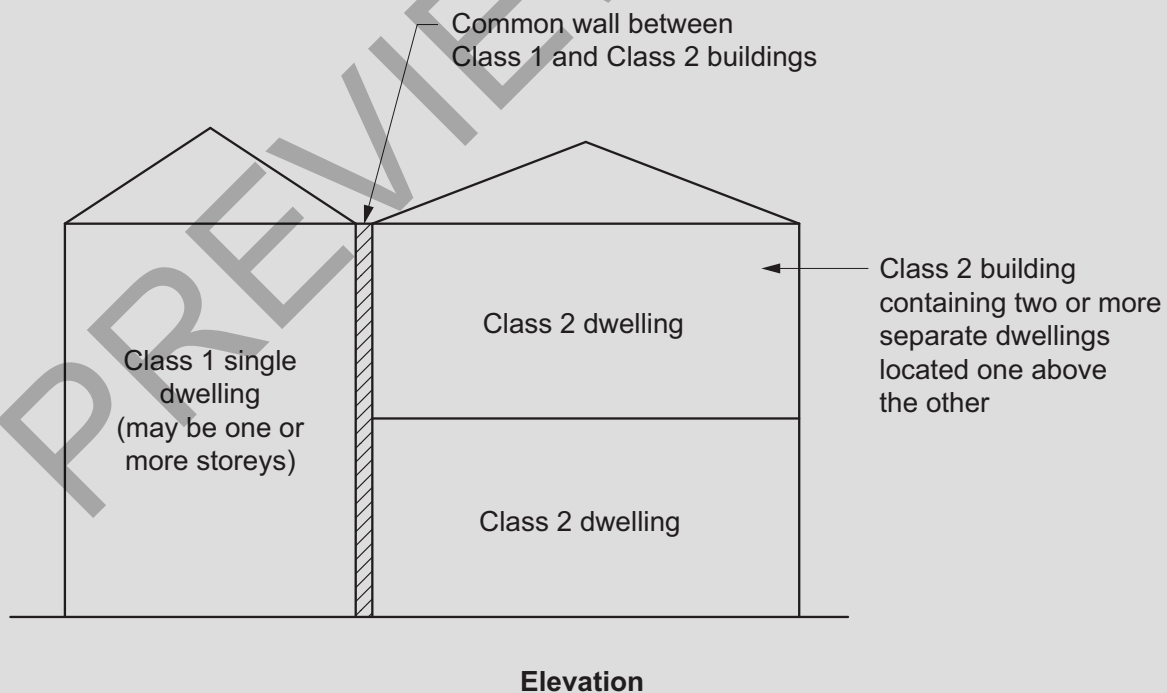


Figure A6G3b (explanatory): Elevation showing a single storey of Class 2 with a common area below

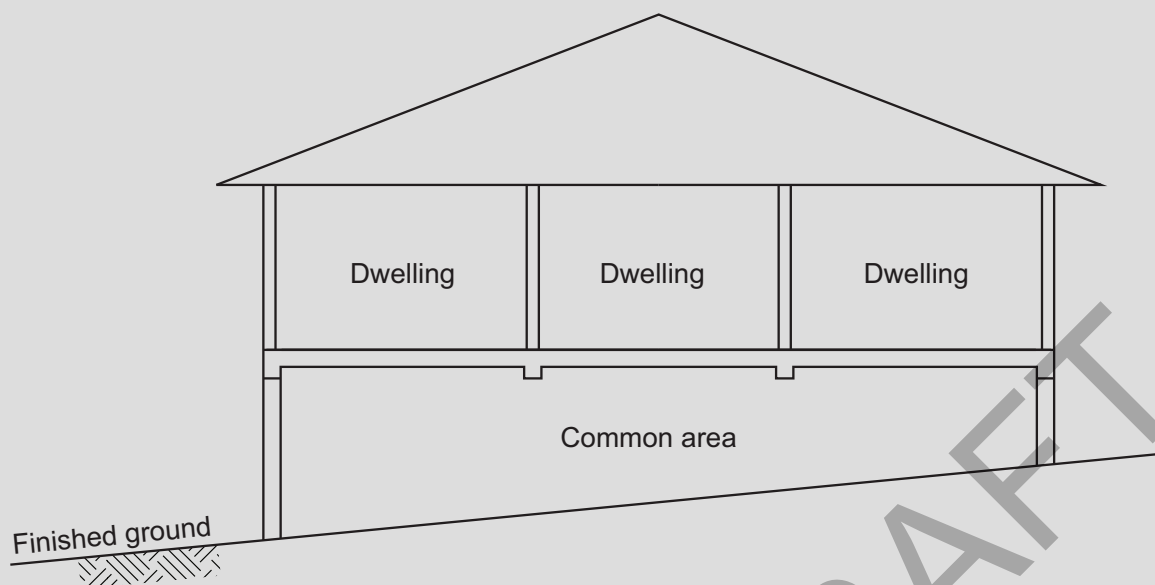

A6G4 Class 3 buildings

- (1) A Class 3 building is a residential building providing long-term or transient accommodation for a number of unrelated persons.
- (2) Class 3 buildings include the following:
 - (a) A boarding house, guest house, hostel, lodging house or backpacker accommodation.
 - (b) A residential part of a hotel or motel.
 - (c) A residential part of a *school*.
 - (d) Accommodation for the aged, children, or people with disability.
 - (e) A residential part of a *health-care building* which accommodates members of staff.
 - (f) A residential part of a *detention centre*.
 - (g) A *residential care building*.

Limitations

For A6G4, a Class 3 building is not a Class 1 or 2 building but may be a mixture of Class 3 and another class.

Explanatory Information

Class 3 buildings provide accommodation for unrelated people. The length of stay is unimportant.

Some exceptions to this classification include: certain bed and breakfast accommodation, boarding houses, guest houses, hostels, or lodging houses and the like which fall within the concession provided for Class 1b buildings.

Also, any sized building can be classified as Class 1 or Class 2 if it is used to house any number of unrelated people who jointly own or rent it, or share it on a non-rental basis with an owner or tenant.

It is not unusual for a manager's, owner's or caretaker's dwelling attached to a Class 3 building to be thought of as a Class 4 part of the Class 3 building. However, a Class 4 part of a building can only be part of a Class 5-9 building.

Accordingly, such dwellings are either classified as Class 1, Class 2 or Class 3, depending on the circumstances of the building proposal. However, a building could be a mixture of Class 3 and another class.

Class 3 buildings include—

- the residential parts of hotels and motels; and
- hotel or motel caretakers', managers' or owners' flats, noting that under certain circumstances such dwellings could

be Class 1, Class 2 or Class 3 buildings; and

- dormitory accommodation, in schools or elsewhere, noting that a dormitory is generally (but not always) considered to be a *sole-occupancy unit*; and
- bed and breakfast accommodation, a boarding house, guest house, hostel, or lodging house; and
- backpackers' accommodation; and
- a building which houses elderly people or other people who require special care (in some States or Territories it is not acceptable for a Class 1b building to be used to house elderly people or other people who require special care - it is recommended the local building regulatory body be consulted); and
- workers' quarters, including shearers' or fruit pickers' accommodation, or hotel workers' accommodation.

A6G5 Class 4 buildings

Class 4 is a dwelling in a Class 5, 6, 7, 8 or 9 building if it is the only dwelling in the building.

Explanatory Information

Class 4 classification applies to some types of accommodation located within a Class 5-9 building. The most common include a caretaker's flat within a building; and accommodation over or otherwise connected to a shop.

A Class 4 part cannot be located within a Class 1, Class 2 or Class 3 building. There can only be one Class 4 dwelling in a building. If there are two or more dwellings, they are Class 1, Class 2, or possibly Class 3. These Class 1, Class 2 or Class 3 parts need not be attached to one another, nor be more than a single *storey*.

Where a Class 4 part of a building is rented out for accommodation purposes, it retains its Class 4 classification. However, if any other part of the principal building is used for accommodation, for example, the attached shop is converted into an additional flat, both flats become classifiable as Class 2 or, depending on their use, possibly Class 3.

A6G6 Class 5 buildings

A Class 5 building is an office building used for professional or commercial purposes.

Explanatory Information

Class 5 buildings include professional chambers or suites, lawyers' offices, government offices, advertising agencies and accountants' offices.

NSW A6G7

SA A6G7

A6G7 Class 6 buildings

- (1) A Class 6 building is a shop or other building used for the sale of goods by retail or the supply of services direct to the public.
- (2) Class 6 buildings include the following:
 - (a) An eating room, cafe, restaurant, milk or soft-drink bar.
 - (b) A dining room, bar area that is not an *assembly building*, shop or kiosk part of a hotel or motel.
 - (c) A hairdresser's or barber's shop, public laundry, or undertaker's establishment.
 - (d) A supermarket or sale room, showroom, or *service station*.

Explanatory Information

A Class 6 building is a building where goods or services are directly sold or supplied to the public. Examples of a Class 6 building may include—

- a place where food or drink may be purchased such as a café or restaurant; or
- a dining room, bar area that is not an *assembly building*, shop or kiosk part of a hotel or motel; or
- a hairdresser's or barber's shop, public laundry, veterinarian; or
- supermarket or sale room, florist, showroom, or *service station*.

Service stations are Class 6 buildings. These are outlets used for the servicing of cars and the selling of fuel or other goods. The expression '*service station*' is not intended to cover buildings where panel beating, auto electrical, muffler replacement, tyre replacement and the like are solely carried out. Such buildings should be classified as Class 6, Class 7 or Class 8 buildings as the *appropriate authority* sees fit.

A6G8 Class 7 buildings

- (1) A Class 7 building is a storage-type building.
- (2) Class 7 includes the following sub-classifications:
 - (a) Class 7a — a *carpark*.
 - (b) Class 7b — a building that is used for storage, or display of goods or produce for sale by wholesale.

Explanatory Information

There are three basic types of Class 7 building. The first is a *carpark* as defined in the NCC. The second is a building used for storage, often referred to as a 'warehouse'. The third is a building used for the display of goods or produce for sale by wholesale. 'Wholesale' means sale to people in the trades or in the business of 'on-selling' goods and services to another party (including the public).

A6G9 Class 8 buildings

- (1) A Class 8 building is a process-type building.
- (2) Class 8 buildings include the following:
 - (a) A laboratory.
 - (b) A building in which the production, assembling, altering, repairing, packing, finishing, or cleaning of goods or produce for sale takes place.

Explanatory Information

The most common way to describe a Class 8 building is as a 'factory'. However, this can give a simplistic impression of the types of building which can fall within this classification.

For example—

- some laboratories, despite their often small size, have been included as Class 8 buildings principally because of their high *fire hazard*; and
- buildings used for altering or repairing (except *service stations*, which are specifically included in A6G7 as Class 6 buildings); and
- potteries; and
- food manufacturers (but not restaurants, which are specifically included in A6G7 as Class 6 buildings); and
- buildings used for the packing or processing of produce, such as a farm or horticultural building.

A6G10

Class 9 buildings

- (1) A Class 9 building is a building of a public nature.
- (2) Class 9 includes the following sub-classifications:
 - (a) Class 9a — a *health-care building* including any parts of the building set aside as laboratories, and includes a *health-care building* used as a *residential care building*.
 - (b) Class 9b — an *assembly building* including a trade workshop or laboratory in a primary or secondary *school*.
 - (c) Class 9c — a *residential care building*.

Exemptions

A6G10(2)(b) excludes any parts of the building that are of another Class.

Explanatory Information

Class 9a buildings are *health-care buildings*, including day-care surgeries or procedure units and the like. See definition of *health-care building*. Laboratories that are part of a Class 9a building are Class 9a, despite the general classification of laboratories as Class 8 buildings.

Class 9b buildings are *assembly buildings*.

These buildings can include—

- theatres, cinemas and halls, churches, schools, early childhood centres, kindergartens, preschools and child-minding centres; and
- indoor cricket, tennis, basketball centres and sport stadiums; and
- nightclubs, discotheques, bar areas providing live entertainment and/or containing a dance floor, public halls, dance halls and other places of entertainment; and
- snooker halls; and
- bus and railway stations.

Regarding the Exemption to A6G10(2)(b), a building could be a mixture of Class 9b and another class, or a Class 9b building could contain parts that are of another class, but be taken as a Class 9b building because of Exemption (1) to A6G1.

Class 9c buildings are *residential care buildings* that may contain residents who have various care level needs.

The Class 9c classification recognises that many residents progress through a continuum of care needs from low to high. Many older people enter residential care with low care needs (typically Class 3 facilities) but, as they age, require higher levels of care. In the past, such progression often necessitated the transfer of a hostel resident (Class 3) to a nursing home (Class 9a). This frequently had negative consequences for the health and well-being of the resident, for whom the hostel accommodation was home. It also led, at times, to the separation of couples with differing care needs.

Building designers should note that Class 3 buildings include hostels for the accommodation of the aged, and Class 9a buildings include nursing homes. It is important to be aware, however, that construction of Class 3 or 9a buildings may restrict the options available to the operators of a facility in relation to the profile of the residents they wish to accommodate. Where the potential exists for residents of varying care needs to be accommodated, consideration of the Class 9c provisions may be appropriate. The Class 9c classification allows for any mix of low and high care residents and is intended to allow the mix to change as the residents' care needs change over time, without the need to obtain any further consent or approval from the *appropriate authority*.

Multi-care level facilities are for residents who may require the full range of care services outlined by the Aged Care Act. Hence, it is not intended to restrict the resident type and provides maximum flexibility for service providers, residents and the community.

The NCC provisions for Class 9c buildings are based on minimal on duty on-site staff being available at any time. However, it is recognised that the staff numbers vary throughout the course of any one day, due to the care needs of the residents and the functioning of the facility. It is also recognised that the specific care needs of the residents may result in a greater minimum number of staff.

A6G11 Class 10 buildings and structures

- (1) A Class 10 building or structure is non-habitable.
- (2) Class 10 includes the following sub-classifications:
 - (a) Class 10a is a non-habitable building including a *private garage*, carport, shed or the like.
 - (b) Class 10b is a structure that is a fence, mast, antenna, retaining wall or free-standing wall or *swimming pool* or the like.
 - (c) Class 10c is a *private bushfire shelter*.

Explanatory Information

Class 10a buildings are non-habitable buildings. See [Explanatory Figure A6G11](#) for an indication of some Class 10 building configurations.

Class 10b structures are non-habitable structures. There is no requirement for Class 10 buildings to be appurtenant to a building of any other Class, for example, a small shed standing on its own on an allotment and a toilet block in a park.

A habitable 'outbuilding' which is appurtenant to another building is generally part of that building. Again, habitable 'outbuildings' cannot be classified as Class 10 buildings.


Typical outbuilding classifications include the following:

- A sleepout on the same allotment as a Class 1 building is part of the Class 1 building.
- A detached entertainment room on the same allotment as a Class 1 building, perhaps associated with a *swimming pool*, is part of the Class 1 building.
- A small toolshed, used for trade-related hobbies for non-commercial purposes or home repairs, on the same allotment as a Class 1 building, would be classified as a Class 10 building.

Provisions relating to Class 10c structures are only intended to address *private bushfire shelters* associated with a single Class 1a dwelling. These provisions are contained in Volume Two of the NCC.

Some States or Territories may exempt some Class 10 buildings or structures (often on the basis of height or size) from the need to have a building permit. Queries on this matter should be referred to the State or Territory body responsible for regulatory matters.

Figure A6G11 (explanatory): Examples of Class 10 buildings and structures

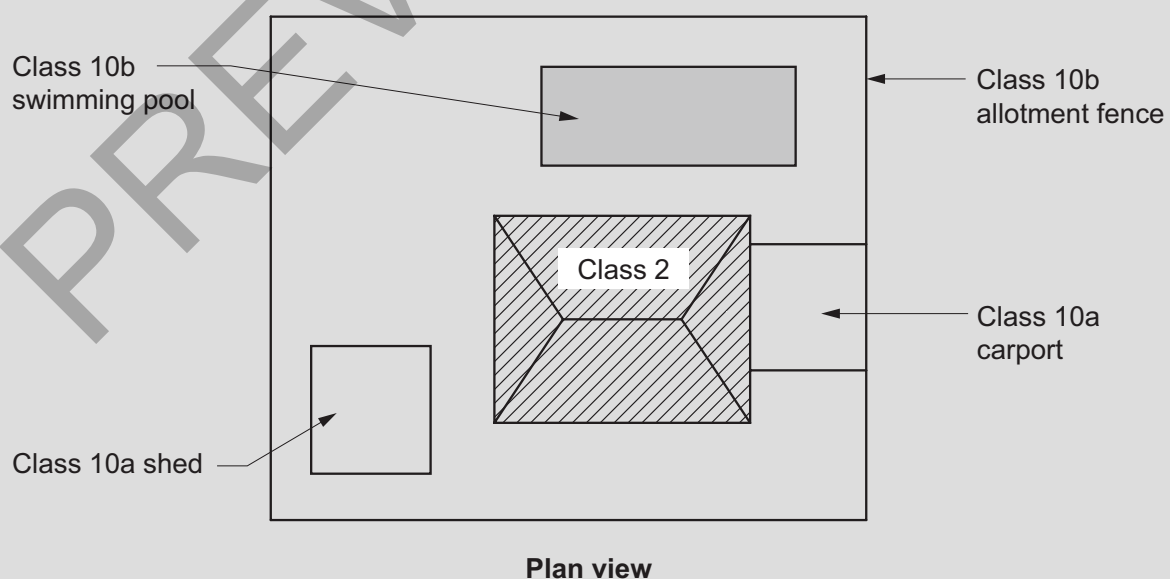

A6G12 Multiple classifications

A building (or part of a building) may be designed, constructed or adapted for multiple purposes and have more than one classification.

Applications

For A6G12, a building (or part of a building) must comply with all the relevant requirements that apply to each of the classifications for that building (or part of a building).

Explanatory Information: Difficult classifications — Class 2 or Class 3?

There is a fine line between a Class 2 building containing apartments or flats and a Class 3 motel building with units containing bathroom, laundry and cooking facilities, which may both be made available for short term holiday rental. When does a Class 3 motel unit become a Class 2 holiday flat and vice versa?

In general, an assessment will be based on the most likely use of the building by *appropriate authorities*.

Class 3 buildings, where the occupants are generally unfamiliar with the building and have minimum control over the safety of the building, represent a higher risk level and therefore require higher safety levels. In a case where the classification is unclear, a decision should be made according to the perceived risks inherent in the use of the building.

Explanatory Information: Difficult classifications — Class 6 or Class 7?

Class 7 buildings include those used to sell goods on the wholesale market, whereas Class 6 buildings are used to sell goods to the public.

Some establishments claim to sell goods to both the wholesale and retail markets. As a rule, however, if the general public has access to the building, it is considered a 'shop', and therefore a Class 6 building.

Explanatory Information: Difficult classifications — Hotel bars: Class 6 or 9b?

As can be seen from the definition of a Class 6 building, it includes a hotel bar which is not an *assembly building*. The bar includes the bar area and associated standing and seating areas. This clarifies that the bar extends beyond the serving area to include standing and sitting areas where patrons may drink alcohol or other beverages and consume food. The exclusion of an *assembly building* means that a bar providing live entertainment or containing a dance floor is not considered to be Class 6; it must be considered as Class 9b. However, when that use is minor compared with the remainder of the bar, such as a piano bar or the like where patrons only listen to music and there is no dance floor, the *appropriate authority* should exercise judgement on the predominant use and therefore the appropriate classification of the bar.

A Class 9b building is an *assembly building* which is defined to include a building where people may assemble for entertainment, recreational or sporting purposes.

A building may have more than one classification (see A6G12).

Explanatory Information: Buildings used for farming purposes

Buildings used for farming-type purposes are often very diverse in nature, occupancy, use and size. In some States or Territories, *appropriate authorities* may classify farm buildings as Class 10a, which covers non-habitable buildings. They would only make this decision if a classification of Class 7 or Class 8 would not be more appropriate.

When making their decision they consider the building's size, purpose, operations and the extent to which people are employed in the building. For example, it may be appropriate to classify a shed which is used to store a tractor as a Class 10a building.

The NCC has definitions of *farm building* and *farm shed* which are certain Class 7 and 8 buildings used for farming purposes. Concessions to specific *Deemed-to-Satisfy Provisions* apply to *farm buildings* and *farm sheds* in recognition of their often low risk features, and it is recommended that reference is made to the definitions of *farm building* and *farm shed* for further guidance which may assist determination of an appropriate NCC classification.

For example, if people are likely to be employed to stack materials/produce in a storage building or remove materials/produce from a storage building then a classification of Class 7b may be appropriate. Depending upon whether

the criteria in the definition of *farm shed* or *farm building* have been met, the associated *Deemed-to-Satisfy Provisions* in NCC Volume One Part I3 may apply.

Similarly if people are likely to be employed to pack or process materials/produce within a building, or employed to feed, clean or collect produce from animals or plants within a building then a classification of Class 8 may be appropriate. Depending upon whether the criteria in the definition of *farm shed* or *farm building* have been met, the associated *Deemed-to-Satisfy Provisions* in NCC Volume One Part I3 may apply.

However identification of low *fire load*, low occupant risk and low risk of fire spread should not be used as justification for choosing a less stringent building classification for a building under the *Deemed-to-Satisfy Provisions*. For example, if the intended use of a building is to grow or store a large amount of tomatoes, such as a large greenhouse, and there is likely to be only one to two persons in the building at any time, it is considered inappropriate to classify the building as a Class 10a under the *Deemed-to-Satisfy Provisions* and a classification of Class 7 or Class 8 would be more appropriate.

The *Deemed-to-Satisfy Provisions* for a Class 7 or Class 8 *farm building* or *farm shed* do not prevent the ability to consider or develop a *Performance Solution* for a particular building where the requirements may not be considered appropriate or are viewed as too stringent. Similarly if a Class 7 or 8 building used for farming purposes does not meet all the criteria to be considered a *farm building* or *farm shed* under the *Deemed-to-Satisfy Provisions*, this would not limit the ability to develop a *Performance Solution* which could contain features similar to those allowed under the *Deemed-to-Satisfy Provisions* for *farm buildings* or *farm sheds*.

For example, if a Class 8 commercial poultry building meets all the criteria to be considered a farm building under the *Deemed-to-Satisfy Provisions* other than the maximum *floor area* criteria, a *Performance Solution* could be developed to demonstrate that the concessions for a farm building under the *Deemed-to-Satisfy Provisions* are appropriate.

In regards to a *farm building* or *farm shed* where the purpose of the building is to park farm vehicles when not in use, as well as perhaps clean or polish the vehicle(s), it may be appropriate that this type of building is classified as a Class 7a.

However, a number of *farm buildings* and *farm sheds* are often not only used for the storage of farm vehicles, but to store supplies such as fuel, grain or hay. A Class 7a classification may still be appropriate where the majority of the shed's space is intended to be designated for the parking of vehicles. However, it may be more appropriate to classify some types of buildings as Class 7b, rather than Class 7a where a mixed use shed is intended.

Under A6G12 each part of a building (including the entire building) may have more than one classification. This means, for example, that it is permissible to classify part of a building as a Class 6/7 building, or a Class 5/6 building, or whatever is appropriate.

It is expected that this approach may be taken by a builder who is uncertain of what the precise use of a building will be after its sale, or to maximise the flexibility of the building's use.

Under the Application to A6G12, where a building has more than one classification the more stringent Class requirements will apply.

Part A7 United buildings

Introduction to this Part

This Part explains how multiple buildings can be considered as a united building. Where adjacent buildings are joined through openings in walls, they need not meet additional requirements if they jointly comply with the NCC as a single building.

Governing Requirements

A7G1 United buildings

Buildings are deemed united when two or more buildings adjoining each other are connected and used as one building.

Applications

- (1) For A7G1, two or more buildings are a united building if they are connected through openings in the walls dividing them and together comply with all the requirements of the NCC as though they are a single building.
- (2) A7G1 only applies to Class 2 to 9 buildings.

A7G2 Alterations in a united building

If, after [alterations](#) or any other building work, two or more of the buildings in [A7G1](#) cease to be connected through openings in the dividing walls, each of those buildings not now connected must comply with all the requirements for a single building.

Explanatory Information

It is not unusual for authorities to receive plans proposing the connecting of two or more buildings. Connecting buildings could be achieved by breaking openings through walls, or by joining the buildings by a tunnel, bridge or covered walkway.

When connected, if the buildings jointly comply with all the requirements of the NCC applying as if they were a single building, they become a united building.

United buildings are not [required](#) to comply with additional NCC provisions. For example, any new openings do not require any form of fire protection not [required](#) of a single building.

Note, however, an [external wall](#), which as a result of an interconnection becomes an [internal wall](#), must comply with the requirements for an [internal wall](#).

Interconnected buildings that do not jointly comply with all the requirements applicable to a single building, remain as separate buildings.

This raises the possible need for fire doors, or other forms of protection to be fitted to connecting openings.

Explanatory Information: Multiple allotments or ownership

The NCC does not concern itself with actually prohibiting or permitting the uniting of buildings in separate ownership or on separate allotments. Such matters are dealt with by the relevant local bodies.

Explanatory Information: Example of connection by bridge

In this example, Building A is connected to Building B by bridge C. There are four different options for designing such a proposal.

The first is a united building:

A, B and C are considered as a single structure and comply with the NCC.

The second is three separate buildings:

A, B and C are a fire-source feature to each of the others, and are separated by fire walls with the openings protected at the points of connection. In this case, C may require independent support and separate egress to a road or open space, that is not through Buildings A or B. In this case, attention should also be paid to the length of the bridge, as regards distance of travel to an [exit](#).

The third option is the bridge as a portion of Building A:

In this option, A and C are one building, meeting all requirements of the NCC as a single or united building. B is a separate building, with suitable fire separation, including fire-doors at the point of interconnection. Bridge C could be supported off Building A, but not off Building B.

The fourth option is having the bridge as a portion of Building B:

In this option, B and C are one building, meeting all requirements of the NCC as a single or united building. A is a separate building, with suitable fire separation, including fire doors at the point of interconnection. Bridge C could be supported off Building B, but not off Building A.

In some cases, C will link A and B across a public road, including laneways and the like. Special approvals may be required from various [appropriate authorities](#). However, in such cases—

- if C is supported by means other than off A and B, such support will generally only be permitted if there is no obstruction of the public road; and
- care will need to be taken in calculating the distance of travel to an [exit](#) if travel is required to be over C and the road is wide; and
- fire-separation may be necessary at each end of the bridge.

If the last stipulation is the case, the following matters need consideration:

- The bridge would probably need to be of fire-rated construction because [combustible](#) construction could provide a ready path for the transfer of fire, and [non-combustible](#) construction could, in a major fire, distort and collapse onto the road.
- The designer needs to take care that the bridge does not negate the fire separation between the [storeys](#) of the building.

Specification 1 Fire-resistance of building elements

S1C1 Scope

This Specification sets out the procedures for determining the FRL of building elements.

S1C2 Rating

A building element meets the requirements of this Specification if—

- (a) it is listed in, and complies with Tables S1C2a, S1C2b, S1C2c, S1C2d, S1C2e, S1C2f, S1C2g, S1C2h, S1C2i, S1C2j, S1C2k, S1C2l, S1C2m or S1C2n of this Specification as applicable; or
- (b) it is identical with a prototype that has been submitted to the *Standard Fire Test*, or an equivalent or more severe test, and the FRL achieved by the prototype without the assistance of an active fire suppression system is confirmed in a report from an *Accredited Testing Laboratory* which—
 - (i) describes the method and conditions of the test and the form of construction of the tested prototype in full; and
 - (ii) certifies that the application of restraint to the prototype complied with the *Standard Fire Test*; or
- (c) it differs in only a minor degree from a prototype tested under (b) and the FRL attributed to the building element is confirmed in a report from an *Accredited Testing Laboratory* which—
 - (i) certifies that the building element is capable of achieving the FRL despite the minor departures from the tested prototype; and
 - (ii) describes the materials, construction and conditions of restraint which are necessary to achieve the FRL; or
- (d) it is designed to achieve the FRL in accordance with—
 - (i) AS/NZS 2327, AS 4100 and AS/NZS 4600 if it is a steel or composite structure; or
 - (ii) AS 3600 if it is a concrete structure; or
 - (iii) AS 1720.4 if it is a timber element other than *fire-protected timber*; or
 - (iv) AS 3700 if it is a masonry structure; or
- (e) the FRL is determined by calculation based on the performance of a prototype in the *Standard Fire Test* and confirmed in a report in accordance with S1C3; or
- (f) for *fire-protected timber*, it complies with Specification 10 where applicable.

Table S1C2a: FRLs deemed to be achieved by walls — masonry

Masonry type	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Ashlar	-	-	-	-	300
Calcium silicate	See clause S1C2(d)(iv)				
Concrete					
Fired clay					

Table Notes

For the purposes of this table, each element must meet the requirements of Specification 2.

Table S1C2b: FRLs deemed to be achieved by walls — concrete

Concrete type	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
No fines	-	-	-	150	300
Prestressed	See clause S1C2(d)(iv)				
Reinforced					
Plain	-	-	-	150	170

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2c: FRLs deemed to be achieved by walls — gypsum

Gypsum type	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Solid gypsum blocks	75	90	100	110	125
Gypsum — perlite or gypsum vermiculite-plaster on metal lath and channel (non-loadbearing walls only)	50	50	65	-	-

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2d: FRLs deemed to be achieved by concrete columns

Column type	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Prestressed	See clause S1C2(d)(ii)				
Reinforced					

Table S1C2e: FRLs deemed to be achieved by hot-rolled steel columns (including a fabricated column) exposed on not more than 3 sides

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Concrete cast in-situ — loadbearing	25	30	40	55	75
Concrete cast in-situ — non-loadbearing unplastered	25	30	40	50	75
Concrete cast in-situ — non-loadbearing plastered 13 mm	25	25	30	40	50
Gypsum cast in-situ	-	-	-	-	50
Gypsum — perlite or gypsum-vermiculite plaster—sprayed to contour	20	25	35	50	55

Governing Requirements

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Gypsum — perlite or gypsum-vermiculite plaster—sprayed on metal lath	20	20	25	35	45

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2f: FRLs deemed to be achieved by hot-rolled steel columns (including a fabricated column) exposed on no more than 3 sides and with column spaces filled

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Solid calcium-silicate masonry	50	50	50	50	65
Solid clay masonry	50	50	50	65	90
Solid concrete masonry	50	50	50	65	90
Solid gypsum blocks	50	50	50	50	65
Hollow terracotta blocks — plastered 13 mm	50	50	50	65	90

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2g: FRLs deemed to be achieved by hot-rolled steel columns (including a fabricated column) exposed on no more than 3 sides and with column spaces unfilled

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Solid calcium-silicate masonry	50	50	50	-	-
Solid clay masonry	50	50	65	-	-
Solid concrete masonry	50	50	65	-	-
Solid gypsum blocks	50	50	50	-	-
Hollow terracotta blocks — plastered 13 mm	50	50	65	-	-

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2h: FRLs deemed to be achieved by hot-rolled steel columns (including a fabricated column) exposed on no more than 4 sides

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/—/—	90/—/—	120/—/—	180/—/—	240/—/—
Concrete cast in-situ — <i>loadbearing</i>	25	40	45	65	90
Concrete cast in-situ — non- <i>loadbearing</i> unplastered	35	30	40	50	65
Concrete cast in-situ — non- <i>loadbearing</i> plastered 13 mm	25	25	30	40	50
Gypsum cast in-situ	-	-	-	-	50

Governing Requirements

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/–/–	90/–/–	120/–/–	180/–/–	240/–/–
Gypsum — perlite or gypsum-vermiculite plaster — sprayed to contour	25	30	40	55	65
Gypsum — perlite or gypsum-vermiculite plaster — sprayed on metal lath	20	20	30	40	50

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2i: FRLs deemed to be achieved by hot-rolled steel columns (including a fabricated column) exposed on no more than 4 sides and with column spaces filled

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/–/–	90/–/–	120/–/–	180/–/–	240/–/–
Solid calcium-silicate masonry	50	50	50	65	75
Solid clay masonry	50	50	50	75	100
Solid concrete masonry	50	50	50	75	100
Solid gypsum blocks	50	50	50	65	75
Hollow terracotta blocks — plastered 13 mm	50	50	50	75	100

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2j: FRLs deemed to be achieved by hot-rolled steel columns (including a fabricated column) exposed on no more than 4 sides and with column spaces unfilled

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/–/–	90/–/–	120/–/–	180/–/–	240/–/–
Solid calcium-silicate masonry	50	50	50	-	-
Solid clay masonry	50	50	65	-	-
Solid concrete masonry	50	50	65	-	-
Solid gypsum blocks	50	50	50	-	-
Hollow terracotta blocks — plastered 13 mm	50	50	65	-	-

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2k: FRLs deemed to be achieved by concrete beams

Concrete type	Minimum thickness (mm) of principal material for FRLs				
	60/–/–	90/–/–	120/–/–	180/–/–	240/–/–
Prestressed	See clause S1C2(d)(ii)				
Reinforced					

Table S1C2l: FRLs deemed to be achieved by hot-rolled steel beams (including an open-web joist, girder, truss, etc.) exposed on no more than 3 sides

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/–/–	90/–/–	120/–/–	180/–/–	240/–/–
Concrete — cast in-situ	25	30	40	50	65

Governing Requirements

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/-/-	90/-/-	120/-/-	180/-/-	240/-/-
Gypsum — perlite or gypsum-vermiculite plaster — sprayed to contour	20	25	35	50	55
Gypsum — perlite or gypsum-vermiculite plaster — sprayed on metal lath	20	20	25	35	45

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2m: FRLs deemed to be achieved by hot-rolled steel beams (including an open-web joist, girder, truss, etc.) exposed on 4 sides

Fire protection	Minimum thickness (mm) of principal material for FRLs				
	60/-/-	90/-/-	120/-/-	180/-/-	240/-/-
Concrete — cast in-situ	25	40	45	60	90
Gypsum — perlite or gypsum-vermiculite plaster — sprayed to contour	20	30	40	55	65
Gypsum — perlite or gypsum-vermiculite plaster — sprayed on metal lath	20	20	35	40	50

Table Notes

For the purposes of this table, each element must meet the requirements of [Specification 2](#).

Table S1C2n: FRLs deemed to be achieved by floor, roof or ceiling

Floor, roof or ceiling type	Minimum thickness (mm) of principal material for FRLs				
	60/60/60	90/90/90	120/120/120	180/180/180	240/240/240
Prestressed	See clause S1C2(d)(ii)				
Reinforced					

S1C3 FRLs determined by calculation

If the FRL of a building element is determined by calculation based on a tested prototype—

- (a) the building element may vary from the prototype in relation to—
 - (i) length and height if it is a wall; and
 - (ii) height if it is a column; and
 - (iii) span if it is a floor, roof or beam; and
 - (iv) conditions of support; and
 - (v) to a minor degree, cross-section and components; and
- (b) the report must demonstrate by calculation that the building element would achieve the FRL if it is subjected to the regime of the [Standard Fire Test](#) in relation to—
 - (i) [structural adequacy](#) (including deflection); and
 - (ii) [integrity](#); and
 - (iii) [insulation](#); and
- (c) the calculations must take into account—
 - (i) the temperature reached by the components of the prototype and their effects on strength and modulus of elasticity; and

- (ii) appropriate features of the building element such as support, restraint, cross-sectional shape, length, height, span, slenderness ratio, reinforcement, ratio of surface area to mass per unit length, and fire protection; and
- (iii) features of the prototype that influenced its performance in the *Standard Fire Test* although these features may not have been taken into account in the design for dead and live load; and
- (iv) features of the conditions of test, the manner of support and the position of the prototype during the test, that might not be reproduced in the building element if it is exposed to fire; and
- (v) the design load of the building element in comparison with the tested prototype.

S1C4 Interchangeable materials

- (1) Concrete and plaster — An FRL achieved with any material of Group A, B, C, D or E as an ingredient in concrete or plaster, applies equally when any other material of the same group is used in the same proportions:
 - (a) Group A: any portland cement.
 - (b) Group B: any lime.
 - (c) Group C: any dense sand.
 - (d) Group D: any dense calcareous aggregate, including any limestone or any calcareous gravel.
 - (e) Group E: any dense siliceous aggregate, including any basalt, diorite, dolerite, granite, granodiorite or trachyte.
- (2) Perlite and vermiculite — An FRL achieved with either gypsum-perlite plaster or gypsum-vermiculite plaster applies equally for each plaster.

S1C5 Columns covered with lightweight construction

If the *fire-resisting* covering of a steel column is *lightweight construction*, the construction must comply with Volume One C2D9 and C4D17.

S1C6 Non-loadbearing elements

If a non-*loadbearing* element is able to be used for a purpose where the *Deemed-to-Satisfy Provisions* prescribe an FRL for *structural adequacy*, *integrity* and *insulation*, that non-*loadbearing* element need not comply with the *structural adequacy* criteria.

Specification 2

Descriptions of elements referred to in Specification 1

S2C1 Scope

This Specification sets out the descriptions of elements referred to in Tables S1C2a, S1C2b, S1C2c, S1C2e, S1C2f, S1C2g, S1C2h, S1C2i, S1C2j, S1C2l and S1C2m of Specification 1.

S2C2 Mortar for masonry

Masonry units of ashlar, calcium silicate, concrete or fired clay (including terracotta blocks) must be laid in cement mortar or composition mortar complying with the relevant provisions of AS 3700.

S2C3 Gypsum blocks

Gypsum blocks must be laid in gypsum-sand mortar or lime mortar.

S2C4 Gypsum-sand mortar and plaster

Gypsum-sand mortar and gypsum-sand plaster must consist of either—

- (a) not more than 3 parts by volume of sand to 1 part by volume of gypsum; or
- (b) if lime putty is added, not more than 2.5 parts by volume of sand to 1 part by volume of gypsum and not more than 5% of lime putty by volume of the mixed ingredients.

S2C5 Gypsum-perlite and gypsum-vermiculite plaster

Gypsum-perlite or gypsum-vermiculite plaster must be applied—

- (a) in either one or 2 coats each in the proportions of 1 m³ of perlite or vermiculite to 640 kg of gypsum if the *required* thickness of the plaster is not more than 25 mm; and
- (b) in 2 coats if the *required* thickness is more than 25 mm, the first in the proportions of 1 m³ of perlite or vermiculite to 800 kg of gypsum and the second in the proportions of 1 m³ of perlite or vermiculite to 530 kg of gypsum.

S2C6 Plaster of cement and sand or cement, lime and sand

Plaster prescribed in Tables S1C2c, S1C2e, S1C2f, S1C2g, S1C2h, S1C2i, S1C2j, S1C2l and S1C2m—

- (a) must consist of cement and sand or cement, lime and sand; and
- (b) may be finished with gypsum, gypsum-sand, gypsum-perlite or gypsum-vermiculite plaster or with lime putty.

S2C7 Plaster reinforcement

If plaster used as fire protection on walls is more than 19 mm thick—

- (a) it must be reinforced with expanded metal lath that—
 - (i) has a mass per unit area of not less than 1.84 kg/m²; and
 - (ii) has not fewer than 98 meshes per metre; and
 - (iii) is protected against corrosion by galvanising or other suitable method; or
- (b) it must be reinforced with 13 mm x 13 mm x 0.7 mm galvanised steel wire mesh securely fixed at a distance from the face of the wall of not less than 1/3 of the total thickness of the plaster.

S2C8 Ashlar stone masonry

Ashlar masonry must not be used in a part of the building containing more than 2 *storeys*, and must not be of—

- (a) aplite, granite, granodiorite, quartz dacite, quartz diorite, quartz porphyrite or quartz porphyry; or
- (b) conglomerate, quartzite or sandstone; or
- (c) chert or flint; or
- (d) limestone or marble.

S2C9 Dimensions of masonry

The thicknesses of masonry of calcium-silicate, concrete and fired clay are calculated as set out in S2C10 to S2C12.

S2C10 Solid units

For masonry in which the amount of perforation or coring of the units does not exceed 25% by volume (based on the overall rectangular shape of the unit) the thickness of the wall must be calculated from the manufacturing dimensions of the units and the specified thickness of the joints between them as appropriate.

S2C11 Hollow units

For masonry in which the amount of perforation or coring of the units exceeds 25% by volume (based on the overall rectangular shape of the unit) the thickness of the wall must be calculated from the equivalent thicknesses of the units and the specified thickness of the joints between them as appropriate.

S2C12 Equivalent thickness

The equivalent thickness of a masonry unit is calculated by dividing the net volume by the area of one vertical face.

S2C13 Height-to-thickness ratio of certain walls

The ratio of height between lateral supports to overall thickness of a wall of ashlar, no-fines concrete, unreinforced concrete, solid gypsum blocks, gypsum-perlite or gypsum-vermiculite plaster on metal lath and channel, must not exceed—

- (a) 20 for a *loadbearing* wall; or
- (b) 27 for a non-*loadbearing* wall.

S2C14 Increase in thickness by plastering — walls

If a wall of ashlar, solid gypsum blocks or concrete is plastered on both sides to an equal thickness, the thickness of the wall for the purposes of [Tables S1C2b](#) and [S1C2c](#) (but not for the purposes of [S2C5](#)) may be increased by the thickness of the plaster on one side.

S2C15 Increase in thickness by plastering — columns

- (1) Where [Tables S1C2e](#), [S1C2f](#), [S1C2g](#), [S1C2h](#), [S1C2i](#) and [S1C2j](#) indicate that column-protection is to be plastered, the tabulated thicknesses are those of the principal material.
- (2) The thicknesses referred to in (1) do not include the thickness of plaster, which must be additional to the listed thickness of the material to which it is applied.

S2C16 Gypsum-perlite or gypsum-vermiculite plaster or metal lath — walls

In walls fabricated of gypsum-perlite or gypsum-vermiculite plaster on metal lath and channel—

- (a) the lath must be securely wired to each side of 19 mm x 0.44 kg/m steel channels (used as studs) spaced at not more than 400 mm centres; and
- (b) the gypsum-perlite or gypsum-vermiculite plaster must be applied symmetrically to each exposed side of the lath.

S2C17 Gypsum-perlite or gypsum-vermiculite plaster or metal lath — columns

- (1) For the fire protection of steel columns with gypsum-perlite or gypsum-vermiculite on metal lath—
 - (a) the lath must be fixed at not more than 600 mm centres vertically to steel furring channels, and—
 - (i) if the plaster is to be 35 mm thick or more — at least 12 mm clear of the column; or
 - (ii) if the plaster is to be less than 35 mm thick — at least 6 mm clear of the column; or
 - (b) the plaster may be applied to self-furring lath with furring dimples to hold it not less than 10 mm clear of the column.
- (2) For the purposes of (1), the thickness of the plaster must be measured from the back of the lath.

S2C18 Gypsum-perlite or gypsum-vermiculite plaster or metal lath — beams

For the fire protection of steel beams with gypsum-perlite or gypsum-vermiculite on metal lath—

- (a) the lath must be fixed at not more than 600 mm centres to steel furring channels and at least 20 mm clear of the steel; and
- (b) the thickness of the plaster must be measured from the back of the lath.

S2C19 Exposure of columns

A column incorporated in or in contact on one or more sides with a wall of solid masonry or concrete at least 100 mm thick may be considered to be exposed to fire on no more than 3 sides.

S2C20 Exposure of beams

A beam, open-web joist, girder or truss in direct and continuous contact with a concrete slab or a hollow block floor or roof may be considered to be exposed to fire on no more than 3 sides.

S2C21 Filling of column spaces

- (1) The spaces between the fire-protective material and the steel (and any re-entrant parts of the column itself) must be filled solid with a fire-protective material like concrete, gypsum or grout.
- (2) The insides of hollow sections, including pipes, need not be filled.

S2C22 Hollow terracotta blocks

The proportion of cored holes or perforations in a hollow terracotta block (based on the overall rectangular volume of the unit) must not exceed the following:

- (a) For blocks up to 75 mm thick — 35%.
- (b) For blocks more than 75 mm but not more than 100 mm thick — 40%.
- (c) For blocks more than 100 mm — 50%.

S2C23 Reinforcing for column and beam protection — masonry

Masonry of calcium-silicate, fired clay and concrete for the protection of steel columns must have steel-wire or mesh reinforcement in every second course and lapped at the corners.

S2C24 Reinforcing for column and beam protection — gypsum blocks and hollow terracotta blocks

Gypsum blocks and hollow terracotta blocks for the protection of steel columns must have steel-wire or mesh reinforcement in every course and lapped at corners.

S2C25 Reinforcing for column and beam protection — structural concrete and poured gypsum

If a steel column or a steel beam is to be protected with structural concrete or poured gypsum, the concrete or gypsum must be reinforced with steel-wire mesh or steel-wire binding placed about 20 mm from its outer surface, and—

- (a) for concrete or gypsum less than 50 mm thick, the steel wire must be—
 - (i) at least 3.15 mm in diameter; and
 - (ii) spaced at not more than 100 mm vertically; or
- (b) for concrete or gypsum not less than 50 mm thick, the steel wire must be either—
 - (i) of a diameter and spacing in accordance with (a); or
 - (ii) at least 5 mm in diameter and spaced at not more than 150 mm vertically.

S2C26 Reinforcing for column and beam protection — gypsum-perlite or gypsum-vermiculite plaster sprayed to contour

- (1) If a steel column or steel beam is protected with either gypsum-perlite or gypsum-vermiculite plaster sprayed to contour and the construction falls within the limits of Table S2C26a or S2C26b, the plaster must be reinforced with—
 - (a) expanded metal lath complying with S2C7; or
 - (b) galvanised steel wire mesh complying with S2C7.
- (2) The reinforcement must be placed at a distance from the face of the plaster of at least 1/3 of the thickness of the plaster and must be securely fixed to the column or beam at intervals of not more than the relevant listing in Tables S2C26a and S2C26b.
- (3) For the purposes of Tables S2C26a and S2C26b—
 - (a) “vertical” includes a surface at not more than 10° to the vertical; and
 - (b) “horizontal” includes a surface at not more than 10° to the horizontal; and
 - (c) “underside” means the underside of any horizontal or non-vertical surface.

Table S2C26a: Reinforcement of gypsum-perlite or gypsum-vermiculite plaster sprayed to contour — vertical members with H or I cross-section

Surface to be protected	Reinforcement required if smaller dimension of surface exceeds (mm)	Max spacing of fixings of the mesh to surface (mm)
Vertical	450	450
Non-vertical	300	300
Underside	300	300
Upper side of a horizontal surface	Not required	N/A

Table S2C26b: Reinforcement of gypsum-perlite or gypsum-vermiculite plaster sprayed to contour — vertical members with other shapes

Surface to be protected	Reinforcement required if smaller dimensions of surface exceeds (mm)	Max spacing of fixings of the mesh to surface (mm)
Vertical	Any size	450
Non-vertical	Any size	300
Underside	Any size	300
Upper side of a horizontal surface	Not required	N/A

S2C27 Measurement of thickness of column and beam protection

The thickness of the fire protection to steel columns and steel beams (other than fire protection of gypsum-perlite or gypsum-vermiculite plaster sprayed on metal lath or sprayed to contour) is to be measured from the face or edge of the steel, from the face of a splice plate or from the outer part of a rivet or bolt, whichever is the closest to the outside of the fire-protective construction, except that—

- (a) if the thickness of the fire protection is 40 mm or more, rivet heads may be disregarded; and
- (b) if the thickness of the fire protection is 50 mm or more—
 - (i) any part of a bolt (other than a high-tensile bolt) may be disregarded; and
 - (ii) a column splice plate within 900 mm of the floor may encroach upon the fire protection by up to a ¼ of the thickness of the fire protection; and
- (c) the flange of a column or beam may encroach by up to 12 mm upon the thickness of the fire protection at right

angles to the web if—

- (i) the column or beam is intended to have an FRL of 240/240/240 or 240/—/—; and
- (ii) the flange projects 65 mm or more from the web; and
- (iii) the thickness of the edge of the flange (inclusive of any splice plate) is not more than 40 mm.

PREVIEW DRAFT

Specification 3 Fire hazard properties

S3C1 Scope

This Specification sets out the procedures for determining the *fire hazard properties* of assemblies tested to AS/NZS 1530.3.

Assemblies

S3C2 General requirement

The *fire hazard properties* of assemblies and their ability to screen their core materials as *required* under *Specification 7* must be determined by testing in accordance with S3C3 to S3C6.

S3C3 Form of test

Tests must be carried out in accordance with—

- (a) for the determination of the *Spread-of-Flame Index* and *Smoke-Developed Index* — AS/NZS 1530.3; and
- (b) for the determination of the ability to prevent ignition and to screen its core material from free air — AS 1530.4.

S3C4 Test specimens

Test specimens must incorporate—

- (a) all types of joints; and
- (b) all types of perforations, recesses or the like for pipes, light switches or other fittings, which are proposed to be used for the member or assembly of members in the building.

S3C5 Concession

S3C4 does not apply to joints, perforations, recesses or the like that are larger than those in the proposed application and have already been tested in the particular form of construction concerned and found to comply with the conditions of the test.

S3C6 Smaller specimen permitted

A testing laboratory may carry out the test specified in S3C3(b) at pilot scale if a specimen (which must be not less than 900 mm x 900 mm) will adequately represent the proposed construction in the building, but the results of that test do not apply to construction larger than limits defined by the laboratory conducting the pilot examination.

Section B

Structure

Part B1

Structural provisions**Objectives**

B1O1 Objective

Functional Statements

B1F1 Structure

B1F2 Glazing

Performance Requirements

B1P1 Structural reliability

B1P2 Glass installations at risk of human impact

B1P3 Buildings in flood areas

Verification Methods

B1V1 Structural reliability of components

B1V2 Structural robustness

Deemed-to-Satisfy Provisions

B1D1 Deemed-to-Satisfy Provisions

B1D2 Resistance to actions

B1D3 Determination of individual actions

B1D4 Determination of structural resistance of materials and forms of construction

B1D5 Structural software

B1D6 Construction of buildings in flood hazard areas

Specification 4

Design of buildings in cyclonic areas

S4C1 Scope

S4C2 Roof cladding

Part B1 Structural provisions

Introduction to this Part

This Part focuses on safeguarding people from injury caused by structural failure, loss of amenity caused by structural behaviour (deflections, creep, vibration, settlement and the like), protection of other property from physical damage caused by structural failure and safeguarding people from injury that may be caused by failure of, or impact with, glazing.

Objectives

B1O1 Objective

The Objective of this Part is to—

- (a) safeguard people from injury caused by structural failure; and
- (b) safeguard people from loss of amenity caused by structural behaviour; and
- (c) protect *other property* from physical damage caused by structural failure; and
- (d) safeguard people from injury that may be caused by failure of, or impact with, glazing.

Functional Statements

B1F1 Structure

A building or structure is to withstand the combination of loads and other actions to which it may be reasonably subjected.

B1F2 Glazing

- (1) Glazing is to be installed in a building to avoid undue risk of injury to people.
- (2) Glazing in a building should not cause injury to people due to its failure or people impacting with it because they did not see it.

Performance Requirements

B1P1 Structural reliability

- (1) By resisting the actions to which it may reasonably be expected to be subjected, a building or structure, during construction and use, with appropriate levels of reliability, must—
 - (a) perform adequately under all reasonably expected design actions; and
 - (b) withstand extreme or frequently repeated design actions; and
 - (c) be designed to sustain local damage, with the structural system as a whole remaining stable and not being damaged to an extent disproportionate to the original local damage; and
 - (d) avoid causing damage to *other properties*.

- (2) Each component of the building or structure must withstand all actions with the minimum levels of reliability specified in [Tables B1P1a, B1P1b and B1P1c](#) as determined in accordance with [B1V1](#).
- (3) The actions to be considered to satisfy (1) and (2) include but are not limited to—
- (a) permanent actions (dead loads) including, for a Class 7b building, an additional notional permanent roof load of not less than 0.15 kPa to support the addition of solar photovoltaic panels; and
 - (b) imposed actions (live loads arising from occupancy and use); and
 - (c) wind action; and
 - (d) earthquake action; and
 - (e) snow action; and
 - (f) liquid pressure action; and
 - (g) ground water action; and
 - (h) rainwater action (including ponding action); and
 - (i) earth pressure action; and
 - (j) differential movement; and
 - (k) time dependent effects (including creep and shrinkage); and
 - (l) thermal effects; and
 - (m) ground movement caused by—
 - (i) swelling, shrinkage or freezing of the subsoil; and
 - (ii) landslip or subsidence; and
 - (iii) siteworks associated with the building or structure; and
 - (n) [construction activity actions](#); and
 - (o) termite actions.
- (4) The structural resistance of materials and forms of construction must be determined using material properties with appropriate allowance for the type and use of the material and the degree of accuracy inherent in the methods used to assess the structural behaviour.
- (5) For the purposes of B1P1(2), Importance Level must be assigned in accordance with [Table B1P1d](#).

Table B1P1a: Minimum annual reliability indices (β) for additive load combinations (gravity actions only)

All Importance Levels
$\beta = 4.30$

Table Notes

- (1) The annual reliability indices in Table B1P1a must be met for all components necessary to comply with B1P1(1) at the relevant Importance Level.
- (2) [Ancillary components](#) may have a reliability index appropriate to the component, but not less than that [required](#) for Importance Level 1, irrespective of the Importance Level of the whole building or structure.

Table B1P1b: Minimum annual reliability indices (β) for additive load combinations (combined gravity and other actions)

Importance Level 1	Importance Level 2	Importance Level 3	Importance Level 4
$\beta = 3.45$	$\beta = 3.70$	$\beta = 3.85$	$\beta = 4.00$

Table Notes

- (1) The annual reliability indices in Table B1P1b must be met for all components necessary to comply with B1P1(1) at the relevant Importance Level.
- (2) [Ancillary components](#) may have a reliability index appropriate to the component, but not less than that [required](#) for

Importance Level 1, irrespective of the Importance Level of the whole building or structure.

Table B1P1c: Minimum annual reliability indices (β) for action reversal and stability load combinations (combined gravity and other actions)

Importance Level 1	Importance Level 2	Importance Level 3	Importance Level 4
$\beta = 3.00$	$\beta = 3.35$	$\beta = 3.55$	$\beta = 3.65$

Table Notes

- (1) The annual reliability indices in Table B1P1c must be met for all components necessary to comply with B1P1(1) at the relevant Importance Level.
- (2) *Ancillary components* may have a reliability index appropriate to the component, but not less than that *required* for Importance Level 1, irrespective of the Importance Level of the whole building or structure.

Table B1P1d: Importance Levels of buildings and structures

Importance Level	Building Types
1	Buildings or structures presenting a low degree of hazard to life and <i>other property</i> in the case of failure.
2	Buildings or structures not included in Importance Level 1, 3 and 4.
3	Buildings or structures that are designed to contain a large number of people.
4	Buildings or structures that are essential to post-disaster recovery or associated with hazardous facilities.

Exemptions

The requirement for an additional notional permanent roof load to support photovoltaic panels in B1P1(3)(a) does not apply to a Class 7b building—

- (a) where 100% of the roof area is shaded for more than 70% of daylight hours; or
- (b) with a roof area of not more than 55 m²; or
- (c) where more than 50% of the roof area is used as a terrace, *carpark*, roof garden, roof light or the like.

Notes

B1P1(2) does not take effect until 1 year after the adoption date for NCC 2025.

Notes

When assessing compliance with B1P1(3)(a) to (e), the actions must include those from the relevant part of AS/NZS 1170 series of Standards.

Explanatory Information

Structural reliability in terms of failure and behaviour is considered for each component (beams, columns, struts, ties, slabs, external wall and roof cladding, etc, that are subject to a combination of loads) and for the structure as a whole. The *Performance Requirements* for components are prescribed as minimum reliability indices for combinations of loads and building importance. B1P1(1) requires that the structure as a whole achieves levels of reliability that take into account material properties, the nature of imposed actions, failure modes, building use, serviceability requirements and occupant vulnerability which may require that components have higher levels of reliability than those specified in *Tables B1P1a, B1P1b and B1P1c*. For further guidance refer to ABCB Handbook — Structural Reliability Verification Method.

The actions imposed by gravity, wind, snow and earthquake loads are set out in AS/NZS 1170 Parts 1 to 4. The reliability indices in *Tables B1P1a, B1P1b and B1P1c* are derived from load combinations based on AS/NZS 1170 and are a weighted average of indices for individual load combinations and components derived from various provisions in the

below listed Australian Standards. These standards set the minimum structural requirements for timber, concrete, masonry and steel components for structural design:

- AS 1720 Timber structures.
- AS 3600 Concrete structures.
- AS 3700 Masonry structures.
- AS 4100 Steel structures.
- AS/NZS 4600 Cold-form steel structures.

These standards apply to many types of structures, including buildings, and were adopted as the requirements for building structures in the BCA in 1989. As existing requirements they are classified as *Deemed-to-Satisfy Solutions* from BCA 1996 onwards. They remain the principle minimum requirements for timber, concrete, masonry and steel components in buildings for both *Performance Solutions* and *Deemed-to-Satisfy Solutions*. By retaining them as *Deemed-to-Satisfy Solutions* they can be applied without the need for a *performance-based design brief*.

The derived reliability indices in [Tables B1P1a, B1P1b and B1P1c](#) give a consistent base for assessing components of building structures made from materials other than materials included in B1D4(a) to (f), or for components using these materials in a way not covered by these standards.

A2G2(5) requires that components made from materials included in B1D4(a) to (f) be assessed as part of a *Deemed-to-Satisfy Solution* using B1D3 and B1D4, or as part of a *Performance Solution* utilising comparison with *Deemed-to-Satisfy Provisions* B1D3 and B1D4.

Explanatory Information

- (1) Annual probability of failure (P_F) can be derived from the reliability index (β) where $\beta = -\sigma^{-1}(P_F)$ where σ^{-1} is the inverse standardised normal distribution. Approximate equivalent probabilities of failure to the reliability indices in [Table B1P1a](#), [Table B1P1b](#) and [Table B1P1c](#) are contained in [Table B1P1 \(explanatory\)](#).
- (2) Values in Table B1P1 (explanatory) are notional, accounting for uncertainties in design parameters but excluding accidents and gross human errors.
- (3) For further guidance refer to ABCB Handbook – Structural Reliability Verification Method.

Table B1P1 (explanatory): Approximate equivalent probabilities of failure

Additive load combination (gravity actions only)	Additive load combinations (combined gravity and other actions)				Action reversal and stability load combinations (combined gravity and other actions)			
All Importance Levels	Importance Level 1	Importance Level 2	Importance Level 3	Importance Level 4	Importance Level 1	Importance Level 2	Importance Level 3	Importance Level 4
$P_F = 1/117,000$ per year	$P_F = 1/3,500$ per year	$P_F = 1/9,200$ per year	$P_F = 1/16,900$ per year	$P_F = 1/31,500$ per year	$P_F = 1/700$ per year	$P_F = 1/2,400$ per year	$P_F = 1/5,100$ per year	$P_F = 1/7,600$ per year

B1P2 Glass installations at risk of human impact

Glass installations that are at risk of being subjected to human impact must have glazing that—

- if broken on impact, will break in a way that is not likely to cause injury to people; and
- resists a reasonably foreseeable human impact without breaking; and
- is protected or marked in a way that will reduce the likelihood of human impact.

QLD B1P3

SA B1P3

B1P3 Buildings in flood areas

- (1) A building in a *flood hazard area*, must be designed and constructed, to the degree necessary, to resist flotation, collapse or significant permanent movement resulting from the action of hydrostatic, hydrodynamic, erosion and scour, wind and other actions during the *defined flood event*.
- (2) The actions and requirements to be considered to satisfy (1) include but are not limited to—
 - (a) flood actions; and
 - (b) elevation requirements; and
 - (c) foundation and footing requirements; and
 - (d) requirements for enclosures below the *flood hazard level*; and
 - (e) requirements for structural connections; and
 - (f) material requirements; and
 - (g) requirements for utilities; and
 - (h) requirements for occupant egress.

Applications

B1P3 only applies to—

- (a) a Class 2 or 3 building or a Class 4 part of a building; and
- (b) a Class 9a *health-care building*; and
- (c) a Class 9c building.

Verification Methods**B1V1 Structural reliability of components**

- (1) This *Verification Method* is applicable to components with a resistance coefficient of variation of not more than 40%.
- (2) Where the calculated resistance coefficient of variation is less than 10%, then a minimum value of 10% must be used.
- (3) The resistance model for the component must be established by taking into account variability due to material properties, fabrication and construction processes, structural modelling and time dependent effects.
- (4) Annual action models must be determined for all reasonably expected actions and combinations of actions in accordance with *Table B1V1a*.
- (5) Compliance with *B1P1(2)* is verified for the design of a component where—
 - (a) the calculated reliability index β is not less than the applicable *required* values.

- (b) the reliability index β is calculated in accordance with the equation:
$$\beta = \frac{\ln \left[\frac{\bar{R}}{\bar{S}} \sqrt{\frac{C_S}{C_R}} \right]}{\sqrt{\ln(C_S C_R)}}, \text{ where—}$$

- (i) $C_R = 1 + V^2_R$; and
- (ii) $C_S = 1 + V^2_S$, where subject to (iii)—
 - (A) $\bar{R}$ = means resistance; and
 - (B) $\bar{S}$ = means action; and

- (C) V_s = coefficient of variation of the action; and
- (D) V_R = coefficient of variation of the resistance; and
- (iii) Where the load action s is due to the combination of multiple structural actions—
- (A) $S = S_1 + S_2 + \dots + S_n$; and
- (B) the mean of the combined load action is calculated in accordance with the equation:
 $\bar{S} = \bar{S}_1 + \bar{S}_2 + \dots + \bar{S}_n$, where $\bar{S}_i$ is the mean of the i th action S_i ; and
- (C) the standard deviation of the combined load action is calculated in accordance with the equation:
 $\sigma^2_S = \sigma^2_{S1} + \sigma^2_{S2} + \dots + \sigma^2_{Sn}$, where σ_{Si} is the standard deviation of the i th action S_i ; and
- (D) the coefficient of the variation of the combined action s is calculated in accordance with the equation

$$V_s = \frac{\sigma_S}{\bar{S}}$$

Table B1V1: Annual action models

Design action	Ratio of mean action to nominal	Coefficient of variation of the action
Permanent action	1.05	0.10
Annual maximum imposed action	0.35	0.45
Arbitrary-point-in-time imposed action	0.25	0.78
Wind (non-cyclonic regions, Importance Level 1)	0.37	0.47
Wind (non-cyclonic regions, Importance Level 2)	0.31	0.47
Wind (non-cyclonic regions, Importance Level 3)	0.29	0.47
Wind (non-cyclonic regions, Importance Level 4)	0.27	0.47
Wind (cyclonic regions, Importance Level 1)	0.19	0.76
Wind (cyclonic regions, Importance Level 2)	0.16	0.76
Wind (cyclonic regions, Importance Level 3)	0.14	0.76
Wind (cyclonic regions, Importance Level 4)	0.13	0.76
Earthquake (Importance Level 1)	0.28	0.90
Earthquake (Importance Level 2)	0.15	0.90
Earthquake (Importance Level 3)	0.12	0.90
Earthquake (Importance Level 4)	0.084	0.90
Snow	0.29	0.57

Table Notes

- (1) Actions not listed must be considered and derived on a case-by-case basis.
- (2) Nominal loads are based on AS/NZS 1170 series of standards.

Notes

- (1) B1V1 of NCC 2022 may apply instead of B1V1 of NCC 2025 until 1 year after the adoption date of NCC 2025.
- (2) When determining appropriate combinations of actions to meet the requirements of B1V1(5)(b)(ii), consideration must be made for those given in AS/NZS 1170.
- (3) B1V1 may be used for all materials and actions to determine compliance with B1P1(2).
- (4) Requirements for values of β can be found in Table B1P1a, Table B1P1b and Table B1P1c.

B1V2 Structural robustness

- (1) Compliance with B1P1(1)(c) is verified for structural robustness if (2) and (3) are complied with.
- (2) The structure is assessed such that the building remains stable and the resulting collapse does not extend further than the immediately adjacent *storeys* upon the notional removal in isolation of—
 - (a) any supporting column; or
 - (b) any beam supporting one or more columns; or
 - (c) any segment of a load bearing wall of length equal to the height of the wall.
- (3) It is demonstrated that if a supporting structural component is relied upon to carry more than 25% of the total structure, a systematic risk assessment of the building is undertaken and critical high risk components are identified and designed to cope with the identified hazard or protective measures chosen to minimise the risk.

Deemed-to-Satisfy Provisions

B1D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* B1P1 to B1P3 are satisfied by complying with B1D2 to B1D6.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

B1D2 Resistance to actions

The resistance of a building or structure must be greater than the most critical action effect resulting from different combinations of actions, where—

- (a) the most critical action effect on a building or structure is determined in accordance with B1D3 and the general design procedures contained in AS/NZS 1170.0; and
- (b) design for the actions in (a) accommodates expected 10-year deflection for *structural substrates* in Part F1; and
- (c) the resistance of a building or structure is determined in accordance with B1D4.

WA

B1D3 Determination of individual actions

The magnitude of individual actions must be determined in accordance with the following:

- (a) Permanent actions:
 - (i) the design or known dimensions of the building or structure; and
 - (ii) the unit weight of the construction; and
 - (iii) AS/NZS 1170.1; and
 - (iv) for a Class 7b building, a notional additional permanent roof load of not less than 0.15 kPa to support the addition of solar photovoltaic panels.
- (b) Imposed actions:
 - (i) the known loads that will be imposed during the occupation or use of the building or structure; and
 - (ii) *construction activity actions*; and

- (iii) AS/NZS 1170.1.
- (c) Wind, snow and ice and earthquake actions:
 - (i) the applicable annual probability of design event for safety, determined by—
 - (A) assigning the building or structure an Importance Level in accordance with [Table B1D3a](#); and
 - (B) determining the corresponding annual probability of exceedance in accordance with [Table B1D3b](#); and
 - (ii) AS/NZS 1170.2; and
 - (iii) AS/NZS 1170.3 as appropriate; and
 - (iv) AS 1170.4 as appropriate; and
 - (v) in cyclonic areas, metal roof cladding, its connections and immediate supporting members must comply with [Specification 4](#); and
 - (vi) for the purposes of (v), cyclonic areas are those determined as being located in wind regions B2, C and D in accordance with AS/NZS 1170.2.
- (d) Actions not covered in (a), (b) and (c) above:
 - (i) the nature of the action; and
 - (ii) the nature of the building or structure; and
 - (iii) the Importance Level of the building or structure determined in accordance with [Table B1D3a](#); and
 - (iv) AS/NZS 1170.1.
- (e) For the purposes of (d) the actions include but are not limited to—
 - (i) liquid pressure action; and
 - (ii) ground water action; and
 - (iii) rainwater action (including ponding action); and
 - (iv) earth pressure action; and
 - (v) differential movement; and
 - (vi) time dependent effects (including creep and shrinkage); and
 - (vii) thermal effects; and
 - (viii) ground movement caused by—
 - (A) swelling, shrinkage or freezing of the subsoil; and
 - (B) landslip or subsidence; and
 - (C) [siteworks](#) associated with the building or structure; and
 - (ix) [construction activity actions](#).

Table B1D3a: Importance Levels of buildings and structures

Importance level	Building Types
1	Buildings or structures presenting a low degree of hazard to life and other property in the case of failure.
2	Buildings or structures not included in Importance Level 1, 3 and 4.
3	Buildings or structures that are designed to contain a large number of people.
4	Buildings or structures that are essential to post-disaster recovery or associated with hazardous facilities.

Table B1D3b: Design events for safety — Annual probability of exceedance

Importance level	Non-cyclonic wind	Cyclonic wind (wind regions B2 and C)	Cyclonic wind (wind region D)	Snow	Earthquake
1	1:100	1:200	1:250	1:100	1:250

Importance level	Non-cyclonic wind	Cyclonic wind (wind regions B2 and C)	Cyclonic wind (wind region D)	Snow	Earthquake
2	1:500	1:500	1:1000	1:150	1:500
3	1:1000	1:1000	1:2000	1:200	1:1000
4	1:2000	1:2000	1:5000	1:250	1:1500

Exemptions

B1D3(a)(iv) does not apply to a Class 7b building—

- (a) where 100% of the roof area is shaded for more than 70% of daylight hours; or
- (b) with a roof area of not more than 55m²; or
- (c) where more than 50% of the roof area is used as a terrace, *carpark*, roof garden, roof light or the like.

NT B1D4

QLD B1D4

WA B1D4

B1D4 Determination of structural resistance of materials and forms of construction

The structural resistance of materials and forms of construction must be determined in accordance with the following, as appropriate:

- (a) Masonry (including masonry-veneer, unreinforced masonry and reinforced masonry): AS 3700, except—
 - (i) '(for piers—isolated or engaged)' is removed from Clause 8.5.1(d); and
 - (ii) where Clause 8.5.1 requires design as for unreinforced masonry in accordance with Section 7, the member must also be designed as unreinforced masonry in accordance with Tables 10.3 and 4.1(a)(i)(C) of AS 3700.
- (b) Concrete:
 - (i) Concrete construction (including reinforced and prestressed concrete): AS 3600.
 - (ii) Autoclaved aerated concrete: AS 5146.1 and AS 5146.3.
 - (iii) Post-installed and cast-in fastenings: AS 5216.
- (c) Steel construction:
 - (i) Steel structures: AS 4100.
 - (ii) Cold-formed steel structures: AS/NZS 4600.
 - (iii) Residential and low-rise steel framing: NASH Standard – Residential and Low-Rise Steel Framing Part 1 or Part 2.
- (d) Composite steel and concrete: AS/NZS 2327.
- (e) Aluminium construction: AS/NZS 1664.1 or AS/NZS 1664.2.
- (f) Timber construction:
 - (i) Design of timber structures: AS 1720.1.
 - (ii) Timber structures: AS 1684.2, AS 1684.3 or AS 1684.4.
 - (iii) Nailplated timber roof trusses: AS 1720.5.
- (g) Piling: AS 2159.
- (h) Glazed assemblies:
 - (i) The following glazed assemblies in an *external wall* must comply with AS 2047:

- (A) Windows excluding those listed in (ii).
- (B) Sliding and swinging glazed doors with a frame, including french and bi-fold doors with a frame.
- (C) Adjustable louvres.
- (D) Shopfronts.
- (E) Window walls with one piece framing.
- (ii) All glazed assemblies not covered by (i) and the following glazed assemblies must comply with AS 1288:
 - (A) All glazed assemblies not in an *external wall*.
 - (B) Revolving doors.
 - (C) Fixed louvres.
 - (D) Skylights, roof lights and windows in other than the vertical plane.
 - (E) Sliding and swinging doors without a frame.
 - (F) Windows constructed on site and architectural one-off windows, which are not design tested in accordance with AS 2047.
 - (G) Second-hand windows, re-used windows and recycled windows.
 - (H) Heritage windows.
 - (I) Glazing used in balustrades and sloping overhead glazing.
- (i) Termite Risk Management: Where a *primary building element* is subject to attack by subterranean termites: AS 3660.1, and—
 - (i) for the purposes of this provision, a *primary building element* consisting entirely of, or a combination of, any of the following materials is considered not subject to termite attack:
 - (A) Steel, aluminium or other metals.
 - (B) Concrete.
 - (C) Masonry.
 - (D) Fibre-reinforced cement.
 - (E) Timber — naturally termite resistant in accordance with Appendix C of AS 3660.1.
 - (F) Timber — preservative treated in accordance with Appendix D of AS 3660.1; and
 - (ii) a durable notice must be permanently fixed to the building in a prominent location, such as a meter box or the like, indicating—
 - (A) the termite management system used; and
 - (B) the date of installation of the system; and
 - (C) where a chemical is used, its life expectancy as listed on the *appropriate authority's* pesticides register label; and
 - (D) the installer's or manufacturer's recommendations for the scope and frequency of future inspections for termite activity.
- (j) Roof construction (except in cyclonic areas):
 - (i) Terracotta, fibre-cement and timber slates and shingles: AS 4597.
 - (ii) Roof tiling: AS 2050.
 - (iii) Cellulose cement corrugated sheets: AS/NZS 2908.1 with safety mesh installed in accordance with AS 1562.3 clause 2.4.3.2 except for sub-clause (c)(vii) for plastic sheeting.
 - (iv) Metal roofing: AS 1562.1.
- (k) Roof construction (cyclonic areas) — metal roofing: AS 1562.1 and *Specification 4*.
- (l) Particleboard structural flooring: AS 1860.2.
- (m) Garage doors and other large access doors in openings not more than 3 m in height in *external walls* of buildings determined as being located in wind region B2, C or D in accordance with AS/NZS 1170.2: AS/NZS 4505.
- (n) Lift *shafts* which are not *required* to have an FRL, must—
 - (i) except as required by (ii), be completely enclosed with non-perforated material between the bottom of the

- pit and the ceiling of the lift *shaft*, other than—
 - (A) at landing doors, emergency doors and pit access doors; and
 - (B) *low-rise, low-speed constant pressure lifts*; and
- (ii) in *atrium* and observation areas, be protected with non-perforated material not less than 2.5 m in height—
 - (A) above any places on which a person can stand, which are within 800 mm horizontal reach of any vertical moving lift component including ropes and counterweights; and
 - (B) at the lowest level of the *atrium* area that the lift serves, on all sides except the door opening, for not less than 2.5 m in height, by enclosure with non-perforated material; and
- (iii) be of non-brittle material; and
- (iv) where glazing is used—
 - (A) comply with Table B1D4; or
 - (B) not fail the deflection criteria *required* by S6C11(c)(iii).

Table B1D4: Material and minimum thickness of glazing and polycarbonate sheet

Application	Lift <i>shaft</i> vision panels more than 65 000 mm ² , door panels, and lift <i>shafts</i>	Lift <i>shaft</i> vision panels less than or equal to 65 000 mm ²
Laminated glass	10 mm (0.76 mm interlayer)	6 mm (0.76 mm interlayer)
Toughened/ laminated glass	10 mm (0.76 mm interlayer)	6 mm (0.76 mm interlayer)
Annealed glass with security polyester film coating	10 mm	6 mm
Safety wire glass	Not applicable	Subject to fire test
Polycarbonate sheet	13 mm	6 mm

B1D5 Structural software

- (1) Structural software used in computer aided design of a building or structure, that uses design criteria based on the *Deemed-to-Satisfy Provisions* of the BCA, including its referenced documents, for the design of steel or timber trussed roof and floor systems and framed building systems, must comply with the ABCB Protocol for Structural Software.
- (2) Structural software referred to in (1) can only be used for buildings within the following geometric limits:
 - (a) The distance from ground level to the underside of eaves must not exceed 6 m.
 - (b) The distance from ground level to the highest point of the roof, neglecting chimneys, must not exceed 8.5 m.
 - (c) The building width including roofed verandahs, excluding eaves, must not exceed 16 m.
 - (d) The building length must not exceed five times the building width.
 - (e) The roof pitch must not exceed 35 degrees.
- (3) The requirements of (1) do not apply to design software for individual frame members such as electronic tables similar to those provided in—
 - (a) AS 1684; or
 - (b) NASH Standard Residential and Low-Rise Steel Framing Part 2.

QLD B1D6

SA B1D6

VIC B1D6

B1D6

Construction of buildings in flood hazard areas

- (1) A building in a *flood hazard area* must comply with the ABCB Standard for Construction of Buildings in Flood Hazard Areas.
- (2) The requirements of (1) only apply to a Class 2 or 3 building, Class 9a *health-care building*, Class 9c building or a Class 4 part of a building.

PREVIEW DRAFT

Specification 4 Design of buildings in cyclonic areas

S4C1 Scope

- (1) This specification contains requirements for the design of buildings in cyclonic areas in addition to the requirements of AS/NZS 1170.2.
- (2) For the purposes of [Specification 4](#), cyclonic areas are those determined as being located in wind regions B2, C and D in accordance with AS/NZS 1170.2.

S4C2 Roof cladding

Test for strength: Metal roof cladding, its connections and immediate supporting members must be capable of remaining in position notwithstanding any permanent distortion, fracture or damage that might occur in the sheet or fastenings under the pressure sequences A to G defined in [Table S4C2](#).

Table S4C2: Low-high-low pressure sequence

Sequence	Number of cycles	Load
A	4500	0 to 0.45 Pt
B	600	0 to 0.6 Pt
C	80	0 to 0.8 Pt
D	1	0 to 1.0 Pt
E	80	0 to 0.8 Pt
F	600	0 to 0.6 Pt
G	4500	0 to 0.45 Pt

Table Notes

- (1) Pt is the ultimate limit state wind pressure on internal and external surfaces as determined in accordance with AS/NZS 1170.2, modified by an appropriate factor for variability, as determined in accordance with Table B1 of AS/NZS 1170.0.
- (2) The rate of load cycling must be less than 3 Hz.
- (3) The single load cycle (sequence D) must be held for a minimum of 10 seconds.

[NT S4C3](#)

Section C Fire resistance

Part C1

Fire resistance

Objectives

C1O1	Objective

Functional Statements

C1F1	Structural stability during a fire
C1F2	Prevention of fire spread

Performance Requirements

C1P1	Structural stability during a fire
C1P2	Spread of fire
C1P3	Spread of fire and smoke in health and residential care buildings
C1P4	Safe conditions for evacuation
C1P5	Behaviour of concrete external walls in a fire
C1P6	Fire protection of service equipment
C1P7	Fire protection of emergency equipment
C1P8	Fire protection of openings and penetrations
C1P9	Fire brigade access

Verification Methods

C1V1	Fire spread between buildings on adjoining allotments
C1V2	Fire spread between buildings on the same allotment
C1V3	Fire spread via external walls
C1V4	Fire Safety Verification Method

Part C2

Fire resistance and stability

Deemed-to-Satisfy Provisions

C2D1	Deemed-to-Satisfy Provisions
C2D2	Type of construction required
C2D3	Calculation of rise in storeys
C2D4	Buildings of multiple classification
C2D5	Mixed types of construction
C2D6	Two storey Class 2, 3 or 9c buildings
C2D7	Class 4 parts of buildings
C2D8	Open spectator stands and indoor sports stadiums
C2D9	Lightweight construction
C2D10	Non-combustible building elements
C2D11	Fire hazard properties
C2D12	Performance of external walls in fire
C2D13	Fire-protected timber: Concession
C2D14	Ancillary elements
C2D15	Fixing of bonded laminated cladding panels

Part C3

Compartmentation and separation

Deemed-to-Satisfy Provisions

C3D1	Deemed-to-Satisfy Provisions
C3D2	Application of Part

C3D3	General floor area and volume limitations
C3D4	Large isolated buildings
C3D5	Requirements for open spaces and vehicular access
C3D6	Class 9 buildings
C3D7	Vertical separation of openings in external walls
C3D8	Separation by fire walls
C3D9	Separation of classifications in the same storey
C3D10	Separation of classifications in different storeys
C3D11	Separation of lift shafts
C3D12	Stairways and lifts in one shaft
C3D13	Separation of equipment
C3D14	Electricity supply system
C3D15	Public corridors in Class 2 and 3 buildings

Part C4

Protection of openings

Deemed-to-Satisfy Provisions

C4D1	Deemed-to-Satisfy Provisions
C4D2	Application of Part
C4D3	Protection of openings in external walls
C4D4	Separation of external walls and associated openings in different fire compartments
C4D5	Acceptable methods of protection
C4D6	Doorways in fire walls
C4D7	Sliding fire doors
C4D8	Protection of doorways in horizontal exits
C4D9	Openings in fire-isolated exits
C4D10	Service penetrations in fire-isolated exits
C4D11	Openings in fire-isolated lift shafts
C4D12	Bounding construction: Class 2 and 3 buildings and Class 4 parts
C4D13	Openings in floors and ceilings for services
C4D14	Openings in shafts
C4D15	Openings for service installations
C4D16	Construction joints
C4D17	Columns protected with lightweight construction to achieve an FRL

Specification 5 Fire-resisting construction

S5C1	Scope
S5C2	Exposure to fire-source features
S5C3	Fire protection for a support of another part
S5C4	Lintels
S5C5	Method of attachment not to reduce the fire-resistance of building elements
S5C6	General concessions
S5C7	Mezzanine floors: Concession
S5C8	Enclosure of shafts
S5C9	Carparks and ancillary uses for Class 2 and 3 buildings
S5C10	Residential care building: Concession

S5C11	Type A fire-resisting construction — fire-resistance of building elements
S5C12	Type A fire-resisting construction — concessions for floors
S5C13	Type A fire-resisting construction — floor loading of Class 5 and 9b buildings: Concession
S5C14	Type A fire-resisting construction — roof superimposed on concrete slab: Concession
S5C15	Type A fire-resisting construction — roof: Concession
S5C16	Type A fire-resisting construction — roof lights
S5C17	Type A fire-resisting construction — internal columns and walls: Concession
S5C18	Type A fire-resisting construction — open spectator stands and indoor sports stadiums: Concession
S5C19	Type A fire-resisting construction — carparks
S5C20	Type A fire-resisting construction — Class 2 and 3 buildings: Concession
S5C21	Type B fire-resisting construction — fire-resistance of building elements
S5C22	Type B fire-resisting construction — carparks
S5C23	Type B fire-resisting construction — Class 2 and 3 buildings: Concession
S5C24	Type C fire-resisting construction — fire-resistance of building elements
S5C25	Type C fire-resisting construction — carparks

Specification 6 Structural tests for lightweight construction

S6C1	Scope
S6C2	Application
S6C3	Walls of certain Class 9b buildings
S6C4	Walls of shafts and fire-isolated exits generally
S6C5	Additional requirements for lift shafts
S6C6	Walls generally
S6C7	General requirements for testing
S6C8	Testing in-situ
S6C9	Testing of specimens
S6C10	Test methods
S6C11	Criteria for compliance

Specification 7 Fire hazard properties

S7C1	Scope
S7C2	Application
S7C3	Floor linings and floor coverings
S7C4	Wall and ceiling linings
S7C5	Air-handling ductwork
S7C6	Lift cars
S7C7	Other materials

Specification 8 Performance of external walls in fire

S8C1	Scope

S8C2	Application
S8C3	General requirements for external wall panels
S8C4	Additional requirements for vertically spanning external wall panels adjacent to columns

Specification 9 Cavity barriers for fire-protected timber

S9C1	Scope
S9C2	Requirements

Specification 10 Fire-protected timber

S10C1	Scope
S10C2	General requirements
S10C3	Massive timber
S10C4	Form of test
S10C5	Smaller specimen permitted
S10C6	Acceptance criteria

Specification 11 Smoke-proof walls in health-care and residential care buildings

S11C1	Scope
S11C2	Class 9a health-care buildings
S11C3	Class 9c buildings
S11C4	Doorways in smoke-proof walls

Specification 12 Fire doors, smoke doors, fire windows and shutters

S12C1	Scope
S12C2	Fire doors
S12C3	General requirements for smoke doors
S12C4	Construction Deemed-to-Satisfy for smoke doors
S12C5	Fire shutters
S12C6	Fire windows

Specification 13 Penetration of walls, floors and ceilings by services

S13C1	Scope
S13C2	Application
S13C3	Metal pipe systems
S13C4	Pipes penetrating sanitary compartments
S13C5	Wires and cables
S13C6	Electrical switches and outlets
S13C7	Fire-stopping

Part C1 Fire resistance

Introduction to this Part

This Part focuses on minimising risk of illness, injury or loss of life due to fire in a building including during evacuation, reducing fire spread within and between buildings and minimising risk to the public and occupants of nearby buildings when a fire occurs.

Objectives

C101 Objective

The Objective of [Parts C1](#), [C2](#), [C3](#) and [C4](#) is to—

- (a) safeguard people from illness or injury due to a fire in a building; and
- (b) safeguard occupants from illness or injury while evacuating a building during a fire; and
- (c) facilitate the activities of emergency services personnel; and
- (d) avoid the spread of fire between buildings; and
- (e) protect *other property* from physical damage caused by structural failure of a building as a result of fire

Functional Statements

C1F1 Structural stability during a fire

A building is to be constructed to maintain structural stability during fire to—

- (a) allow occupants time to evacuate safely; and
- (b) allow for *fire brigade* intervention; and
- (c) avoid damage to *other property*.

C1F2 Prevention of fire spread

A building is to be provided with safeguards to prevent fire spread—

- (a) so that occupants have time to evacuate safely without being overcome by the effects of fire; and
- (b) to allow for *fire brigade* intervention; and
- (c) to *sole-occupancy units* providing sleeping accommodation; and
- (d) to adjoining *fire compartments*; and
- (e) between buildings.

Applications

C1F2(c) only applies to a Class 2 or 3 building or Class 4 part of a building.

Performance Requirements

C1P1 Structural stability during a fire

A building must have elements which will, to the degree necessary, maintain structural stability during a fire appropriate to—

- (a) the function or use of the building; and
- (b) the *fire load*; and
- (c) the potential *fire intensity*; and
- (d) the *fire hazard*; and
- (e) the height of the building; and
- (f) its proximity to *other property*; and
- (g) any active *fire safety systems* installed in the building; and
- (h) the size of any *fire compartment*; and
- (i) *fire brigade* intervention; and
- (j) other elements they support; and
- (k) the *evacuation time*.

C1P2 Spread of fire

(1) A building must have elements which will, to the degree necessary, avoid the spread of fire—

- (a) to *exits*; and
- (b) to *sole-occupancy units* and *public corridors*; and
- (c) between buildings; and
- (d) in a building.

(2) Avoidance of the spread of fire referred to in (1) must be appropriate to—

- (a) the function or use of the building; and
- (b) the *fire load*; and
- (c) the potential *fire intensity*; and
- (d) the *fire hazard*; and
- (e) the number of *storeys* in the building; and
- (f) its proximity to *other property*; and
- (g) any active *fire safety systems* installed in the building; and
- (h) the size of any *fire compartment*; and
- (i) *fire brigade* intervention; and
- (j) other elements they support; and
- (k) the *evacuation time*.

Applications

C1P2(1)(b) only applies to a Class 2 or 3 building or Class 4 part of a building.

C1P3 Spread of fire and smoke in health and residential care buildings

A building must be protected from the spread of fire and smoke to allow sufficient time for the orderly evacuation of the building in an emergency.

Applications

C1P3 only applies to—

- (a) a *patient care area* of a Class 9a *health-care building*; and
- (b) a Class 9c building.

C1P4 Safe conditions for evacuation

To maintain tenable conditions during occupant evacuation, a material and an assembly must, to the degree necessary, resist the spread of fire and limit the generation of smoke and heat, and any toxic gases likely to be produced, appropriate to—

- (a) the *evacuation time*; and
- (b) the number, mobility and other characteristics of occupants; and
- (c) the function or use of the building; and
- (d) any active *fire safety systems* installed in the building.

Applications

C1P4 applies to linings, materials and assemblies in a Class 2 to 9 building.

C1P5 Behaviour of concrete external walls in a fire

A concrete *external wall* that could collapse as a complete panel (e.g. tilt-up and pre-cast concrete) must be designed so that in the event of fire within the building the likelihood of outward collapse is avoided.

Limitations

C1P5 does not apply to a building having more than two *storeys* above ground level.

C1P6 Fire protection of service equipment

A building must have elements, which will, to the degree necessary, avoid the spread of fire from service equipment having—

- (a) a high *fire hazard*; or
- (b) a potential for explosion resulting from a high *fire hazard*.

C1P7 Fire protection of emergency equipment

A building must have elements, which will, to the degree necessary, avoid the spread of fire so that emergency equipment provided in a building will continue to operate for a period of time necessary to ensure that the intended function of the

equipment is maintained during a fire.

C1P8 Fire protection of openings and penetrations

Any building element provided to resist the spread of fire must be protected, to the degree necessary, so that an adequate level of performance is maintained—

- (a) where openings, construction joints and the like occur; and
- (b) where penetrations occur for building services.

C1P9 Fire brigade access

Access must be provided to and around a building, to the degree necessary, for *fire brigade* vehicles and personnel to facilitate *fire brigade* intervention appropriate to—

- (a) the function or use of the building; and
- (b) the *fire load*; and
- (c) the potential *fire intensity*; and
- (d) the *fire hazard*; and
- (e) any active *fire safety systems* installed in the building; and
- (f) the size of any *fire compartment*.

Verification Methods

C1V1 Fire spread between buildings on adjoining allotments

Compliance with C1P2(1)(c) to avoid the spread of fire between buildings on adjoining allotments is verified when it is calculated that—

- (a) a building will not cause heat flux in excess of those set out in Column 2 of Table C1V1 at the location on an adjoining property set out in Column 1 of Table C1V1; and
- (b) when located at the distances from the allotment boundary set out in Column 1 of Table C1V1, a building is capable of withstanding the heat flux set out in Column 2 of Table C1V1 without ignition.

Table C1V1: Fire spread between buildings on adjoining allotments

Column 1 (Location)	Column 2 (Heat flux (kW/m ²))
On boundary	80
1 m from boundary	40
3 m from boundary	20
6 m from boundary	10

C1V2 Fire spread between buildings on the same allotment

Compliance with C1P2(1)(c) to avoid the spread of fire between buildings on the same allotment is verified when, for the distances between buildings set out in Column 1 of Table C1V2, it is calculated that a building—

- (a) is capable of withstanding the heat flux set out in Column 2 of Table C1V2 without ignition; and

- (b) will not cause heat flux in excess of those set out in Column 2 of Table C1V2.

Table C1V2: Fire spread between buildings on the same allotment

Column 1 (Distance between buildings on the same allotment (m))	Column 2 (Heat flux (kW/m ²))
0	80
2	40
6	20
12	10

C1V3 Fire spread via external walls

Compliance with C1P2 to avoid the spread of fire via the *external wall* of a building is verified when—

- (a) compliance with C1P2(1)(c) to avoid the spread of fire between buildings, where applicable, is verified in accordance with C1V1 or C1V2, as appropriate; and
- (b) the *external wall* system—
 - (i) has been tested for external wall (EW) performance by an *Accredited Testing Laboratory* in accordance with AS 5113; and
 - (ii) has achieved the classification EW; and
 - (iii) if containing a cavity, incorporates cavity barriers and these cavity barriers have been included in the test performed under (i) at the perimeter of each floor; and
- (c) in a building of Type A construction, the building is protected throughout by a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 and has—
 - (i) sprinkler protection to balconies, patios and terraces, and where overhead sprinkler coverage is not achieved alongside the *external wall*, sidewall sprinkler heads are provided at the *external wall* for the extent of the balcony, patio or terrace where overhead sprinkler coverage is not achieved; and
 - (ii) for a building with an *effective height* more than 25 m—
 - (A) monitored stop valves provided at each floor level arranged to allow the isolation of the floor level containing the stop valve while maintaining protection to the remainder of the building; and
 - (B) the sprinkler system being capable of providing sufficient flow to serve the design area required by AS 2118.1 for the relevant hazard class on each floor level plus the design area required by AS 2118.1 for the floor level above, except where the former level is either the floor level below the uppermost roof, or any floor level that is wholly below ground; and
- (d) in a building of Type B construction, the building is—
 - (i) a Class 5, 6, 7 or 8 building or Class 4 part of a building; or
 - (ii) a Class 2, 3 or 9 building that—
 - (A) is protected throughout by a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17; or
 - (B) has any openings in *external walls* separated by a slab or other horizontal construction complying with C3D7(1)(d) as if the building were of Type A construction.

Notes

Until adoption of the next edition of the NCC EW performance testing need not be undertaken by an *Accredited Testing Laboratory*.

C1V4 Fire Safety Verification Method

- (1) Compliance with C1P1, C1P2, C1P3, C1P4, C1P5, C1P6, C1P7, C1P8 and C1P9 is verified when a building is designed in accordance with—
 - (a) the requirements of (2), (3), (4), (5) and (6); and
 - (b) the Fire Safety Verification Method Standard.
- (2) *Performance-based design brief (PBDB)*:
 - (a) When using this *Verification Method*, the fire safety engineer must undertake a *performance-based design brief (PBDB)* that must—
 - (i) involve all stakeholders relevant to the building design; and
 - (ii) outline the fire strategy to be adopted.
 - (b) While full agreement on all aspects of the *PBDB* is the preferred outcome, it is acknowledged that in some instances this may not be possible to obtain.
 - (c) In the event that full agreement cannot be achieved through the *PBDB*, dissenting views must be appropriately recorded and carried throughout the process and considered as part of the due processes of the *appropriate authority* when determining compliance and providing approval.
 - (d) Consideration of whether a peer review (by an independent fire safety engineer) of some or all of the proposed *Performance Solutions* and the supporting analysis is required or not, must be undertaken at this *PBDB* stage.
- (3) Fire strategy:
 - (a) The *PBDB* must cover the fire safety strategy for the building, outlining the philosophy and approach that will be adopted to achieve the required level of performance.
 - (b) The fire safety strategy must pay particular attention to the evacuation strategy to be used and the management regimes necessary.
- (4) Stakeholder involvement:
 - (a) The *PBDB* must be developed collaboratively by the relevant stakeholders in the particular project.
 - (b) The following parties must be involved:
 - (i) Client or client's representative (such as project manager).
 - (ii) Fire engineer.
 - (iii) Architect or designer.
 - (iv) Various specialist consultants.
 - (v) Fire service (public or private).
 - (vi) *Appropriate authority* (Authority Having Jurisdiction – subject to state/territory legislation).
 - (vii) Tenants or tenants representative for the proposed building (if available)
 - (viii) Building operations management (if available).
 - (c) Conducting a simple stakeholder analysis can be used to determine who must be involved in the *PBDB* process.
 - (d) This analysis must identify stakeholders with a high level of interest in the design process, and/or likely to be affected by the consequences of a fire should it occur in the building.
- (5) Required level of safety:
 - (a) Given the absence of specific safety targets in the NCC and the qualitative nature of the NCC fire safety *Performance Requirements*, for this *Verification Method* to ensure the level of safety expected, the proposed building design must be at least equivalent to the relevant *Deemed-to-Satisfy Provisions*.
 - (b) As the NCC *Deemed-to-Satisfy Provisions* evolved originally from State and Territory regulations and are regularly updated to reflect technical advances and experience they are commonly accepted as providing an acceptable benchmark.
 - (c) It is accepted that the NCC *Deemed-to-Satisfy Provisions* reflect societal expectations in terms of fire safety, which address individual risk, societal risk and the robustness in the design by adopting a defence in depth approach.

- (d) In the majority of *design scenarios* the *Verification Method* requires a demonstration that the proposed level of safety is at least equivalent to the *Deemed-to-Satisfy Provisions*.
- (e) In relation to the required level of safety, the *PBDB* process must—
 - (i) identify the relevant *Deemed-to-Satisfy Provisions* to be used in the equivalency process to determine whether the relevant *Performance Requirements* have been met; and
 - (ii) consider the specific size, complexity and use of the building with regards to the *Deemed-to-Satisfy Provisions* to be used in the equivalency process; and
 - (iii) consider the specific occupant profile of the building, paying particular attention to occupants with a disability and the vulnerable, in regards to the *Deemed-to-Satisfy Provisions* to be used in the equivalency process.
- (6) Final report: Once the analysis of all relevant *design scenarios* for all the required *Performance Solutions* has been completed, the fire safety engineer must prepare a final report that includes the following:
 - (a) The agreed *PBDB*.
 - (b) All modelling and analysis.
 - (c) Analysis required to demonstrate that the proposed building provides a level of safety at least equivalent to the relevant *Deemed-to-Satisfy Provisions*.
 - (d) Any other information required to clearly demonstrate that the building and its *fire safety system* satisfies the relevant *Performance Requirements* as set out in the Fire Safety Verification Method Standard.

Explanatory Information

When developing a *Performance Solution*, a *PBDB* is an important step in the process. It allows all relevant stakeholders to be involved in the development of the building design and its *fire safety system*.

A *PBDB* is a documented process that defines the scope of work for the fire engineering analysis. Its purpose is to set down the basis, as agreed by the relevant stakeholders, on which the fire safety analysis of the proposed building and its *Performance Solutions* will be undertaken.

Relevant stakeholders will vary from design to design. However, some examples of relevant stakeholders are: a fire safety engineer, architect, developer, client, *appropriate authority* (some state legislation prevents *appropriate authorities* from being involved in the design process), fire authority and other stakeholders that fire safety design may affect such as insurers. Further information on the relevant stakeholders is provided in the Fire Safety Verification Method Standard.

Guidance on the development of a *PBDB* is presented in the Australian Fire Engineering Guidelines.

Part C2 Fire resistance and stability

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for Part C1. It sets out Types of *fire-resisting* construction based on building height, size, use and other relevant factors, FRLs and *fire hazard properties*, which describe how certain materials react to fire. It also contains construction requirements to facilitate *fire brigade* intervention.

Deemed-to-Satisfy Provisions

C2D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* C1P1 to C1P9 are satisfied by complying with—
 - (a) C2D2 to C2D15, C3D2 to C3D15 and C4D2 to C4D17; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) for a building containing an *occupiable outdoor area*, Part G6; and
 - (d) for additional requirements for Class 9b buildings, Part I1; and
 - (e) for *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

C2D2 Type of construction required

SA C2D2(1)

- (1) The minimum Type of *fire-resisting construction* of a building must be determined in accordance with Table C2D2, except as allowed for—
 - (a) certain Class 2, 3 or 9c buildings, in C2D6; and
 - (b) a Class 4 part of a building located on the top *storey*, in C2D4(2); and
 - (c) *open spectator stands* and indoor sports stadiums, in C2D8.
- (2) Each building element must comply with *Specification 5* as applicable.

SA C2D2(3)

SA C2D2(4)

Table C2D2: Type of construction required

Rise in storeys	Class of building 2, 3, 9	Class of building 5, 6, 7, 8
4 or more	A	A
3	A	B
2	B	C
1	C	C

C2D3 Calculation of rise in storeys

- (1) The *rise in storeys* is the sum of the greatest number of *storeys* at any part of the *external walls* of the building and any *storeys* within the roof space—
 - (a) above the finished ground next to that part; or
 - (b) if part of the *external wall* is on the boundary of the allotment, above the natural ground level at the relevant part of the boundary.
- (2) A *storey* is not counted if—
 - (a) it is situated at the top of the building and contains only heating, ventilating or lift equipment, water tanks, or similar service units or equipment; or
 - (b) it is situated partly below the finished ground and the underside of the ceiling is not more than 1 m above the average finished level of the ground at the *external wall*, or if the *external wall* is more than 12 m long, the average for the 12 m part where the ground is lowest.
- (3) In a Class 7 or 8 building, a *storey* that has an average internal height of more than 6 m is counted as—
 - (a) one *storey* if it is the only *storey* above the ground; or
 - (b) 2 *storeys* in any other case.
- (4) For the purposes of calculating the *rise in storeys* of a building—
 - (a) a *mezzanine* is regarded as a *storey* in that part of the building in which it is situated if its *floor area* is more than 200 m² or more than $\frac{1}{3}$ of the *floor area* of the room, whichever is the lesser; and
 - (b) two or more *mezzanines* are regarded as a *storey* in that part of the building in which they are situated if they are at or near the same level and have an aggregate *floor area* more than 200 m² or more than $\frac{1}{3}$ of the *floor area* of the room, whichever is the lesser.

C2D4 Buildings of multiple classification

- (1) In a building of multiple classifications, the Type of construction *required* for the building is the most *fire-resisting* Type resulting from the application of Table C2D2 on the basis that the classification applying to the top *storey* applies to all *storeys*.
- (2) In a building containing a Class 4 part on the top *storey*, for the purpose of (1), the classification applying to the top *storey* must be—
 - (a) when the Class 4 part occupies the whole of the top *storey*, the classification applicable to the next highest *storey*; or
 - (b) when the Class 4 part occupies part of the top *storey*, the classification applicable to the adjacent part.

C2D5 Mixed types of construction

A building may be of mixed Types of construction where it is separated in accordance with C3D8 and the Type of construction is determined in accordance with C2D2 or C2D4.

C2D6 Two storey Class 2, 3 or 9c buildings

A building having a *rise in storeys* of 2 may be of Type C construction if—

- (a) it is a Class 2 or 3 building or a mixture of these classes and each *sole-occupancy unit* has—
 - (i) access to at least 2 *exits*; or
 - (ii) its own direct access to a road or *open space*; or

- (b) it is a Class 9c building protected throughout with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with [Specification 17](#) and complies with the maximum compartment size specified in [Table C3D3](#) for Type C construction.

C2D7 Class 4 parts of buildings

For the Type of construction [required](#) by [C2D4](#), a Class 4 part of a building requires the same FRL for building elements and the same construction separating the Class 4 part from the remainder of the building as a Class 2 part in the same Type of construction.

C2D8 Open spectator stands and indoor sports stadiums

- (1) An [open spectator stand](#) or indoor sports stadium may be of Type C construction and need not comply with the other provisions of this Part if it contains not more than one tier of seating, is of [non-combustible](#) construction, and has only changing rooms, sanitary facilities or the like below the tiered seating.
- (2) In (1), one tier of seating means numerous rows of tiered seating incorporating cross-overs but within one viewing level.

C2D9 Lightweight construction

- (1) [Lightweight construction](#) must comply with [Specification 6](#) if it is used in a wall system—
 - (a) that is [required](#) to have an FRL; or
 - (b) for a lift [shaft](#), stair [shaft](#) or service [shaft](#) or an [external wall](#) bounding a [public corridor](#) including a non [fire-isolated passageway](#) or non [fire-isolated ramp](#), in a spectator stand, sports stadium, cinema or theatre, railway station, bus station or airport terminal.
- (2) If [lightweight construction](#) is used for the [fire-resisting](#) covering of a steel column or the like, and if—
 - (a) the covering is not in continuous contact with the column, then the void must be filled solid, to a height of not less than 1.2 m above the floor to prevent indenting; and
 - (b) the column is liable to be damaged from the movement of vehicles, materials or equipment, then the covering must be protected by steel or other suitable material.

C2D10 Non-combustible building elements

- (1) In a building [required](#) to be of Type A or B construction, the following building elements and their components must be [non-combustible](#):
 - (a) [External walls](#) and [common walls](#), including all components incorporated in them including the facade covering, framing and insulation.
 - (b) The flooring and floor framing of lift pits.
 - (c) Non-loadbearing [internal walls](#) where they are [required](#) to be [fire-resisting](#).
- (2) A [shaft](#), being a lift, ventilating, pipe, garbage, or similar [shaft](#) that is not for the discharge of hot products of combustion, that is non-loadbearing, must be of [non-combustible](#) construction in—
 - (a) a building [required](#) to be of Type A construction; and
 - (b) a building [required](#) to be of Type B construction, subject to [C3D11](#), in—
 - (i) a Class 2, 3 or 9 building; and
 - (ii) a Class 5, 6, 7 or 8 building if the [shaft](#) connects more than 2 [storeys](#).

- (3) A *loadbearing internal wall* and a *loadbearing fire wall*, including those that are part of a *loadbearing shaft*, must comply with [Specification 5](#).
- (4) The requirements of (1) and (2) do not apply to the following:
- (a) Gaskets.
 - (b) Caulking.
 - (c) Sealants.
 - (d) Termite management systems.
 - (e) Glass, including laminated glass, and associated adhesives, including tapes.
 - (f) Thermal breaks associated with—
 - (i) glazing systems; or
 - (ii) *external wall* systems, where the thermal breaks—
 - (A) are no larger than necessary to achieve thermal objectives; and
 - (B) do not extend beyond one *storey*; and
 - (C) do not extend beyond one *fire compartment*.
 - (g) *Damp-proof courses*.
 - (h) Compressible fillers and backing materials, including those associated with articulation joints, closing gaps not wider than 50 mm.
 - (i) Isolated—
 - (i) construction packers and shims; or
 - (ii) blocking for fixing fixtures; or
 - (iii) fixings, including fixing accessories; or
 - (iv) acoustic mounts.
 - (j) Waterproofing materials applied to the external face, used below ground level and up to 250 mm above ground level.
 - (k) Joint trims and joint reinforcing tape and mesh of a width not greater than 50 mm.
 - (l) Weather sealing materials, applied to gaps not wider than 50 mm, used within and between concrete elements.
 - (m) Wall ties and other masonry components complying with AS 2699 Part 1 and Part 3 as appropriate, and associated with masonry wall construction.
 - (n) Reinforcing bars and associated minor elements that are wholly or predominately encased in concrete or grout.
 - (o) A paint, lacquer or a similar finish or coating.
 - (p) Adhesives, including tapes, associated with stiffeners for cladding systems.
 - (q) Fire-protective materials and components *required* for the protection of penetrations.
- (5) The following materials, when entirely composed of itself, are *non-combustible* and may be used wherever a *non-combustible* material is *required*:
- (a) Concrete.
 - (b) Steel, including metallic coated steel.
 - (c) Masonry, including mortar.
 - (d) Aluminium, including aluminium alloy.
 - (e) Autoclaved aerated concrete, including mortar.
 - (f) Iron.
 - (g) Terracotta.
 - (h) Porcelain.
 - (i) Ceramic.
 - (j) Natural stone.
 - (k) Copper.

- (l) Zinc.
 - (m) Lead.
 - (n) Bronze.
 - (o) Brass.
- (6) The following materials may be used wherever a *non-combustible* material is *required*:
- (a) Plasterboard.
 - (b) Perforated gypsum lath with a normal paper finish.
 - (c) Fibrous-plaster sheet.
 - (d) Fibre-reinforced cement sheeting.
 - (e) Pre-finished metal sheeting having a *combustible* surface finish not exceeding 1 mm thickness and where the *Spread-of-Flame Index* of the product is not greater than 0.
 - (f) *Sarking-type materials* that do not exceed 1 mm in thickness and have a *Flammability Index* not greater than 5.
 - (g) Bonded laminated materials where—
 - (i) each lamina, including any core, is *non-combustible*; and
 - (ii) each adhesive layer does not exceed 1 mm in thickness and the total thickness of the adhesive layers does not exceed 2 mm; and
 - (iii) the *Spread-of-Flame Index* and the *Smoke-Developed Index* of the bonded laminated material as a whole do not exceed 0 and 3 respectively; and
 - (iv) when located externally, are fixed in accordance with C2D15.

Explanatory Information

For C2D10(4)(i), isolated refers to localised situations where these elements are used. For example, construction packers and shims used for levelling *window* frames at fixing points and blocking used to fix a handrail. Blocking an entire wall is not considered to be used in an isolated situation. Isolated fixings and fixing accessories may include, but are not limited to, screws, anchors, wall plugs, nails and washers.

Associated minor elements in C2D10(4)(n) refers to elements such as bar chairs, tie wire and spacers commonly used to support reinforcement in concrete construction.

C2D10(4)(p) applies only to adhesives and tapes associated with stiffeners that may be installed to prevent buckling, bowing or distortion of a cladding material. This provision does not allow for the use of adhesives and tapes as the primary method of support or fixing the cladding material. Refer also to C2D15.

C4D15 is a provision that necessitates the installation of fire-protective materials and components referred to in C2D10(4)(q).

NSW C2D11

C2D11 Fire hazard properties

- (1) The *fire hazard properties* of the following internal linings, materials and assemblies within a Class 2 to 9 building must comply with *Specification 7*:
- (a) Floor linings and floor coverings.
 - (b) Wall linings and ceiling linings.
 - (c) Air-handling ductwork.
 - (d) Lift cars.
 - (e) In Class 9b buildings used as a theatre, public hall or the like—
 - (i) fixed seating in the audience area or auditorium; and
 - (ii) a proscenium curtain *required* by *Specification 32*.
 - (f) Escalators, moving walkways and non-*required* non *fire-isolated stairways* or pedestrian ramps subject to

Specification 14.

- (g) *Sarking-type materials*.
 - (h) Attachments to floors, ceilings, *internal walls*, *common walls*, *fire walls* and to internal linings of *external walls*.
 - (i) Other materials including insulation materials other than *sarking-type materials*.
- (2) Paint or fire-retardant coatings must not be used to achieve compliance with the *required fire hazard properties*.

VIC C2D11(3)

- (3) The requirements of (1) do not apply to a material or assembly if it is—
- (a) plaster, cement render, concrete, terrazzo, ceramic tile or the like; or
 - (b) a *fire-protective covering*; or
 - (c) a timber-framed *window*; or
 - (d) a solid timber handrail or skirting; or
 - (e) a timber-faced door; or
 - (f) an electrical switch, socket-outlet, cover plate or the like; or
 - (g) a material used for—
 - (i) a roof insulating material applied in continuous contact with a substrate; or
 - (ii) an adhesive; or
 - (iii) a *damp-proof course*, *flashing*, caulking, sealing, ground moisture barrier, or the like; or
 - (h) a paint, varnish, lacquer or similar finish, other than nitro-cellulose lacquer; or
 - (i) a clear or translucent roof light of glass fibre-reinforced polyester if—
 - (i) the roof in which it is installed forms part of a single *storey* building *required* to be Type C construction; and
 - (ii) the material is used as part of the roof covering; and
 - (iii) it is not closer than 1.5 m from another roof light of the same type; and
 - (iv) each roof light is not more than 14 m² in area; and
 - (v) the area of the roof lights per 70 m² of roof surface is not more than 14 m²; or
 - (j) a face plate or neck adaptor of supply and return air outlets of an air handling system; or
 - (k) a face plate or diffuser plate of light fitting and emergency *exit* signs and associated electrical wiring and electrical components; or
 - (l) a joinery unit, cupboard, shelving, or the like; or
 - (m) an attached non-building fixture and fitting such as—
 - (i) a curtain, blind, or similar decor, other than a proscenium curtain *required* by *Specification 32*; and
 - (ii) a whiteboard, *window* treatment or the like; or
 - (n) timber treads, risers, landings and associated supporting framework installed in accordance with *D3D30* where the *Spread-of-Flame Index* and the *Smoke-Developed Index* of the timber does not exceed 9 and 8 respectively; or
 - (o) any other material that does not significantly increase the hazards of fire.

C2D12 Performance of external walls in fire

Concrete *external walls* that could collapse as complete panels (e.g. tilt-up and pre-cast concrete), in a building having a *rise in storeys* of not more than 2, must comply with *Specification 8*.

C2D13 Fire-protected timber: Concession

Fire-protected timber may be used wherever an element is *required* to be *non-combustible*, provided—

- (a) the building is—
 - (i) a separate building; or
 - (ii) a part of a building—
 - (A) which only occupies part of a *storey*, and is separated from the remaining part by a *fire wall*; or
 - (B) which is located above or below a part not containing *fire-protected timber* and the floor between the adjoining parts is provided with an FRL not less than that prescribed for a *fire wall* for the lower *storey*; and
- (b) the building has an *effective height* of not more than 25 m; and
- (c) the building has a sprinkler system (other than a FPAA101D or FPAA101H system) throughout complying with *Specification 17*; and
- (d) any insulation installed in the cavity of the timber building element to have an FRL is *non-combustible*; and
- (e) cavity barriers are provided in accordance with *Specification 9*.

C2D14 Ancillary elements

An *ancillary element* must not be fixed, installed, attached to or supported by the concealed internal parts or external face of an *external wall* that is *required* to be *non-combustible* unless it is one of the following:

- (a) An *ancillary element* that is *non-combustible*.
- (b) A gutter, downpipe or other plumbing fixture or fitting.
- (c) A flashing.
- (d) A grate, grille or similar cover not more than 2 m² in area associated with a building service.
- (e) An electrical switch, socket-outlet, cover plate or the like.
- (f) A light fitting.
- (g) A *required* sign.
- (h) A sign other than one provided under (a) or (g) that—
 - (i) achieves a *group number* of 1 or 2; and
 - (ii) does not extend beyond one *storey*; and
 - (iii) does not extend beyond one *fire compartment*; and
 - (iv) is separated vertically from other signs permitted under (h) by at least 2 *storeys*.
- (i) An awning, sunshade, canopy, blind or shading hood other than one provided under (a) that—
 - (i) meets the relevant requirements of *Table S7C7* as for an internal element; and
 - (ii) serves a *storey*—
 - (A) at ground level; or
 - (B) immediately above a *storey* at ground level; and
 - (iii) does not serve an *exit*, where it would render the *exit* unusable in a fire.
- (j) A part of a security, intercom or announcement system.
- (k) Wiring.
- (l) Waterproofing material installed in accordance with AS 4654.2 and applied to an adjacent floor surface, including vertical upturn, or a roof surface.
- (m) Collars, sleeves and insulation associated with service installations.
- (n) Screens applied to vents, weepholes and gaps complying with AS 3959.

- (o) Wiper and brush seals associated with doors, windows or other openings.
- (p) A gasket, caulking, sealant or adhesive directly associated with (a) to (o).

Limitations

C2D14 does not apply to *ancillary elements* fixed, installed or attached to the internal face or lining of an *external wall*.

Notes

C2D14 does not prevent the mounting of domestic air-conditioning condenser units on *external walls*.

Explanatory Information

Ancillary elements fixed, installed or attached to the internal face or lining of an *external wall* may be subject to other provisions such as C2D11.

C2D15 Fixing of bonded laminated cladding panels

- (1) In a building *required* to be of Type A or B construction, externally located bonded laminated cladding panels must have all layers of cladding mechanically supported or restrained to the supporting frame.
- (2) An externally located bonded laminated cladding panel need not comply with (1) if it is one of the following:
 - (a) A laminated glass system.
 - (b) Layered plasterboard product.
 - (c) Perforated gypsum lath with a normal paper finish.
 - (d) Fibrous-plaster sheet.
 - (e) Fibre-reinforced cement sheeting.
 - (f) A component of a garage door.

Notes

For C2D15(1), mechanical support or restraint means fixing that does not solely rely on chemical adhesive and includes concealed fixing systems such as cassette fixing, channel-type fixing and face fixing.

Explanatory Information

For structural requirements relating to the fixing of cladding, refer to Section B. For most cladding systems, the requirements of Section B will necessitate mechanical fixing of the cladding panel to the supporting frame.

SA C2D16

Part C3 Compartmentation and separation

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for Part C1. It covers compartmentation to limit fire size and spread, separation to limit fire spread between *fire compartments*, parts with different classifications, stairways, lift *shafts*, equipment, electricity supplies and *public corridors*. It also contains construction requirements to facilitate *fire brigade* intervention.

Deemed-to-Satisfy Provisions

C3D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* C1P1 to C1P9 are satisfied by complying with—
 - (a) C2D2 to C2D15, C3D2 to C3D15 and C4D2 to C4D17; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) for a building containing an *occupiable outdoor area*, Part G6; and
 - (d) for additional requirements for Class 9b buildings, Part I1; and
 - (e) for *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

C3D2 Application of Part

- (1) C3D3, C3D4 and C3D5 do not apply to a *carpark* provided with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*, an *open-deck carpark* or an *open spectator stand*.
- (2) C3D13(1)(e) does not apply to a Class 8 *electricity network substation*.

C3D3 General floor area and volume limitations

- (1) The size of any *fire compartment* or *atrium* in a Class 5, 6, 7, 8 or 9 building must not exceed the relevant maximum *floor area* nor the relevant maximum *volume* set out in Table C3D3 and C3D6 except as permitted in C3D4.
- (2) A part of a building which contains only heating, ventilating, or lift equipment, water tanks, or similar service units is not counted in the *floor area* or *volume* of a *fire compartment* or *atrium* if it is situated at the top of the building.
- (3) In a building containing an *atrium*, the part of the *atrium well* bounded by the perimeter of the openings in the floors and extending from the level of the first floor above the *atrium* floor to the roof covering is not counted in the *volume* of the *atrium* for the purposes of this clause.

Table C3D3: Maximum size of fire compartments or atria

Classification	Type A construction	Type B construction	Type C construction
5, 9b or 9c	Max <i>floor area</i> —8 000 m ²	Max <i>floor area</i> —5 500 m ²	Max <i>floor area</i> —3 000 m ²
	Max <i>volume</i> —48 000 m ³	Max <i>volume</i> —33 000 m ³	max <i>volume</i> —18 000 m ³

Classification	Type A construction	Type B construction	Type C construction
6, 7, 8 or 9a (except for <i>patient care areas</i>)	Max <i>floor area</i> —5 000 m ²	Max <i>floor area</i> —3 500 m ²	Max <i>floor area</i> —2 000 m ²
	Max <i>volume</i> —30 000 m ³	Max <i>volume</i> —21 000 m ³	Max <i>volume</i> —12 000 m ³

Table Notes

See C3D6 for maximum size of compartments in *patient care areas* in Class 9a *health-care buildings*.

C3D4 Large isolated buildings

The size of a *fire compartment* in a building may exceed that specified in Table C3D3 where—

- (a) the building does not exceed 18 000 m² in *floor area* nor exceed 108 000 m³ in *volume*, if—
 - (i) the building is Class 7 or 8 and—
 - (A) contains not more than 2 *storeys*; and
 - (B) is provided with open space complying with C3D5(1) not less than 18 m wide around the building; or
 - (ii) the building is Class 5, 6, 7, 8 or 9 and is—
 - (A) protected throughout with a sprinkler system complying with Specification 17; and
 - (B) provided with a perimeter vehicular access complying with C3D5(2); or
- (b) the building is Class 5, 6, 7, 8 or 9 and exceeds 18 000 m² in *floor area* or 108 000 m³ in *volume*, if it is—
 - (i) protected throughout with a sprinkler system complying with Specification 17; and
 - (ii) provided with a perimeter vehicular access complying with C3D5(2); or
- (c) there is more than one building on the allotment and—
 - (i) each building complies with (a) or (b); or
 - (ii) if the buildings are closer than 6 m to each other they are regarded as one building and collectively comply with (a) or (b).

C3D5 Requirements for open spaces and vehicular access

- (1) An open space *required* by C3D4 must—
 - (a) be wholly within the allotment except that any road, river, or public place adjoining the allotment, but not the farthest 6 m of it may be included; and
 - (b) include vehicular access in accordance with (2); and
 - (c) not be used for the storage or processing of materials; and
 - (d) not be built upon, except for guard houses and service structures (such as electricity substations and pump houses) which may encroach upon the width of the space if they do not unduly impede fire-fighting at any part of the perimeter of the allotment or unduly add to the risk of spread of fire to any building on an adjoining allotment.
- (2) Vehicular access *required* by this Part—
 - (a) must be capable of providing continuous access for emergency vehicles to enable travel in a forward direction from a public road around the entire building; and
 - (b) must have a minimum unobstructed width of 6 m with no part of its furthest boundary more than 18 m from the building and in no part of the 6 m width be built upon or used for any purpose other than vehicular or pedestrian movement; and
 - (c) must provide reasonable pedestrian access from the vehicular access to the building; and
 - (d) must have a load bearing capacity and unobstructed height to permit the operation and passage of *fire brigade* vehicles; and
 - (e) must be wholly within the allotment except that a public road complying with (a), (b), (c) and (d) may serve as

the vehicular access or part thereof.

C3D6 Class 9 buildings

(1) A Class 9a *health-care building* must comply with the following:

- (a) *patient care areas* must be divided into *fire compartments* not exceeding 2000 m².
- (b) A *fire compartment* must be separated from the remainder of the building by *fire walls* and—
 - (i) in Type A construction—floors and roof or ceiling as *required* in *Specification 5*; and
 - (ii) in Type B construction—floors with an FRL of not less than 120/120/120 and with the openings in *external walls* bounding *patient care areas* being vertically separated in accordance with the requirements of C3D7 as if the building were of Type A construction.
- (c) *Ward areas*—
 - (i) where the *floor area* exceeds 1000 m², must be divided into *floor areas* not more than 1000 m² by walls with an FRL of not less than 60/60/60; and
 - (ii) where the *floor area* exceeds 500 m², must be divided into *floor areas* not more than 500 m² by smoke-proof walls complying with *Specification 11*; and
 - (iii) where the *floor area* is not more than 500 m², must be separated from the remainder of the *patient care area* by smoke-proof walls complying with *Specification 11*; and
 - (iv) where division of *ward areas* by *fire-resisting* walls under (a) or (c)(i) is not *required*, any smoke-proof wall *required* under (c)(ii) or (iii) must have an FRL of not less than 60/60/60.
- (d) *Treatment areas*—
 - (i) where the *floor area* exceeds 1000 m², must be divided into *floor areas* not more than 1000 m² by smoke-proof walls complying with *Specification 11*; and
 - (ii) where the *floor area* is not more than 1000 m², must be separated from the remainder of the *patient care area* by smoke-proof walls complying with *Specification 11*.
- (e) Ancillary use areas located within a *patient care area* and containing equipment or materials that are a high potential *fire hazard*, must be separated from the remainder of the *patient care area* by walls with an FRL of not less than 60/60/60.
- (f) The ancillary use areas referred to in (e) include, but are not limited to, the following:
 - (i) A kitchen and related food preparation areas having a combined *floor area* of more than 30 m².
 - (ii) A room containing a hyperbaric facility (pressure chamber).
 - (iii) A room used predominantly for the storage of medical records having a *floor area* of more than 10 m².
 - (iv) A laundry, where items of equipment are of the type that are potential fire sources (e.g. gas fire dryers).
- (g) A wall *required* by (e) to separate ancillary use areas from the remainder of the building must extend to the underside of—
 - (i) the floor above; or
 - (ii) a *non-combustible* roof covering; or
 - (iii) a ceiling having a *resistance to the incipient spread of fire* to the space above itself of not less than 60 minutes.
- (h) Openings in walls *required* by (c) and (e) to have an FRL must be protected as follows:
 - (i) Doorways—*self-closing* or *automatic* closing –/60/30 fire doors.
 - (ii) Windows—*automatic* or permanently fixed closed –/60/– fire windows or –/60/– *automatic* fire shutters.
 - (iii) Other openings—construction having an FRL not less than –/60/–.

(2) In a building containing a Class 9b *early childhood centre*—

- (a) unless the Class 9b *early childhood centre* is the only use in the building, it must be separated from the remainder of the building by walls and/or floors with an FRL not less than that *required* for a *fire wall*; and
- (b) each *storey* within the Class 9b *early childhood centre* must contain not less than 2 *fire compartments*.

NSW C3D6(3)

(3) A Class 9c building must comply with the following:

- (a) A building must be divided into areas not more than 500 m² by smoke-proof walls complying with [Specification 11](#).
- (b) A [fire compartment](#) must be separated from the remainder of the building by [fire walls](#) and, notwithstanding [C3D8](#) and [Specification 5](#), floors with an FRL of not less than 60/60/60.
- (c) Internal walls (other than those bounding lift and stair shafts) supported by floors provided in accordance with (b) need not comply with [Specification 5](#) if they have an FRL not less than 60/—/—.
- (d) Ancillary use areas containing equipment or materials that are a high potential [fire hazard](#), must be separated from the [sole-occupancy units](#) by smoke-proof walls complying with [Specification 11](#).
- (e) The ancillary use areas referred to in (d) include, but are not limited to, the following:
 - (i) A kitchen and related food preparation areas having a combined [floor area](#) of more than 30 m².
 - (ii) A laundry, where items of equipment are of the type that are potential fire sources (e.g. gas fired dryers).
 - (iii) Storage rooms greater than 10 m² used predominantly for the storage of administrative records.
- (f) Openings in [fire walls](#) must be protected as follows:
 - (i) Doorways — [self-closing](#) or [automatic](#) closing —/60/30 fire doors.
 - (ii) Windows — [automatic](#) or permanently fixed closed —/60/— fire windows or —/60/— [automatic](#) fire shutters.
 - (iii) Other openings — construction having an FRL not less than —/60/—.

Exemptions

C3D6(2) does not apply to a Class 9b [early childhood centre](#)—

- (a) wholly within a [storey](#) that provides direct egress to a road or [open space](#); or
- (b) with a [rise in storeys](#) of not more than 2, where the Class 9b [early childhood centre](#) is the only use in the building.

C3D7 Vertical separation of openings in external walls

- (1) If in a building of Type A construction, any part of a [window](#) or other opening in an [external wall](#) is above another opening in the [storey](#) next below and its vertical projection falls no further than 450 mm outside the lower opening (measured horizontally), the openings must be separated by—
 - (a) a spandrel which—
 - (i) is not less than 900 mm in height; and
 - (ii) extends not less than 600 mm above the upper surface of the intervening floor; and
 - (iii) is of [non-combustible](#) material having an FRL of not less than 60/60/60; or
 - (b) part of a [curtain wall](#) or [panel wall](#) that complies with (a); or
 - (c) construction that complies with (a) behind a [curtain wall](#) or [panel wall](#) and has any gaps packed with a [non-combustible](#) material that will withstand thermal expansion and structural movement of the walling without the loss of seal against fire and smoke; or
 - (d) a slab or other horizontal construction that—
 - (i) projects outwards from the external face of the wall not less than 1100 mm; and
 - (ii) extends along the wall not less than 450 mm beyond the openings concerned; and
 - (iii) is [non-combustible](#) and has an FRL of not less than 60/60/60.
- (2) The requirements of (1) do not apply to—
 - (a) an [open-deck carpark](#); or
 - (b) an [open spectator stand](#); or
 - (c) a building which has a sprinkler system (other than a FPAA101D or FPAA101H system) complying with

Specification 17 installed throughout; or

- (d) openings within the same stairway; or
 - (e) openings in *external walls* where the floor separating the *storeys* does not require an FRL with respect to *integrity* and *insulation*.
- (3) For the purposes of C3D7, *window* or other opening means that part of the *external wall* of a building that does not have an FRL of 60/60/60 or greater.

C3D8 Separation by fire walls

- (1) Construction — A *fire wall* must be constructed in accordance with the following:
- (a) The *fire wall* has the relevant FRL prescribed by Specification 5 for each of the adjoining parts, and if these are different, the greater FRL, except where S5C19(3)(c)(i), S5C22(3)(c)(i) and S5C25(3)(c)(i) permit a lower FRL on the *carpark* side.
 - (b) Any openings in a *fire wall* must not reduce the FRL *required* by Specification 5 for the *fire wall*, except where permitted by the *Deemed-to-Satisfy Provisions* of Part C4.
 - (c) Building elements, other than roof battens with dimensions of 75 mm x 50 mm or less or *sarking-type material*, must not pass through or cross the *fire wall* unless the *required fire-resisting* performance of the *fire wall* is maintained.
- (2) Separation of buildings — A part of a building separated from the remainder of the building by a *fire wall* may be treated as a separate building for the purposes of the *Deemed-to-Satisfy Provisions* of Sections C, D and E if it is constructed in accordance with (1) and the following:
- (a) The *fire wall* extends through all *storeys* and spaces in the nature of *storeys* that are common to that part and any adjoining part of the building.
 - (b) The *fire wall* is carried through to the underside of the roof covering.
 - (c) Where the roof of one of the adjoining parts is lower than the roof of the other part, the *fire wall* extends to the underside of—
 - (i) the covering of the higher roof, or not less than 6 m above the covering of the lower roof; or
 - (ii) the lower roof if it has an FRL not less than that of the *fire wall* and no openings closer than 3 m to any wall above the lower roof; or
 - (iii) the lower roof if its covering is *non-combustible* and the lower part has a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17.
- (3) Separation of *fire compartments* — A part of a building separated from the remainder of the building by a *fire wall* may be treated as a separate *fire compartment* if it is constructed in accordance with (a) and the *fire wall* extends to the underside of—
- (a) a floor having an FRL *required* for a *fire wall*; or
 - (b) the roof covering.

C3D9 Separation of classifications in the same storey

- (1) If a building has parts of different classifications located alongside one another in the same *storey*—
- (a) each building element in that *storey* must have the higher FRL prescribed in Specification 5 for that element for the classifications concerned; or
 - (b) the parts must be separated in that *storey* by a *fire wall*.
- (2) A *fire wall required* by (1)(b) must have the FRL prescribed in accordance with Specification 5 as applicable for that element for the Type of construction and the classifications concerned.
- (3) For the purposes of (2), the FRL in Specification 5 must be either—
- (a) the higher FRL prescribed in Table S5C11d or S5C21d; or

- (b) the FRL prescribed in Table S5C24c.
- (4) For the purposes of (1), where one part is a *carpark* complying with S5C19, S5C22 or S5C25, the parts may be separated by a *fire wall* complying with S5C19(3)(c), S5C22(3)(c) or S5C25(3)(c) as appropriate.

C3D10 Separation of classifications in different storeys

If parts of different classification are situated one above the other in adjoining *storeys* they must be separated as follows:

- (a) Type A construction — The floor between the adjoining parts must have an FRL of not less than that prescribed in Specification 5 for the classification of the lower *storey*.
- (b) Type B or C construction — If one of the adjoining parts is of Class 2, 3 or 4, the floor separating the part from the *storey* below must—
 - (i) be a floor/ceiling system incorporating a ceiling which has a *resistance to the incipient spread of fire* to the space above itself of not less than 60 minutes; or
 - (ii) have an FRL of at least 30/30/30; or
 - (iii) have a *fire-protective covering* on the underside of the floor, including beams incorporated in it, if the floor is *combustible* or of metal.

C3D11 Separation of lift shafts

- (1) Any lift connecting more than 2 *storeys*, or more than 3 *storeys* if the building is sprinklered, (other than lifts which are wholly within an *atrium*) must be separated from the remainder of the building by enclosure in a *shaft* in which—
 - (a) in a building *required* to be of Type A construction — the walls have the relevant FRL prescribed by Specification 5; and
 - (b) in a building *required* to be of Type B construction — the walls—
 - (i) if *loadbearing*, have the relevant FRL prescribed by Table S5C21e; or
 - (ii) if non-*loadbearing*, be of *non-combustible* construction.
- (2) Any lift in a *patient care area* in a Class 9a *health-care building* or a *resident use area* in Class 9c building must be separated from the remainder of the building by a *shaft* having an FRL of not less than—
 - (a) in a building of Type A or B construction — 120/120/120; or
 - (b) in a building of Type C construction — 60/60/60.
- (3) An emergency lift must be contained within a *fire-resisting shaft* having an FRL of not less than 120/120/120.
- (4) Openings for lift landing doors and services must be protected in accordance with the *Deemed-to-Satisfy Provisions* of Part C4.

C3D12 Stairways and lifts in one shaft

A stairway and lift must not be in the same *shaft* if either the stairway or the lift is *required* to be in a *fire-resisting shaft*.

C3D13 Separation of equipment

- (1) Equipment other than that described in (2) and (3) must be separated from the remainder of the building with construction complying with (4), if that equipment comprises—
 - (a) lift motors and lift control panels; or
 - (b) emergency generators used to sustain emergency equipment operating in the emergency mode; or

- (c) central smoke control plant; or
 - (d) *boilers*; or
 - (e) a *battery system* installed in the building that has a total voltage of 12 volts or more and a storage capacity of 200 kWh or more.
- (2) Equipment need not be separated in accordance with (1) if the equipment comprises—
- (a) smoke control exhaust fans located in the air stream which are constructed for high temperature operation in accordance with *Specification 21*; or
 - (b) *exit* pressurising equipment installed in compliance with the relevant provisions of AS 1668.1; or
 - (c) a lift installation without a machine-room; or
 - (d) equipment otherwise adequately separated from the remainder of the building.
- (3) Separation of on-site fire pumps must comply with the requirements of AS 2419.1.
- (4) Separating construction must have—
- (a) except as provided by (b)—
 - (i) an FRL as *required* by *Specification 5*, but not less than 120/120/120; and
 - (ii) any doorway protected with a *self-closing* fire door having an FRL of not less than –/120/30; or
 - (b) when separating a lift *shaft* and lift motor room, an FRL not less than 120/–/–.

C3D14 Electricity supply system

- (1) An electricity substation located within a building must—
- (a) be separated from any other part of the building by construction having an FRL of not less than 120/120/120; and
 - (b) have any doorway in that construction protected with a *self-closing* fire door having an FRL of not less than –/120/30.
- (2) A main switchboard located within the building which sustains emergency equipment operating in the emergency mode must—
- (a) be separated from any other part of the building by construction having an FRL of not less than 120/120/120; and
 - (b) have any doorway in that construction protected with a *self-closing* fire door having an FRL of not less than –/120/30.
- (3) Subject to (4), electrical conductors must—
- (a) have a classification in accordance with AS/NZS 3013 of not less than—
 - (i) if located in a position that could be subject to damage by motor vehicles — WS53W; or
 - (ii) otherwise — WS52W; or
 - (b) be enclosed or otherwise protected by construction having an FRL of not less than 120/120/120.
- (4) The requirements of (3) only apply to electrical conductors located within a building that supply—
- (a) a substation located within the building which supplies a main switchboard covered by (2); or
 - (b) a main switchboard covered by (2).
- (5) Where emergency equipment is *required* in a building, all switchboards in the electrical installation, which sustain the electricity supply to the emergency equipment, must be constructed so that emergency equipment switchgear is separated from non-emergency equipment switchgear by metal partitions designed to minimise the spread of a fault from the non-emergency equipment switchgear.
- (6) For the purposes of (5), emergency equipment includes but is not limited to the following:
- (a) Fire hydrant booster pumps.
 - (b) Pumps for *automatic* sprinkler systems, water spray, chemical fluid suppression systems or the like.

- (c) Pumps for fire hose reels where such pumps and fire hose reels form the sole means of fire protection in the building.
- (d) Air handling systems designed to exhaust and control the spread of fire and smoke.
- (e) Emergency lifts.
- (f) Control and indicating equipment.
- (g) Emergency warning and intercom systems.

C3D15 Public corridors in Class 2 and 3 buildings

In a Class 2 or 3 building, a *public corridor*, if more than 40 m in length, must be divided at intervals of not more than 40 m with smoke-proof walls complying with **S11C2**.

SA C3D16

SA C3D17

PREVIEW DRAFT

Part C4 Protection of openings

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for Part C1. It covers the protection of openings such as *windows*, doors, services and construction joints to reduce the risk of fire spread within or between buildings.

Deemed-to-Satisfy Provisions

C4D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* C1P1 to C1P9 are satisfied by complying with—
 - (a) C2D2 to C2D15, C3D2 to C3D15 and C4D2 to C4D17; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) for a building containing an *occupiable outdoor area*, Part G6; and
 - (d) for additional requirements for Class 9b buildings, Part I1; and
 - (e) for *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

C4D2 Application of Part

- (1) The *Deemed-to-Satisfy Provisions* of this Part do not apply to the following:
 - (a) Control joints, weep holes and the like in *external walls* of masonry construction and joints between panels in *external walls* of pre-cast concrete panel construction if, in all cases they are not larger than necessary for the purpose.
 - (b) *Non-combustible* ventilators for subfloor or cavity ventilation, if each does not exceed 45 000 mm² in face area and is spaced not less than 2 m from any other ventilator in the same wall.
 - (c) Openings in the vertical plane formed between building elements at the construction edge or perimeter of a balcony or verandah, colonnade, terrace, or the like.
 - (d) In a *carpark* floor other than a floor that separates a part not used as a *carpark*, and subject to (e), the following openings in a *carpark* floor:
 - (i) Service penetrations.
 - (ii) Openings formed by a vehicle ramp.
 - (e) The requirements of (d) only apply where the connected *carpark* levels comply as a single *fire compartment* for the purposes of all other requirements of the *Deemed-to-Satisfy Provisions* of Sections C, D and E.
- (2) For the purposes of the *Deemed-to-Satisfy Provisions* of this Part, openings in building elements *required* to be *fire-resisting* include doorways, *windows* (including any associated fanlight), infill panels and fixed or openable glazed areas that do not have the *required* FRL.
- (3) For the purposes of the *Deemed-to-Satisfy Provisions* of this Part, openings, other than those covered under (1)(c), between building elements such as columns, beams and the like, in the plane formed at the construction edge or perimeter of the building, are deemed to be openings in an *external wall*.

C4D3 Protection of openings in external walls

- (1) Subject to (2), openings in an *external wall*, or openings in part of an *external wall*, where that external wall or *external wall* part is *required* to have an FRL must be protected in accordance with C4D5, and if wall-wetting sprinklers are used, they must be located externally.
- (2) The requirements of (1) only apply if the distance between the opening and the *fire-source feature* to which it is exposed is less than—
 - (a) 3 m from a side or rear boundary of the allotment; or
 - (b) 6 m from the far boundary of a road, river, lake or the like adjoining the allotment, if not located in a *storey* at or near ground level; or
 - (c) 6 m from another building on the allotment that is not Class 10.
- (3) Openings *required* to be protected under (1), must not occupy more than 1/3 of the area of the *external wall* of the *storey* in which they are located unless they are in a Class 9b building used as an *open spectator stand*.

C4D4 Separation of external walls and associated openings in different fire compartments

The distance between parts of *external walls* and any openings within them in different *fire compartments* separated by a *fire wall* must not be less than that set out in Table C4D4, unless—

- (a) those parts of each wall have an FRL not less than 60/60/60; and
- (b) any openings are protected in accordance with C4D5.

Table C4D4: Distance between external walls and associated openings in different fire compartments

Angle between walls	Minimum distance (m)
0° (walls opposite)	6
more than 0° to 45°	5
more than 45° to 90°	4
more than 90° to 135°	3
more than 135° to less than 180°	2
180° or more	Nil

C4D5 Acceptable methods of protection

- (1) Where protection is *required*, doorways, *windows* and other openings must be protected as follows:
 - (a) Doorways—
 - (i) internal or external wall-wetting sprinklers as appropriate used with doors that are *self-closing* or *automatic* closing; or
 - (ii) –/60/30 fire doors that are *self-closing* or *automatic* closing.
 - (b) *Windows*—
 - (i) internal or external wall-wetting sprinklers as appropriate used with *windows* that are *automatic* closing or permanently fixed in the closed position; or
 - (ii) –/60/– fire *windows* that are *automatic* closing or permanently fixed in the closed position; or
 - (iii) –/60/– *automatic* closing fire shutters.
 - (c) Other openings—

- (i) excluding voids — internal or external wall-wetting sprinklers, as appropriate; or
 - (ii) construction having an FRL not less than $-/60/-$.
- (2) Fire doors, fire *windows* and fire shutters must comply with [Specification 12](#).

C4D6 Doorways in fire walls

- (1) The aggregate width of openings for doorways in a *fire wall*, which are not part of a *horizontal exit*, must not exceed $\frac{1}{2}$ of the length of the *fire wall*, and each doorway must be protected by—
- (a) 2 fire doors or fire shutters, one on each side of the doorway, each of which has an FRL of not less than $\frac{1}{2}$ that *required* by [Specification 5](#) for the *fire wall* except that each door or shutter must have an *insulation* level of at least 30; or
 - (b) a fire door on one side and a fire shutter on the other side of the doorway, each of which complies with (a); or
 - (c) a single fire door or fire shutter which has an FRL of not less than that *required* by [Specification 5](#) for the *fire wall* except that each door or shutter must have an *insulation* level of at least 30.
- (2) A fire door or fire shutter *required* by (1)(a), (b) or (c) must be *self-closing*, or *automatic* closing in accordance with (3) and (4).
- (3) The *automatic* closing operation *required* by (2) must be initiated by the activation of a smoke detector, or any other detector deemed suitable in accordance with AS 1670.1 if smoke detectors are unsuitable in the atmosphere, installed in accordance with the relevant provisions of AS 1670.1 and located on each side of the *fire wall* not more than 1.5 m horizontal distance from the opening.
- (4) Where any other *required* suitable fire alarm system, including a sprinkler system (other than a FPAA101D system) complying with [Specification 17](#), is installed in the building, activation of the system in either *fire compartment* separated by the *fire wall* must also initiate the *automatic* closing operation.

C4D7 Sliding fire doors

- (1) If a doorway in a *fire wall* is fitted with a sliding fire door which is open when the building is in use—
- (a) it must be held open with an electromagnetic device, which when de-activated in accordance with (2) and (3), allows the door to be fully closed in not less than 20 seconds and not more than 30 seconds after release; and
 - (b) in the event of power failure to the door — the door must fail safe in the closed position in accordance with (a); and
 - (c) an audible warning device must be located near the doorway and a red flashing warning light of adequate intensity on each side of the doorway must be activated in accordance with (2) and (3); and
 - (d) signs must be installed on each side of the doorway located directly over the opening stating, in capital letters not less than 50 mm high in a colour contrasting with the background:

WARNING — SLIDING FIRE DOOR

- (2) The electromagnetic device *required* by (1)(a) must be de-activated and the warning system activated by heat or smoke detectors, as appropriate, installed in accordance with AS 1905.1 and the relevant provisions of AS 1670.1.
- (3) Where any other *required* suitable fire alarm system, including a sprinkler system (other than a FPAA101D system) complying with [Specification 17](#), is installed in the building, activation in either *fire compartment* separated by the *fire wall* must also de-activate the electromagnetic device and activate the warning system.

C4D8 Protection of doorways in horizontal exits

- (1) A doorway that is part of a *horizontal exit* must be protected by either—
- (a) a single fire door that has an FRL of not less than that *required* by [Specification 5](#) for the *fire wall* except that the door must have an *insulation* level of at least 30; or

- (b) in a Class 7 or 8 building — 2 fire doors, one on each side of the doorway, each with an FRL of not less than $\frac{1}{2}$ that *required* by *Specification 5* for the *fire wall* except that each door must have an *insulation* level of at least 30.
- (2) Each door *required* by (1) must be *self-closing*, or *automatic-closing* in accordance with the following:
 - (a) The *automatic-closing* operation must be initiated by the activation of a smoke detector, or any other detector deemed suitable in accordance with AS 1670.1 if smoke detectors are unsuitable in the atmosphere, installed in accordance with the relevant provisions of AS 1670.1 and located on each side of the *fire wall* not more than 1.5 m horizontal distance from the opening.
 - (b) Where any other *required* suitable fire alarm system, including a sprinkler system (other than a FPAA101D system) complying with *Specification 17*, is installed in the building, activation of the system in either *fire compartment* separated by the *fire wall* must also initiate the *automatic-closing* operation.

C4D9 Openings in fire-isolated exits

- (1) Doorways that open to *fire-isolated stairways*, *fire-isolated passageways* or *fire-isolated ramps*, and are not doorways opening to a road or *open space*, must be protected by $-/60/30$ fire doors that are *self-closing*, or *automatic* closing in accordance with (2) and (3).
- (2) The *automatic-closing* operation *required* by (1) must be initiated by the activation of a smoke detector, or any other detector deemed suitable in accordance with AS 1670.1 if smoke detectors are unsuitable in the atmosphere, installed in accordance with the relevant provisions of AS 1670.1 and located not more than 1.5 m horizontal distance from the approach side of the doorway.
- (3) Where any other *required* suitable fire alarm system, including a sprinkler system (other than a FPAA101D system) complying with *Specification 17*, is installed in the building, activation of the system must also initiate the *automatic-closing* operation.
- (4) A *window* in an *external wall* of a *fire-isolated stairway*, *fire-isolated passageway* or *fire-isolated ramp* must be protected in accordance with C4D5 if it is within 6 m of, and exposed to, a *window* or other opening in a wall of the same building, other than in the same fire-isolated enclosure.

C4D10 Service penetrations in fire-isolated exits

Fire-isolated *exits* must not be penetrated by any services other than—

- (a) electrical wiring permitted by D3D8(6) to be installed within the *exit*; or
- (b) ducting associated with a pressurisation system if it—
 - (i) is constructed of material having an FRL of not less than $-/120/60$ where it passes through any other part of the building; and
 - (ii) does not open into any other part of the building; or
- (c) for fire services, water supply and test drain pipes; or
- (d) wiring, sensors and the like *required* for the function and performance of a pressurisation system serving the *exit*.

C4D11 Openings in fire-isolated lift shafts

- (1) Doorways — If a lift *shaft* is *required* to be fire-isolated, an entrance doorway to that *shaft* must be protected by $-/60/-$ fire doors that—
 - (a) comply with AS 1735.11; and
 - (b) are set to remain closed except when discharging or receiving passengers, goods or vehicles.
- (2) Lift indicator panels — A lift call panel, indicator panel or other panel in the wall of a fire-isolated lift *shaft* must be backed by construction having an FRL of not less than $-/60/60$ if it exceeds 35 000 mm² in area.

C4D12

Bounding construction: Class 2 and 3 buildings and Class 4 parts

- (1) A doorway in a Class 2 or 3 building must be protected if it provides access from a *sole-occupancy unit* to—
 - (a) a *public corridor*, public lobby, or the like; or
 - (b) a room not within a *sole-occupancy unit*; or
 - (c) the landing of an internal non *fire-isolated stairway* that serves as a *required exit*; or
 - (d) another *sole-occupancy unit*.
- (2) A doorway in a Class 2 or 3 building must be protected if it provides access from a room not within a *sole-occupancy unit* to—
 - (a) a *public corridor*, public lobby, or the like; or
 - (b) the landing of an internal non *fire-isolated stairway* that serves as a *required exit*.
- (3) A doorway in a Class 4 part of a building must be protected if it provides access to any other internal part of the building.

NSW C4D12(4)

- (4) Except as provided in (5), protection for a doorway must be at least—
 - (a) in a building of Type A construction — a *self-closing* –/60/30 fire door; and
 - (b) in a building of Type B or C construction — a *self-closing*, tight fitting, solid core door, not less than 35 mm thick.

NSW C4D12(5)

- (5) In a Class 3 building used as a *residential care building* protected with a sprinkler system complying with *Specification 17*, protection for a doorway must be at least—
 - (a) a tight fitting, solid core door not less than 35 mm thick if the building is divided into *floor areas* not exceeding 500 m² with smoke proof walls complying with *S11C2*; or
 - (b) a tight fitting, solid core door not less than 35 mm thick fitted with a *self-closing* device, a delayed closing device or an *automatic* closing device.
- (6) Other openings in *internal walls* which are *required* to have an FRL with respect to *integrity* and *insulation* must not reduce the *fire-resisting* performance of the wall.
- (7) A door *required* by (4) or (5) may be *automatic*-closing in accordance with the following:
 - (a) The *automatic*-closing operation must be initiated by the activation of a smoke detector, or any other detector deemed suitable in accordance with AS 1670.1 if smoke detectors are unsuitable in the atmosphere, installed in accordance with the relevant provisions of AS 1670.1 and located not more than 1.5 m horizontal distance from the approach side of the doorway.
 - (b) Where any other *required* suitable fire alarm system, including a sprinkler system (other than a FPAA101D system) complying with *Specification 17*, is installed in the building, activation of the system must also initiate the *automatic*-closing operation.
- (8) The requirements of (9) apply in a Class 2 or 3 building where a path of travel to an *exit*—
 - (a) does not provide a person seeking egress with a choice of travel in different directions to alternative *exits*; and
 - (b) is along an open balcony, landing or the like; and
 - (c) passes an *external wall* of—
 - (i) another *sole-occupancy unit*; or
 - (ii) a room not within a *sole-occupancy unit*.
- (9) The *external wall* mentioned in (8)(c) must—
 - (a) be constructed of concrete or masonry, or be lined internally with a *fire-protective covering*; and
 - (b) have any doorway fitted with a *self-closing*, tight-fitting solid core door not less than 35 mm thick; and
 - (c) have any *windows* or other openings—
 - (i) protected internally in accordance with *C4D5*; or

- (ii) located at least 1.5 m above the floor of the balcony, landing or the like.

NSW C4D12(10)

C4D13 Openings in floors and ceilings for services

- (1) Where a service passes through—
 - (a) a floor that is *required* to have an FRL with respect to *integrity* and *insulation*; or
 - (b) a ceiling *required* to have a *resistance to the incipient spread of fire*,
 the service must be installed in accordance with (2).
- (2) A service must be protected—
 - (a) in a building of Type A construction, by a *shaft* complying with *Specification 5*; or
 - (b) in a building of Type B or C construction, by a *shaft* that will not reduce the fire performance of the building elements it penetrates; or
 - (c) in accordance with C4D15.
- (3) Where a service passes through a floor which is *required* to be protected by a *fire-protective covering*, the penetration must not reduce the fire performance of the covering.

C4D14 Openings in shafts

In a building of Type A construction, an opening in a wall providing access to a ventilating, pipe, garbage or other service *shaft* must be protected by—

- (a) if it is in a *sanitary compartment* — a door or panel which, together with its frame, is *non-combustible* or has an FRL of not less than –/30/30; or
- (b) a *self-closing* –/60/30 fire door or hopper; or
- (c) an access panel having an FRL of not less than –/60/30; or
- (d) if the *shaft* is a garbage *shaft* — a door or hopper of *non-combustible* construction.

C4D15 Openings for service installations

- (1) The requirements of (2) apply where an electrical, electronic, plumbing, mechanical ventilation, air-conditioning or other service penetrates a building element (other than an *external wall* or roof) that is *required* to have an FRL with respect to *integrity* or *insulation* or a *resistance to the incipient spread of fire*.
- (2) An installation mentioned in (1) must comply with any one of the following:
 - (a) Tested systems — the following applies:
 - (i) The service, building element and any protection method at the penetration—
 - (A) are identical with a prototype assembly of the service, building element and protection method which has been tested in accordance with AS 4072.1 and AS 1530.4 and has achieved the *required* FRL or *resistance to the incipient spread of fire*; or
 - (B) differ from a prototype assembly of the service, building element and protection method in accordance with Section 4 of AS 4072.1.
 - (ii) It complies with (i) except for the *insulation* criteria relating to the service if—
 - (A) the service is a pipe system comprised entirely of metal (excluding pipe seals or the like); and
 - (B) any *combustible* building element is not located within 100 mm of the service for a distance of 2 m from the penetration; and
 - (C) *combustible* material is not able to be located within 100 mm of the service for a distance of 2 m from

the penetration; and

(D) it is not located in a *required exit*.

(iii) The determination of the *required* FRL must be confirmed in a report from an *Accredited Testing Laboratory* in accordance with *Specifications 1 and 2*.

(b) Ventilation and air-conditioning — in the case of ventilating or air-conditioning ducts or equipment, the opening is protected in accordance with AS 1668.1.

(c) Compliance with *Specification 13* — the following applies:

(i) The service is a pipe system comprised entirely of metal (excluding pipe seals or the like) and is installed in accordance with *Specification 13* and it—

(A) penetrates a wall, floor or ceiling, but not a ceiling *required* to have a *resistance to the incipient spread of fire*; and

(B) connects not more than 2 *fire compartments* in addition to any *fire-resisting* service *shafts*; and

(C) does not contain a flammable or combustible liquid or gas.

(ii) The service is sanitary plumbing installed in accordance with *Specification 13* and it—

(A) is of metal or UPVC pipe; and

(B) penetrates the floors of a Class 5, 6, 7, 8 or 9b building; and

(C) is in a *sanitary compartment* separated from other parts of the building by walls with the FRL *required* by *Specification 5* for a stair *shaft* in the building and a *self-closing* –/60/30 fire door.

(iii) The service is a wire or cable, or a cluster of wires or cables installed in accordance with *Specification 13* and it—

(A) penetrates a wall, floor or ceiling, but not a ceiling *required* to have a *resistance to the incipient spread of fire*; and

(B) connects not more than 2 *fire compartments* in addition to any *fire-resisting* service *shafts*.

(iv) The service is an electrical switch, outlet, or the like, and it is installed in accordance with *Specification 13*.

C4D16 Construction joints

(1) Construction joints, spaces and the like in and between building elements *required* to be *fire-resisting* with respect to *integrity* and *insulation* must be protected in a manner—

(a) identical with a prototype tested in accordance with AS 4072.1 and AS 1530.4 to achieve the *required* FRL; or

(b) that differs from a prototype in accordance with Section 4 of AS 4072.1 and achieves the *required* FRL.

(2) The determination of the *required* FRL must be confirmed in a report from an *Accredited Testing Laboratory* in accordance with *Specifications 1 and 2*.

(3) The requirements of (1) do not apply where joints, spaces and the like between *fire-protected timber* elements are provided with cavity barriers in accordance with *Specification 9*.

C4D17 Columns protected with lightweight construction to achieve an FRL

A column protected by *lightweight construction* to achieve an FRL which passes through a building element that is *required* to have an FRL or a *resistance to the incipient spread of fire*, must be installed using a method and materials identical with a prototype assembly of the construction which has achieved the *required* FRL or *resistance to the incipient spread of fire*.

SA C4D18

Specification 5

Fire-resisting construction

S5C1 Scope

This Specification contains requirements for the *fire-resisting construction* of building elements.

General requirements

S5C2 Exposure to fire-source features

- (1) A part of a building element is exposed to a *fire-source feature* if any of the horizontal straight lines between that part and the *fire-source feature*, or vertical projection of the feature, is not obstructed by another part of the building that—
 - (a) has an FRL of not less than 30/—/—; and
 - (b) is neither transparent nor translucent.
- (2) A part of a building element is not exposed to a *fire-source feature* if the *fire-source feature* is—
 - (a) an *external wall* of another building that stands on the allotment and the part concerned is more than 15 m above the highest part of that *external wall*; or
 - (b) a side or rear boundary of the allotment and the part concerned is below the level of the finished ground at every relevant part of the boundary concerned.
- (3) If various distances apply for different parts of a building element—
 - (a) the entire element must have the FRL applicable to that part having the least distance between itself and the relevant *fire-source feature*; or
 - (b) each part of the element must have the FRL applicable according to its individual distance from the relevant *fire-source feature*.
- (4) The requirements of (3) do not override or permit any exemption from S5C3.

S5C3 Fire protection for a support of another part

- (1) Where a part of a building *required* to have an FRL depends upon direct vertical or lateral support from another part to maintain its FRL, that supporting part, subject to (2), must—
 - (a) have an FRL not less than that *required* by other provisions of this Specification; and
 - (b) if located within the same *fire compartment* as the part it supports have an FRL in respect of *structural adequacy* the greater of that *required*—
 - (i) for the supporting part itself; and
 - (ii) for the part it supports; and
 - (c) be *non-combustible*—
 - (i) if *required* by other provisions of this Specification; or
 - (ii) if the part it supports is *required* to be *non-combustible*.
- (2) The following building elements need not comply with (1)(b) and (1)(c)(ii):
 - (a) An element providing lateral support to an *external wall* complying with S5C24(1)(b) or C2D12.
 - (b) An element providing support within a *carpark* and complying with S5C19, S5C22 or S5C25.

- (c) A roof providing lateral support in a building—
 - (i) of Type A construction if it complies with S5C15(a), (b) or (d); and
 - (ii) of Type B and C construction.
- (d) A column providing lateral support to a wall where the column complies with S5C6(1) and (2).
- (e) An element providing lateral support to a *fire wall* or *fire-resisting* wall, provided the wall is supported on both sides and failure of the element on one side does not affect the fire performance of the wall.

S5C4 Lintels

- (1) A lintel must have the FRL *required* for the part of the building in which it is situated.
- (2) A lintel need not comply with (1) if it does not contribute to the support of a fire door, fire *window* or fire shutter, and—
 - (a) it spans an opening in—
 - (i) a wall of a building containing only one *storey*; or
 - (ii) a non-*loadbearing* wall of a Class 2 or 3 building; or
 - (b) it spans an opening in masonry which is not more than 150 mm thick and—
 - (i) not more than 3 m wide if the masonry is non-*loadbearing*; or
 - (ii) not more than 1.8 m wide if the masonry is *loadbearing* and part of a solid wall or one of the leaves of a cavity wall.

S5C5 Method of attachment not to reduce the fire-resistance of building elements

The method of attaching or installing a finish, lining, *ancillary element* or service installation to the building element must not reduce the fire-resistance of that element to below that *required*.

S5C6 General concessions

- (1) Steel columns — A steel column, other than one in a *fire wall* or *common wall*, need not have an FRL in a building that contains—
 - (a) only 1 *storey*; or
 - (b) 2 *storeys* in some of its parts and 1 *storey* only in its remaining parts if the sum of the *floor areas* of the upper *storeys* of its 2 *storey* parts does not exceed the lesser of—
 - (i) 1/8 of the sum of the *floor areas* of the 1 *storey* parts; or
 - (ii) in the case of a building to which one of the maximum *floor areas* specified in Table C3D3 is applicable — 1/10 of that area; or
 - (iii) in the case of a building to which two or more of the maximum *floor area* specified in Table C3D3 is applicable — 1/10 of the lesser of those areas.
- (2) Timber columns — A timber column may be used in a single *storey* building if—
 - (a) in a *fire wall* or *common wall* the column has an FRL not less than that listed in Table S5C11d, S5C21d or S5C24c as appropriate; and
 - (b) in any other case where the column is *required* to have an FRL in accordance with Table S5C11a, S5C11c, S5C11g, S5C21a, S5C21c, S5C21g, S5C24a or S5C24b, it has an FRL of not less than 30/—/—.
- (3) Structures on roofs — A *non-combustible* structure situated on a roof need not comply with the other provisions of this Specification if it only contains—
 - (a) lift motor equipment; or

- (b) one or more of the following:
 - (i) Hot water or other water tanks.
 - (ii) Ventilating ductwork, ventilating fans and their motors.
 - (iii) Air-conditioning chillers.
 - (iv) *Window* cleaning equipment.
 - (v) Other service units that are *non-combustible* and do not contain flammable or combustible liquids or gases.
- (4) Curtain walls and panel walls — A requirement for an *external wall* to have an FRL does not apply to a *curtain wall* or *panel wall* which is of *non-combustible* construction and fully protected by *automatic* external wall-wetting sprinklers.
- (5) Balconies and verandahs — A balcony, verandah or the like and any incorporated supporting part, which is attached to or forms part of a building, need not comply with Table S5C11c, S5C11g, S5C21c, S5C21g, S5C24b or S5C24e if—
 - (a) it does not form part of the only path of travel to a *required exit* from the building; and
 - (b) in Type A construction—
 - (i) it is situated not more than 2 *storeys* above the lowest *storey* providing direct egress to a road or *open space*; and
 - (ii) any supporting columns are of *non-combustible* construction.

S5C7 Mezzanine floors: Concession

- (1) This Clause does not apply to a Class 9b building that is a spectator stand or audience viewing area accommodating more than 100 persons as calculated according to D2D18.
- (2) A *mezzanine* and its supports need not have an FRL or be *non-combustible* provided—
 - (a) the total *floor area* of all the *mezzanines* in the same room does not exceed 1/3 of the *floor area* of the room or 200 m², whichever is the lesser; and
 - (b) the FRL of each wall and column that supports any other part of the building within 6 m of the *mezzanine* is increased by the amount listed in Table S5C7.

Table S5C7: Increased FRLs — Construction surrounding mezzanines

Level otherwise <i>required</i> for any FRL criterion (mins)	Increase in level to not less than (mins)
30	60
60	90
90	120
120	180
180	240

Table Notes

The increase in level applies to each FRL criterion (*structural adequacy*, *integrity* or *insulation*) relevant to the building element concerned.

S5C8 Enclosure of shafts

- (1) *Shafts required* to have an FRL must be enclosed at the top and bottom by construction having an FRL not less than that *required* for the walls of a non-*loadbearing shaft* in the same building.
- (2) The provisions of (1) need not apply to—
 - (a) the top of a *shaft* extending beyond the roof covering, other than one enclosing a *fire-isolated stairway* or *ramp*; or

- (b) the bottom of a *shaft* if it is *non-combustible* and laid directly on the ground.

S5C9 Carports and ancillary uses for Class 2 and 3 buildings

- (1) A Class 7 part of a building may be regarded as Class 2 for the purpose of determining the relevant *fire-resisting* requirements of this Specification where—
 - (a) the entire building—
 - (i) consists only of Class 2 and Class 7; and
 - (ii) contains not more than 4 *storeys*; and
 - (b) the Class 7 part—
 - (i) is wholly within the same *storey*; and
 - (ii) has a purpose that is ancillary to the building, such as carparking; and
 - (iii) is the only Class 7 part within the entire building.
- (2) A Class 7 part of a building may be regarded as Class 3 for the purpose of determining the relevant *fire-resisting* requirements of this Specification where—
 - (a) the entire building—
 - (i) consists only of Class 3 and Class 7; and
 - (ii) contains not more than 3 *storeys*; and
 - (b) the Class 7 part—
 - (i) is wholly within the same *storey*; and
 - (ii) has a purpose that is ancillary to the building, such as carparking; and
 - (iii) is the only Class 7 part within the entire building.

Applications

For S5C9(2), reference to 'Class 3' may include Class 2 parts in conjunction with Class 3 parts.

S5C10 Residential care building: Concession

- (1) In a Class 3 building protected with a sprinkler system complying with *Specification 17* and used as a *residential care building*, any FRL criterion prescribed in *Tables S5C11a, S5C11d, S5C11e, S5C11f, S5C11g, S5C21a, S5C21d, S5C21e, S5C21f, S5C21g, S5C24a, S5C24c or S5C24d*—
 - (a) for any floor and any *loadbearing* wall, may be reduced to 60, except any FRL criterion of 90 for an *external wall* must be maintained when tested from the outside; and
 - (b) for any *non-loadbearing internal wall*, need not apply if—
 - (i) it is lined on each side with standard grade plasterboard not less than 13 mm thick or similar *non-combustible* material; and
 - (ii) it extends—
 - (A) to the underside of the floor next above; or
 - (B) to the underside of a ceiling lined with standard grade plasterboard not less than 13 mm thick or a material with at least an equivalent level of fire protection; or
 - (C) to the underside of a *non-combustible* roof covering; and
 - (iii) any insulation installed in the cavity of the wall is *non-combustible*; and
 - (iv) any construction joint, space or the like between the top of the wall and the floor, ceiling or roof is smoke sealed with intumescent putty or other suitable material.

- (2) The concession described at (1) does not apply to *fire-protected timber* building elements.

Type A Fire-Resisting Construction

S5C11 Type A fire-resisting construction — fire-resistance of building elements

- (1) In a building *required* to be of Type A construction—
- (a) each building element listed in Tables S5C11a, S5C11b, S5C11c, S5C11d, S5C11e, S5C11f and S5C11g, and any beam or column incorporated in it, must have an FRL not less than that listed in those Tables for the particular class of building concerned; and
 - (b) any *internal wall required* to have an FRL with respect to *integrity* and *insulation* must extend to—
 - (i) the underside of the floor next above; or
 - (ii) the underside of a roof complying with Table S5C11g; or
 - (iii) if under S5C15 the roof is not *required* to comply with Table S5C11g, the underside of the *non-combustible* roof covering and, except for roof battens with dimensions of 75 mm x 50 mm or less or *sarking-type material*, must not be crossed by timber or other *combustible* building elements; or
 - (iv) a ceiling that is immediately below the roof and has a *resistance to the incipient spread of fire* to the roof space between the ceiling and the roof of not less than 60 minutes; and
 - (c) a *loadbearing internal wall* and a *loadbearing fire wall* (including those that are part of a *loadbearing shaft*) must be constructed from—
 - (i) concrete; or
 - (ii) masonry; or
 - (iii) subject to (2), *fire-protected timber*; or
 - (iv) subject to (3), *fire-protected steel*; or
 - (v) any combination of (i) to (iv); and
 - (d) the FRLs specified in Table S5C11c for an external column apply also to those parts of an internal column that face and are within 1.5 m of a *window* and are exposed through that *window* to a *fire-source feature*.
- (2) For the purposes of (1)(c)(iii), fire-protected timber may be used, provided that—
- (a) the building is—
 - (i) a separate building; or
 - (ii) a part of a building—
 - (A) which only occupies part of a *storey*, and is separated from the remaining part by a *fire wall*; or
 - (B) which is located above or below a part not containing *fire-protected timber* and the floor between the adjoining parts is provided with an FRL not less than that prescribed for a *fire wall* for the lower *storey*; and
 - (b) the building has an *effective height* of not more than 25 m; and
 - (c) the building has a sprinkler system (other than a FPAA101D or FPAA101H system) throughout complying with Specification 17; and
 - (d) any insulation installed in the cavity of the timber building element *required* to have an FRL is *non-combustible*; and
 - (e) cavity barriers are provided in accordance with Specification 9.
- (3) For the purposes of (1)(c)(iv), *fire-protected steel* may be used in a Class 2 or 3 building or the uppermost *storey* of any other building classification, provided that—
- (a) the building is—
 - (i) a separate building; or

- (ii) a part of a building—
- (A) which only occupies part of a *storey*, and is separate from the remaining part by a *fire wall*; or
 - (B) which is located above a part not containing *fire-protected steel* and the floor between adjoining parts is provided with an FRL, not less than that prescribed for a *fire wall* for the lower *storey*; and
- (b) the building has an *effective height* of not more than 25 m; and
- (c) the building has a sprinkler system (other than a FPAA101D or FPAA101H system) throughout complying with *Specification 17*; and
- (d) any insulation installed in the cavity of walls *required* to have an FRL is *non-combustible*; and
- (e) at each floor level, any cavity within a wall *required* to have an FRL that provides a vertically continuous gap to the level above is interrupted by a cavity barrier in the form of a steel member, steel sheet of 0.5 mm base metal thickness or greater, a 16 mm thick or greater fire-protective grade plasterboard or a 45 mm thick or greater mineral wool barrier.
- (4) For the purposes of *Table S5C11a* and *Table S5C11b*, *external wall* includes any column and other building element incorporated within it or other external building element.

Table S5C11a: Type A construction: FRL of loadbearing parts of external walls

Distance from a <i>fire-source feature</i>	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Less than 1.5 m	90/90/90	120/120/120	180/180/180	240/240/240
1.5 to less than 3 m	90/60/60	120/90/90	180/180/120	240/240/180
3 m or more	90/60/30	120/60/30	180/120/90	240/180/90

Table S5C11b: Type A construction: FRL of non-loadbearing parts of external walls

Distance from a <i>fire-source feature</i>	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Less than 1.5 m	–/90/90	–/120/120	–/180/180	–/240/240
1.5 to less than 3 m	–/60/60	–/90/90	–/180/120	–/240/180
3 m or more	–/–/–	–/–/–	–/–/–	–/–/–

Table S5C11c: Type A construction: FRL of external columns not incorporated in an external wall

Column type	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Loadbearing</i>	90/–/–	120/–/–	180/–/–	240/–/–
<i>Non-loadbearing</i>	–/–/–	–/–/–	–/–/–	–/–/–

Table S5C11d: Type A construction: FRL of common walls and fire walls

Wall type	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Loadbearing</i> or <i>non-loadbearing</i>	90/90/90	120/120/120	180/180/180	240/240/240

Table S5C11e: Type A construction: FRL of loadbearing internal walls

Location	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Fire-resisting</i> lift and stair <i>shafts</i>	90/90/90	120/120/120	180/120/120	240/120/120
Bounding <i>public corridors</i> , public lobbies and the like	90/90/90	120/—/—	180/—/—	240/—/—
Between or bounding <i>sole-occupancy units</i>	90/90/90	120/—/—	180/—/—	240/—/—
Ventilating, pipe, garbage, and like <i>shafts</i> not used for the discharge of hot products of combustion	90/90/90	120/90/90	180/120/120	240/120/120

Table S5C11f: Type A construction: FRL of non-loadbearing internal walls

Location	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Fire-resisting</i> lift and stair <i>shafts</i>	—/90/90	—/120/120	—/120/120	—/120/120
Bounding <i>public corridors</i> , public lobbies and the like	—/60/60	—/—/—	—/—/—	—/—/—
Between or bounding <i>sole-occupancy units</i>	—/60/60	—/—/—	—/—/—	—/—/—
Ventilating, pipe, garbage, and like <i>shafts</i> not used for the discharge of hot products of combustion	—/90/90	—/90/90	—/120/120	—/120/120

Table S5C11g: Type A construction: FRL of other building elements not covered by Tables S5C11a to S5C11f

Building element	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Other <i>loadbearing</i> internal walls, internal beams, trusses and columns	90/—/—	120/—/—	180/—/—	240/—/—
Floors	90/90/90	120/120/120	180/180/180	240/240/240
Roofs	90/60/30	120/60/30	180/60/30	240/90/60

S5C12 Type A fire-resisting construction — concessions for floors

A floor need not comply with Table S5C11g if—

- it is laid directly on the ground; or
- in a Class 2, 3, 5 or 9 building, the space below is not a *storey*, does not accommodate motor vehicles, is not a storage or work area, and is not used for any other ancillary purpose; or
- it is a timber *stage* floor in a Class 9b building laid over a floor having the *required* FRL and the space below the *stage* is not used as a dressing room, store room, or the like; or
- it is within a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building; or
- it is an open-access floor (for the accommodation of electrical and electronic services and the like) above a floor with the *required* FRL.

S5C13 Type A fire-resisting construction — floor loading of Class 5 and 9b buildings: Concession

If a floor in a Class 5 or 9b building is designed for a live load not exceeding 3 kPa—

- (a) the floor next above (including floor beams) may have an FRL of 90/90/90; or
- (b) the roof, if that is next above (including roof beams), may have an FRL of 90/60/30.

S5C14 Type A fire-resisting construction — roof superimposed on concrete slab: Concession

A roof superimposed on a concrete slab roof need not comply with S5C11 as to *fire-resisting construction* if—

- (a) the superimposed roof and any construction between it and the concrete slab roof are *non-combustible* throughout; and
- (b) the concrete slab roof complies with Table S5C11g.

S5C15 Type A fire-resisting construction — roof: Concession

A roof need not comply with Table S5C11g if its covering is *non-combustible* and the building—

- (a) has a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 installed throughout; or
- (b) has a *rise in storeys* of 3 or less; or
- (c) is of Class 2 or 3; or
- (d) has an *effective height* of not more than 25 m and the ceiling immediately below the roof has a *resistance to the incipient spread of fire* to the roof space of not less than 60 minutes.

S5C16 Type A fire-resisting construction — roof lights

If a roof is *required* to have an FRL or its covering is *required* to be *non-combustible*, roof lights or the like installed in that roof must—

- (a) have an aggregate area of not more than 20% of the roof surface; and
- (b) be not less than 3 m from—
 - (i) any boundary of the allotment other than the boundary with a road or public place; and
 - (ii) any part of the building which projects above the roof unless that part has the FRL *required* of a *fire wall* and any openings in that part of the wall for 6 m vertically above the roof light or the like are protected in accordance with C4D5; and
 - (iii) any roof light or the like in an adjoining *sole-occupancy unit* if the walls bounding the unit are *required* to have an FRL; and
 - (iv) any roof light or the like in an adjoining fire-separated section of the building; and
- (c) if a ceiling with a *resistance to the incipient spread of fire* is *required*, be installed in a way that will maintain the level of protection provided by the ceiling to the roof space.

S5C17 Type A fire-resisting construction — internal columns and walls: Concession

For a building with an *effective height* of not more than 25 m and having a roof without an FRL in accordance with S5C15, in the *storey* immediately below that roof, internal columns other than those referred to in S5C11(1)(d) and *internal walls* other than *fire walls* and *shaft walls* may have—

- (a) in a Class 2 or 3 building: FRL 60/60/60; or
- (b) in a Class 5, 6, 7, 8 or 9 building—
 - (i) with *rise in storeys* exceeding 3: FRL 60/60/60; or
 - (ii) with *rise in storeys* not exceeding 3: no FRL.

S5C18 Type A fire-resisting construction — open spectator stands and indoor sports stadiums: Concession

In an *open spectator stand* or indoor sports stadium, the following building elements need not have the FRL specified in Tables S5C11a, S5C11b, S5C11c, S5C11e and S5C11g:

- (a) The roof if it is *non-combustible*.
- (b) Columns and *loadbearing* walls supporting only the roof if they are *non-combustible*.
- (c) Any non-*loadbearing* part of an *external wall* less than 3 m—
 - (i) from any *fire-source feature* to which it is exposed if it has an FRL of not less than –/60/60 and is *non-combustible*; or
 - (ii) from an *external wall* of another *open spectator stand* if it is *non-combustible*.

S5C19 Type A fire-resisting construction — carparks

(1) Notwithstanding S5C11, a *carpark* may comply with this clause if it is—

- (a) an *open-deck carpark* which is a separate building; or
- (b) protected with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 and is—
 - (i) a separate building; or
 - (ii) a part of a building—
 - (A) which only occupies part of a *storey*, and is separated from the remaining part by a *fire wall*; or
 - (B) which is located above, but not below, another classification, and the floor separating the classifications complies with C3D10; or
 - (C) which is located above another Class 7 part of the building not used for carparking, and the floor separating the parts complies with Table S5C11g for a Class 7 part other than a *carpark*; or
 - (D) which is located below another Class 7 part of the building not used for carparking, and the floor separating the parts complies with this clause.

(2) For the purposes of this clause, a *carpark*—

- (a) includes—
 - (i) an administration area associated with the functioning of the *carpark*; and
 - (ii) where the *carpark* is sprinklered, is associated with a Class 2 or 3 building and provides carparking for separate *sole-occupancy units*, each carparking area with an area not greater than 10% of its *floor area* for purposes ancillary to the *sole-occupancy units*; but
- (b) excludes—

- (i) except for (a), any area of another classification, or other part of a Class 7 building not used for carparking; and
 - (ii) a building or part of a building specifically intended for the parking of trucks, buses, vans and the like.
- (3) For building elements in a *carpark* as described in (1) and (2), the following minimum FRLs are applicable:
- (a) **External wall:**
 - (i) Less than 3 m from a *fire-source feature* to which it is exposed:
 - (A) *Loadbearing*: 60/60/60.
 - (B) *Non-loadbearing*: -/60/60.
 - (ii) 3 m or more from a *fire-source feature* to which it is exposed: -/-/-.
 - (b) **Internal wall:**
 - (i) *Loadbearing*, other than one supporting only the roof (not used for carparking): 60/-/-.
 - (ii) Supporting only the roof (not used for carparking): -/-/-.
 - (iii) *Non-loadbearing*: -/-/-.
 - (c) **Fire wall:**
 - (i) From the direction used as a *carpark*: 60/60/60.
 - (ii) From the direction not used as a *carpark*: as *required by Table S5C11d*.
 - (d) **Columns:**
 - (i) Supporting only the roof (not used for carparking) and 3 m or more from a *fire-source feature* to which it is exposed: -/-/-.
 - (ii) Steel column, other than one covered by (i) and one that does not support a part of a building that is not used as a *carpark*—
 - (A) 60/-/-; or
 - (B) an ESA/M of not greater than 26m²/tonne.
 - (iii) Any other column not covered by (i) or (ii): 60/-/-.
 - (e) **Beams:**
 - (i) Steel floor beam in continuous contact with a concrete floor slab—
 - (A) 60/-/-; or
 - (B) an ESA/M of not greater than 30m²/tonne.
 - (ii) Any other beam: 60/-/-.
 - (f) *Fire-resisting* lift and stair shaft (within the *carpark* only): 60/60/60.
 - (g) Floor slab and vehicle ramp: 60/60/60.
 - (h) Roof (not used for carparking): -/-/-.
- (4) For the purposes of sub-clause (3):
- (a) ESA/M means the ratio of exposed surface area to mass per unit length.
 - (b) Refer to *Specification 17* for special requirements for a sprinkler system in a *carpark* complying with (3) and located within a multi-classified building.

S5C20 Type A fire-resisting construction — Class 2 and 3 buildings: Concession

- (1) In a Class 2 or 3 building with a *rise in storeys* of not more than 3—
 - (a) notwithstanding C2D10(1) and (2) and C3D7, timber framing may be used for—
 - (i) *external walls*; and
 - (ii) *common walls*; and
 - (iii) the floor framing of lifts pits; and

- (iv) non-loadbearing internal walls which are *required* to be *fire-resisting*; and
- (v) non-loadbearing shafts, except shafts used for the discharge of hot products of combustion; and
- (vi) spandrels or horizontal construction provided for the purposes of C3D7; and
- (b) notwithstanding S5C11(1)(c), for loadbearing internal walls and loadbearing fire walls—
 - (i) timber framing may be used; and
 - (ii) non-combustible materials may be used; and
- (c) notwithstanding S5C3(1)(c), timber framing may be used for a part of a building that provides support to a part of a building constructed of timber framing or non-combustible material in accordance with (a) and (b).
- (2) A building having a *rise in storeys* of not more than 4 may have the top three storeys constructed in accordance with (1) provided—
 - (a) the lowest storey is used solely for the purpose of parking motor vehicles or for some other ancillary purpose; and
 - (b) the remaining storeys are Class 2 or 3; and
 - (c) the lowest storey's loadbearing elements are constructed of concrete or masonry including the floor between it and the Class 2 or 3 part of the building above; and
 - (d) the lowest storey and the storey above are separated by construction having an FRL of not less than 90/90/90 with no openings or penetrations that would reduce the *fire-resisting* performance of that construction except that a doorway in that construction may be protected by a -/60/30 self-closing fire door.
- (3) In a Class 2 or 3 building complying with (1) or (2) and fitted with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17, any FRL criterion prescribed in Tables S5C11a, S5C11d, S5C11e, S5C11f and S5C11g—
 - (a) for any floor and any loadbearing wall, may be reduced to 60, except any FRL criterion of 90 for an external wall must be maintained when tested from the outside; and
 - (b) for any non-loadbearing internal wall, need not apply if—
 - (i) it is lined on each side with 13 mm standard grade plasterboard or similar non-combustible material; and
 - (ii) it extends—
 - (A) to the underside of the floor next above; or
 - (B) to the underside of a ceiling with a *resistance to the incipient spread of fire* of 60 minutes; or
 - (C) to the underside of a non-combustible roof covering; and
 - (iii) any insulation installed in the cavity of the wall is non-combustible; and
 - (iv) any construction joint, space or the like between the top of the wall and the floor, ceiling or roof is smoke sealed with intumescent putty or other suitable material; and
 - (v) any doorway in the wall is protected by a self-closing, tight fitting, solid core door not less than 35 mm thick.

Type B Fire-Resisting Construction

S5C21 Type B fire-resisting construction — fire-resistance of building elements

- (1) In a building *required* to be of Type B construction—
 - (a) each building element listed in Tables S5C21a, S5C21b, S5C21c, S5C21d, S5C21e, S5C21f and S5C21g, and any beam or column incorporated in it, must have an FRL not less than that listed in the Tables for the particular class of building concerned; and
 - (b) if a stair shaft supports any floor or a structural part of it—
 - (i) the floor or part must have an FRL of 60/—/— or more; or
 - (ii) the junction of the stair shaft must be constructed so that the floor or part will be free to sag or fall in a fire without causing structural damage to the shaft; and

- (c) any *internal wall* which is *required* to have an FRL with respect to *integrity* and *insulation*, except a wall that bounds a *sole-occupancy unit* in the topmost (or only) *storey* and there is only one unit in that *storey*, must extend to—
 - (i) the underside of the floor next above if that floor has an FRL of at least 30/30/30; or
 - (ii) the underside of a ceiling having a *resistance to the incipient spread of fire* to the space above itself of not less than 60 minutes; or
 - (iii) the underside of the roof covering if it is *non-combustible* and, except for roof battens with dimensions of 75 mm x 50 mm or less or *sarking-type material*, must not be crossed by timber or other *combustible* building elements; or
 - (iv) 450 mm above the roof covering if it is *combustible*; and
 - (d) a *loadbearing internal wall* and a *loadbearing fire wall* (including those that are part of a *loadbearing shaft*) must be constructed from—
 - (i) concrete; or
 - (ii) masonry; or
 - (iii) subject to (2), *fire-protected timber*; or
 - (iv) any combination of (i) to (iii); and
 - (e) in a Class 5, 6, 7, 8 or 9 building, in the *storey* immediately below the roof, internal columns and *internal walls* other than *fire walls* and *shaft walls*, need not comply with Tables S5C21e, S5C21f and S5C21g; and
 - (f) in a Class 2 or 3 building, except where within the one *sole-occupancy units*, or a Class 9a *health-care building* or a Class 9b building, a floor separating *storeys* or above a space for the accommodation of motor vehicles or used for storage or any other ancillary purpose, must—
 - (i) be constructed so that it is at least of the standard achieved by a floor/ceiling system incorporating a ceiling which has a *resistance to the incipient spread of fire* to the space above itself of not less than 60 minutes; or
 - (ii) have an FRL of at least 30/30/30; or
 - (iii) have a *fire-protective covering* on the underside of the floor, including beams incorporated in it, if the floor is *combustible* or of metal; and
 - (g) in a Class 9c building a floor above a space for the accommodation of motor vehicles or used for storage or any other ancillary purpose, and any column supporting the floor must—
 - (i) be constructed so that it is at least of the standard achieved by a floor/ceiling system incorporating a ceiling which has a *resistance to the incipient spread of fire* to the space above itself of not less than 60 minutes; or
 - (ii) have an FRL of at least 30/30/30; or
 - (iii) have a *fire-protective covering* on the underside of the floor, including beams incorporated in it, if the floor is *combustible* or of metal.
- (2) For the purposes of (1)(d)(iii), *fire-protected timber* may be used, provided that—
- (a) the building is—
 - (i) a separate building; or
 - (ii) a part of a building—
 - (A) which only occupies part of a *storey*, and is separated from the remaining part by a *fire wall*; or
 - (B) which is located above or below a part not containing *fire-protected timber* and the floor between the adjoining parts is provided with an FRL not less than that prescribed for a *fire wall* for the lower *storey*; and
 - (b) the building has an *effective height* of not more than 25 m; and
 - (c) the building has a sprinkler system (other than a FPAA101D or FPAA101H system) throughout complying with *Specification 17*; and
 - (d) any insulation installed in the *cavity* of the timber building element *required* to have an FRL is *non-combustible*; and
 - (e) cavity barriers are provided in accordance with *Specification 9*.

Fire resistance

- (3) For the purposes of Table S5C21a and Table S5C21b, *external wall* includes any column and other building element incorporated within it or other external building element.

Table S5C21a: Type B construction: FRL of loadbearing parts of external walls

Distance from a <i>fire-source feature</i>	FRL (in minutes) <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Less than 1.5 m	90/90/90	120/120/120	180/180/180	240/240/240
1.5 to less than 3 m	90/60/30	120/90/60	180/120/90	240/180/120
3 m to less than 9 m	90/30/30	120/30/30	180/90/60	240/90/60
9 m to less than 18 m	90/30/–	120/30/–	180/60/–	240/60/–
18 m or more	–/–/–	–/–/–	–/–/–	–/–/–

Table S5C21b: Type B construction: FRL of non-loadbearing parts of external walls

Distance from a <i>fire-source feature</i>	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Less than 1.5 m	–/90/90	–/120/120	–/180/180	–/240/240
1.5 m to less than 3 m	–/60/30	–/90/60	–/120/90	–/180/120
3 m or more	–/–/–	–/–/–	–/–/–	–/–/–

Table S5C21c: Type B construction: FRL of external columns not incorporated in an external wall

Distance from a <i>fire-source feature</i>	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Loadbearing</i> column — less than 18 m	90/–/–	120/–/–	180/–/–	240/–/–
<i>Loadbearing</i> column — 18 m or more	–/–/–	–/–/–	–/–/–	–/–/–
Non- <i>loadbearing</i> column	–/–/–	–/–/–	–/–/–	–/–/–

Table S5C21d: Type B construction: FRL of common walls and fire walls

Wall type	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Loadbearing</i> or non- <i>loadbearing</i>	90/90/90	120/120/120	180/180/180	240/240/240

Table S5C21e: Type B construction: FRL of loadbearing internal walls

Location	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Fire-resisting</i> lift and stair <i>shafts</i>	90/90/90	120/120/120	180/120/120	240/120/120
Bounding <i>public corridors</i> , public lobbies and the like	60/60/60	120/–/–	180/–/–	240/–/–
Between or bounding <i>sole-occupancy units</i>	60/60/60	120/–/–	180/–/–	240/–/–

Table S5C21f: Type B construction: FRL of non-loadbearing internal walls

Location	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Fire-resisting stair <i>shafts</i>	–/90/90	–/120/120	–/120/120	–/120/120
Bounding <i>public corridor</i> , public lobbies and the like	–/60/60	–/–/–	–/–/–	–/–/–
Between or bounding <i>sole-occupancy units</i>	–/60/60	–/–/–	–/–/–	–/–/–

Table S5C21g: Type B construction: FRL of other building elements not covered by Tables S5C21a to S5C21f

Building element	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Other <i>loadbearing</i> internal walls and columns	60/–/–	120/–/–	180/–/–	240/–/–
Roofs	–/–/–	–/–/–	–/–/–	–/–/–

S5C22 Type B fire-resisting construction — carparks

- (1) Notwithstanding S5C21, a *carpark* may comply with this clause if it is—
 - (a) an *open-deck carpark* which is a separate building; or
 - (b) protected with a sprinkler system (other than FPAA101D or FPAA101H system) complying with Specification 17 and is—
 - (i) a separate building; or
 - (ii) a part of a building, and if occupying only part of a *storey*, is separated from the remaining part by a *fire wall*.
- (2) For the purposes of this clause, a *carpark*—
 - (a) includes—
 - (i) an administration area associated with the functioning of the *carpark*; and
 - (ii) where the *carpark* is sprinklered, is associated with a Class 2 or 3 building and provides carparking for separate *sole-occupancy units* each carparking area with an area not greater than 10% of its *floor area* for purposes ancillary to the *sole-occupancy units*; but
 - (b) excludes—
 - (i) except for (a), any area of another classification, or other part of a Class 7 building not used for carparking; and
 - (ii) a building or part of a building specifically intended for the parking of trucks, buses, vans and the like.
- (3) For building elements in a *carpark* as described in (1) and (2), the following minimum FRLs are applicable:
 - (a) *External walls*:
 - (i) Less than 3 m from a *fire-source feature* to which it is exposed:
 - (A) *Loadbearing*: 60/60/60.
 - (B) *Non-loadbearing*: –/60/60.
 - (ii) 3 m or more from a *fire-source feature* to which it is exposed: –/–/–.
 - (b) *Internal walls*:
 - (i) *Loadbearing*, other than one supporting only the roof (not used for carparking): 60/–/–.

- (ii) Supporting only the roof (not used for carparking): —/—/—.
 - (iii) Non-*loadbearing*: —/—/—.
 - (c) *Fire walls*:
 - (i) From the direction used as a *carpark*: 60/60/60.
 - (ii) From the direction not used as a *carpark*: as *required* by Table S5C21d.
 - (d) Columns:
 - (i) Supporting only the roof (not used for carparking) and 3 m or more from a *fire-source feature* to which it is exposed: —/—/—.
 - (ii) Steel column, other than one covered by (i) and one that does not support a part of a building that is not used as a *carpark*—
 - (A) 60/—/—; or
 - (B) an ESA/M of not greater than 26 m²/tonne.
 - (iii) Any other column not covered by (i) or (ii): 60/—/—.
 - (e) Beams:
 - (i) Steel floor beam less than 3 m from a *fire-source feature* in continuous contact with a concrete floor slab—
 - (A) 60/—/—; or
 - (B) an ESA/M of not greater than 30 m²/tonne.
 - (ii) Any other beam less than 3 m from a *fire-source feature*: 60/—/—.
 - (iii) Any beam 3 m or more from a *fire-source feature*: —/—/—.
 - (f) Lift *shaft*: —/—/—.
 - (g) *Fire-resisting* stair shaft (within the *carpark* only): 60/60/60.
 - (h) Roof, floor slab and vehicle ramp: —/—/—.
- (4) For the purposes of (3), ESA/M means the ratio of exposed surface area to mass per unit length.

S5C23 Type B fire-resisting construction — Class 2 and 3 buildings: Concession

- (1) In a Class 2 or 3 building with a *rise in storeys* of not more than 2—
 - (a) notwithstanding C2D10(1) and (2), timber framing may be used for—
 - (i) *external walls*; and
 - (ii) *common walls*; and
 - (iii) the floor framing of lifts pits; and
 - (iv) non-*loadbearing internal walls* which are *required* to be *fire-resisting*; and
 - (v) non-*loadbearing shafts*, except *shafts* used for the discharge of hot products of combustion; and
 - (b) notwithstanding S5C21(1)(d), for *loadbearing internal walls* and *loadbearing fire walls*—
 - (i) timber framing may be used; and
 - (ii) *non-combustible* materials may be used; and
 - (c) notwithstanding S5C3(1)(c), timber framing may be used for a part of a building that provides support to a part of a building constructed of timber framing or *non-combustible* material in accordance with (a) and (b).
- (2) A building having a *rise in storeys* of not more than 2 may have the top *storey* constructed in accordance with (1) provided—
 - (a) the lowest *storey* is used solely for the purpose of parking motor vehicles or for some other ancillary purpose; and
 - (b) the remaining *storeys* are Class 2 or 3; and
 - (c) the lowest *storey's loadbearing* elements are constructed of concrete or masonry including the floor between it and the Class 2 or 3 part of the building above; and

- (d) the lowest *storey* and the *storey* above are separated by construction having an FRL of not less than 90/90/90 with no openings or penetrations that would reduce the *fire-resisting* performance of that construction except that a doorway in that construction may be protected by a –/60/30 *self-closing* fire door.
- (3) In a Class 2 or 3 building complying with (1) or (2) and fitted with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*, any FRL criterion prescribed in *Tables S5C21a, S5C21d, S5C21e, S5C21f and S5C21g*; and—
 - (a) for any *loadbearing* wall, may be reduced to 60, except any FRL criterion of 90 for an *external wall* must be maintained when tested from the outside; and
 - (b) for any non-*loadbearing internal wall*, need not apply, if—
 - (i) it is lined on both sides with 13 mm standard grade plasterboard or similar *non-combustible* material; and
 - (ii) it extends—
 - (A) to the underside of the floor next above if that floor has an FRL of at least 30/30/30 or is lined on the underside with a *fire-protective covering*; or
 - (B) to the underside of a ceiling with a *resistance to the incipient spread of fire* of 60 minutes; or
 - (C) to the underside of a *non-combustible* roof covering; and
 - (iii) any insulation installed in the cavity of the wall is *non-combustible*; and
 - (iv) any construction joints, spaces and the like between the top of the wall and the floor, ceiling or roof is smoke sealed with intumescent putty or other suitable material.

Type C Fire-Resisting Construction

S5C24 Type C fire-resisting construction — fire-resistance of building elements

- (1) In a building *required* to be of Type C construction—
 - (a) a building element listed in *Tables S5C24a, S5C24b, S5C24c, S5C24d and S5C24e* and any beam or column incorporated in it, must have an FRL not less than that listed in those Tables for the particular Class of building concerned; and
 - (b) an *external wall* that is *required* by *Table S5C24a* to have an FRL need only be tested from the outside to satisfy the requirement; and
 - (c) a *fire wall* or an *internal wall* bounding a *sole-occupancy unit* or separating adjoining units must comply with *Specification 6* if it is of *lightweight construction* and is *required* to have an FRL; and
 - (d) in a Class 2 or 3 building, an *internal wall* which is *required* by *S5C24c* or *S5C24d* to have an FRL must extend—
 - (i) to the underside of the floor next above if that floor has an FRL of at least 30/30/30 or a *fire-protective covering* on the underside of the floor; or
 - (ii) to the underside of a ceiling having a *resistance to the incipient spread of fire* to the space above itself of not less than 60 minutes; or
 - (iii) to the underside of the roof covering if it is *non-combustible*, and except for roof battens with dimensions of 75 mm x 50 mm or less or *sarking-type material*, must not be crossed by timber or other *combustible* building elements; or
 - (iv) 450 mm above the roof covering if it is *combustible*; and
 - (e) in a Class 2 or 3 building, except where within the one *sole-occupancy unit*, or a Class 9a *health-care building*, or a Class 9b building, a floor separating *storeys*, or above a space for the accommodation of motor vehicles or used for storage or any other ancillary purpose, and any column supporting the floor, must—
 - (i) have an FRL of at least 30/30/30; or
 - (ii) have a *fire-protective covering* on the underside of the floor including beams incorporated in it and around the column, if the floor or column is *combustible* or of metal; and
 - (f) in a Class 9c building a floor above a space for the accommodation of motor vehicles or used for storage or any

other ancillary purpose, and any column supporting the floor, must—

- (i) have an FRL of at least 30/30/30; or
- (ii) have a *fire-protective covering* on the underside of the floor including beams incorporated in it and around the column, if the floor or column is *combustible* or of metal.

(2) For the purposes of Table S5C24a and Table S5C24b, *external wall* includes any column and other building element incorporated within it or other external building element.

Table S5C24a: Type C construction: FRL of parts of external walls

Distance from a <i>fire-source feature</i>	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Less than 1.5 m	90/90/90	90/90/90	90/90/90	90/90/90
1.5 to less than 3 m	—/—/—	60/60/60	60/60/60	60/60/60
3 m or more	—/—/—	—/—/—	—/—/—	—/—/—

Table S5C24b: Type C construction: FRL of external columns not incorporated into an external wall

Distance from a <i>fire-source feature</i>	FRL (in minutes): <i>structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Less than 1.5 m	90/—/—	90/—/—	90/—/—	90/—/—
1.5 to less than 3 m	—/—/—	60/—/—	60/—/—	60/—/—
3 m or more	—/—/—	—/—/—	—/—/—	—/—/—

Table S5C24c: Type C construction: FRL of common walls and fire walls

Wall type	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
<i>Loadbearing</i> or non- <i>loadbearing</i>	90/90/90	90/90/90	90/90/90	90/90/90

Table S5C24d: Type C construction: FRL of internal walls

Location	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Bounding <i>public corridors</i> , public lobbies and the like	60/60/60	—/—/—	—/—/—	—/—/—
Between or bounding <i>sole-occupancy units</i>	60/60/60	—/—/—	—/—/—	—/—/—
Bounding a stair if <i>required</i> to be rated	60/60/60	60/60/60	60/60/60	60/60/60

Table S5C24e: Type C construction: FRL of roof

Location	FRL (in minutes): <i>Structural adequacy / Integrity / Insulation</i>			
	Class 2, 3 or 4 part	Class 5, 7a or 9	Class 6	Class 7b or 8
Roofs	-/-/-	-/-/-	-/-/-	-/-/-

S5C25 Type C fire-resisting construction — carpark

- (1) Notwithstanding S5C24, a *carpark* may comply with this clause if it is an *open-deck carpark* or is protected with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 and is—
- a separate building; or
 - a part of a building, and if occupying only part of a *storey*, is separated from the remaining part by a *fire wall*.
- (2) For the purposes of this clause, a *carpark*—
- includes—
 - an administration area associated with the functioning of the *carpark*; and
 - where the *carpark* is sprinklered, is associated with a Class 2 or 3 building and provides carparking for separate *sole-occupancy units*, each carparking area with an area not greater than 10% of its *floor area* for purposes ancillary to the *sole-occupancy units*; but
 - excludes—
 - except for (a), any area of another classification, or other part of a Class 7 building not used for carparking; and
 - a building or part of a building specifically intended for the parking of trucks, buses, vans and the like.
- (3) For building elements in a *carpark* as described in (1) and (2), the following minimum FRLs are applicable:
- External walls*:
 - Less than 1.5 m from a *fire-source feature* to which it is exposed:
 - Loadbearing*: 60/60/60.
 - Non-loadbearing*: -/60/60.
 - 1.5 m or more from a *fire-source feature* to which it is exposed: -/-/-.
 - Internal walls*: -/-/-.
 - Fire walls*:
 - From the direction used as a *carpark*: 60/60/60.
 - From the direction not used as a *carpark*: 90/90/90.
 - Columns:
 - Steel column less than 1.5 m from a *fire-source feature*—
 - 60/-/-; or
 - ESA/M not greater than 26 m²/tonne.
 - Any other column less than 1.5 m from a *fire-source feature*: 60/-/-.
 - Any other column not covered by (i) or (ii): -/-/-.
 - Beams:
 - Steel floor beam, less than 1.5 m from a *fire-source feature*, in continuous contact with a concrete floor slab—
 - 60/-/-; or
 - an ESA/M of not greater than 30 m²/tonne.

- (ii) any other beam: 60/-/-.
 - (iii) more than 1.5 m from a *fire-source feature*: -/-/-.
 - (f) Roof, floor slab and vehicle ramp: -/-/-.
- (4) For the purposes of (3), ESA/M means the ratio of exposed surface area to mass per unit length.

PREVIEW DRAFT

Specification 6

Structural tests for lightweight construction

S6C1 Scope

This Specification describes tests to be applied to and criteria to be satisfied by a wall system of *lightweight construction*.

S6C2 Application

A wall system need not be tested in accordance with this Specification for static pressure or impact if it is designed and constructed in accordance with the *Deemed-to-Satisfy Provisions* of Part B1 to resist the appropriate pressures and impacts defined in this Specification.

Tests

S6C3 Walls of certain Class 9b buildings

(1) *Lightweight construction* forming—

- (a) a wall of a lift *shaft* and stair *shaft*; and
- (b) an *external* and *internal wall* bounding a *public corridor*, public lobby or the like, including a *fire-isolated* and non *fire-isolated passageway* or *ramp*,

in spectator stand, sports stadium, cinema or theatre, railway or bus station or airport terminal, must be subjected to the tests and must fulfil the criteria set out in (2).

(2) For the purposes of (1), the following tests and criteria apply:

- (a) The materials tests of S6C10(a) and the criteria of S6C11(a).
- (b) A static test by the imposition of a uniformly distributed load of 1.0 kPa (or its equivalent) in accordance with S6C10(b) and the damage and deflection criteria of S6C11(b) and (c) respectively.
- (c) A dynamic test by the fall of the impact bag through a height of 350 mm in accordance with S6C10(c) and the damage and deflection criteria of S6C11(b) and (d) respectively.
- (d) The surface indentation test of S6C10(d) and the surface indentation criterion of S6C11(e).

S6C4 Walls of shafts and fire-isolated exits generally

A wall of *lightweight construction* that is required to be *fire-resisting* and which bounds a lift *shaft*, stair *shaft*, or service *shaft*, *fire-isolated passageway* or *fire-isolated ramp* must be subjected to the following tests and must fulfil the following criteria:

- (a) The materials tests of S6C10(a) and the criteria of S6C11(a).
- (b) A static test by the imposition of a uniformly distributed load of 0.35 kPa (or its equivalent) in accordance with S6C10(b) and the damage and deflection criteria of S6C11(b) and (c) respectively.
- (c) A dynamic test by the fall of the impact bag through a height of 150 mm in accordance with S6C10(c) and the damage and deflection criteria of S6C11(b) and (d) respectively.
- (d) The surface indentation test of S6C10(d) and the surface indentation criterion of S6C11(e).

S6C5 Additional requirements for lift shafts

- (1) In addition to the requirements of S6C3 and S6C4, a wall system for use in a lift *shaft* that is *required* to be *fire-resisting* must be subjected to dynamic test by the imposition of—
 - (a) where the lift car speed is 7 m/s or less — 10^6 cycles of a uniformly distributed load between 0 and 0.2 kPa (or its equivalent); or
 - (b) where the lift car speed is greater than 7 m/s — 10^6 cycles of a uniformly distributed load between 0 and 0.35 kPa (or its equivalent) in accordance with S6C10(e) and must fulfil the damage criteria of S6C11(b).
- (2) The wall system must be subjected to the static test in accordance with S6C4(b) after the successful conclusion of the dynamic test specified in (1).

S6C6 Walls generally

An *external* and *internal wall* of *lightweight construction* that is *required* to be *fire-resisting*, other than one covered by S6C3, S6C4 or S6C5, must be subjected to the following tests and must fulfil the following criteria:

- (a) The materials tests of S6C10(a) and the criteria of S6C11(a).
- (b) A static test by the imposition of a uniformly distributed load of 0.25 kPa (or its equivalent) in accordance with S6C10(b) and the damage and deflection criteria of S6C11(b) and (c) respectively.
- (c) A dynamic test by fall of the impact bag through a height of 100 mm in accordance with S6C10(c) and the damage and deflection criteria of S6C11(b) and (d) respectively.
- (d) The surface indentation test of S6C10(d) and the surface indentation criterion of S6C11(e).

Test Specimens

S6C7 General requirements for testing

Testing must be carried out on either—

- (a) construction in-situ; or
- (b) a laboratory specimen of the construction.

S6C8 Testing in-situ

If testing is carried out in-situ, it must be done on that part of the construction least likely, because of the particular combination of the height of the walls, the support conditions and other aspects of the construction, to resist the loads.

S6C9 Testing of specimens

If a laboratory specimen is tested, the specimen must span only in the direction corresponding to the height of the wall and testing must be done in accordance with either (a) or (b) below:

- (a) The test specimen—
 - (i) height (or length, if the specimen is tested horizontally) must be identical with the height between supports in the actual construction; and
 - (ii) must be supported at the top and bottom (or at each end if tested horizontally) by components identical

with, and in a manner identical with, the actual construction.

- (b) If the distance between supports of the actual construction is more than 3 m, then a smaller specimen may be tested but—
 - (i) the distance between supports must be not less than 3 m; and
 - (ii) forces, reactions and support conditions must be modelled so as to reproduce the behaviour of the actual construction if it were tested in-situ.

Test Methods and Compliance Criteria

S6C10 Test methods

Tests must be carried out in accordance with the following:

- (a) Material tests — The methods specified for the constituent materials of the construction of the standards adopted by reference in the NCC.
- (b) For resistance to static pressure — The provisions for testing walls under transverse load in ASTM E72-15, except that—
 - (i) support conditions must be as specified in S6C9; and
 - (ii) equivalent load shall mean the quarter-point load that produces the same deflection or central moment as appropriate; and
 - (iii) the timber species nominated in that standard may be substituted with a different species.
- (c) For resistance to impact — The provisions for testing wall systems in ASTM E695-03, except that—
 - (i) the point of impact must be set 1.5 m above finished floor level or 1.5 m above the part of the specimen that corresponds to finished floor level; and
 - (ii) the impact bag must be not less than 225 mm in diameter and not more than 260 mm in diameter and have a mass of not less than 27.2 kg or more than 27.3 kg; and
 - (iii) the mass must be achieved by putting loose, dry sand into the bag and must be adjusted before each series of impact tests; and
 - (iv) where the impact bag and suspension cannot be vertical at the instant of impact on a curved surface or an inclined surface, the height of drop is the net height at the point of impact.
- (d) For resistance to surface indentation — The test for resistance to surface indentation must be carried out at three points on the surface of an undamaged sample sheet as follows:
 - (i) A steel ball of 10 mm diameter with a load of 150 N must be placed gently on the surface of the sheet and allowed to remain in position for 5 minutes.
 - (ii) The ball and load must then be removed and the diameter of each impression of the ball on the surface measured.
- (e) For resistance of lift shaft construction to repetitive load — As for (b) except that—
 - (i) it is sufficient to test one specimen with the pressure applied from the side of the construction on which the lift will operate; and
 - (ii) the load must be applied dynamically at a frequency not less than 1 Hz and not more than 3 Hz; and
 - (iii) equivalent load shall mean the quarter-point load that produces the same central moment as the distributed load.

S6C11 Criteria for compliance

The wall system or the specimen of it must fulfil the following criteria:

- (a) Materials — Materials must comply with the applicable standard adopted by reference in the NCC.
- (b) Damage — There must be no crack, penetration or permanent surface-deformation to a depth of more than 0.5 mm or any other non-elastic deformation or fastener failure.
- (c) Deflection — Static pressure — Under static pressure the deflection must not be more than—
 - (i) 1/240th of the height between supports; or
 - (ii) for construction other than a lift *shaft* — 30 mm; or
 - (iii) for a lift *shaft* — 20 mm.
- (d) Deflection — Impact — Under impact the instantaneous deflection must not be more than—
 - (i) 1/120th of the height of the wall between supports; or
 - (ii) for construction other than a lift *shaft* — 30 mm; or
 - (iii) for a lift *shaft* — 20 mm.
- (e) Surface indentation — No impression must be more than 5 mm in diameter.

PREVIEW DRAFT

Specification 7 Fire hazard properties

S7C1 Scope

This Specification sets out requirements in relation to the *fire hazard properties* of linings, materials and assemblies in Class 2 to 9 buildings as set out in Table S7C2.

S7C2 Application

Linings, materials and assemblies must comply with the appropriate requirement described in Table S7C2.

Table S7C2: Fire hazard property requirements

Lining, material or assembly	Requirement
Floor linings and floor coverings	S7C3
Wall linings and ceiling linings	S7C4
Air-handling ductwork	S7C5
Lift cars	S7C6
In fire control rooms subject to Specification 6 and fire isolated <i>exits</i>	S7C7
In Class 9b buildings used as a theatre, public hall or the like — fixed seating in the audience area or auditorium; and a proscenium curtain <i>required</i> by Specification 32	S7C7
Escalators, moving walkways and non- <i>required</i> non- <i>fire-isolated stairways</i> or pedestrian ramps subject to Specification 14	S7C7
<i>Sarking-type material</i>	S7C7
Attachments to internal floors, walls and ceilings	S7C7
Other materials including insulation	S7C7

S7C3 Floor linings and floor coverings

A floor lining or floor covering must have—

- (a) a *critical radiant flux* not less than that listed in Table S7C3; and
- (b) in a building not protected by a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17, a maximum *smoke development rate* of 750 percent-minutes; and
- (c) a *group number* complying with S7C6(b), for any portion of the floor covering that is continued more than 150 mm up a wall.

Table S7C3: Critical radiant flux (CHF in kW/m²) of floor linings and floor coverings

Class of building	Building not fitted with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17	Building fitted with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17	Fire-isolated exits and fire control rooms
Class 2, 3, 5, 6, 7, 8 or 9b, excluding Class 3 accommodation for the aged and Class 9b as specified below	2.2 kW/m ²	1.2 kW/m ²	2.2 kW/m ²
Class 3 accommodation for the aged	4.5 kW/m ²	2.2 kW/m ²	4.5 kW/m ²
Class 9a <i>patient care areas</i>	4.5 kW/m ²	2.2 kW/m ²	4.5 kW/m ²
Class 9a areas other than <i>patient care areas</i>	2.2 kW/m ²	1.2 kW/m ²	4.5 kW/m ²
Class 9b auditorium or audience seating area used mainly for indoor swimming or ice skating	1.2 kW/m ²	1.2 kW/m ²	2.2 kW/m ²
Class 9b auditorium or audience seating area used mainly for other sports or multi-purpose functions	2.2 kW/m ²	1.2 kW/m ²	2.2 kW/m ²
Class 9c <i>resident use area</i>	N/A	2.2 kW/m ²	4.5 kW/m ²
Class 9c areas other than <i>resident use areas</i>	N/A	1.2 kW/m ²	4.5 kW/m ²

S7C4 Wall and ceiling linings

- (1) A wall or ceiling lining system must comply with the *group number* specified in Table S7C4 and for buildings not fitted with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 have—
 - (a) a *smoke growth rate index* not more than 100; or
 - (b) an *average specific extinction area* less than 250 m²/kg.
- (2) A *group number* of a wall or ceiling lining and the *smoke growth rate index* or *average specific extinction area* must be determined by an *Accredited Testing Laboratory* in accordance with AS 5637.1.

Notes

Until adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

Table S7C4: Wall and ceiling lining materials (material groups permitted)

Class of building	Fire-isolated exits and fire control rooms	Public corridors	Specific areas	Other areas
Class 2 or 3, unsprinklered, excluding accommodation for the aged, people with disabilities and children	Walls: 1	Walls: 1, 2	Walls: 1, 2, 3	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1, 2	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3

Fire resistance

Class of building	Fire-isolated exits and fire control rooms	Public corridors	Specific areas	Other areas
Class 2 or 3, sprinklered, excluding accommodation for the aged, people with disabilities and children	Walls: 1	Walls: 1, 2, 3	Walls: 1, 2, 3	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3
Class 3 or 9a, unsprinklered, accommodation for the aged, people with a disability, children and <i>health-care buildings</i>	Walls: 1	Walls: 1	Walls: 1, 2	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1	Ceilings: 1, 2	Ceilings: 1, 2, 3
Class 3 or 9a, sprinklered, accommodation for the aged, people with a disability, children and <i>health-care buildings</i>	Walls: 1	Walls: 1, 2	Walls: 1, 2, 3	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1, 2	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3
Class 5, 6, 7, 8 or 9b <i>schools</i> , unsprinklered	Walls: 1	Walls: 1, 2	Walls: 1, 2, 3	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1, 2	Ceilings: 1, 2	Ceilings: 1, 2, 3
Class 5, 6, 7, 8 or 9b <i>schools</i> , sprinklered	Walls: 1	Walls: 1, 2, 3	Walls: 1, 2, 3	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3
Class 9b other than <i>schools</i> , unsprinklered	Walls: 1	Walls: 1	Walls: 1, 2	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1	Ceilings: 1, 2	Ceilings: 1, 2, 3
Class 9b other than <i>schools</i> , sprinklered	Walls: 1	Walls: 1, 2	Walls: 1, 2, 3	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1, 2	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3
Class 9c, sprinklered	Walls: 1	Walls: 1, 2	Walls: 1, 2, 3	Walls: 1, 2, 3
	Ceilings: 1	Ceilings: 1, 2	Ceilings: 1, 2, 3	Ceilings: 1, 2, 3

Table Notes

- (1) "Sprinklered" means a building fitted with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with [Specification 17](#).
- (2) "Specific areas" means within—
- (i) for Class 2 and 3 buildings, a *sole-occupancy unit*; and
 - (ii) for Class 5 buildings, open plan offices with a minimum floor dimension/floor to ceiling height ratio > 5; and
 - (iii) for Class 6 buildings, shops or other building with a minimum floor dimension/floor to ceiling height ratio > 5; and
 - (iv) for Class 9a *health-care buildings*, *patient care areas*; and
 - (v) for Class 9b theatres and halls, etc, an auditorium; and
 - (vi) for Class 9b *schools*, a classroom; and
 - (vii) for Class 9c buildings, *resident use area*.

S7C5 Air-handling ductwork

Rigid and flexible ductwork in a Class 2 to 9 building must comply with the *fire hazard properties* set out in AS 4254.1 and AS 4254.2.

S7C6

Lift cars

Materials used as—

- (a) floor linings and floor coverings must have a *critical radiant flux* not less than 2.2; and
- (b) wall and ceiling linings must be a Group 1 material or a Group 2 material in accordance with AS 5637.1.

S7C7

Other materials

Materials and assemblies not included in S7C3, S7C4, S7C5 or S7C6 must not exceed the indices set out in Table S7C7.

NSW Table S7C7

Table S7C7: Other materials

Material or assembly location	Flammability Index	Spread-of-Flame Index	Smoke-Developed Index
Fire control rooms subject to Specification 19 and fire-isolated <i>exits</i> , other than a <i>sarking-type material</i> used in a ceiling or used as an attachment or part of an attachment to a building element. ^{Note 1}	N/A	0	2
Class 9b buildings used as a theatre, public hall or the like: Any part of fixed seating in the audience area or auditorium.	N/A	0	5
Class 9b buildings used as a theatre, public hall or the like: A proscenium curtain <i>required</i> by Specification 32 .	N/A	0	3
Escalators, moving walkways or non- <i>required</i> non <i>fire-isolated stairway</i> or pedestrian ramps subject to Specification 14 .	N/A	0	5
<i>Sarking-type materials</i> : In a fire control room subject to Specification 19 or a fire-isolated <i>exit</i> or fire control room used in the form of an exposed wall or ceiling.	0	N/A	N/A
<i>Sarking-type materials</i> : In other locations. ^{Note 2}	5	N/A	N/A
Other materials or locations and insulation materials other than <i>sarking-type material</i> . ^{Notes 2 and 3}	N/A	9	8 if the <i>Spread-of-Flame Index</i> is more than 5

Table Notes

(1) In a fire control room or *fire-isolated stairway*, a material used as an attachment or part of an attachment to a

building element must, if *combustible*, be attached directly to a *non-combustible* substrate and not exceed 1 mm finished thickness.

- (2) A material, other than one located within a fire-isolated *exit* or fire control room, may be covered on all faces by concrete or masonry not less than 50 mm thick, as an alternative to meeting the specified indices.
- (3) In the case of a composite member or assembly, the member or assembly must be constructed so that when assembled as proposed in a building—
 - (a) any material which does not comply with this table is protected on all sides and edges from exposure to the air; and
 - (b) the member or assembly, when tested in accordance with *Specification 3*, has *Spread-of-Flame Index* and *Smoke-Developed Index* not exceeding those prescribed in this table; and
 - (c) the member or assembly retains the protection in position so that it prevents ignition of the material and continues to screen it from access to free air for a period of not less than 10 minutes.

PREVIEW DRAFT

Specification 8

Performance of external walls in fire

S8C1 Scope

This Specification contains measures to minimise, in the event of fire, the likelihood of *external walls* covered by S8C2 collapsing outwards as complete panels and the likelihood of panels separating from supporting members.

S8C2 Application

This Specification applies to buildings having a *rise in storeys* of not more than 2 with concrete *external walls* that could collapse as complete panels (e.g. tilt-up and precast concrete) which—

- (a) consist of either single or multiple panels attached by steel connections to lateral supporting members; and
- (b) depend on those connections to resist outward movement of the panels relative to the supporting members; and
- (c) have height to thickness ratio not greater than 50.

S8C3 General requirements for external wall panels

- (1) Cast-in inserts and fixings must be anchored into the panel with welded bars or be fixed to the panel reinforcement.
- (2) Cast-in inserts for top connections and fixings acting together must be able to resist an ultimate load of two times the larger of the forces *required* to develop—
 - (a) the ultimate bending moment capacity of the panel at its base; or
 - (b) the overturning moment at the base of the panel arising from an outwards lateral displacement at the top of the panel equal to one tenth of the panel height.
- (3) Top connections of the panel exposed to fire, such as clips and drilled-in inserts, acting together must be able to resist an ultimate load of six times the larger of the forces *required* to develop the moment specified in (2)(a) or (b).
- (4) Lateral supporting members and their connections must be designed to resist the connection forces specified in (2) and (3) and in the case of an eaves tie member the force in the member must be determined assuming that it deforms in a manner compatible with the lateral displacement of the wall panels, and that it acts in tension only.
- (5) *External wall* panels that span vertically must have at least two upper connections per panel to the supporting member, except that where a number of panels are designed to act as one unit, (e.g. tongue and groove hollow-core panels), only two upper connections are *required* for each unit.
- (6) *External wall* panels that span horizontally between columns must have at least two connections at each column.
- (7) Connections providing lateral support to a panel must be designed to remain engaged to the supported panel both before and during a fire.

Notes

The increased forces specified by the multiplier of two or six in (2) and (3) above are to take account of the lower strength of the connections and members at the higher than ambient temperatures expected in a fire.

S8C4 Additional requirements for vertically spanning external wall panels adjacent to columns

- (1) Where vertically spanning *external wall* panels are located adjacent to columns, connections to the panels must be located and/or detailed to minimise forces that may develop between the panels and columns arising from the restraint of differential displacement.
- (2) The requirements of (1) are satisfied by—
- (a) detailing the connections and/or the supporting member to sustain a relative outward displacement of (d) between the panels and columns at the connection height where d(m) is calculated as—
 - (i) the square of the connection height (m) divided by one hundred and twenty-five, when the connection height is less than 5 m; or
 - (ii) the connection height (m) divided by twenty-five, when the connection height (m) is greater than or equal to 5 m; or
 - (b) in situations where an eaves tie member is used to provide lateral support to *external wall* panels, the tie member is connected to the panels no closer than a distance (s) from the column where s(m) is taken as one quarter of the panel height (m).

Specification 9

Cavity barriers for fire-protected timber

S9C1 Scope

This Specification sets out requirements for cavity barriers in *fire-protected timber* construction.

S9C2 Requirements

- (1) Cavity barriers must be provided in the following locations where *fire-protected timber* is used in any of the listed elements:
 - (a) At concealed cavities adjacent to junctions between *fire-resisting* floor/ceiling assemblies and *fire-resisting* walls.
 - (b) At concealed cavities adjacent to junctions between *fire-resisting* floor/ceiling assemblies and *fire-resisting* or *non-combustible external walls*.
 - (c) At concealed cavities adjacent to junctions between *fire-resisting* walls and *fire-resisting* or *non-combustible external walls*.
 - (d) Around the perimeter of door and window openings in *fire-resisting* construction.
- (2) Cavity barriers must be installed so they are tight fitting and are able to withstand thermal expansion and structural movement without the loss of seal against fire and smoke.
- (3) In addition to cavity barriers *required* by (1), horizontal and vertical cavity barriers are to be provided to wall cavities within, around or adjacent to *fire-protected timber* elements as follows:
 - (a) Horizontal cavity barriers — at not more than 5 m centres.
 - (b) Vertical cavity barriers — at not more than 10 m centres.
- (4) Cavity barriers must—
 - (a) achieve the performance specified in Table S9C2 based on the highest FRL of the elements they are mounted within or seal against; or
 - (b) consist of—
 - (i) timber with the minimum thickness specified in Table S9C2; or
 - (ii) polythene-sleeved mineral wool or mineral wool slabs or strips placed under compression to achieve the minimum thickness specified in Table S9C2.
- (5) Cavity barriers provided around openings may be formed by the window or door frame if—
 - (a) the frame is constructed of steel or timber with the minimum thickness specified in Table S9C2 for timber; and
 - (b) the frame is tightly fitted to rigid construction and mechanically fixed in position.
- (6) The FRL of cavity barriers in *fire-protected timber* construction must be determined in accordance with Specifications 1 and 2 applying the criteria for control joint systems specified in Section 10 of AS 1530.4 with the cavity barrier system fitted within an opening between timber members exposed directly to the furnace heating conditions.
- (7) Notwithstanding anything to the contrary in Specifications 1 and 2 or AS 1530.4, the test results from (6) may be used when the *fire-protected timber* is constructed from timber having a nominal density at least equal to the tested timber.

Table S9C2: Cavity barrier requirements

System <i>required</i> FRL	–/60/60 or –/90/90	–/120/120, –/180/180 or –/240/240
Cavity barrier <i>required</i> FRL	–/45/45	–/60/60
Timber, <i>required</i> minimum thickness	45 mm	60 mm

Fire resistance

System <i>required</i> FRL	–/60/60 or –/90/90	–/120/120, –/180/180 or –/240/240
Mineral wool, <i>required</i> minimum thickness	45 mm	60 mm

Table Notes

Minimum thicknesses are to be measured in the direction of heat flow.

PREVIEW DRAFT

Specification 10

Fire-protected timber

S10C1 Scope

This Specification contains requirements for *fire-protected timber* and procedures for determining the time at which the temperature at the interface between the protection system and the timber is exceeded.

Requirements

S10C2 General requirements

- (1) *Fire-protected timber* must—
 - (a) utilise a *non-combustible fire-protective covering* fixed in accordance with the system requirements to achieve an FRL not less than that *required* for the building element; and
 - (b) have a *non-combustible fire-protective covering* fixed in accordance with system requirements—
 - (i) to achieve a *resistance to the incipient spread of fire* of not less than 45 minutes when tested in accordance with—
 - (A) for horizontal elements — Section 4 of AS 1530.4; and
 - (B) for other elements — the relevant test procedures from Section 4 of AS 1530.4 applied to the element lining; or
 - (ii) which consists of not less than 2 layers of 13 mm thick, fire-protective grade plasterboard.
- (2) For the purposes of (1), the *non-combustible fire-protective covering* provided under (1)(b) may form all or part of the *non-combustible fire-protective covering* provided under (1)(a).

S10C3 Massive timber

- (1) *Fire-protected timber*, where the timber is *massive timber*, need not comply with S10C2 if the *fire-protected timber*—
 - (a) utilises a *non-combustible fire-protective covering* fixed in accordance with system requirements to achieve an FRL not less than that *required* for the building element; and
 - (b) has a *non-combustible fire-protective covering* fixed in accordance with system requirements—
 - (i) so as the temperature at the interface between the protection system and the timber does not exceed 300°C during a fire resistance test performed in accordance with S10C4, S10C5 and S10C6 for the application and periods listed in Table S10C3; or
 - (ii) not less than that specified by Table S10C3; and
 - (c) has any cavity filled with *non-combustible insulation*, or no cavity, between—
 - (i) the surface of the timber and the *fire-protective covering*; or
 - (ii) timber elements within the *fire-protective covering*.
- (2) For the purposes of (1), the *non-combustible fire-protective covering* provided under (1)(b) may form all or part of the *non-combustible fire-protective covering* provided under (1)(a).

Table S10C3: Interface temperature and minimum fire protective grade plasterboard thickness

Application	Time – without timber interface exceeding 300°C (mins)	Minimum thickness of fire-grade plasterboard (mm)
Inside a <i>fire-isolated stairway</i> or lift shaft	20	13
<i>External walls</i> within 1 m of an allotment boundary or 2 m of a building on the same allotment	45	2 x 13
All other applications	30	16

Determination of time the timber interface temperature exceeds 300°C for timber at least 75 mm thick

S10C4 Form of test

- (1) Tests must be carried out in accordance with the *Standard Fire Test*, or an equivalent or more severe test, on the timber element with the proposed *non-combustible* coverings fixed in a representative manner, with the time the timber interface temperatures exceeded 300°C confirmed in a report from an *Accredited Testing Laboratory*.
- (2) If a fire protection system incorporates joints, the test specimens must incorporate representative joints.
- (3) Interface temperatures must be measured over the following features by a minimum of two thermocouples:
 - (a) At joint positions in the protection systems.
 - (b) At least 200 mm from any joint.
 - (c) At service penetrations.
 - (d) At any other locations where, in the opinion of the *Accredited Testing Laboratory*, the interface temperature may be higher than the above positions.
- (4) The temperatures must be measured in accordance with Appendix C1 and Section 2 of AS 1530.4 as appropriate.

S10C5 Smaller specimen permitted

An *Accredited Testing Laboratory* may carry out the test specified in S10C4 at pilot scale provided—

- (a) a specimen (which must be not less than 1000 mm x 1000 mm) adequately represents the proposed construction in the building; and
- (b) the fire resistance of the specimen has already been determined in a full scale test performed in accordance with AS 1530.4 to demonstrate adequate retention of the fire protection system in conjunction with the timber elements being protected; and
- (c) the results of the test do not apply to construction larger than limits defined by the *Accredited Testing Laboratory* conducting the pilot examination.

S10C6 Acceptance criteria

The time the timber interface temperature exceeds 300°C must be taken as the minimum time any of the thermocouples specified in S10C4 exceeded 300°C.

Specification 11

Smoke-proof walls in health-care and residential care buildings

S11C1 Scope

- (1) This Specification sets out requirements for the construction of smoke-proof walls in Class 9a *health-care buildings* and Class 9c buildings.
- (2) Smoke proof walls *required* to have an FRL are to be in accordance with A5G5.

S11C2 Class 9a health-care buildings

Smoke-proof walls *required* by C3D6 in Class 9a *health-care buildings* must comply with the following:

- (a) Be lined on both sides.
- (b)
 - (i) the floor above; or
 - (ii) a *non-combustible* roof covering; or
 - (iii) a ceiling having a *resistance to the incipient spread of fire* to the space above itself of not less than 60 minutes.
- (c) If plasterboard is used as the lining on a wall, it must be minimum of 13 mm thick plasterboard.
- (d) Not incorporate any glazed areas unless the glass is safety glass as defined in AS 1288.
- (e) Only have doorways which are fitted with smoke doors complying with *Specification 12*.
- (f) Have all openings around penetrations and the junctions of the smoke-proof wall and the remainder of the building stopped with *non-combustible* material to prevent the free passage of smoke.
- (g) Incorporate smoke dampers complying with AS 1682.1 where air-handling ducts penetrate the wall unless the duct forms part of a smoke hazard management system *required* to continue air movement through the duct during a fire.

S11C3 Class 9c buildings

Smoke-proof walls *required* by C3D6 in Class 9c buildings must comply with the following:

- (a) The wall may be lined on one side only.
- (b) Linings on the wall must be *non-combustible* and extend to the underside of—
 - (i) the floor above; or
 - (ii) a *non-combustible* roof covering; or
 - (iii) a flush plasterboard ceiling lined with 13 mm standard grade plasterboard or a *fire-protective covering*, with all penetrations sealed against the free passage of smoke.
- (c) If plasterboard is used in the lining on a wall, it must be a minimum of 13 mm standard grade plasterboard.
- (d) Not incorporate any glazed areas unless the glass is safety glass as defined in AS 1288.
- (e) Only have doorways which are fitted with smoke doors complying with *Specification 12*.
- (f) Have all openings around penetrations and the junctions of the smoke-proof wall and the remainder of the building stopped with *non-combustible* material to prevent the free passage of smoke.
- (g) Incorporate smoke dampers complying with AS 1682.1 where air-handling ducts penetrate the wall unless the duct forms part of a smoke hazard management system *required* to continue air movement through the duct

during a fire.

S11C4 **Doorways in smoke-proof walls**

A door *required* by C3D6 or this Specification to be smoke-proof or have an FRL must provide a smoke reservoir by not extending within 400 mm of the underside of—

- (a) a roof covering; or
- (b) the floor above; or
- (c) an imperforate false ceiling that will prevent the free passage of smoke.

PREVIEW DRAFT

Specification 12**Fire doors, smoke doors, fire windows and shutters****S12C1 Scope**

This Specification sets out requirements for the construction of fire doors, smoke doors, fire *windows* and fire shutters.

S12C2 Fire doors

A *required* fire door must—

- (a) comply with AS 1905.1; and
- (b) not fail by radiation through any glazed part during the period specified for *integrity* in the *required* FRL.

S12C3 General requirements for smoke doors

Smoke doors must be constructed so that smoke will not pass from one side of the doorway to the other and, if they are glazed, there is minimal danger of a person being injured by accidentally walking into them.

S12C4 Construction Deemed-to-Satisfy for smoke doors

A smoke door of one or two leaves satisfies *S12C3* if it is constructed as follows:

- (a) The leaves are side-hung to swing—
 - (i) in the direction of egress; or
 - (ii) in both directions.
- (b) The leaves are solid-core and at least 35 mm thick, or are capable of resisting smoke at 200°C for 30 minutes.
- (c) The leaves are fitted with smoke seals.
- (d) The leaves—
 - (i) are normally in the closed position; or
 - (ii) operate such that—
 - (A) they are closed *automatically* with the *automatic* closing operation initiated by smoke detectors, installed in accordance with the relevant provisions of AS 1670.1, located on each side of the doorway not more than 1.5 m horizontal distance from the doorway; and
 - (B) in the event of power failure to the door, they will fail-safe in the closed position.
- (e) The leaves return to the fully closed position after each manual opening.
- (f) Any glazing incorporated in the door complies with AS 1288.
- (g) If a glazed panel is capable of being mistaken for an unobstructed *exit*, the presence of the glass must be identified by an opaque mid-height band, mid-rail, crash-bar or other opaque construction.

S12C5 Fire shutters

A *required* fire shutter must—

- (a) be a shutter that—
 - (i) is identical with a tested prototype that has achieved the *required* FRL; and
 - (ii) is installed in the same manner and in an opening that is not larger than the tested prototype; and
 - (iii) did not have a rise in average temperature on the side remote from the furnace of more than 140 K during the first 30 minutes of the test; or
- (b) be a steel shutter complying with AS 1905.2 if a metallic fire shutter is not prohibited by C4D6.

S12C6 **Fire windows**

A *required* fire *window* must be—

- (a) identical in construction with a prototype that has achieved the *required* FRL; and
- (b) installed in the same manner and in an opening that is not larger than the tested prototype.

PREVIEW DRAFT

Specification 13

Penetration of walls, floors and ceilings by services

S13C1 Scope

This Specification prescribes materials and methods of installation for services that penetrate walls, floors and ceilings *required* to have an FRL.

S13C2 Application

- (1) This Specification applies to installations permitted under the *Deemed-to-Satisfy Provisions* of the NCC as alternatives to systems that have been demonstrated by test to fulfil the requirements of C4D15(2)(a).
- (2) This Specification does not apply to installations in ceilings *required* to have a *resistance to the incipient spread of fire* nor to the installation of piping that contains or is intended to contain a flammable liquid or gas.

S13C3 Metal pipe systems

- (1) A pipe system comprised entirely of metal (excluding pipe seals or the like) that is not normally filled with liquid must not be located within 100 mm, for a distance of 2 m from the penetration, of any *combustible* building element or a position where *combustible* material may be located, and must be constructed of—
 - (a) copper alloy or stainless steel with a wall thickness of at least 1 mm; or
 - (b) cast iron or steel (other than stainless steel) with a wall thickness of at least 2 mm.
- (2) An opening for a pipe system comprised entirely of metal (excluding pipe seals or the like) must—
 - (a) be neatly formed, cut or drilled; and
 - (b) be no closer than 200 mm to any other service penetration; and
 - (c) accommodate only one pipe.
- (3) A pipe system comprised entirely of metal (excluding pipe seals or the like) must be wrapped but must not be lagged or enclosed in thermal insulation over the length of its penetration of a wall, floor or ceiling unless the lagging or thermal insulation fulfils the requirements of S13C7.
- (4) The gap between a metal pipe and the wall, floor or ceiling it penetrates must be fire-stopped in accordance with S13C7.

S13C4 Pipes penetrating sanitary compartments

If a pipe of metal or UPVC penetrates the floor of a *sanitary compartment* in accordance with C4D15(2)(c)(ii)—

- (a) the opening must be neatly formed and no larger than is necessary to accommodate the pipe or fitting; and
- (b) the gap between pipe and floor must be fire-stopped in accordance with S13C7.

S13C5 Wires and cables

If a wire or cable or cluster of wires or cables penetrates a floor, wall or ceiling—

- (a) the opening must be neatly formed, cut or drilled and no closer than 50 mm to any other service; and

- (b) the opening must be no larger in cross-sectional area than—
 - (i) 2000 mm² if only a single cable is accommodated and the gap between cable and wall, floor or ceiling is no wider than 15 mm; or
 - (ii) 500 mm² in any other case; and
- (c) the gap between the service and the wall, floor or ceiling must be fire-stopped in accordance with S13C7.

S13C6 Electrical switches and outlets

If an electrical switch, outlet, socket or the like is accommodated in an opening or recess in a wall, floor or ceiling—

- (a) the opening or recess must not—
 - (i) be located opposite any point within 300 mm horizontally or 600 mm vertically of any opening or recess on the opposite side of the wall; or
 - (ii) extend beyond half the thickness of the wall; and
- (b) the gap between the service and the wall, floor or ceiling must be fire-stopped in accordance with S13C7.

S13C7 Fire-stopping

- (1) Material: The material used for the fire-stopping of service penetrations must be concrete, high-temperature mineral fibre, high-temperature ceramic fibre or other material that does not flow at a temperature below 1120°C when tested in accordance with ISO 540, and must have—
 - (a) demonstrated in a system tested in accordance with C4D15(2)(a) that it does not impair the *fire-resisting* performance of the building element in which it is installed; or
 - (b) demonstrated in a test in accordance with (5) that it does not impair the *fire-resisting* performance of the test slab.
- (2) Installation: Fire-stopping material must be packed into the gap between the service and wall, floor or ceiling in a manner, and compressed to the same degree, as adopted for testing under (1)(a) or (b).
- (3) Hollow construction: If a pipe penetrates a hollow wall (such as a stud wall, a cavity wall or a wall of hollow blockwork) or a hollow floor/ceiling system, the cavity must be so framed and packed with fire-stopping material that is—
 - (a) installed in accordance with (2) to a thickness of 25 mm all round the service for the full length of the penetration; and
 - (b) restrained, independently of the service, from moving or parting from the surfaces of the service and of the wall, floor or ceiling.
- (4) Recesses: If an electrical switch, socket, outlet or the like is accommodated in a recess in a hollow wall or hollow floor/ceiling system—
 - (a) the cavity immediately behind the service must be framed and packed with fire-stopping material in accordance with (3); or
 - (b) the back and sides of the service must be protected with refractory lining board identical with and to the same thickness as that in which the service is installed.
- (5) Test: The test to demonstrate compliance of a fire-stopping material with this Specification must be conducted as follows:
 - (a) The test specimen must comprise a concrete slab not less than 1 m square and not more than 100 mm thick, and appropriately reinforced if necessary for *structural adequacy* during manufacture, transport and testing.
 - (b) The slab must have a hole 50 mm in diameter through the centre and the hole must be packed with the fire-stopping material.
 - (c) The slab must be conditioned in accordance with AS 1530.4.
 - (d) Two thermocouples complying with AS 1530.4 must be attached to the upper surface of the packing each about 5 mm from its centre.

- (e) The slab must be tested on flat generally in accordance with Section 10 of AS 1530.4 and must achieve an FRL of 60/60/60 or as otherwise *required*.

PREVIEW DRAFT

Section D Access and egress

Part D1

Access and egress

Objectives

D1O1 Objective

Functional Statements

D1F1 Access

D1F2 Egress

Performance Requirements

D1P1 Access for people with a disability

D1P2 Safe movement to and within a building

D1P3 Fall prevention barriers

D1P4 Exits

D1P5 Fire-isolated exits

D1P6 Paths of travel to exits

D1P7 Evacuation lifts

D1P8 Carparking for people with a disability

D1P9 Communication systems for people with hearing impairment

D1P10 Wayfinding

Verification Methods

D1V1 Wire barriers

D1V2 Access to and within a building

D1V3 Ramp gradient, crossfall, surface profile and slip resistance for ramps used by wheelchairs

D1V4 Fire Safety Verification Method

Part D2

Provision for escape

Deemed-to-Satisfy Provisions

D2D1 Deemed-to-Satisfy Provisions

D2D2 Application of Part

D2D3 Number of exits required

D2D4 When fire-isolated stairways and ramps are required

D2D5 Exit travel distances

D2D6 Distance between alternative exits

D2D7 Height of exits, paths of travel to exits and doorways

D2D8 Width of exits and paths of travel to exits

D2D9 Width of doorways in exits or paths of travel to exits

D2D10 Exit width not to diminish in direction of travel

D2D11 Determination and measurement of exits and paths of travel to exits

D2D12 Travel via fire-isolated exits

D2D13 External stairways or ramps in lieu of fire-isolated exits

D2D14 Travel by non-fire-isolated stairways or ramps

D2D15 Discharge from exits

D2D16 Horizontal exits

D2D17	Non-required stairways, ramps or escalators
D2D18	Number of persons accommodated
D2D19	Measurement of distances
D2D20	Method of measurement
D2D21	Plant rooms, lift machine rooms and electricity network substations: Concession
D2D22	Access to lift pits
D2D23	Egress from primary schools

Part D3

Construction of exits

Deemed-to-Satisfy Provisions

D3D1	Deemed-to-Satisfy Provisions
D3D2	Application of Part
D3D3	Fire-isolated stairways and ramps
D3D4	Non-fire-isolated stairways and ramps
D3D5	Separation of rising and descending stair flights
D3D6	Open access ramps and balconies
D3D7	Smoke lobbies
D3D8	Installations in exits and paths of travel
D3D9	Enclosure of space under stairs and ramps
D3D10	Width of required stairways and ramps
D3D11	Pedestrian ramps
D3D12	Fire-isolated passageways
D3D13	Roof as open space
D3D14	Goings and risers
D3D15	Landings
D3D16	Thresholds
D3D17	Barriers to prevent falls
D3D18	Height of barriers
D3D19	Openings in barriers
D3D20	Barrier climbability
D3D21	Wire barriers
D3D22	Handrails
D3D23	Fixed platforms, walkways, stairways and ladders
D3D24	Doorways and doors
D3D25	Swinging doors
D3D26	Operation of latch
D3D27	Re-entry from fire-isolated exits
D3D28	Signs on doors
D3D29	Protection of openable windows
D3D30	Timber stairways: Concession
D3D31	Wayfinding signage

Part D4

Access for people with a disability

Deemed-to-Satisfy Provisions

D4D1	Deemed-to-Satisfy Provisions
D4D2	General building access requirements

D4D3	Access to buildings
D4D4	Parts of buildings to be accessible
D4D5	Exemptions
D4D6	Accessible carparking
D4D7	Signage
D4D8	Hearing augmentation
D4D9	Tactile indicators
D4D10	Wheelchair seating spaces in Class 9b assembly buildings
D4D11	Swimming pools
D4D12	Ramps
D4D13	Glazing on an accessway

Specification 14 Non-required stairways, ramps and escalators

S14C1	Scope
S14C2	Requirements

Specification 15 Braille and tactile signs

S15C1	Scope
S15C2	Location of braille and tactile signs
S15C3	Braille and tactile sign specification
S15C4	Luminance contrast
S15C5	Lighting
S15C6	Braille

Specification 16 Accessible water entry/exit from swimming pools

S16C1	Scope
S16C2	Fixed or moveable ramp
S16C3	Zero depth entry
S16C4	Platform swimming pool lift
S16C5	Sling-style swimming pool lift
S16C6	Aquatic wheelchair

Part D1 Access and egress

Introduction to this Part

This Part focuses on specifying the number and location of *exits*, construction of *exits* to enable safe evacuation and providing access to and within buildings for people with disability. It also includes measures intended to reduce slips, trips and falls.

Objectives

D101 Objective

The Objective of this Section is to—

- (a) provide, as far as is reasonable, people with safe, equitable and dignified access to—
 - (i) a building; and
 - (ii) the services and facilities within a building; and
- (b) safeguard occupants from illness or injury while evacuating in an emergency.

Functional Statements

D1F1 Access

A building is to provide, as far as is reasonable—

- (a) safe; and
- (b) equitable and dignified,

access for people to the services and facilities within.

Limitations

D1F1(b) does not apply to a Class 4 part of a building.

D1F2 Egress

A building is to be provided with means of evacuation which allow occupants time to evacuate safely without being overcome by the effects of an emergency.

Limitations

D1F2 does not apply to the internal parts of a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building.

Performance Requirements

D1P1 Access for people with a disability

Access must be provided, to the degree necessary, to enable—

- (a) people to—
 - (i) approach the building from the road boundary and from any [accessible](#) carparking spaces associated with the building; and
 - (ii) approach the building from any [accessible](#) associated building; and
 - (iii) access work and public spaces, accommodation and facilities for personal hygiene; and
- (b) identification of [accessways](#) at appropriate locations which are easy to find.

Limitations

D1P1 does not apply to a Class 4 part of a building.

D1P2 Safe movement to and within a building

So that people can move safely to and within a building, it must have—

- (a) walking surfaces with safe gradients; and
- (b) any doors installed to avoid the risk of occupants—
 - (i) having their egress impeded; or
 - (ii) being trapped in the building; and
- (c) any stairways and ramps with—
 - (i) slip-resistant walking surfaces on—
 - (A) ramps; and
 - (B) stairway treads or near the edge of the nosing; and
 - (ii) suitable handrails where necessary to assist and provide stability to people using the stairway or ramp; and
 - (iii) suitable landings to avoid undue fatigue; and
 - (iv) landings where a door opens from or onto the stairway or ramp so that the door does not create an obstruction; and
 - (v) in the case of a stairway, suitable safe passage in relation to the nature, volume and frequency of likely usage.

Limitations

D1P2(c) does not apply to [threshold ramps](#), except D1P2(c)(i)(A) applies to [threshold ramps](#) provided for people with a disability.

D1P3 Fall prevention barriers

(1) A barrier must be provided where people could fall—

- (a) 1 m or more—
 - (i) from a floor or roof or through an opening (other than through an openable window) in the [external wall](#) of a building; or
 - (ii) due to a sudden change of level within or associated with a building; or
- (b) 2 m or more from a floor through an openable window—

- (i) in a bedroom in a Class 2 or 3 building or a Class 4 part of a building; or
 - (ii) in a Class 9b *early childhood centre*; or
 - (c) 4 m or more from a floor through an openable window not covered by (b).
- (2) A barrier *required* by (1) must be—
- (a) continuous and extend for the full extent of the hazard; and
 - (b) of a height to protect people from accidentally falling from the floor or roof or through the opening or openable window; and
 - (c) constructed to prevent people from falling through the barrier; and
 - (d) capable of restricting the passage of children; and
 - (e) of strength and rigidity to withstand—
 - (i) the foreseeable impact of people; and
 - (ii) where appropriate, the static pressure of people pressing against it.

Limitations

- (1) D1P3 does not apply where such barrier would be incompatible with the intended use of an area such as a stage, loading dock or the like.
- (2) D1P3(2)(d) does not apply to—
 - (a) *fire-isolated stairways*, *fire-isolated ramps*, and other areas used primarily for emergency purposes, excluding external stairways and ramps; and
 - (b) Class 7 (other than *carparks*) and Class 8 buildings and parts of buildings containing those classifications.

D1P4 Exits

Exits must be provided from a building to allow occupants to evacuate safely, with their number, location and dimensions being appropriate to—

- (a) the travel distance; and
- (b) the number, mobility and other characteristics of occupants; and
- (c) the function or use of the building; and
- (d) the height of the building; and
- (e) whether the *exit* is from above or below ground level.

D1P5 Fire-isolated exits

To protect evacuating occupants from a fire in the building *exits* must be fire-isolated, to the degree necessary, appropriate to—

- (a) the number of storeys connected by the *exits*; and
- (b) the *fire safety system* installed in the building; and
- (c) the function or use of the building; and
- (d) the number of *storeys* passed through by the *exits*; and
- (e) *fire brigade* intervention.

D1P6 Paths of travel to exits

So that occupants can safely evacuate the building, paths of travel to **exits** must have dimensions appropriate to—

- (a) the number, mobility and other characteristics of occupants; and
- (b) the function or use of the building.

Limitations

D1P6 does not apply to the internal parts of a **sole-occupancy unit** in a Class 2 or 3 building or Class 4 part of a building.

D1P7 Evacuation lifts

Where a lift is intended to be used in addition to the **required exits** to assist occupants to evacuate a building safely, the type, number, location and fire-isolation must be appropriate to—

- (a) the travel distance to the lift; and
- (b) the number, mobility and other characteristics of occupants; and
- (c) the function or use of the building; and
- (d) the number of **storeys** connected by the lift; and
- (e) the **fire safety system** installed in the building; and
- (f) the waiting time, travel time and capacity of the lift; and
- (g) the reliability and availability of the lift; and
- (h) the emergency procedures for the building.

D1P8 Carparking for people with a disability

Carparking spaces for use by people with a disability must be—

- (a) provided, to the degree necessary, to give equitable access for carparking; and
- (b) designated and easy to find.

Limitations

D1P8 does not apply to a building where—

- (a) a parking service is provided; and
- (b) direct access to any carparking spaces by the general public or occupants is not available.

D1P9 Communication systems for people with hearing impairment

An inbuilt communication system for entry, information, entertainment, or for the provision of a service, must be suitable for occupants who are deaf or hearing impaired.

Limitations

D1P9 does not apply to—

- (a) a Class 4 part of a building; or
- (b) an inbuilt communication system used only for emergency warning purposes.

D1P10 Wayfinding

Wayfinding signage must be provided in a building to the degree necessary to assist egress and emergency services personnel activities appropriate to—

- (a) the height of the building; and
- (b) the number of below ground *storeys*.

TAS D1P10

Verification Methods


D1V1 Wire barriers

Compliance with D1P3(2)(c) and (d) for wire barriers is verified when the wire barrier passes the test described below:

- (a) Application — the test must be carried out on either—
 - (i) a prototype of a wire barrier that is identical to that proposed to be installed on-site; or
 - (ii) a wire barrier installed on-site.
- (b) Test equipment — the test equipment must consist of the following:
 - (i) A horizontally suspended 125 mm diameter, 405 mm long cylinder of 1 mm thick steel having a highly polished 105 mm long cone at one end with a 20 mm diameter flat leading edge to which an eye bolt is fixed.
 - (ii) A sufficiently flexible horizontal cable with mechanisms capable of applying and measuring a tension of 150 N (or a 15.3 kg weight suspended over a low friction pulley) is to be attached to the eye bolt (see [Figure D1V1](#)).
 - (iii) A mechanism capable of measuring the tension force applied to each wire.
- (c) Test procedure — the test procedure must be as follows:
 - (i) Tension the wires, within their safe load, to the same tension in all wires and measure the tensions with a strain indicator.
 - (ii) For—
 - (A) horizontal or near horizontal wires, position the cone against a pair of wires at the mid-span between supports, then apply the 150 N tension force to the cone; and
 - (B) vertical wires, position the cone against a pair of wires at the mid-span between supporting rails, then apply the 150 N tension force to the cone; and
 - (C) near-vertical wires, position the cone against a pair of wires at the widest opening between the wires, then apply the 150 N tension force to the cone.
 - (iii) Attempt to pull the cone through the gap between the wires under the 150 N load, and—
 - (A) increase the tension in the wires and repeat (ii) until such time as the cone will not pull through; or
 - (B) if it does not pull through, reduce the tension in the wires and repeat step (ii); and
 - (iv) When the cone is just prevented from pulling through the gap, the wires are at the correct tension in which case the cone is withdrawn and the tension recorded.
 - (v) Reduce the tension in the wires and repeat steps (ii) to (iv) twice more, recording the tension in each case after the cone has been removed and then calculate the average of the three tensions as the *required* tension for each wire.
 - (vi) For prototype tests of horizontal or near horizontal wires, record the deflection of each wire at the average tension calculated in accordance with (v) when a 2 kg mass is hung at mid-span between supports.

- (d) Test report — the test report must include the following information:
- (i) The name and address of the person supervising the test.
 - (ii) The test report number.
 - (iii) The date of the test.
 - (iv) The wire manufacturer's name and address, and specifications of the wires used in the test including the safe load limit of the wires.
 - (v) The construction details of the test specimen, including a description and drawings and details of the components including supports, post or railing spacings and wire spacings.
 - (vi) For a prototype test, the *required* tension calculated in accordance with (c)(v).
 - (vii) For prototype tests of horizontal or near horizontal wires, the deflection measured in accordance with (c)(vi).

Figure D1V1: Apparatus for testing wire barriers

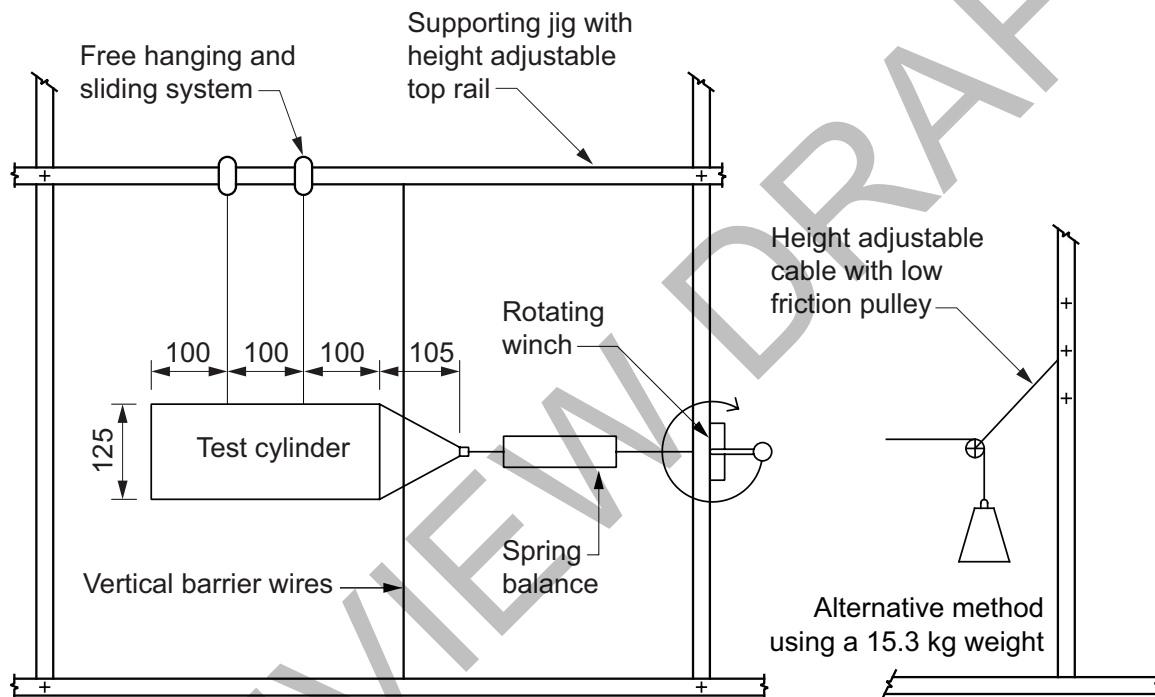

D1V2 Access to and within a building

Compliance with [D1P1](#), [D1P2](#), [D1P6](#), [E3P4](#) and/or [F4P1](#), for access, is verified when it is determined that the proposed building provides an equivalent level of access as a reference building when using the following process:

- (a) A *performance-based design brief* is completed to define the following:
 - (i) The occupant profile and *characteristics* based on the type and use of the building.
 - (ii) The appropriate method for determining the level of access.
 - (iii) The appropriate modelling method and tool.
 - (iv) The measurable acceptance criteria.
- (b) Using the appropriate method, the level of access *required* is determined by first modelling a reference building using the relevant *Deemed-to-Satisfy Provisions* of Sections D, E and F and the occupant profile and *characteristics* to determine the—
 - (i) needs of the occupants that the reference building addresses; and
 - (ii) facilities *required* to be accessed by each occupant profile; and
 - (iii) baseline measurable acceptance criteria.
- (c) The proposed building and access solution must be modelled using a modelling method and approach consistent

with that used for the reference building, and the same critical features including the following:

- (i) Occupant profile and *characteristics*.
 - (ii) Building location and orientation.
 - (iii) Locations of all entrances and *exits*.
 - (iv) Locations of facilities important to the solution, including sanitary facilities, lifts, stairwells, etc.
 - (v) The number and range of facilities.
- (d) The proposed solution's level of access is assessed by modelling occupant performance using *characteristics*, whereby the proposed building provides for equivalent access appropriate to the needs of each occupant profile.

D1V3 Ramp gradient, crossfall, surface profile and slip resistance for ramps used by wheelchairs

- (1) Compliance with *Performance Requirement D1P2*, relating to gradient, crossfall, surface profile and slip resistance of a ramp for the use of wheelchairs is verified when—
- (a) the ramp has a gradient that is not steeper than 1:8; and
 - (b) the pushing force required to accelerate a wheelchair and user during ascent is in accordance with (2); and
 - (c) the required braking force for a wheelchair and user during descent is in accordance with (3); and
 - (d) the projected ascent time is in accordance with (4); and
 - (e) the ramp crossfall, surface profile and slip resistance is in accordance with (5).

- (2) The pushing force during ascent must be in accordance with the formula: $F_p > mg \sin \alpha + C_{\pi 1} N_1 + C_{\pi 2} N_2$ where—

F_p = the maximum force during ascent, equal to 40 N for ramps required to be usable by the general public; and

m = the design mass of the wheelchair and wheelchair user, equal to 127 kg for ramps required to be usable by the general public; and

g = the gravitational constant, equal to 9.8 m/s²; and

α = the angle of incline of the ramp; and

$C_{\pi 1}, C_{\pi 2}$ = the coefficient of rolling resistance between the wheelchair wheel and the ramp surface, for the rear wheels and front wheels respectively; and

N_1, N_2 = the normal force between the wheelchair wheels and ramp surface, for rear wheels and front wheels respectively.

- (3) The braking force during descent must be less than 9 N when calculated in accordance with the formula:

$$F_b = mg \sin \alpha - C_{\pi 1} N_1 - C_{\pi 2} N_2$$

where—

F_b = the braking force during descent; and

m = the design mass of the wheelchair and wheelchair user, equal to 127 kg for ramps required to be usable by the general public; and

g = the gravitational constant, equal to 9.8 m/s²; and

α = the angle of incline of the ramp; and

$C_{\pi 1}, C_{\pi 2}$ = the coefficient of rolling resistance between the wheelchair wheel and ramp surface, for the rear wheels and front wheels respectively; and

N_1, N_2 = the normal force between the wheelchair wheels and ramp surface, for the rear wheels and front wheels

respectively.

- (4) The time taken to ascend the ramp must be less than 17 s when calculated in accordance with the formula:

$$T = \frac{Lm}{t(F_p - mg \sin \alpha - C_{\pi 1}N_1 - C_{\pi 2}N_2)}$$

where—

T = the time taken to ascend the ramp in seconds; and

L = the length of the ramp in metres; and

m = the design mass of the wheelchair and wheelchair user, equal to 127 kg for ramps required to be useable by the general public; and

t = the time taken for the wheelchair to achieve maximum velocity, equal to 0.8 m/s; and

F_p = the maximum pushing force during ascent, equal to 40 N for ramps required to be usable by the general public; and

g = the gravitational constant, equal to 9.8 m/s²; and

α = the angle of incline of the ramp; and

$C_{\pi 1}, C_{\pi 2}$ = the coefficient of rolling resistance between the wheelchair wheel and ramp surface, for the rear wheels and front wheels respectively; and

N_1, N_2 = the normal force between wheelchair wheels and ramp surface, for the rear wheels and front wheels respectively.

- (5) The crossfall must be no steeper than, the surface profile must be no rougher than, and the slip resistance must be no less than, the values nominated in [Table D1V3](#) for the gradient of the ramp.

Table D1V3: Ramp crossfall, surface profile and slip resistance

Gradient	Crossfall	Surface profile (mm)	Slip resistance
1:14	1:40	2	P4/R11
1:12	1:50	2	P5/R12
1:10	1:100	1	P5/R12
1:8	1:100	0.5	P5/R12

D1V4 Fire Safety Verification Method

Compliance with [D1P4](#), [D1P5](#), [D1P6](#) and [D1P7](#) is verified when a building is designed in accordance with [C1V4](#).

PREVIEW DRAFT

Part D2 Provision for escape

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for Part D1. It sets out required numbers, dimensions and placement of *exits*, rules for measuring building occupancy and travel distance to *exits*, places *exits* lead to and the use of *horizontal exits* within a building.

Deemed-to-Satisfy Provisions

D2D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements D1P1 to D1P6, D1P8 and D1P10* are satisfied by complying with—
 - (a) *D2D2 to D2D23, D3D2 to D3D31 and D4D2 to D4D13*; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) in a building in an *alpine area*, Part G4; and
 - (d) for a building containing an *occupiable outdoor area*, Part G6; and
 - (e) for additional requirements for Class 9b buildings, Part I1; and
 - (f) for public transport buildings, Part I2; and
 - (g) for *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with *A2G2(3)* and *A2G4(3)* as applicable.
- (3) *Performance Requirement D1P7* must be complied with if lifts are to be used to assist occupants to evacuate a building.

Notes

There are no *Deemed-to-Satisfy Provisions* for *D1P7* in respect of using lifts to assist occupants to evacuate a building.

D2D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part do not apply to the internal parts of a *sole-occupancy unit* in a Class 2 or 3 building or a Class 4 part of a building.

D2D3 Number of exits required

- (1) All buildings — Every building must have at least one *exit* from each *storey*.

SA D2D3(2)

- (2) Class 2 to 8 buildings —
 - (a) In addition to any *horizontal exit*, not less than 2 *exits* must be provided from the following:
 - (i) Each *storey* if the building has an *effective height* of more than 25 m.
 - (ii) A Class 2 or 3 building subject to *C2D6*.

- (b) The requirements of (a)(i) do not apply to a part of a *storey* that—
 - (i) is provided with direct egress to a road or *open space*; and
 - (ii) satisfies D2D5 by the provision of 1 *exit*.
- (3) Basements — In addition to any *horizontal exit*, not less than 2 *exits* must be provided from any *storey* if egress from that *storey* involves a vertical rise within the building of more than 1.5 m, unless—
 - (a) the *floor area* of the *storey* is not more than 50 m²; and
 - (b) the distance of travel from any point on the floor to a single *exit* is not more than 20 m.

NSW D2D3(4)

- (4) Class 9 buildings —
 - (a) In addition to any *horizontal exit*, not less than 2 *exits* must be provided from the following:
 - (i) Each *storey* if the building has a *rise in storeys* of more than 6 or an *effective height* of more than 25 m.
 - (ii) Any *storey* which includes a *patient care area* in a Class 9a *health-care building*.
 - (iii) Any *storey* that contains sleeping areas in a Class 9c building.
 - (iv) Any *storey* used as a Class 9b *early childhood centre*, or any Class 9b *early childhood centre* which forms part of a *storey*.
 - (v) Each *storey* in a primary or secondary *school* with a *rise in storeys* of 2 or more.
 - (vi) Any *storey* or *mezzanine* that accommodates more than 50 persons, calculated under D2D18.
 - (b) The requirements of (a) do not apply to a part of a *storey* that—
 - (i) is a plant room, machinery room, storeroom, lift-machine room or the like; and
 - (ii) is provided with direct egress to a road, *open space* or a fire-isolated *exit* complying with D2D12(2); and
 - (iii) satisfies D2D5 by the provision of 1 *exit*.
- (5) *Exits* from Class 9c buildings and *patient care areas* in Class 9a *health-care buildings* — In a Class 9a *health-care building* and a Class 9c building, at least one *exit* must be provided from every part of a *storey* which has been divided into *fire compartments* in accordance with C3D3 or C3D6.
- (6) Exits in open spectator stands — In an *open spectator stand* containing more than one tier of seating, every tier must have not less than 2 stairways or ramps, each forming part of the path of travel to not less than 2 *exits*.
- (7) Access to exits — Without passing through another *sole-occupancy unit* every occupant of a *storey* or part of a *storey* must have access to—
 - (a) an *exit*; or
 - (b) at least 2 *exits* if 2 or more *exits* are *required*.

D2D4 When fire-isolated stairways and ramps are required

- (1) Class 2 and 3 buildings — The following applies:
 - (a) Subject to (b), every stairway or ramp serving as a *required exit* must be fire-isolated unless it connects, passes through or passes by not more than—
 - (i) 3 consecutive *storeys* in a Class 2 building; or
 - (ii) 2 consecutive *storeys* in a Class 3 building.
 - (b) Notwithstanding (a), one extra *storey* of any classification may be included if—
 - (i) it is only for the accommodation of motor vehicles or for other ancillary purposes; or
 - (ii) the building has a sprinkler system (other than a FPAA101D system) complying with *Specification 17* installed throughout; or
 - (iii) the *required exit* does not provide access to or egress for, and is separated from, the extra *storey* by construction having—
 - (A) an FRL of –/60/60, if non-*loadbearing*; and

- (B) an FRL of 90/90/90, if *loadbearing*; and
- (C) no opening that could permit the passage of fire or smoke.

SA D2D4(2)

- (2) Class 5, 6, 7, 8 or 9 buildings — Every stairway or ramp serving as a *required exit* must be fire-isolated unless—
- (a) in a Class 9a *health-care building* — it connects, or passes through or passes by not more than 2 consecutive *storeys* in areas other than *patient care areas*; or
 - (b) it is part of an *open spectator stand*; or
 - (c) in any other case, except in a Class 9b *early childhood centre* or a Class 9c building, it connects, passes through or passes by not more than 2 consecutive *storeys* and one extra *storey* of any classification may be included if—
 - (i) the building has a sprinkler system (other than a FPAA101D system) complying with *Specification 17* installed throughout; or
 - (ii) the *required exit* does not provide access to or egress for, and is separated from, the extra *storey* by construction having—
 - (A) an FRL of –/60/60, if non-*loadbearing*; and
 - (B) an FRL of 90/90/90 for Type A construction or 60/60/60 for Type B or C construction, if *loadbearing*; and
 - (C) no opening that could permit the passage of fire or smoke.

Exemptions

D2D4(2) does not apply to—

- (a) a Class 9b *early childhood centre* wholly within a *storey* that provides direct egress to a road or *open space*; or
- (b) a Class 9b *early childhood centre* with a *rise in storeys* of not more than 2, where the Class 9b *early childhood centre* is the only use in that building.

D2D5 Exit travel distances

- (1) Class 2 and 3 buildings —
- (a) The entrance doorway of any *sole-occupancy unit* must be not more than—
 - (i) 6 m from an *exit* or from a point from which travel in different directions to 2 *exits* is available; or
 - (ii) 20 m from a single *exit* serving the *storey* at the level of egress to a road or *open space*; and
 - (b) no point on the floor of a room which is not in a *sole-occupancy unit* must be more than 20 m from an *exit* or from a point at which travel in different directions to 2 *exits* is available.
- (2) Class 4 parts of a building — The entrance doorway to any Class 4 part of a building must be not more than 6 m from an *exit* or a point from which travel in different directions to 2 *exits* is available.
- (3) Class 5, 6, 7, 8 or 9 buildings — Subject to (4), (5) and (6)—
- (a) no point on a floor must be more than 20 m from an *exit*, or a point from which travel in different directions to 2 *exits* is available, in which case the maximum distance to one of those *exits* must not exceed 40 m; and
 - (b) in a Class 5 or 6 building, the distance to a single *exit* serving a *storey* at the level of access to a road or *open space* may be increased to 30 m.

VIC D2D5(4)

- (4) Class 9a buildings — In a *patient care area* in a Class 9a building—
- (a) no point on the floor must be more than 12 m from a point from which travel in different directions to 2 of the *required exits* is available; and
 - (b) the maximum distance to one of those *exits* must not be more than 30 m from the starting point.
- (5) Open spectator stands — The distance of travel to an *exit* in a Class 9b building used as an *open spectator stand*

must be not more than 60 m.

- (6) Assembly buildings — In a Class 9b building other than a *school* or *early childhood centre*, the distance to one of the *exits* may be 60 m if—
- (a) the path of travel from the room concerned to that *exit* is through another area which is a corridor, hallway, lobby, ramp or other circulation space; and
 - (b) the room is smoke-separated from the circulation space by construction having an FRL of not less than 60/60/60 with every doorway in that construction protected by a tight fitting, *self-closing*, solid-core door not less than 35 mm thick; and
 - (c) the maximum distance of travel does not exceed 40 m within the room and 20 m from the doorway to the room through the circulation space to the *exit*.

SA D2D5(7)

SA D2D5(8)

SA D2D6

D2D6 Distance between alternative exits

Exits that are *required* as alternative means of egress must be—

- (a) distributed as uniformly as practicable within or around the *storey* served and in positions where unobstructed access to at least 2 *exits* is readily available from all points on the floor including lift lobby areas; and
- (b) not less than 9 m apart; and
- (c) not more than—
 - (i) in a Class 2 or 3 building — 45 m apart; or
 - (ii) in a Class 9a *health-care building*, if such *required exit* serves a *patient care area* — 45 m apart; or
 - (iii) in all other cases — 60 m apart; and
- (d) located so that alternative paths of travel do not converge such that they become less than 6 m apart.

D2D7 Height of exits, paths of travel to exits and doorways

In a *required exit* or path of travel to an *exit* the unobstructed height throughout must be not less than 2 m, except the unobstructed height of any doorway may be reduced to not less than 1980 mm.

D2D8 Width of exits and paths of travel to exits

- (1) The unobstructed width of each *required exit* or path of travel to an *exit*, except for ladders provided in accordance with D2D21, D3D23 or I3D5, and doorways, must be not less than—
 - (a) 1 m; or
 - (b) 1.8 m in a passageway, corridor or ramp normally used for the transportation of patients in beds within a *treatment area* or *ward area*; and
 - (c) in a *public corridor* in a Class 9c *aged care building*, notwithstanding (2) and (3)—
 - (i) 1.5 m; and
 - (ii) 1.8 m for the full width of the doorway, providing access into a *sole-occupancy unit* or communal bathroom.
- (2) If a *fire compartment* relying on one or more *horizontal exits*, a *storey*, a *mezzanine* or an *open spectator stand* accommodates more than 100 persons but not more than 200 persons, the aggregate unobstructed width of *required exits* or paths of travel to an *exit*, except for doorways, must be not less than—
 - (a) 1 m plus 250 mm for each 25 persons (or part) in excess of 100; or

- (b) 1.8 m in a passageway, corridor or ramp normally used for the transportation of patients in beds within a *treatment area* or *ward area*.
- (3) If a *fire compartment* relying on one or more *horizontal exits*, a *storey*, a *mezzanine* or an *open spectator stand* accommodates more than 200 persons, the aggregate unobstructed width of *required exits* or paths of travel to an *exit*, except for doorways, must be not less than—
 - (a) 2 m plus 500 mm for every 60 persons (or part) in excess of 200 persons if egress involves a change in floor level by a stairway or ramp with a gradient steeper than 1 in 12; or
 - (b) in any other case, 2 m plus 500 mm for every 75 persons (or part) in excess of 200.
- (4) In an *open spectator stand* which accommodates more than 2000 persons, the aggregate unobstructed width of *required exits* or paths of travel to an *exit*, except for doorways, must be not less than 17 m plus a width (in metres) equal to the number in excess of 2000 divided by 600.

NSW D2D8(5)

NSW D2D9

VIC D2D9

D2D9 Width of doorways in exits or paths of travel to exits

In a *required exit* or path of travel to an *exit*, the unobstructed width of a doorway must be not less than—

- (a) in *patient care areas* through which patients would normally be transported in beds—
 - (i) if the doorway provides access to, or from, a corridor of width—
 - (A) less than 2.2 m — 1200 mm; or
 - (B) 2.2 m or greater — 1070 mm; and
 - (ii) where the doorway referred to in (i) is fitted with two leaves and one leaf is secured in the closed position in accordance with D3D26(3)(e), the other leaf must permit an unobstructed opening not less than 800 mm wide; or
- (b) in *patient care areas* in a *horizontal exit* — 1250 mm; or
- (c) the unobstructed width of each *exit* provided to comply with D2D8, minus 250 mm; or
- (d) in a Class 9c building, 800 mm, except—
 - (i) in *resident use areas* the minimum unobstructed width must be 870 mm; and
 - (ii) for doorways leading from a *public corridor* to a *sole-occupancy unit* the minimum unobstructed width must be 1070 mm; and
 - (iii) where the doorway is fitted with two leaves and one leaf is secured in the closed position in accordance with D3D26(3)(e), the other leaf must permit an unobstructed opening not less than 870 mm wide in *resident use areas* and 800 mm wide in non-*resident use area*; or
- (e) in any other case except where it opens to a *sanitary compartment* or bathroom — 750 mm wide.

D2D10 Exit width not to diminish in direction of travel

The unobstructed width of a *required exit* must not diminish in the direction of travel to a road or *open space*, except where the width is increased in accordance with D2D8(1)(b) or D2D9(a)(i).

D2D11 Determination and measurement of exits and paths of travel to exits

For the purposes of D2D7 to D2D10 the following apply:

- (a) The *required* width of a stairway or ramp in a *required exit* or path of travel to an *exit* must—

- (i) be measured clear of all obstructions such as handrails, projecting parts of barriers and the like; and
 - (ii) extend without interruption, except for ceiling cornices, to a height not less than 2 m vertically above a line along the nosings of the treads or the floor surface of the ramp or landing.
- (b) To determine the aggregate unobstructed width, the number of persons accommodated must be calculated according to [D2D18](#).

D2D12 Travel via fire-isolated exits

- (1) A doorway from a room must not open directly into a stairway, passageway or ramp that is [required](#) to be fire-isolated unless it is from—
- (a) a [public corridor](#), public lobby or the like; or
 - (b) a [sole-occupancy unit](#) occupying all of a [storey](#); or
 - (c) a [sanitary compartment](#), airlock or the like.
- (2) Each [fire-isolated stairway](#) or [fire-isolated ramp](#) must provide independent egress from each [storey](#) served and discharge directly, or by way of its own [fire-isolated passageway](#)—
- (a) to a road or [open space](#); or
 - (b) to a point—
 - (i) in a [storey](#) or space, within the confines of the building, that is used only for pedestrian movement, car parking or the like and is open for at least $\frac{2}{3}$ of its perimeter; and
 - (ii) from which an unimpeded path of travel, not further than 20 m, is available to a road or [open space](#); or
 - (c) into a covered area that—
 - (i) adjoins a road or [open space](#); and
 - (ii) is open for at least $\frac{1}{3}$ of its perimeter; and
 - (iii) has an unobstructed clear height throughout, including the perimeter openings, of not less than 3 m; and
 - (iv) provides an unimpeded path of travel from the point of discharge to the road or [open space](#) of not more than 6 m.
- (3) Where a path of travel from the point of discharge of a fire-isolated [exit](#) necessitates passing within 6 m of any part of an [external wall](#) of the same building, measured horizontally at right angles to the path of travel, the following applies:
- (a) That part of the wall must have—
 - (i) an FRL of not less than 60/60/60; and
 - (ii) any openings protected internally in accordance with [C4D5](#); and
 - (b) The protection [required](#) by (a) must extend for a distance of 3 m above or below, as appropriate, the level of the path of travel, or for the height of the wall, whichever is the lesser.
- (4) If more than 2 access doorways, not from a [sanitary compartment](#) or the like, open to a [required](#) fire-isolated [exit](#) in the same [storey](#)—
- (a) a smoke lobby in accordance with [D3D7](#) must be provided; or
 - (b) the [exit](#) must be pressurised in accordance with AS 1668.1.
- (5) A ramp must be provided at any change in level less than 600 mm in a [fire-isolated passageway](#) in a Class 9 building.

D2D13 External stairways or ramps in lieu of fire-isolated exits

- (1) An external stairway or ramp may serve as a [required exit](#) in lieu of a fire-isolated [exit](#) serving a [storey](#) below an [effective height](#) of 25 m, if the stairway or ramp is—
- (a) [non-combustible](#) throughout; and

- (b) protected in accordance with (3) if it is within 6 m of, and exposed to, any part of the *external wall* of the building it serves.
- (2) For the purposes of this clause—
 - (a) exposure under (1)(b), is measured in accordance with S5C2, as if the *exit* was a building element and the *external wall* of the building was a *fire-source feature* to the *exit*, except that the FRL *required* in S5C2(1)(a) must not be less than 60/60/60; and
 - (b) the plane formed at the construction edge or perimeter of an unenclosed building or part such as an *open-deck carpark*, *open spectator stand* or the like, is deemed to be an *external wall*; and
 - (c) openings in an *external wall* and openings under (3) and (4), are determined in accordance with C4D2.
- (3) The protection referred to in (1)(b), must adequately protect occupants using the *exit* from exposure to a fire within the building, in accordance with one of the following methods:
 - (a) The part of the *external wall* of the building to which the *exit* is exposed must have—
 - (i) an FRL of not less than 60/60/60; and
 - (ii) no openings less than 3 m from the *exit* (except a doorway serving the *exit* protected by a –/60/30 fire door in accordance with C4D9(1)); and
 - (iii) any opening 3 m or more but less than 6 m from the *exit*, protected in accordance with C4D5 and if wall wetting sprinklers are used, they are located internally.
 - (b) The *exit* must be protected by construction of a wall, roof, floor or other shielding element as appropriate in accordance with (4) from—
 - (i) any part of the *external wall* of the building having an FRL of less than 60/60/60; and
 - (ii) any openings in the *external wall*.
- (4) The wall, roof, floor or other shielding element *required* by (3)(b) must—
 - (a) have an FRL of not less than 60/60/60; and
 - (b) have no openings less than 3 m from the *external wall* of the building (except a doorway serving the *exit* protected by a –/60/30 fire door in accordance with C4D9(1)); and
 - (c) have any opening 3 m or more but less than 6 m from any part of the *external wall* of the building protected in accordance with C4D5 and if wall wetting sprinklers are used, they are located on the side exposed to the *external wall*.

D2D14 Travel by non-fire-isolated stairways or ramps

- (1) A non-*fire-isolated stairway* or non-*fire-isolated ramp* serving as a *required exit* must provide a continuous means of travel by its own *flights* and landings from every *storey* served to the level at which egress to a road or *open space* is provided.
- (2) In a Class 2, 3 or 4 building, the distance between the doorway of a room or *sole-occupancy unit* and the point of egress to a road or *open space* by way of a stairway or ramp that is not fire-isolated and is *required* to serve that room or *sole-occupancy unit* must not exceed—
 - (a) 30 m in a building of Type C construction; or
 - (b) 60 m in all other cases.
- (3) In a Class 5, 6, 7, 8 or 9 building, the distance from any point on a floor to a point of egress to a road or *open space* by way of a *required non-fire-isolated stairway* or non-*fire-isolated ramp* must not exceed 80 m.
- (4) In a Class 2, 3 or 9a building, a *required non-fire-isolated stairway* or non-*fire-isolated ramp* must discharge at a point not more than—
 - (a) 15 m from a doorway providing egress to a road or *open space* or from a *fire-isolated passageway* leading to a road or *open space*; or
 - (b) 30 m from one of 2 such doorways or passageways if travel to each of them from the non-*fire-isolated stairway* or non-*fire-isolated ramp* is in opposite or approximately opposite directions.
- (5) In a Class 5 to 8 or 9b building, a *required non-fire-isolated stairway* or non-*fire-isolated ramp* must discharge at a

point not more than—

- (a) 20 m from a doorway providing egress to a road or *open space* or from a *fire-isolated passageway* leading to a road or *open space*; or
 - (b) 40 m from one of 2 such doorways or passageways if travel to each of them from the non-*fire-isolated stairway* or non-*fire-isolated ramp* is in opposite or approximately opposite directions.
- (6) In a Class 2 or 3 building, if 2 or more *exits* are *required* and are provided by means of internal non-*fire-isolated stairways* or non-*fire-isolated ramps* each *exit* must—
- (a) provide separate egress to a road or *open space*; and
 - (b) be suitably smoke-separated from each other at the level of discharge.

SA D2D14(7)

D2D15 Discharge from exits

- (1) An *exit* must not be blocked at the point of discharge and where necessary, suitable barriers must be provided to prevent vehicles from blocking the *exit*, or access to it.
- (2) If a *required exit* leads to an *open space*, the path of travel to the road must have an unobstructed width throughout of not less than—
 - (a) the minimum width of the *required exit*; or
 - (b) 1 m,whichever is the greater.
- (3) If an *exit* discharges to *open space* that is at a different level than the public road to which it is connected, the path of travel to the road must be by—
 - (a) a ramp or other incline having a gradient not steeper than 1:8 at any part, or not steeper than 1:14 if *required* by the *Deemed-to-Satisfy Provisions* of Part D4; or
 - (b) except if the *exit* is from a Class 9a building, a stairway complying with the *Deemed-to-Satisfy Provisions* of the NCC.
- (4) The discharge point of alternative *exits* must be located as far apart as practical.
- (5) In a Class 9b building which is an *open spectator stand* that accommodates more than 500 persons, a *required* stairway or *required* ramp must not discharge to the ground in front of the stand.

NSW D2D15(6)

- (6) In a Class 9b building containing an auditorium which accommodates more than 500 persons, not more than $\frac{2}{3}$ of the *required* width of *exits* must be located in the main entrance foyer.
- (7) The number of persons accommodated must be calculated according to D2D18.

D2D16 Horizontal exits

- (1) *Horizontal exits* must not be counted as *required exits*—
 - (a) between *sole-occupancy units*; or
 - (b) in a Class 9b building used as an *early childhood centre*, primary or secondary *school*.
- (2) In a Class 9a *health-care building* or Class 9c building, *horizontal exits* may be counted as *required exits* if the path of travel from a *fire compartment* leads by one or more *horizontal exits* directly into another *fire compartment* which has at least one *required exit* which is not a *horizontal exit*.
- (3) In cases other than in (2), *horizontal exits* must not comprise more than half of the *required exits* from any part of a *storey* divided by a *fire wall*.
- (4) *Horizontal exits* must have a clear area on the side of the *fire wall* to which occupants are evacuating, to accommodate the total number of persons (calculated under D2D18) served by the *horizontal exit* of not less than—

- (a) 2.5 m² per patient/resident in a Class 9a *health-care building* or Class 9c *aged care building*; and
 - (b) 0.5 m² per person in any other case.
- (5) Where a *fire compartment* is provided with only two *exits*, and one of those *exits* is a *horizontal exit*, the clear area *required* by (4) is to be of a size that accommodates all the occupants from the *fire compartment* being evacuated.
- (6) In a Class 9b *early childhood centre*, the clear area *required* by (4) must accommodate all occupants of the *early childhood centre*.
- (7) The clear area *required* by (4) must be connected to the *horizontal exit* by an unobstructed path that has at least the dimensions *required* for the *horizontal exit* and may include the area of the unobstructed path.
- (8) Each *fire compartment required* by C3D6(2) must be served by not less than 2 *horizontal exits*, each located not less than 9 m from—
- (a) at least one other *horizontal exit*; and
 - (b) an *exit* other than a *horizontal exit*.

D2D17 Non-required stairways, ramps or escalators

An escalator, moving walkway or non-*required* non *fire-isolated stairway* or pedestrian ramp—

- (a) must not be used between *storeys* in—
 - (i) a *patient care area* in a Class 9a *health-care building*; or
 - (ii) a *resident use area* in a Class 9c building; and
- (b) may connect any number of *storeys* if it is—
 - (i) in an *open spectator stand* or indoor sports stadium; or
 - (ii) in a *carpark* or an *atrium*; or
 - (iii) outside a building; or
 - (iv) in a Class 5 or 6 building that is sprinklered throughout, where the escalator, walkway, stairway or ramp complies with *Specification 14*; and
- (c) except where permitted in (b) must not connect more than—
 - (i) 3 *storeys* if—
 - (A) each of those *storeys* is provided with a sprinkler system (other than a FPAA101D system) complying with *Specification 17* throughout; and
 - (B) at least one of those *storeys* is situated at a level at which there is a direct egress to a road or *open space*; or
 - (ii) 2 *storeys*, provided that those *storeys* are consecutive, and one of the *storeys* is situated at a level at which there is direct egress to a road or *open space*; and
- (d) except where permitted in (b) or (c), must not connect, directly or indirectly, more than 2 *storeys* at any level in a Class 5, 6, 7, 8 or 9 building and those *storeys* must be consecutive.

D2D18 Number of persons accommodated

For the purposes of the *Deemed-to-Satisfy Provisions*, the number of persons accommodated in a *storey*, room or *mezzanine* must be determined with consideration to the purpose for which it is used and the layout of the *floor area* by—

- (a) calculating the sum of the numbers obtained by dividing the *floor area* of each part of the *storey* by the number of square metres per person listed in *Table D2D18* according to the use of that part, excluding spaces set aside for—
 - (i) lifts, stairways, ramps and escalators, corridors, hallways, lobbies and the like; and
 - (ii) service ducts and the like, *sanitary compartments* or other ancillary uses; or
- (b) reference to the seating capacity in an *assembly building* or room; or

- (c) any other suitable means of assessing its capacity.

NSW Table D2D18

Table D2D18: Area per person according to use

Type of use	Area per person
Art gallery, exhibition area, museum	4 m ²
Bar — standing	0.5m ²
Bar — other	1 m ²
Board room	2 m ²
Boarding house	15 m ²
Cafe, church, dining room	1 m ²
<i>Carpark</i>	30 m ²
Computer room	25 m ²
Court room — judicial area	10 m ²
Court room — public seating	1 m ²
Dance floor	0.5 m ²
Dormitory	5 m ²
<i>Early childhood centre</i>	4 m ²
Factory — machine shop, fitting shop or like place for cutting, grading, finishing or fitting of metals or glass, except in the fabrication of structural steelwork or manufacture of vehicles or bulky products	5 m ²
Factory — areas used for fabrication and processing other than a machine shop, fitting shop or the like.	50 m ²
Factory — a space in which the layout and natural use of fixed plant or equipment determines the number of persons who will occupy the space during working hours	Area per person determined by the use of the plant or equipment
Gymnasium	3 m ²
Hostel, hotel, motel, guest house	15 m ²
Indoor sports stadium—arena	10 m ²
Kiosk	1 m ²
Kitchen, laboratory, laundry	10 m ²
Library — reading space	2 m ²
Library — storage space	30 m ²
Office, including one for typewriting or document copying	10 m ²
<i>Patient care areas</i>	10 m ²
Plant room — ventilation, electrical or other service units	30 m ²
Plant room — boilers or power plant	50 m ²
Reading room	2 m ²
Restaurant	1 m ²
<i>School</i> — general classroom	2 m ²
<i>School</i> — multi-purpose hall	1 m ²
<i>School</i> — staff room	10 m ²
<i>School</i> — trade and practical area — primary	4 m ²
<i>School</i> — trade and practical area — secondary	As for workshop

Type of use	Area per person
Shop — space for sale of goods — at a level entered direct from the open air or any lower level	3 m ²
Shop — space for sale of goods — all other levels	5 m ²
Showroom — display area, covered mall or arcade	5 m ²
Skating rink, based on rink area	1.5 m ²
Spectator stand, audience viewing area — standing viewing area	0.3 m ²
Spectator stand, audience viewing area — removable seating	1 m ²
Spectator stand, audience viewing area — fixed seating	Per number of seats
Spectator stand, audience viewing area — bench seating	450 mm/person
Storage space	30 m ²
<i>Swimming pool</i> , based on pool area	1.5 m ²
Switch room, transformer room	30 m ²
Telephone exchange — private	30 m ²
Theatre and public hall	1 m ²
Theatre dressing room	4 m ²
Transport terminal	2 m ²
Workshop — for maintenance staff	30 m ²
Workshop — for manufacturing processes	As for factory

Table Notes

Bar standing is an area used by the standing patrons and extends not less than 1.5 m wide from the outside edge of the bar top for the length of the serving area of the bar.

D2D19 Measurement of distances

The nearest part of an *exit* means in the case of—

- a *fire-isolated stairway*, *fire-isolated passageway*, or *fire-isolated ramp*, the nearest part of the doorway providing access to them; and
- a non-*fire-isolated stairway*, the nearest part of the nearest riser; and
- a non-*fire-isolated ramp*, the nearest part of the junction of the floor of the ramp and the floor of the *storey*; and
- a doorway opening to a road or *open space*, the nearest part of the doorway; and
- a *horizontal exit*, the nearest part of the doorway.

D2D20 Method of measurement

The following rules apply:

- In the case of a room that is not a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building, the distance includes the straight-line measurement from any point on the floor of the room to the nearest part of a doorway leading from it, together with the distance from that part of the doorway to the single *required exit* or point from which travel in different directions to 2 *required exits* is available.
- Subject to (d), the distance from the doorway of a *sole-occupancy unit* in a Class 2 or 3 building or a Class 4 part of a building is measured in a straight line to the nearest part of the *required* single *exit* or point from which travel in different directions to 2 *required exits* is available.

- (c) Subject to (d), the distance between **exits** is measured in a straight line between the nearest parts of those **exits**.
- (d) Only the shortest distance is taken along a corridor, hallway, external balcony or other path of travel that curves or changes direction.
- (e) If more than one corridor, hallway, or other internal path of travel connects **required exits**, for the purposes of **D2D6(c)** the measurement is along the path of travel through the point at which travel in different directions to those **exits** is available, as determined in accordance with **D2D5**.
- (f) If a wall (including a demountable **internal wall**) that does not bound a room, corridor, hallway or the like causes a change of direction in proceeding to a **required exit**, the distance is measured along the path of travel past that wall.
- (g) If permanent fixed seating is provided, the distance is measured along the path of travel between the rows of seats.
- (h) In the case of a non-**fire-isolated stairway** or non-**fire-isolated ramp**, the distance is measured along a line connecting the nosings of the treads, or along the slope of the ramp, together with the distance connecting those lines across any intermediate landings.

D2D21 Plant rooms, lift machine rooms and electricity network substations: Concession

- (1) A ladder may be used in lieu of a stairway to provide egress from—
 - (a) a plant room with a **floor area** of not more than 100 m²; or
 - (b) all but one point of egress from a plant room, a lift machine room or a Class 8 **electricity network substation** with a **floor area** of not more than 200 m².
- (2) A ladder permitted under (1)—
 - (a) may—
 - (i) form part of an **exit** provided that in the case of a **fire-isolated stairway** it is contained within the **shaft**; or
 - (ii) discharge within a **storey** in which case it must be considered as forming part of the path of travel; and
 - (b) for a plant room or a Class 8 **electricity network substation**, must comply with AS 1657; and
 - (c) for a lift machine room, where access is provided from within a machine room to a secondary floor, a fixed rung type ladder complying with AS 1657 may be used, provided that—
 - (i) the height between the floors is not more than 2800 mm; and
 - (ii) the ladder is inclined at an angle to the horizontal not less than 65 degrees nor more than 75 degrees; and
 - (iii) the distance between the front face of the ladder and any adjacent obstruction is not less than—
 - (A) 960 mm, where the ladder is inclined 65 degrees to the horizontal; or
 - (B) 760 mm, where the ladder is inclined 75 degrees to the horizontal; or
 - (C) a distance that is determined by interpolating the values in (A) and (B), where the ladder is inclined at any angle between 65 degrees and 75 degrees to the horizontal; and
 - (iv) a clear space not less than 600 mm exists between the foot of the ladder and any equipment.

SA D2D21(3)

D2D22 Access to lift pits

Access to lift pits must—

- (a) where the pit depth is not more than 3 m, be through the lowest landing doors; or
- (b) where the pit depth is more than 3 m, be provided through an access doorway complying with the following:
 - (i) In lieu of **D2D7** to **D2D11**, the doorway must be level with the pit floor and not be less than 600 mm wide by 1980 mm high clear opening, which may be reduced to 1500 mm where it is necessary to comply with

- (ii).
- (ii) No part of the lift car or platform must encroach on the pit doorway entrance when the car is on a fully compressed buffer.
- (iii) Access to the doorway must be by a stairway complying with AS 1657.
- (iv) In lieu of D3D26, doors fitted to the doorway must be—
 - (A) of the horizontal sliding or outwards opening hinged type; and
 - (B) self-closing and self-locking from the outside; and
 - (C) marked on the landing side with the letters not less than 35 mm high:

**DANGER LIFTWELL – ENTRY OF UNAUTHORIZED PERSONS PROHIBITED – KEEP CLEAR
AT ALL TIMES**

D2D23 Egress from primary schools

- (1) Every part of a Class 9b primary *school* must be wholly within a *storey* that provides direct egress to a road or *open space*.
- (2) The requirements of (1) do not apply to a building with a *rise in storeys* of 4 or less, where the primary *school* is the only use in that building.

Applications

- (1) For D2D23(1), a primary *school* includes classrooms, offices, staffrooms, halls, canteens and the like within the primary *school*.
- (2) For D2D23(2), a primary *school* includes classrooms, offices, staffrooms, halls, canteens, carparks, end of trip facilities and the like provided solely for the primary *school*, or *school* which incorporates the primary *school*.

Explanatory Information

D2D23(1) recognises the difficulties associated with evacuation of primary *schools*. Should a primary *school* be proposed within a *storey* that does not meet the requirements of D2D23, a *Performance Solution* is to be used to demonstrate compliance with the relevant *Performance Requirements*.

Part D3 Construction of exits

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for Part D1. It covers safety aspects of parts of a building including stairways, ramps, handrails, balustrades, fall prevention barriers and operation of doors that are part of an *exit*. It also covers fall prevention requirements for openable windows.

Deemed-to-Satisfy Provisions

D3D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* D1P1 to D1P6, D1P8 to D1P10 are satisfied by complying with—
 - (a) D2D2 to D2D23, D3D2 to D3D31 and D4D2 to D4D13; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) in a building in an *alpine area*, Part G4; and
 - (d) for a building containing an *occupiable outdoor area*, Part G6; and
 - (e) for additional requirements for Class 9b buildings, Part I1; and
 - (f) for public transport buildings, Part I2; and
 - (g) for *farm buildings* and *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.
- (3) *Performance Requirement* D1P7 must be complied with if lifts are to be used to assist occupants to evacuate a building.

Notes

There are no *Deemed-to-Satisfy Provisions* for D1P7 in respect of using lifts to assist occupants to evacuate a building.

NSW D3D2

D3D2 Application of Part

Except for—

- (a) D3D14, D3D15(a), D3D17, D3D18, D3D19, D3D20, D3D21, D3D22(5), D3D22(6), D3D26 and D3D29, the *Deemed-to-Satisfy Provisions* of this Part do not apply to the internal parts of a *sole-occupancy unit* in a Class 3 building; and
- (b) D3D14, D3D15(a), D3D17, D3D18, D3D19, D3D20, D3D21, D3D22(5), D3D22(6), D3D23 and D3D29, the *Deemed-to-Satisfy Provisions* of this Part do not apply to the internal parts of a *sole-occupancy unit* in a Class 2 building or Class 4 part of a building.

D3D3 Fire-isolated stairways and ramps

A stairway or ramp (including any landings) that is *required* to be within a *fire-resisting shaft* must be constructed—

- (a) of *non-combustible* materials; and
- (b) so that if there is local failure it will not cause structural damage to, or impair the fire-resistance of, the *shaft*.

D3D4 Non-fire-isolated stairways and ramps

In a building having a *rise in storeys* of more than 2, *required* stairs and ramps (including landings and any supporting building elements) which are not *required* to be within a *fire-resisting shaft*, must be constructed according to D3D3, or only of—

- (a) reinforced or prestressed concrete; or
- (b) steel in no part less than 6 mm thick; or
- (c) timber that—
 - (i) has a finished thickness of not less than 44 mm; and
 - (ii) has an average density of not less than 800 kg/m³ at a moisture content of 12%; and
 - (iii) has not been joined by means of glue unless it has been laminated and glued with resorcinol formaldehyde or resorcinol phenol formaldehyde glue.

D3D5 Separation of rising and descending stair flights

If a stairway serving as an *exit* is *required* to be fire-isolated—

- (a) there must be no direct connection between—
 - (i) a *flight* rising from a *storey* below the lowest level of access to a road or *open space*; and
 - (ii) a *flight* descending from a *storey* above that level; and
- (b) any construction that separates or is common to the rising and descending *flights* must be—
 - (i) *non-combustible*; and
 - (ii) smoke proof in accordance with S11C2.

D3D6 Open access ramps and balconies

Where an open access ramp or balcony is provided to meet the smoke hazard management requirements of E2D4 to E2D13, it must—

- (a) have ventilation openings to the outside air which—
 - (i) have a total unobstructed area not less than the *floor area* of the ramp or balcony; and
 - (ii) are evenly distributed along the open sides of the ramp or balcony; and
- (b) not be enclosed on its open sides above a height of 1 m except by an open grille or the like having a free air space of not less than 75% of its area.

D3D7 Smoke lobbies

A smoke lobby *required* by D2D12 must—

- (a) have a *floor area* not less than 6 m²; and
- (b) be separated from the occupied areas in the *storey* by walls which are impervious to smoke, and—
 - (i) have an FRL of not less than 60/60/— (which may be fire-protective grade plasterboard, gypsum block with set plaster, face brickwork, glass blocks or glazing); and

- (ii) extend from slab to slab, or to the underside of a ceiling with a *resistance to the incipient spread of fire* of 60 minutes which covers the lobby; and
- (iii) any construction joints between the top of the walls and the floor slab, roof or ceiling must be smoke sealed with intumescent putty or other suitable material; and
- (c) at any opening from the occupied areas, have smoke doors complying with S12C3 and S12C4 except that the smoke sensing device need only be located on the approach side of the opening; and
- (d) be pressurised as part of the *exit* if the *exit* is *required* to be pressurised under E2D4.

D3D8 Installations in exits and paths of travel

- (1) Access to service *shafts* and services other than to fire-fighting or detection equipment as permitted in the *Deemed-to-Satisfy Provisions* of Section E, must not be provided from a *fire-isolated stairway*, *fire-isolated passageway* or *fire-isolated ramp*.
- (2) An opening to any chute or duct intended to convey hot products of combustion from a boiler, incinerator, fireplace or the like, must not be located in any part of a *required exit* or any corridor, hallway, lobby or the like leading to a *required exit*.
- (3) Gas or other fuel services must not be installed in a *required exit*.
- (4) Except for in a fire-isolated *exit* specified in (1), services or equipment enclosed in accordance with (5) may be installed in a *required exit*, or in any corridor, hallway, lobby or the like leading to a *required exit*, where that service or equipment comprises—
 - (a) electricity meters, distribution boards or ducts; or
 - (b) central telecommunications distribution boards or equipment; or
 - (c) electrical motors or other motors serving equipment in the building.
- (5) An enclosure for the purposes of (4) must be suitably sealed against smoke spreading from the enclosure and be—
 - (a) *non-combustible* construction; or
 - (b) a *fire-protective covering*.
- (6) Electrical wiring may be installed in a fire-isolated *exit* if the wiring is associated with—
 - (a) a lighting, detection, or pressurisation system serving the *exit*; or
 - (b) a security, surveillance or management system serving the *exit*; or
 - (c) an intercommunication system or an audible or visual alarm system in accordance with D3D27; or
 - (d) the monitoring of hydrant or sprinkler isolating valves.

D3D9 Enclosure of space under stairs and ramps

- (1) Fire-isolated stairways and ramps — If the space below a *required fire-isolated stairway* or *fire-isolated ramp* is within the fire-isolated *shaft*, it must not be enclosed to form a cupboard or similar enclosed space.
- (2) Non fire-isolated stairways and ramps — The space below a *required non fire-isolated stairway* (including an external stairway) or non *fire-isolated ramp* must not be enclosed to form a cupboard or other enclosed space unless—
 - (a) the enclosing walls and ceilings have an FRL of not less than 60/60/60; and
 - (b) any access doorway to the enclosed space is fitted with a *self-closing* –/60/30 fire door.

D3D10 Width of required stairways and ramps

A *required* stairway or ramp that exceeds 2 m in width is counted as having a width of only 2 m unless it is divided by a handrail or barrier continuous between landings and each division has a width of not more than 2 m.

D3D11 Pedestrian ramps

- (1) A *fire-isolated ramp* may be substituted for a *fire-isolated stairway* if the construction enclosing the ramp and the width and ceiling height comply with the requirements for a *fire-isolated stairway*.
- (2) A ramp serving as a *required exit* must—
 - (a) where the ramp is also serving as an *accessible* ramp under Part D4, be in accordance with AS 1428.1; or
 - (b) in any other case, have a gradient not steeper than 1:8.
- (3) The floor surface of a ramp, other than a *threshold ramp*, must have a slip-resistance classification not less than that listed in Table D3D15 when tested in accordance with AS 4586.

D3D12 Fire-isolated passageways

- (1) The enclosing construction of a *fire-isolated passageway* must have an FRL when tested for a fire outside the passageway in another part of the building of—
 - (a) if the passageway discharges from a *fire-isolated stairway* or ramp — not less than that *required* for the stairway or ramp *shaft*; or
 - (b) in any other case — not less than 60/60/60.
- (2) Notwithstanding (1)(b), the top construction of a *fire-isolated passageway* need not have an FRL if the walls of the *fire-isolated passageway* extend to the underside of—
 - (a) a *non-combustible* roof covering; or
 - (b) a ceiling having a *resistance to the incipient spread of fire* of not less than 60 minutes separating the roof space or ceiling space in all areas surrounding the passageway within the *fire compartment*.

D3D13 Roof as open space

If an *exit* discharges to a roof of a building, the roof must—

- (a) have an FRL of not less than 120/120/120; and
- (b) not have any roof lights or other openings within 3 m of the path of travel of persons using the *exit* to reach a road or *open space*.

D3D14 Goings and risers

NSW D3D14(1)

- (1) A stairway must have—
 - (a) not more than 18 and not less than 2 risers in each *flight*; and
 - (b) going (G), riser (R) and quantity (2R + G) in accordance with Table D3D14, except as permitted by (2) and (3); and
 - (c) constant goings and risers throughout each *flight*, except as permitted by (2) and (3), and the dimensions of goings (G) and risers (R) in accordance with (1)(b) are considered constant if the variation between—
 - (i) adjacent risers, or between adjacent goings, is no greater than 5 mm; and
 - (ii) the largest and smallest riser within a *flight*, or the largest and smallest going within a *flight*, does not exceed 10 mm; and
 - (d) risers which do not have any openings that would allow a 125 mm sphere to pass through between the treads; and
 - (e) treads which have—

- (i) a surface with a slip-resistance classification not less than that listed in Table D3D15 when tested in accordance with AS 4586; or
 - (ii) a nosing strip with a slip-resistance classification not less than that listed in Table D3D15 when tested in accordance with AS 4586; and
 - (f) treads of solid construction (not mesh or other perforated material) if the stairway is more than 10 m high or connects more than 3 storeys; and
 - (g) in a Class 9b building, not more than 36 risers in consecutive flights without a change in direction of at least 30°; and
 - (h) in the case of a required stairway, no winders in lieu of a landing.
- (2) In the case of a non-required stairway—
- (a) the stairway must have—
 - (i) not more than 3 winders in lieu of a quarter landing; and
 - (ii) not more than 6 winders in lieu of a half landing; and
 - (b) the going of all straight treads must be constant throughout the same flight and the dimensions of goings (G) is considered constant if the variation between—
 - (i) adjacent goings, is no greater than 5 mm; and
 - (ii) the largest and smallest going within a flight, does not exceed 10 mm; and
 - (c) the going of all winders in lieu of a quarter or half landing may vary from the going of the straight treads within the same flight provided that the going of all such winders is constant.
- (3) Where a stairway discharges to a sloping public walkway or public road—
- (a) the riser (R) may be reduced to account for the slope of the walkway or road; and
 - (b) the quantity (2R+G) may vary at that location.

Table D3D14: Riser and going dimensions


Stairway location	Riser (R)		Going (G) ^{Note 3}		Quantity (2R + G)	
	Max	Min	Max	Min	Max	Min
Public	190	115	355	250	700	550
Private ^{Note 1}	190	115	355	240	700	550

Table Notes

- (1) Private stairways are—
 - (a) stairways in a sole-occupancy unit in a Class 2 building or Class 4 part of a building; and
 - (b) in any building, stairways which are not part of a required exit and to which the public do not normally have access.
- (2) Going and riser dimensions must be measured in accordance with Figure D3D14.
- (3) The going in tapered treads (except winders in lieu of a quarter or half landing) in a curved or spiral stairway is measured—
 - (a) 270 mm in from the outer side of the unobstructed width of the stairway if the stairway is less than 1 m wide (applicable to a non-required stairway only); and
 - (b) 270 mm from each side of the unobstructed width of the stairway if the stairway is 1 m wide or more.

Figure D3D14: Riser and going dimensions

125 mm sphere must not pass through treads

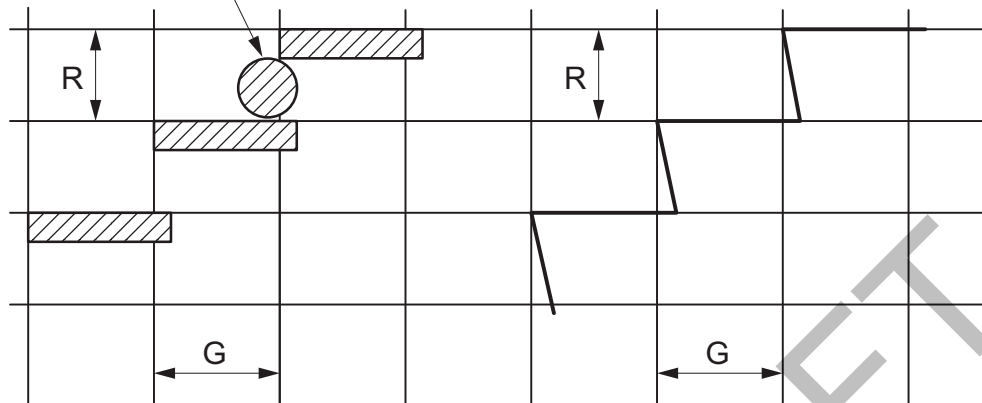

D3D15 Landings

In a stairway—

- (a) **landings** having a maximum gradient of 1:50 may be used in any building to limit the number of risers in each **flight** and each **landing** must—
 - (i) be not less than 750 mm long, and where this involves a change in direction, the length is measured 500 mm from the inside edge of the **landing**; and
 - (ii) have—
 - (A) a surface with a slip-resistance classification not less than that listed in Table D3D15 when tested in accordance with AS 4586; or
 - (B) a strip at the edge of the **landing** with a slip-resistance classification not less than that listed in Table D3D15 when tested in accordance with AS 4586, where the edge leads to a **flight** below; and
- (b) in a Class 9a building—
 - (i) the area of any **landing** must be sufficient to move a stretcher, 2 m long and 600 mm wide, at a gradient not more than the gradient of the stairs, with at least one end of the stretcher on the **landing** while changing direction between **flights**; or
 - (ii) the stair must have a change of direction of 180°, and the **landing** a clear width of not less than 1.6 m and a clear length of not less than 2.7 m.

Table D3D15: Slip-resistance classification

Application	Dry surface conditions	Wet surface conditions
Ramp steeper than 1:14	P4 or R11	P5 or R12
Ramp steeper than 1:20 but not steeper than 1:14	P3 or R10	P4 or R11
Tread or landing surface	P3 or R10	P4 or R11
Nosing or landing edge strip	P3	P4

NSW D3D16

SA D3D16

D3D16 Thresholds

The threshold of a doorway must not incorporate a step or ramp at any point closer to the doorway than the width of the door leaf unless the doorway opens to an external space; and—

- (a) where the doorway serves an area *required* to be *accessible* by Part D4, it is provided with a threshold ramp or step ramp in accordance with AS 1428.1; or
- (b) where (a) does not apply, the door sill is not located below, and is not more than 190 mm above, the finished surface of the ground, balcony, or the like to which the doorway opens.

Exemptions

D3D16 does not apply to a plant room, machinery room, or the like.

Explanatory Information: Read in conjunction with D4D3

D3D16(a) is to be read in conjunction with D4D3, which requires some external doorways to be *accessible*. In order to comply with D4D3, the thresholds of these doorways cannot incorporate a ramp within the width of the door leaf.

Explanatory Information: Bunds

D3D16 does not prevent the addition of a bund within the width of the door leaf from the doorway. However, this is to be considered in conjunction with D4D2 that requires certain areas to be *accessible* which may prevent the incorporation of a bund.

D3D17 Barriers to prevent falls

- (1) A continuous barrier must be provided along the side of—
 - (a) a roof to which general access is provided; and
 - (b) a stairway or ramp; and
 - (c) a floor, corridor, hallway, balcony, deck, verandah, *mezzanine*, access bridge or the like; and
 - (d) any delineated path of access to a building,
 if the trafficable surface is 1 m or more above the surface beneath.
- (2) The requirements of (1) do not apply to—
 - (a) the perimeter of a *stage*, rigging loft, loading dock or the like; or
 - (b) areas referred to in D3D23; or
 - (c) a retaining wall, unless the retaining wall forms part of, or is directly associated with, a delineated path of access to a building from the road or a delineated path of access between buildings; or
 - (d) a barrier provided to an openable window covered by D3D29.
- (3) A barrier *required* by (1) must be constructed in accordance with D3D18, D3D19, D3D20 and, if a wire barrier is used, D3D21.

D3D18 Height of barriers

NSW D3D18(1)

- (1) The height of a barrier *required* by D3D17 must be not less than the following:
 - (a) For stairways or ramps with a gradient of 1:20 or steeper — 865 mm.
 - (b) For *landings* to a stair or ramp where the barrier is provided along the inside edge of the *landing* and does not exceed 500 mm in length — 865 mm.

- (c) In front of fixed seating on a *mezzanine* or balcony within an auditorium in a Class 9b building, where the horizontal projection extends not less than 1 m outwards from the top of the barrier — 700 mm.
 - (d) For all other locations — 1 m.
- (2) For a barrier provided under (1) —
- (a) barrier heights are measured vertically from the surface beneath, except that for stairways the height must be measured above the nosing line of the stair treads; and
 - (b) a transition zone may be incorporated where the barrier height changes from 865 mm on a stair *flight* or ramp to 1 m at a *landing* or floor.

D3D19 Openings in barriers

- (1) Except where allowed by (2), openings in a *required* barrier must not allow a 125 mm sphere to pass through.
- (2) In a *fire-isolated stairway*, *fire-isolated ramp* or other area used primarily for emergency purposes, openings in a *required* barrier—
- (a) must not allow a 300 mm sphere to pass through; or
 - (b) where rails are used—
 - (i) a 150 mm sphere must not be able to pass through the opening between the nosing line of the stair treads and the rail or between the rail and the floor of the *landing*, balcony or the like; and
 - (ii) the opening between rails must not be more than 460 mm.
- (3) In Class 7 (other than *carparks*) and Class 8 buildings, openings in a *required* barrier—
- (a) must not allow a 300 mm sphere to pass through; or
 - (b) where rails are used—
 - (i) a 150 mm sphere must not be able to pass through the opening between the nosing line of the stair treads and the rail or between the rail and the floor of the *landing*, balcony or the like; and
 - (ii) the opening between the rails must not be more than 460 mm.
- (4) The requirements of (2) do not apply to external stairways, external ramps, or *fire-isolated stairways* or *fire-isolated ramps* serving Class 9b *early childhood centres*.
- (5) For a barrier provided under (1), the maximum 125 mm barrier opening for a stairway, such as a non *fire-isolated stairway*, is measured above the nosing line of the stair treads.
- (6) Where a *required* barrier is fixed to the vertical face forming an edge of a *landing*, balcony, deck, stairway or the like, the opening formed between the barrier and the face must not exceed 40 mm.
- (7) For the purposes of (6), the opening is measured horizontally from the edge of the trafficable surface to the nearest internal face of the barrier.

D3D20 Barrier climbability

- (1) A barrier *required* by D3D17, located on a floor more than 4 m above the surface beneath, must not incorporate horizontal or near horizontal elements that could facilitate climbing between 150 mm and 760 mm above the floor.
- (2) The requirements of (1) do not apply to—
- (a) *fire-isolated stairways*, *fire-isolated ramps* and other areas used primarily for emergency purposes, other than—
 - (i) external stairways; and
 - (ii) external ramps; and
 - (b) Class 7 (other than *carparks*) and Class 8 buildings.

D3D21 Wire barriers

Where a **required** barrier is constructed of wire, it is deemed to meet the requirements of D3D19(1) if it is constructed in accordance with the following:

- (a) For horizontal wire systems—
 - (i) when measured with a strain indicator, it must be in accordance with the tension values in Table D3D21a; or
 - (ii) must not exceed the maximum deflections in Table D3D21c.
- (b) For non-continuous vertical wire systems, when measured with a strain indicator, must be in accordance with the tension values in Table D3D21a (see Note 4).
- (c) For continuous vertical or continuous near vertical sloped wire systems—
 - (i) must have wires of no more than 2.5 mm diameter with a lay of 7×7 or 7×19 construction; and
 - (ii) changes in direction at support rails must pass around a pulley block without causing permanent deformation to the wire; and
 - (iii) must have supporting rails, constructed with a spacing of not more than 900 mm, of a material that does not allow deflection that would decrease the tension of the wire under load; and
 - (iv) when the wire tension is measured with a strain indicator, it must be in accordance with the tension values in Table D3D21b and measured in the furthestmost span from the tensioning device.

Table D3D21a: Wire barrier construction – minimum required tension (N) for stainless steel horizontal wires

Wire dia. (mm)	Lay	Wire spacing (mm)	Clear distance between posts (mm)								
			600	800	900	1000	1200	1500	1800	2000	2500
2.5	7x7	60	55	190	263	415	478	823	1080	1139	X
		80	382	630	730	824	1025	1288	X	X	X
		100	869	1218	1368	X	X	X	X	X	X
2.5	1x19	60	35	218	310	402	585	810	1125	1325	X
		80	420	630	735	840	1050	1400	1750	X	X
		100	1140	1565	X	X	X	X	X	X	X
3.0	7x7	60	15	178	270	314	506	660	965	1168	1491
		80	250	413	500	741	818	1083	1370	1565	X
		100	865	1278	1390	1639	X	X	X	X	X
3.0	1x19	60	25	183	261	340	520	790	1025	1180	X
		80	325	555	670	785	1015	1330	1725	1980	X
		100	1090	1500	1705	1910	X	X	X	X	X
4.0	7x7	60	5	73	97	122	235	440	664	813	1178
		80	196	422	480	524	760	1100	1358	1530	2130
		100	835	1182	1360	1528	1837	2381	2811	3098	X
4.0	1x19	60	5	5	10	15	20	147	593	890	1280
		80	30	192	300	415	593	1105	1303	1435	1844
		100	853	1308	1487	1610	2048	2608	3094	3418	3849
4.0	7x19	60	155	290	358	425	599	860	1080	1285	1540
		80	394	654	785	915	1143	1485	1860	2105	2615
		100	1038	1412	1598	1785	2165	2735	X	X	X

Table Notes

- (1) Lay = number of strands by the number of individual wires in each strand. For example a lay of 7x19 consists of 7 strands with 19 individual wires in each strand.
- (2) Where a change of direction is made in a run of wire, the tensioning device is to be placed at the end of the longest span.
- (3) If a 3.2 mm wire is used the tension figures for 3.0 mm wire are applied.
- (4) This table may also be used for a set of non-continuous (single) vertical wires forming a barrier using the appropriate clear distance between posts as the vertical clear distance between the rails.
- (5) X = Not allowed because the required tension would exceed the safe load of the wire.
- (6) Tension measured with a strain indicator.

Table D3D21b: Continuous wire barrier construction – minimum required tension (N) for vertical or near-vertical stainless steel wires where the maximum clear spacing between the rails is 900mm

Wire dia. (mm)	Lay	Widest spacing between wires (mm)	Required tension (N)
2.5	7x19	80	145
		100	310
		110	610
2.5	7x7	80	130
		100	280
		110	500

Table Notes

- (1) Lay = number of strands by the number of individual wires in each strand. For example a lay of 7x19 consists of 7 strands with 19 individual wires in each strand.
- (2) Vertical wires require two pulley blocks to each 180° change of direction in the wire.
- (3) Near vertical wires may only require one pulley block for each change of direction.
- (4) Tension measured with a strain indicator.
- (5) The table only includes 7x7 and 7x19 wires due to other wires not having sufficient flexibility to make the necessary turns.

Table D3D21c: Wire barrier construction – maximum permissible deflection of each wire in mm when a 2 kg mass is suspended at mid-span for stainless steel wires

Wire dia. (mm)	Wire spacing (mm)	Clear distance between posts (mm)					
		600	900	1200	1500	1800	2000
2.5	60	17	11	9	8	8	8
	80	7	5	5	5	X	X
3.0	60	19	13	8	7	7	7
	80	8	6	6	5	5	5
4.0	60	18	12	8	8	7	7
	80	8	6	4	4	4	4

Table Notes

- (1) Where a change of direction is made in a run of wire the 2 kg mass must be placed at the middle of the longest span.
- (2) If a 3.2 mm wire is used the deflection figures for 3.0 mm wire are applied.

- (3) This table may also be used for a set of non-continuous (single) vertical wires forming a barrier using the appropriate clear distance between posts as the vertical clear distance between the rails. The deflection (offset) is measured by hooking a standard spring scale to the mid span of each wire and pulling it horizontally until a force of 19.6 N is applied.
- (4) X = Not allowed because the required tension would exceed the safe load of the wire.
- (5) This table has been limited to 60 mm and 80 mm spaces for 2.5 mm, 3 mm and 4 mm diameter wires because the required wire tensions at greater spacings would require the tension to be beyond the wire safe load limit, or the allowed deflection would be impractical to measure.

D3D22 Handrails

- (1) Subject to (2), handrails must—
- (a) be located along at least one side of the ramp or *flight*; and
 - (b) be located along each side if the total width of the stairway or ramp is 2 m or more; and
 - (c) in a Class 9b building used as a primary *school* or a building that contains an *early childhood centre*—
 - (i) have one handrail fixed at a height of not less than 865 mm; and
 - (ii) in addition to (i), have a handrail—
 - (A) fixed at a height between 665 mm and 750 mm in a primary *school*; and
 - (B) with a cross-sectional dimension not less than 16 mm and not greater than 45 mm as measured in any direction across its centre, fixed at a height between 450 mm and 700 mm in a Class 9b *early childhood centre*; and
 - (d) in any other case, be fixed at a height of not less than 865 mm; and
 - (e) be continuous between stair *flight* landings and have no obstruction on or above them that will tend to break a hand-hold; and
 - (f) in a *required exit* serving an area *required* to be *accessible*, be designed and constructed to comply with clause 9 of AS 1428.1, except that clause 9(d) does not apply to a handrail *required* by (1)(c)(ii).
- (2) For the purposes of (1) the following applies.
- (a) (1) does not apply to—
 - (i) handrails referred to in D3D23; and
 - (ii) *step ramps, threshold ramps* and *kerb ramps*.
 - (b) The height *required* by (1)(c) and (d) is measured above the nosings of stair treads and the floor surface of the ramp, landing or the like.
- (3) Handrails—
- (a) in a Class 9a *health-care building* must be provided along at least one side of every passageway or corridor used by patients, and must be—
 - (i) fixed not less than 50 mm clear of the wall; and
 - (ii) where practicable, continuous for their full length; and
 - (b) in a Class 9c *aged care building* must be provided along both sides of every passageway or corridor used by residents, and must be—
 - (i) fixed not less than 50 mm clear of the wall; and
 - (ii) where practicable, continuous for their full length.
- (4) Handrails *required* to assist people with a disability must be provided in accordance with D4D4.
- (5) Handrails to a stairway or ramp within a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building must—
- (a) be located along at least one side of the *flight* or ramp; and
 - (b) be located along the full length of the *flight* or ramp, except in the case where a handrail is associated with a barrier, the handrail may terminate where the barrier terminates; and

- (c) have the top surface of the handrail not less than 865 mm vertically above the nosings of the stair treads or the floor surface of the ramp; and
 - (d) have no obstruction on or above them that will tend to break a handhold, except for newel posts, ball type stanchions, or the like.
- (6) The requirements of (5) do not apply to—
- (a) handrails referred to in [D3D23](#); or
 - (b) a stairway or ramp providing a change in elevation of less than 1 m; or
 - (c) a landing; or
 - (d) a winder where a newel post is installed to provide a handhold.

SA D3D23

D3D23 Fixed platforms, walkways, stairways and ladders

A fixed platform, walkway, stairway, ladder and any going and riser, landing, handrail or barrier attached thereto may comply with AS 1657 in lieu of [D3D14](#), [D3D15](#), [D3D17](#), [D3D18](#), [D3D19](#), [D3D20](#), [D3D21](#) and [D3D22](#) if it only serves—

- (a) machinery rooms, boiler houses, lift-machine rooms, plant-rooms, and the like; or
- (b) non-*habitable rooms*, such as attics, storerooms and the like that are not used on a frequent or daily basis in the internal parts of a *sole-occupancy unit* in a Class 2 building or Class 4 part of a building.

D3D24 Doorways and doors

- (1) A doorway in a *resident use area* of a Class 9c building must not be fitted with—
- (a) a sliding fire door; or
 - (b) a sliding smoke door; or
 - (c) a revolving door; or
 - (d) a roller shutter door; or
 - (e) a tilt-up door.

NSW D3D24(2)

- (2) A doorway serving as a *required exit* or forming part of a *required exit*, or a doorway in a *patient care area* of a Class 9a *health-care building*—
- (a) must not be fitted with a revolving door; and
 - (b) must not be fitted with a roller shutter or tilt-up door unless—
 - (i) it serves a Class 6, 7 or 8 building or part with a *floor area* not more than 200 m²; and
 - (ii) the doorway is the only *required exit* from the building or part; and
 - (iii) it is held in the open position while the building or part is lawfully occupied; and
 - (c) must not be fitted with a sliding door unless—
 - (i) it leads directly to a road or *open space*; and
 - (ii) the door is able to be opened manually under a force of not more than 110 N; and
 - (d) if fitted with a door which is power-operated—
 - (i) it must be able to be opened manually under a force of not more than 110 N if there is a malfunction or failure of the power source; and
 - (ii) if it leads directly to a road or *open space* it must open automatically if there is a power failure to the door or on the activation of a fire or smoke alarm anywhere in the *fire compartment* served by the door.
- (3) A power-operated door in a path of travel to a *required exit*, except for a door in a *patient care area* of a Class 9a

health-care building as provided in (2), must be able to be opened manually under a force of not more than 110 N if there is a malfunction or failure of the power source.

D3D25 Swinging doors

SA D3D25(1)

- (1) A swinging door in a *required exit* or forming part of a *required exit*—
 - (a) must not encroach—
 - (i) at any part of its swing by more than 500 mm on the *required* width (including any landings) of a *required* stairway, ramp or passageway if it is likely to impede the path of travel of the people already using the *exit*; and
 - (ii) when fully open, by more than 100 mm on the *required* width of the *required exit*; and
 - (b) must swing in the direction of egress unless—
 - (i) it serves a building or part with a *floor area* not more than 200 m², it is the only *required exit* from the building or part and it is fitted with a device for holding it in the open position; or
 - (ii) it serves a *sanitary compartment* or airlock (in which case it may swing in either direction); and
 - (c) must not otherwise impede the path or direction of egress.
- (2) The measurement of encroachment referred to in (1)(a) in each case is to include door handles or other furniture or attachments to the door.

D3D26 Operation of latch

- (1) A door in a *required exit*, forming part of a *required exit* or in the path of travel to a *required exit* must be readily openable without a key from the side that faces a person seeking egress, by—
 - (a) a single hand downward action on a single device which is located between 900 mm and 1.1 m from the floor and if serving an area *required* to be *accessible* by Part D4—
 - (i) be such that the hand of a person who cannot grip will not slip from the handle during the operation of the latch; and
 - (ii) have a clearance between the handle and the back plate or door face at the centre grip section of the handle of not less than 35 mm and not more than 45 mm; or
 - (b) a single hand pushing action on a single device which is located between 900 mm and 1.2 m from the floor.
- (2) Where the latch operation device referred to in (1)(b) is not located on the door leaf itself—
 - (a) manual controls to power-operated doors must be at least 25 mm wide, proud of the surrounding surface and located—
 - (i) not less than 500 mm from an internal corner; and
 - (ii) for a hinged door, between 1 m and 2 m from the door leaf in any position; and
 - (iii) for a sliding door, within 2 m of the doorway and clear of a surface mounted door in the open position; and
 - (b) braille and tactile signage complying with S15C3 and S15C6 must identify the latch operation device.
- (3) The requirements of (1) and (2) do not apply to a door that—
 - (a) serves a vault, strong-room, *sanitary compartment*, or the like; or
 - (b) serves only, or is within—
 - (i) a *sole-occupancy unit* in a Class 2 building or a Class 4 part of a building; or
 - (ii) a *sole-occupancy unit* in a Class 3 building (other than an entry door to a *sole-occupancy unit* of a boarding house, guest house, hostel, lodging house or backpacker accommodation); or
 - (iii) a *sole-occupancy unit* with a *floor area* not more than 200 m² in a Class 5, 6, 7 or 8 building; or
 - (iv) a space which is otherwise inaccessible to persons at all times when the door is locked; or

- (c) complies with (4) and serves—
 - (i) Australian Government Security Zones 4 or 5; or
 - (ii) the secure parts of a bank, *detention centre*, mental health facility, *early childhood centre* or the like; or
 - (d) is fitted with a fail-safe device which *automatically* unlocks the door upon the activation of any sprinkler system (other than a FPAA101D system) complying with *Specification 17* or smoke, or any other detector system deemed suitable in accordance with AS 1670.1 installed throughout the building, and is readily openable when unlocked; or
 - (e) is in a Class 9a or 9c building and—
 - (i) is one leaf of a two-leaf door complying with *D2D9(a)* or *D2D9(d)* provided that it is not held closed by a locking mechanism and is readily openable; and
 - (ii) the door is not *required* to be a fire door or smoke door.
- (4) A door referred to in (3)(c) must be able to be immediately unlocked—
- (a) by operating a fail-safe control switch, not contained within a protective enclosure, to actuate a device to unlock the door; or
 - (b) by hand by a person or persons, specifically nominated by the owner, properly instructed as to the duties and responsibilities involved and available at all times when the building is lawfully occupied so that persons in the building or part may immediately escape if there is a fire.

NSW D3D26(5)

- (5) The requirements of (1) and (2) do not apply in a Class 9b building (other than a *school*, an *early childhood centre* or a building used for religious purposes) to a door in a *required exit*, forming part of a *required exit* or in the path of travel to a *required exit* serving a *storey* or room accommodating more than 100 persons, determined in accordance with *D2D18*, in which case it must be readily openable—
- (a) without a key from the side that faces a person seeking egress; and
 - (b) by a single hand pushing action on a single device such as a panic bar located between 900 mm and 1.2 m from the floor; and
 - (c) where a two-leaf door is fitted, the provisions of (a) and (b) need only apply to one door leaf if the appropriate requirements of *D2D9* are satisfied by the opening of that one leaf.

NSW D3D26(6)

VIC D3D26(6)

D3D27 Re-entry from fire-isolated exits

- (1) Doors of a fire-isolated *exit* must not be locked from the inside as follows:
- (a) In a Class 2 building.
 - (b) In a Class 3 building.
 - (c) In a Class 6 building.
 - (d) In a Class 7a building.
 - (e) In a Class 9 building.
 - (f) In a fire-isolated *exit* serving any storey above an *effective height* of 25 m, throughout the *exit*.
- (2) The requirements of (1) do not apply to a door, other than a door in a Class 9b *early childhood centre*, fitted with a fail-safe device that *automatically* unlocks the door upon the activation of a fire alarm and—
- (a) re-entry is facilitated by—
 - (i) on at least every fourth *storey*, the doors are not able to be locked and a sign is fixed on such doors stating that re-entry is available; and
 - (ii) on at least every second *storey* where re-entry is not available, a sign is fixed to the wall within the fire-isolated *exit* within 1.5 m of the *exit* door stating the location of nearby re-entry; or
 - (b) an intercommunication system, or an audible or visual alarm system, operated from within the enclosure is

provided near the doors on at least every fourth *storey*, and a sign is fixed adjacent to such doors explaining its purpose and method of operation, and on at least every second *storey* where re-entry is not available, a sign is fixed to the wall within the fire-isolated *exit* within 1.5 m of the *exit* door stating the location of a nearby intercommunication system.

- (3) The requirements of (1)(e) do not apply to a door in a Class 9b *early childhood centre* fitted with a fail-safe device that *automatically* unlocks the door upon the activation of a fire alarm.

D3D28 Signs on doors

- (1) A sign, to alert persons that the operation of certain doors must not be impaired, must be installed where it can readily be seen on, or adjacent to—
- (a) a *required*—
- (i) fire door providing direct access to a fire-isolated *exit*, except a door providing direct egress from a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building; and
 - (ii) smoke door; and
- (b) any door which is a—
- (i) fire door forming part of a *horizontal exit*; and
 - (ii) smoke door that swings in both directions; and
 - (iii) door leading from a fire isolated *exit* to a road or *open space*.
- (2) A sign *required* by (1)(a) must be fixed on the side of the door that faces a person seeking egress and, if the door is fitted with a device for holding it in the open position, either a sign must be fixed on the wall adjacent to the doorway, or signs must be fixed to both sides of the door.
- (3) A sign *required* by (1)(b) must be fixed on each side of the door.
- (4) A sign referred to in (1) must be in capital letters not less than 20 mm high in a colour contrasting with the background and state the following:
- (a) For an *automatic* door held open by an *automatic* hold-open device—

FIRE SAFETY DOOR — DO NOT OBSTRUCT

- (b) For a *self-closing* door—

**FIRE SAFETY DOOR
DO NOT OBSTRUCT
DO NOT KEEP OPEN**

- (c) For a door discharging from a fire-isolated *exit*—

FIRE SAFETY DOOR — DO NOT OBSTRUCT

D3D29 Protection of openable windows

- (1) A window opening must be provided with protection, if the floor below the window is 2 m or more above the surface beneath in—
- (a) a bedroom in a Class 2 or 3 building or Class 4 part of a building; or
- (b) a Class 9b *early childhood centre*.
- (2) Where the lowest level of the window opening is less than 1.7 m above the floor, a window opening covered by (1) must comply with the following:
- (a) The openable portion of the window must be protected with—
- (i) a device capable of restricting the window opening; or
 - (ii) a screen with secure fittings.
- (b) A device or screen *required* by (a) must—

- (i) not permit a 125 mm sphere to pass through the window opening or screen; and
 - (ii) resist an outward horizontal action of 250 N against the—
 - (A) window restrained by a device; or
 - (B) screen protecting the opening; and
 - (iii) have a child resistant release mechanism if the screen or device is able to be removed, unlocked or overridden.
- (3) A barrier with a height not less than 865 mm above the floor is **required** to an openable window—
- (a) in addition to window protection, when a child resistant release mechanism is **required** by (2)(b)(iii); and
 - (b) where the floor below the window is 4 m or more above the surface beneath if the window is not covered by (1).
- (4) A barrier covered by (3) except for (5) must not—
- (a) permit a 125 mm sphere to pass through it; and
 - (b) have any horizontal or near horizontal elements between 150 mm and 760 mm above the floor that facilitate climbing.
- (5) A barrier **required** by (3) to an openable window in—
- (a) **fire-isolated stairways**, **fire-isolated ramps** and other areas used primarily for emergency purposes, excluding external stairways and external ramps; and
 - (b) Class 7 (other than **carparks**) and Class 8 buildings and parts of buildings containing those classes, must not permit a 300 mm sphere to pass through it.

D3D30 Timber stairways: Concession

- (1) Notwithstanding D3D3(a), timber treads, risers, landings and associated supporting framework within a **required fire-isolated stairway** or **fire-isolated passageway** may be constructed from **fire-protected timber** in accordance with C2D13—
- (a) if the timber—
 - (i) has a finished thickness of not less than 44 mm; and
 - (ii) has an average density of not less than 800 kg/m³ at a moisture content of 12%; and
 - (b) subject to—
 - (i) the building being protected throughout by a sprinkler system (other than a FPAA101D system) complying with **Specification 17** which extends to within the fire-isolated enclosure; and
 - (ii) fire protection being provided to the underside of stair **flights** and landings located immediately above a landing level which—
 - (A) is at or near the level of egress; or
 - (B) provides direct access to a carpark.
- (2) Fire protection required by (1) must be not less than one layer of 13 mm fire-protective grade plasterboard fixed in accordance with the system requirements for a **fire-protective covering**.

D3D31 Wayfinding signage

- (1) Buildings with an **effective height** of more than 12 m or with more than 3 below ground **storeys** must be provided with stairway identification signs, floor level identification signs and **sole-occupancy unit** indicator signs in accordance with (2) to (6).
- (2) Stairway identification signs must—
- (a) be located external to the **exit** on or adjacent to all doors that provide access into **required fire-isolated stairways**, including discharge doors; and

- (b) identify the floor levels served where the *required fire-isolated stairway* does not serve all floor levels; and
 - (c) state—
 - (i) “Stair”, or in the case of a scissor stair “Scissor Stair”, and
 - (ii) a unique stair descriptor; and
 - (d) use text that—
 - (i) is not less than 50 mm high; and
 - (ii) contrasts with its background; and
 - (iii) is legible in low level lighting conditions or when illuminated with a torch.
- (3) Floor level identification signs must—
- (a) be located—
 - (i) at every landing that is located at a floor level and is in a *required fire-isolated stairway*; and
 - (ii) at every corridor or lobby into which an emergency lift or lift with a stretcher facility opens; and
 - (b) be visible from the top step of the *flight* serving the relevant floor and, where possible, from inside the relevant lift where the lift car door open; and
 - (c) be mounted between 1.7 m and 2 m above floor level and, as far as practicable, at the same height; and
 - (d) where within a *required fire-isolated stairway*, identify that *required exit* stairway in accordance with (2)(c); and
 - (e) state—
 - (i) “Ground Floor” when identifying the ground floor level; or
 - (ii) “Level”, or in the case of a basement level “Basement”, in conjunction with a floor level descriptor; and
 - (f) use text that—
 - (i) is not less than 50 mm high, except the height of the character that designates the floor level descriptor must be at least 100 mm high; and
 - (ii) contrasts with the background, and
 - (iii) is legible in low level lighting conditions or when illuminated with a torch.
- (4) The floor level descriptor *required* by (3)(e)(ii) must—
- (a) for floor level above the ground floor, be numbered sequentially beginning with “1”, and
 - (b) for basement levels below the ground floor, be numbered sequentially beginning with “1”.
- (5) Where a *storey* in a Class 2 or Class 3 building contains more than one *sole-occupancy unit*, *sole-occupancy unit* indicator signs must be provided that state the direction to *sole-occupancy units* accessed on that *storey*.
- (6) *Sole-occupancy unit* identification signs required by (5) must—
- (a) be located immediately below floor identification signs provided under (3)(a), such that the top edge of the sign is not more than 50 mm below the bottom edge of the floor identification sign; and
 - (b) state—
 - (i) “Units” or another suitable descriptor such as “Rooms” or “Apartments”; and
 - (ii) a sequential descriptor of the range of *sole-occupancy units* in each direction relative to the location of the sign; and
 - (iii) the direction in which the range of *sole-occupancy units* are relative to the location of the sign, such as by an arrow symbol; and
 - (c) use text and symbols that—
 - (i) are not less than 25 mm high; and
 - (ii) contrast with the background; and
 - (iii) are legible in low level lighting conditions or when illuminated with a torch.

Notes

- (1) Where a *sole-occupancy unit* is accessed from 2 or more *storeys*, the *sole-occupancy unit* need only be identified

by a *sole-occupancy unit* identification sign on the primary access *storey*.

- (2) Stairway, floor level and *sole-occupancy unit* designations are to be consistent with designations used in block plans and other *fire safety system* documentation.
- (3) Notwithstanding D3D31(3)(e) and D3D31(4)—
 - (a) abbreviations (such as 'G' for 'Ground Floor') may be used; and
 - (b) the ground level may be identified as 'Level 1'; and
 - (c) *mezzanines*, split levels (such as lower ground and upper ground) and the like may be identified accordingly.

Explanatory Information

Each *required fire-isolated stairway* and floor level is to be provided with a unique descriptor to assist co-ordination of egress and *fire brigade* activities. For example, a building may be provided with 2 *required fire-isolated stairways*, A and B. Stairway identification signs and floor identification signs for stairway B must contain the text "Stair B".

NSW D3D31

Part D4 Access for people with a disability

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for Part D1. It covers which buildings, and parts of a building, must be *accessible*, provision of *accessible* carparking spaces, braille and tactile signage, hearing augmentation, tactile ground surface indicators and seating in *assembly buildings* (e.g. cinemas), and access to *swimming pools*.

Deemed-to-Satisfy Provisions

D4D1 Deemed-to-Satisfy Provisions

TAS D4D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* D1P1 to D1P6, D1P8 and D1P10 are satisfied by complying with—
 - (a) D2D2 to D2D23, D3D2 to D3D31 and D4D2 to D4D13; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) in a building in an *alpine area*, Part G4; and
 - (d) for additional requirements for Class 9b buildings, Part I1; and
 - (e) for public transport buildings, Part I2.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

TAS D4D1(3)

- (3) *Performance Requirement* D1P7 must be complied with if lifts are to be used to assist occupants to evacuate a building.

D4D2 General building access requirements

- (1) Buildings and parts of buildings must be *accessible* as *required* by this clause, unless exempted by D4D5.
- (2) Access requirements for a Class 1b building are as follows:
 - (a) Dwellings located on one allotment and used for short-term holiday accommodation — to and within a number of dwellings determined in accordance with Table D4D2a.
 - (b) A boarding house, bed and breakfast, guest house, hostel or the like, other than those described in (a) — to and within—
 - (i) one bedroom and associated sanitary facilities; and
 - (ii) not less than one of each type of room or space for use in common by the residents or guests, including a cooking facility, sauna, gymnasium, *swimming pool*, laundry, games room, eating area, or the like; and
 - (iii) rooms or spaces for use in common by all residents on a floor to which access by way of a ramp complying with AS 1428.1 or a passenger lift is provided.
- (3) For the purposes of (2)(a), a community or strata-type subdivision or development is considered to be on a single allotment.

SA D4D2(4)

- (4) For a Class 2 building, common areas are to be *accessible* as follows:
 - (a) From a pedestrian entrance *required* to be *accessible* to at least one floor containing *sole-occupancy units* and

- to the entrance doorway of each *sole-occupancy unit* located on that level.
- (b) To and within not less than one of each type of room or space for use in common by the residents, including a cooking facility, sauna, gymnasium, *swimming pool*, common laundry, games room, individual shop, eating area, or the like.
 - (c) Where a ramp complying with AS 1428.1 or a passenger lift is installed—
 - (i) to the entrance doorway of each *sole-occupancy unit*; and
 - (ii) to and within rooms or spaces for use in common by the residents.
 - (d) The requirements of (c) only apply where the space referred to in (c)(i) or (ii) is located on the levels served by the lift or ramp.
- (5) For a Class 3 building, access requirements are as follows:
- (a) Common areas:
 - (i) From a pedestrian entrance *required* to be *accessible* to at least one floor containing *sole-occupancy units* and to the entrance doorway of each *sole-occupancy unit* located on that level.
 - (ii) To and within not less than one of each type of room or space for use in common by the residents, including a cooking facility, sauna, gymnasium, *swimming pool*, common laundry, games room, TV room, individual shop, dining room, public viewing area, ticket purchasing service, lunch room, lounge room, or the like.
 - (iii) Where a ramp complying with AS 1428.1 or a passenger lift is installed—
 - (A) to the entrance doorway of each *sole-occupancy unit*; and
 - (B) to and within rooms or spaces for use in common by the residents.
 - (iv) The requirements of (iii) only apply where the space referred to in (iii)(A) or (iii)(B) is located on the levels served by the lift or ramp.
 - (b) To and within *sole-occupancy units* — in accordance with Table D4D2b.
- (6) For Class 5, 6, 7b, 8 and 9a buildings, access must be provided to and within all areas normally used by the occupants.
- (7) For a Class 7a building, access must be provided to and within any level containing *accessible* carparking spaces.
- (8) For a Class 9b building, access requirements are as follows:
- (a) *Schools* and *early childhood centres* — to and within all areas normally used by the occupants.
 - (b) An *assembly building*, not being a *school* or *early childhood centre* — to and within—
 - (i) wheelchair seating spaces provided in accordance with D4D10; and
 - (ii) all other areas normally used by the occupants, except that access need not be provided to tiers or platforms of seating areas that do not contain wheelchair seating spaces.
- (9) For a Class 9c building, access requirements are as follows:
- (a) Common areas:
 - (i) From a pedestrian entrance *required* to be *accessible* to at least one floor containing *sole-occupancy units* and to the entrance doorway of each *sole-occupancy unit* located on that level.
 - (ii) To and within not less than one of each type of room or space for use in common by the residents, including a cooking facility, sauna, gymnasium, *swimming pool*, common laundry, games room, TV room, individual shop, dining room, public viewing area, ticket purchasing service, lunch room, lounge room, or the like.
 - (iii) Where a ramp complying with AS 1428.1 or a passenger lift is installed—
 - (A) to the entrance doorway of each *sole-occupancy unit*; and
 - (B) to and within rooms or spaces for use in common by the residents.
 - (iv) The requirements of (iii) only apply where the space referred to in (iii)(A) or (iii)(B) is located on the levels served by the lift or ramp.
 - (b) *Sole-occupancy units* — to and within a number of *sole-occupancy units* determined in accordance with Table D4D2b.
- (10) For a Class 10 building, access requirements are as follows:
- (a) For a Class 10a non-habitable building located in an *accessible* area intended for use by the public and containing a sanitary facility, change room facility or shelter, to and within—

- (i) an *accessible* sanitary facility; and
 - (ii) a change room facility; and
 - (iii) a public shelter or the like.
- (b) For Class 10b *swimming pools*, to and into *swimming pools* with a total perimeter greater than 40 m, associated with a Class 1b, 2, 3, 5, 6, 7, 8 or 9 building that is *required* to be *accessible*, but not *swimming pools* for the exclusive use of occupants of a Class 1b building or a *sole-occupancy unit* in a Class 2 or Class 3 building.

Table D4D2a: Requirements for access for people with a disability – sole-occupancy units in a Class 1b building

Total number of dwellings	Number <i>required</i> to be <i>accessible</i>
4 to 10	1
11 to 40	2
41 to 60	3
61 to 80	4
81 to 100	5
More than 100	5 dwellings plus 1 additional dwelling for each additional 30 dwellings or part thereof in excess of 100 dwellings.

Table D4D2b: Requirements for access for people with a disability – sole-occupancy units in a Class 3 or 9c building

Total number of <i>sole-occupancy units</i>	Number <i>required</i> to be <i>accessible</i>
1 to 10	1
11 to 40	2
41 to 60	3
61 to 80	4
81 to 100	5
101 to 200	5 <i>sole-occupancy units</i> plus 1 additional <i>sole-occupancy unit</i> for each additional 25 units or part thereof in excess of 100.
201 to 500	9 <i>sole-occupancy units</i> plus 1 additional <i>sole-occupancy unit</i> for each additional 30 units or part thereof in excess of 200.
More than 500	19 <i>sole-occupancy units</i> plus 1 additional <i>sole-occupancy unit</i> for each additional 50 units or part thereof in excess of 500.

Table Notes


- (1) In a Class 3 building, not more than 2 *required accessible sole-occupancy units* may be located adjacent to each other.
- (2) In a Class 3 or 9c building where more than 2 *accessible sole-occupancy units* are *required*, they must be representative of the range of rooms available.

D4D3 Access to buildings

- (1) An *accessway* must be provided to a building *required* to be *accessible*—
 - (a) from the main points of a pedestrian entry at the allotment boundary; and
 - (b) from another *accessible* building connected by a pedestrian link; and

- (c) from any **required accessible** carparking space on the allotment.
- (2) In a building **required** to be **accessible**, an **accessway** must be provided through the principal pedestrian entrance, and—
- (a) through not less than 50% of all pedestrian entrances including the principal pedestrian entrance; and
 - (b) in a building with a total **floor area** more than 500 m², a pedestrian entrance which is not **accessible** must not be located more than 50 m from an **accessible** pedestrian entrance,
- except for pedestrian entrances serving only areas exempted by D4D5.
- (3) Where a pedestrian entrance **required** to be **accessible** has multiple doorways—
- (a) if the pedestrian entrance consists of not more than 3 doorways — not less than 1 of those doorways must be **accessible**; and
 - (b) if a pedestrian entrance consists of more than 3 doorways — not less than 50% of those doorways must be **accessible**.
- (4) For the purposes of (3)—
- (a) an **accessible** pedestrian entrance with multiple doorways is considered to be one pedestrian entrance where—
 - (i) all doorways serve the same part or parts of the building; and
 - (ii) the distance between each doorway is not more than the width of the widest doorway at that pedestrian entrance (see Figure D4D3); and
 - (b) a doorway is considered to be the clear, unobstructed opening created by the opening of one or more door leaves (see Figure D4D3).
- (5) Where a doorway on an **accessway** has multiple leaves (except an automatic opening door), one of those leaves must have a clear opening width of not less than 850 mm in accordance with AS 1428.1.

Figure D4D3: Doorways and pedestrian entrances for access purposes

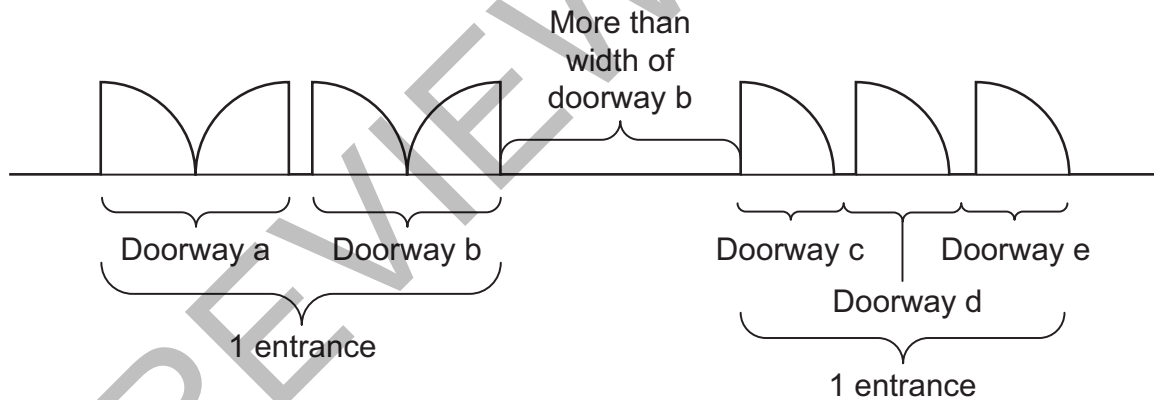

D4D4 Parts of buildings to be accessible

In a building **required** to be **accessible**—

- (a) every ramp and stairway, except for ramps and stairways in areas exempted by D4D5, must comply with—
 - (i) for a ramp, except a **fire-isolated ramp**, clause 7 of AS 1428.1; and
 - (ii) for a stairway, except a **fire-isolated stairway**, clause 8 of AS 1428.1; and
 - (iii) for a **fire-isolated stairway**, clause 8.1(f) and (g) of AS 1428.1; and
- (b) every passenger lift must comply with E3D7 and E3D8; and
- (c) **accessways** must have—
 - (i) passing spaces complying with AS 1428.1 at maximum 20 m intervals on those parts of an **accessway** where a direct line of sight is not available; and
 - (ii) turning spaces complying with AS 1428.1—

- (A) within 2 m of the end of *accessways* where it is not possible to continue travelling along the *accessway*; and
- (B) at maximum 20 m intervals along the *accessway*; and
- (d) an intersection of *accessways* satisfies the spatial requirements for a passing and turning space; and
- (e) a passing space may serve as a turning space; and
- (f) a ramp complying with AS 1428.1 or a passenger lift need not be provided to serve a *storey* or level other than the entrance *storey* in a Class 5, 6, 7b or 8 building—
 - (i) containing not more than 3 *storeys*; and
 - (ii) with a *floor area* for each *storey*, excluding the entrance *storey*, of not more than 200 m².

SA D4D5

TAS D4D5

D4D5 Exemptions

The following areas are not *required* to be *accessible*:

- (a) An area where access would be inappropriate because of the particular purpose for which the area is used.
- (b) An area that would pose a health or safety risk for people with a disability.
- (c) Any path of travel providing access only to an area exempted by (a) or (b).

D4D6 Accessible carparking

- (1) *Accessible* carparking spaces—
 - (a) subject to (b), must be provided in accordance with (2) in—
 - (i) a Class 7a building *required* to be *accessible*; and
 - (ii) a carparking area on the same allotment as a building *required* to be *accessible*; and
 - (b) need not be provided in a Class 7a building or a carparking area where a parking service is provided and direct access to any of the carparking spaces is not available to the public; and
 - (c) subject to (d), must comply with AS/NZS 2890.6; and
 - (d) need not be identified with signage where there is a total of not more than 5 carparking spaces, so as to restrict the use of the carparking space only for people with a disability.
- (2) For each class of building to which the *carpark* or carparking area is associated, the number of *accessible* carparking spaces *required* is as follows:
 - (a) Class 1b and 3 buildings:
 - (i) For a boarding house, guest house, hostel, lodging house, backpackers' accommodation or the residential part of a hotel or motel, the number of *accessible* carparking spaces *required* is to be calculated by multiplying the total number of carparking spaces by the percentage of —
 - (A) *accessible sole-occupancy units* to the total number of *sole-occupancy units*; or
 - (B) *accessible* bedrooms to the total number of bedrooms.
 - (ii) For the purposes of (i), the calculated number is taken to the next whole figure.
 - (iii) For a residential part of a *school*, accommodation for the aged, disabled or children, residential part of a *health-care building* which accommodates members of staff or the residential part of a *detention centre* — 1 *accessible* space for every 100 carparking spaces or part thereof.
 - (b) Class 5, 7, 8 or 9c buildings — 1 *accessible* space for every 100 carparking spaces or part thereof.
 - (c) Class 6 buildings—
 - (i) with up to 1000 carparking spaces — 1 *accessible* space for every 50 carparking spaces or part thereof;

and

- (ii) for each additional 100 carparking spaces or part thereof in excess of 1000 carparking spaces — 1 **accessible** space.
- (d) Class 9a buildings:
 - (i) For a hospital (non-outpatient area) — 1 **accessible** space for every 100 carparking spaces or part thereof.
 - (ii) For a hospital (outpatient area)—
 - (A) with up to 1000 carparking spaces — 1 **accessible** space for every 50 carparking spaces or part thereof; and
 - (B) for each additional 100 carparking spaces or part thereof in excess of 1000 carparking spaces — 1 **accessible** space.
 - (iii) For a nursing home — 1 **accessible** space for every 100 carparking spaces or part thereof.
 - (iv) For a clinic or day surgery not forming part of a hospital — 1 **accessible** space for every 50 carparking spaces or part thereof.
- (e) Class 9b buildings:
 - (i) For a **school** — 1 **accessible** space for every 100 carparking spaces or part thereof.
 - (ii) For other **assembly buildings**—
 - (A) with up to 1000 carparking spaces — 1 **accessible** space for every 50 carparking spaces or part thereof; and
 - (B) for each additional 100 carparking spaces or part thereof in excess of 1000 carparking spaces — 1 **accessible** space.

D4D7 Signage

- (1) In a building **required** to be **accessible**—
 - (a) braille and tactile signage complying with **Specification 15** must—
 - (i) incorporate the international symbol of access or deafness, as appropriate, in accordance with AS 1428.1 and identify each—
 - (A) sanitary facility, except a sanitary facility associated with a bedroom in a Class 1b building or a **sole-occupancy unit** in a Class 3 or Class 9c building; and
 - (B) space with a hearing augmentation system; and
 - (ii) identify each door **required** by **E4D5** to be provided with an **exit** sign and state—
 - (A) “Exit”; and
 - (B) “Level”; and
 - (C) the floor level number or floor level descriptor, or a combination of the two.
 - (b) signage including the international symbol for deafness in accordance with AS 1428.1 must be provided within a room containing a hearing augmentation system identifying—
 - (i) the type of hearing augmentation; and
 - (ii) the area covered within the room; and
 - (iii) if receivers are being used and where the receivers can be obtained; and
 - (c) signage in accordance with AS 1428.1 must be provided for **accessible** unisex sanitary facilities to identify if the facility is suitable for left or right handed use; and
 - (d) signage to identify an ambulant **accessible** sanitary facility in accordance with AS 1428.1 must be located on the door of the facility; and
 - (e) where a pedestrian entrance is not **accessible**, directional signage incorporating the international symbol of access, in accordance with AS 1428.1, must be provided to direct a person to the location of the nearest **accessible** pedestrian entrance; and
 - (f) where a bank of sanitary facilities is not provided with an **accessible** unisex sanitary facility, directional signage

incorporating the international symbol of access in accordance with AS 1428.1 must be placed at the location of the sanitary facilities that are not *accessible*, to direct a person to the location of the nearest *accessible* unisex sanitary facility.

- (2) In a building that is subject to *F4D12* and is *required* to be *accessible*, directional signage complying with *Specification 15* to direct a person to the location of the nearest *accessible* adult change facility within that building must be provided at the location of each—
- (a) bank of sanitary facilities; and
 - (b) *accessible* unisex sanitary facility, other than one that incorporates an *accessible* adult change facility.

D4D8 Hearing augmentation

- (1) A hearing augmentation system must be provided where an inbuilt amplification system, other than one used only for emergency warning, is installed—
- (a) in a room in a Class 9b building; or
 - (b) in an auditorium, conference room, meeting room or room for judicatory purposes; or
 - (c) at any ticket office, teller's booth, reception area or the like, where the public is screened from the service provider.
- (2) If a hearing augmentation system *required* by (1) is—
- (a) an induction loop, it must be provided to not less than 80% of the *floor area* of the room or space served by the inbuilt amplification system; or
 - (b) a system requiring the use of receivers or the like, it must be available to not less than 95% of the *floor area* of the room or space served by the inbuilt amplification system, and the number of receivers provided must not be less than—
 - (i) if the room or space accommodates up to 500 persons, 1 receiver for every 25 persons or part thereof, or 2 receivers, whichever is the greater; and
 - (ii) if the room or space accommodates more than 500 persons but not more than 1000 persons, 20 receivers plus 1 receiver for every 33 persons or part thereof in excess of 500 persons; and
 - (iii) if the room or space accommodates more than 1000 persons but not more than 2000 persons, 35 receivers plus 1 receiver for every 50 persons or part thereof in excess of 1000 persons; and
 - (iv) if the room or space accommodates more than 2000 persons, 55 receivers plus 1 receiver for every 100 persons or part thereof in excess of 2000 persons.
- (3) The number of persons accommodated in the room or space served by an inbuilt amplification system must be calculated according to *D2D18*.
- (4) Any screen or scoreboard associated with a Class 9b building and capable of displaying public announcements must be capable of supplementing any public address system, other than a public address system used for emergency warning purposes only.

D4D9 Tactile indicators

- (1) For a building *required* to be *accessible*, tactile ground surface indicators must be provided to warn people who are blind or have a vision impairment that they are approaching—
- (a) a stairway, other than a *fire-isolated stairway*; and
 - (b) an escalator; and
 - (c) a passenger conveyor or moving walk; and
 - (d) a ramp other than a *fire-isolated ramp*, step ramp, kerb ramp or *swimming pool* ramp; and
 - (e) in the absence of a suitable barrier—
 - (i) an overhead obstruction less than 2 m above floor level, other than a doorway; and
 - (ii) an *accessway* meeting a vehicular way adjacent to any pedestrian entrance to a building, excluding a

pedestrian entrance serving an area referred to in D4D5, if there is no kerb or kerb ramp at that point, except for areas exempted by D4D5.

- (2) Tactile ground surface indicators *required* by (1) must comply with sections 1 and 2 of AS/NZS 1428.4.1.
- (3) A hostel for the aged, nursing home for the aged, a *residential aged care building*, Class 3 accommodation for the aged, Class 9a *health-care building* or a Class 9c *aged care building* need not comply with (1)(a) and (d) if handrails incorporating a raised dome button in accordance with AS/NZS 1428.4.1 are provided to warn people who are blind or have a vision impairment that they are approaching a stairway or ramp.

D4D10 Wheelchair seating spaces in Class 9b assembly buildings

Where fixed seating is provided in a Class 9b *assembly building*, wheelchair seating spaces complying with AS 1428.1 must be provided in accordance with the following:

- (a) The number and grouping of wheelchair seating spaces must be in accordance with Table D4D10.
- (b) In a cinema—
 - (i) with not more than 300 seats — wheelchair seating spaces must not be located in the front row of seats; and
 - (ii) with more than 300 seats — not less than 75% of *required* wheelchair seating spaces must be located in rows other than the front row of seats.

Table D4D10: Wheelchair seating spaces in Class 9b assembly buildings

Fixed seats in a room or space	Wheelchair spaces ^{Note 1}		Grouping and location			Spaces must represent range of seating provided ^{Note 3}
	Minimum spaces required	1 additional space required per ^{Note 2}	Min. single spaces	Min. groups of 2 spaces	Max. spaces in any other group	
Up to 150	3	N/A	1	1	N/A	No
151 to 800	3	50 seats in excess of 150 seats	1	1	5	No
801 to 10 000	16	100 seats in excess of 800 seats	2	2	5	Yes
More than 10 000	108	200 seats in excess of 10 000 seats	5	5	10	Yes

Table Notes

- (1) The total number of *required* wheelchair spaces is the sum of the minimum spaces *required* (left column) and the additional spaces *required* (right column).
- (2) The first number referred to includes any part of that number (e.g. 1 additional space *required* per 50 seats or part thereof).
- (3) This means that the location of *required* wheelchair spaces must be representative of the range of seating provided.

D4D11 Swimming pools

- (1) Not less than 1 means of *accessible* water entry/exit in accordance with *Specification 16* must be provided for each *swimming pool required* by D4D2 to be *accessible*.
- (2) An *accessible* entry/exit must be by means of—

- (a) a fixed or movable ramp and an aquatic wheelchair; or
 - (b) a zero depth entry and an aquatic wheelchair; or
 - (c) a platform *swimming pool* lift and an aquatic wheelchair; or
 - (d) a sling-style *swimming pool* lift.
- (3) Where a *swimming pool* has a perimeter of more than 70 m, at least one *accessible* water entry/exit must be provided by a means specified in (2)(a), (b) or (c).
- (4) Latching devices on gates and doors forming part of a *swimming pool* safety barrier need not comply with AS 1428.1.

D4D12 Ramps

On an *accessway*—

- (a) a series of connected ramps must not have a combined vertical rise of more than 3.6 m; and
- (b) a landing for a step ramp must not overlap a landing for another step ramp or ramp.

D4D13 Glazing on an accessway

On an *accessway*, where there is no chair rail, handrail or transom, all frameless or fully glazed doors, sidelights and any glazing capable of being mistaken for a doorway or opening, must be clearly marked in accordance with AS 1428.1.

TAS D4D14

Specification 14

Non-required stairways, ramps and escalators

S14C1 Scope

- (1) This Specification contains the requirements to allow non-*required* stairways, ramps or escalators to connect any number of *storeys* in a Class 5 or 6 building.
- (2) The requirements do not apply in an *atrium* or outside a building.

S14C2 Requirements

An escalator, moving walkway or non-*required* non-*fire-isolated stairway* or pedestrian ramp must comply with the following:

- (a) The escalator, walkway, stairway or ramp must be bounded by a *shaft* of—
 - (i) construction with an FRL of not less than 120/120/120 if *loadbearing* or –/120/120 if non-*loadbearing* and, if of *lightweight construction*, must comply with *Specification 6*; or
 - (ii) glazed construction with an FRL of not less than –/60/30 protected by a wall wetting system in accordance with *S31C2* to *S31C6*.
- (b) The void of each non-*required* stairway, ramp or escalator must not connect more than 2 *storeys*.
- (c) Rising and descending escalators, walkways, stairways and ramps within one *shaft* must be separated by construction with an FRL of not less than –/60/30.
- (d) Openings into the *shaft* must be protected by fire doors with an FRL not less than –/60/30.
- (e) When the fire door is in the closed position, the floor or any covering over the floor beneath the fire door must not be *combustible*.
- (f) Fire doors must be fitted with smoke seals and the assembly must be tested in accordance with AS 1530.4.
- (g) Fire doors must be—
 - (i) closed and locked for security reasons; or
 - (ii) held open and be *automatic* closing.
- (h) Smoke detectors must be installed on both sides of the opening, not more than 1.5 m horizontal distance from the opening.
- (i) In the closed position, fire doors must be openable on a single hand downward action or horizontal pushing action on a single device within the shaft and by key only from outside the *shaft*.
- (j) A warning sign must be displayed where it can readily be seen outside the *shaft* near all fire doors opening to the *shaft*, and must comply with the details and dimensions of *Figure S14C2*.
- (k) All doors opening into the *shaft* must be within 20 m of a *required exit*.
- (l) Signs showing the direction of the nearest *required exit* must be installed where they can be readily seen.
- (m) Materials attached to any wall, ceiling or floor within the *shaft* must comply with *Specification 7*.
- (n) Emergency lighting must be installed in the *shaft* in accordance with *E4D4*.
- (o) No step or ramp may be closer to the threshold of the doorway than the width of the door leaf.

Figure S14C2: Warning sign for non-required stairway, ramp or escalator

**DO NOT USE THIS STAIRWAY IF
THERE IS A FIRE**

=20 mm

OR

**Do not use this stairway if there
is a fire**

=16 mm

PREVIEW DRAFT

Specification 15

Braille and tactile signs

S15C1 Scope

This Specification sets out the requirements for the design and installation of braille and tactile signage as *required* by D3D26, D4D7 and Specification 27.

S15C2 Location of braille and tactile signs

Signs including symbols, numbering and lettering must be designed and installed as follows:

- (a) Braille and tactile components of a sign must be located not less than 1200 mm and not higher than 1600 mm above the floor or ground surface.
- (b) Signs with single lines of characters must have the line of tactile characters not less than 1250 mm and not higher than 1350 mm above the floor or ground surface.
- (c) Signs identifying rooms containing features or facilities listed in D4D7 must be located—
 - (i) on the wall on the latch side of the door with the leading edge of the sign located between 50 mm and 300 mm from the architrave; and
 - (ii) where (i) is not possible, the sign may be placed on the door itself.
- (d) Signs identifying a door *required* by E4D5 to be provided with an *exit* sign must be located—
 - (i) on the side that faces a person seeking egress; and
 - (ii) on the wall on the latch side of the door with the leading edge of the sign located between 50 mm and 300 mm from the architrave; and
 - (iii) where (ii) is not possible, the sign may be placed on the door itself.

S15C3 Braille and tactile sign specification

- (1) Tactile characters must be raised or embossed to a height of not less than 1 mm and not more than 1.5 mm.
- (2) Title case must be used for all tactile characters, and—
 - (a) upper case tactile characters must have a height of not less than 15 mm and not more than 55 mm, except that the upper case tactile characters on a sign identifying a door *required* by E4D5 to be provided with an *exit* sign must have a height of not less than 20 mm and not more than 55 mm; and
 - (b) lower case tactile characters must have a minimum height of 50% of the related upper case characters.
- (3) Tactile characters, symbols, and the like, must have rounded edges.
- (4) The entire sign, including any frame, must have all edges rounded.
- (5) The background, negative space or fill of signs must be of matt or low sheen finish.
- (6) The characters, symbols, logos and other features on signs must be matt or low sheen finish.
- (7) The minimum letter spacing of tactile characters on signs must be 2 mm.
- (8) The minimum word spacing of tactile characters on signs must be 10 mm.
- (9) The thickness of letter strokes must be not less than 2 mm and not more than 7 mm.
- (10) Tactile text must be left justified, except that single words may be centre justified.
- (11) Tactile text must be Arial typeface.

S15C4 Luminance contrast

The following applies to *luminance contrast*:

- (a) The background, negative space, fill of a sign or border with a minimum width of 5 mm must have a *luminance contrast* with the surface on which it is mounted of not less than 30%.
- (b) Tactile characters, icons and symbols must have a minimum *luminance contrast* of 30% to the surface on which the characters are mounted.
- (c) *Luminance contrasts* must be met under the lighting conditions in which the sign is to be located.

S15C5 Lighting

Braille and tactile signs must be illuminated to ensure *luminance contrast* requirements are met at all times during which the sign is required to be read.

S15C6 Braille

The following applies to braille:

- (a) Braille must be grade 1 braille (uncontracted) in accordance with the criteria set out by the Australian Braille Authority.
- (b) Braille must be raised and domed.
- (c) Braille must be located 8 mm below the bottom line of text (not including descenders).
- (d) Braille must be left justified.
- (e) Where an arrow is used in the tactile sign, a solid arrow must be provided for braille readers.
- (f) On signs with multiple lines of text and characters, a semicircular braille locator at the left margin must be horizontally aligned with the first line of braille text.

Specification 16**Accessible water entry/exit from swimming pools****S16C1 Scope**

This Specification sets out the requirements for types of *accessible* water entry/exit for *swimming pools*.

S16C2 Fixed or moveable ramp

A fixed or moveable ramp must—

- (a) have a slip-resistant surface; and
- (b) have a maximum gradient of 1:14; and
- (c) have handrails complying with the requirements for ramps in AS 1428.1, installed on both sides of the ramp; and
- (d) have kerbs in accordance with the requirements for ramps in AS 1428.1; and
- (e) extend to a depth of not less than 900 mm and not more than 1100 mm below the stationary water level; and
- (f) have landings in accordance with the requirements for ramps in AS 1428.1, with a landing located at the bottom and top of each ramp and a landing must be located at a level between 900 mm and 1100 mm below the stationary water level.

S16C3 Zero depth entry

A zero depth entry must have—

- (a) a slip-resistant surface; and
- (b) a maximum gradient of 1:14; and
- (c) a single handrail complying with the requirements for handrails in AS 1428.1, from the top of the entry point continuous to the bottom level area; and
- (d) a level area—
 - (i) 1500 mm long for the width of the zero depth entry at the entry point; and
 - (ii) located at the bottom of the zero depth entry at a level between 900 mm and 1100 mm below the stationary water level.

S16C4 Platform swimming pool lift

A platform *swimming pool* lift must be—

- (a) capable of being operated from the *swimming pool* surround, within the *swimming pool*, and on the platform; and
- (b) located where the water depth is not more than 1300 mm; and
- (c) designed to withstand a weight capacity of not less than 160 kg and be capable of sustaining a static load of not less than 1.5 times the rated load.

S16C5

Sling-style swimming pool lift

A sling lift must comply with the following:

- (a) A sling lift must be located where the water depth is not more than 1300 mm.
- (b) When the sling is in the raised position and in the transfer position, the centreline of the sling must be located over the *swimming pool* surround and not less than 450 mm from the *swimming pool* edge.
- (c) The surface of the *swimming pool* surround between the centreline of the sling and the *swimming pool* edge must have a gradient of not more than 1:50 and must be slip-resistant.
- (d) A clear space must be provided on the *swimming pool* surround parallel with the *swimming pool* edge on the side remote from the water (see Figure S16C5a and Figure S16C5b) and must—
 - (i) be not less than 900 mm x 1300 mm; and
 - (ii) have a gradient of not more than 1:50; and
 - (iii) have a slip-resistant surface; and
 - (iv) be located so that the centreline of the space is directly below the lifting point for the sling.
- (e) A sling lift must be capable of being operated from the *swimming pool* surround, within the *swimming pool* and from the sling.
- (f) A sling must be designed so that it will submerge to a water depth of not less than 500 mm below the stationary water level.
- (g) A sling lift must be designed to withstand a weight of not less than 136 kg and be capable of sustaining a static load not less than 1.5 times the rated load.

Figure S16C5a: Clear swimming pool surround space for sling lift in the transfer position — Plan view


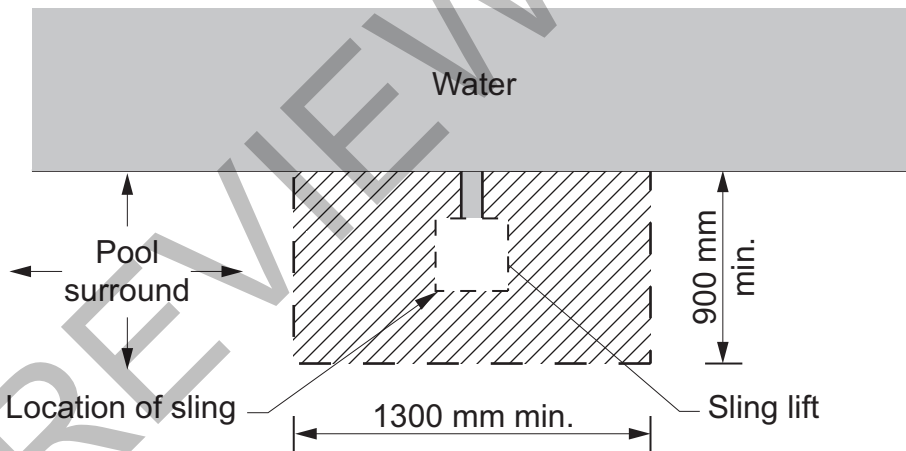


Figure S16C5b: Clear swimming pool surround space for sling lift in the transfer position — Sectional elevation

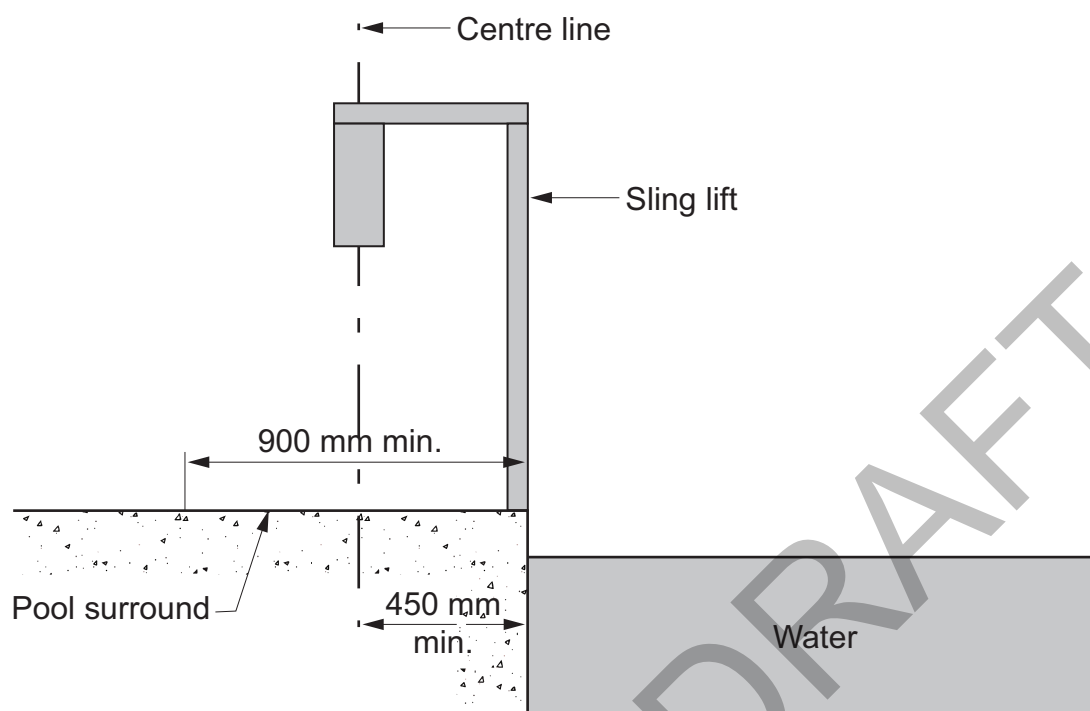

S16C6 Aquatic wheelchair

An aquatic wheelchair must comply with the following:

- (a) The height of the top surface of the seat must be not less than 430 mm.
- (b) The seat width must not be not less than 480 mm.
- (c) A footrest must be provided.
- (d) Armrests must be located on both sides of the seat and must be capable of being moved away from the side of the chair to allow a person to transfer on and off the seat.

Section E Services and equipment

Part E1

Fire fighting equipment

Objectives

E1O1 Objective

Functional Statements

E1F1 Fire-fighting equipment

Performance Requirements

E1P1 Fire hose reels

E1P2 Fire extinguishers

E1P3 Fire hydrants

E1P4 Automatic fire suppression systems

E1P5 Fire-fighting services in buildings under construction

E1P6 Fire control centres

Verification Methods

E1V1 Fire Safety Verification Method

Deemed-to-Satisfy Provisions

E1D1 Deemed-to-Satisfy Provisions

E1D2 Fire hydrants

E1D3 Fire hose reels

E1D4 Sprinklers

E1D5 Where sprinklers are required: all classifications

E1D6 Where sprinklers are required: Class 2 and 3 buildings other than residential care buildings

E1D7 Where sprinklers are required: Class 3 building used as a residential care building

E1D8 Where sprinklers are required: Class 6 building

E1D9 Where sprinklers are required: Class 7a building

E1D10 Where sprinklers are required: Class 9a health-care building used as a residential care building and Class 9c buildings

E1D11 Where sprinklers are required: Class 9b buildings

E1D12 Where sprinklers are required: additional requirements

E1D13 Where sprinklers are required: occupancies of excessive hazard

E1D14 Portable fire extinguishers

E1D15 Fire control centres

E1D16 Fire precautions during construction

E1D17 Provision for special hazards

Part E2

Smoke hazard management

Objectives

E2O1 Objective

Functional Statements

E2F1 Adequate safeguards

Performance Requirements

E2P1 Automatic warning for sleeping occupants

E2P2 Safe evacuation routes

Verification Methods

E2V1 Fire Safety Verification Method

Deemed-to-Satisfy Provisions

E2D1 Deemed-to-Satisfy Provisions

E2D2 Application of part

E2D3 General requirements

E2D4 Fire-isolated exits

E2D5 Buildings more than 25 m in effective height: Class 2 and 3 buildings and Class 4 parts of a building

E2D6 Buildings more than 25 m in effective height: Class 5, 6, 7b, 8 and 9b buildings

E2D7 Buildings more than 25 m in effective height: Class 9a buildings

E2D8 Buildings not more than 25 m in effective height: Class 2 and 3 buildings and Class 4 part of a building

E2D9 Buildings not more than 25 m in effective height: Class 5, 6, 7b, 8 and 9b buildings

E2D10 Buildings not more than 25 m in effective height: large isolated buildings subject to C3D4

E2D11 Buildings not more than 25 m in effective height: Class 9a and 9c buildings

E2D12 Class 7a buildings

E2D13 Basements (other than Class 7a buildings)

E2D14 Class 6 buildings – in fire compartments more than 2000 m²:
Class 6 building (not containing an enclosed common walkway or mall serving more than one Class 6 sole-occupancy unit)

E2D15 Class 6 buildings – in fire compartments more than 2000 m²:
Class 6 building (containing an enclosed common walkway or mall serving more than one Class 6 sole-occupancy unit)

E2D16 Class 9b – assembly buildings: nightclubs, discotheques and the like

E2D17 Class 9b – assembly buildings: exhibition halls

E2D18 Class 9b – assembly buildings: theatres and public halls

E2D19 Class 9b – assembly buildings: theatres and public halls (not listed in E2D18) including lecture theatres and cinema/auditorium complexes

E2D20 Class 9b assembly buildings: other assembly buildings (not listed in E2D16 to E2D19)

E2D21 Provision for special hazards

Part E3

Lift installations

Objectives

E3O1 Objective

Functional Statements

E3F1 Passenger lifts

E3F2 Emergency lifts

E3F3 Emergency alerts

Performance Requirements

E3P1	Stretcher facilities
E3P2	Emergency lifts
E3P3	Emergency alerts
E3P4	Lift access for people with a disability

Verification Methods

E3V1	Fire Safety Verification Method
E3V2	Emergency alerts on the use of lifts

Deemed-to-Satisfy Provisions

E3D1	Deemed-to-Satisfy Provisions
E3D2	Lift installations
E3D3	Stretcher facility in lifts
E3D4	Warning against use of lifts in fire
E3D5	Emergency lifts
E3D6	Landings
E3D7	Passenger lift types and their limitations
E3D8	Accessible features required for passenger lifts
E3D9	Fire service controls
E3D10	Residential care buildings
E3D11	Fire service recall control switch
E3D12	Lift car fire service drive control switch

Part E4

Visibility in an emergency, exit signs and warning systems

Objectives

E4O1	Objective

Functional Statements

E4F1	Visibility in an emergency, exit signs and warning systems

Performance Requirements

E4P1	Visibility in an emergency
E4P2	Identification of exits
E4P3	Emergency warning and intercom systems

Verification Methods

E4V1	Emergency lighting
E4V2	Fire Safety Verification Method

Deemed-to-Satisfy Provisions

E4D1	Deemed-to-Satisfy Provisions
E4D2	Emergency lighting requirements
E4D3	Measurement of distance
E4D4	Design and operation of emergency lighting
E4D5	Exit signs
E4D6	Direction signs
E4D7	Class 2 and 3 buildings and Class 4 parts: exemptions
E4D8	Design and operation of exit signs
E4D9	Emergency warning and intercom systems

Specification 17 Fire sprinkler systems

S17C1	Scope
S17C2	Application of automatic fire sprinkler standards

S17C3	Separation of sprinklered and non-sprinklered areas
S17C4	Protection of openings
S17C5	Quick response sprinklers
S17C6	Sprinkler valve enclosures
S17C7	Water supply
S17C8	Building occupant warning system
S17C9	Connection to other systems
S17C10	Anti-tamper devices
S17C11	Sprinkler systems in car parks
S17C12	Residential care buildings
S17C13	Sprinkler systems in lift installations
S17C14	Early childhood centres

Specification 18 Class 2 and 3 buildings not more than 25 m in effective height

S18C1	Scope
S18C2	Application
S18C3	System requirements
S18C4	Permitted concessions

Specification 19 Fire control centres

S19C1	Scope
S19C2	Application
S19C3	Purpose and content of fire control centre
S19C4	Location of fire control centre
S19C5	Equipment not permitted within a fire control centre
S19C6	Ambient sound level for a fire control centre
S19C7	Construction of a fire control room
S19C8	Protection of openings in a fire control room
S19C9	Doors to a fire control room
S19C10	Size and contents of a fire control room
S19C11	Ventilation and power supply for a fire control room
S19C12	Sign for a fire control room
S19C13	Lighting for a fire control room

Specification 20 Smoke detection and alarm systems

S20C1	Scope
S20C2	Type of system
S20C3	Smoke alarm system
S20C4	Smoke detection system
S20C5	Combined smoke alarm and smoke detection system
S20C6	Smoke detection for smoke control systems
S20C7	Building occupant warning system
S20C8	System monitoring

Specification 21 Smoke exhaust systems

S21C1	Scope
S21C2	Smoke exhaust capacity
S21C3	Smoke exhaust fans
S21C4	Smoke reservoirs

S21C5	Smoke exhaust fan and vent location
S21C6	Make-up air
S21C7	Smoke exhaust system control
S21C8	Smoke detection

Specification 22 Smoke-and-heat vents

S22C1	Scope
S22C2	Adoption of AS 2665
S22C3	Controls

Specification 23 Residential fire safety systems

S23C1	Scope
S23C2	Application
S23C3	General requirements
S23C4	Local fire indicator panel
S23C5	Smoke alarms
S23C6	Signal isolation interface units
S23C7	Wiring
S23C8	Connection to monitoring service
S23C9	Indication at the fire indicator panel

Specification 24 Lift installations

S24C1	Scope
S24C2	Lift cars exposed to solar radiation
S24C3	Lift car emergency lighting
S24C4	Cooling of lift shaft
S24C5	Lift foyer access
S24C6	Emergency access doors in enclosed lift shafts

Specification 25 Passive photoluminescent exit signs

S25C1	Scope
S25C2	Application
S25C3	Illumination
S25C4	Pictorial elements
S25C5	Viewing distance
S25C6	Smoke control systems

Part E1 Fire fighting equipment

Introduction to this Part

This Part focuses on provision of fire-fighting equipment which can enable occupants to fight the fire in its early stages and/or evacuate the building safely, facilitate *fire brigade* intervention and minimise the risk of fire spread between buildings.

Objectives

E101 Objective

The Objective of this Part is to—

- (a) safeguard occupants from illness or injury while evacuating during a fire; and
- (b) provide facilities for occupants and the *fire brigade* to undertake fire-fighting operations; and
- (c) prevent the spread of fire between buildings.

Functional Statements

E1F1 Fire-fighting equipment

A building is to be provided with fire-fighting equipment to safeguard against fire spread—

- (a) to allow occupants time to evacuate safely without being overcome by the effects of fire; and
- (b) so that occupants may undertake initial attack on a fire; and
- (c) so that the *fire brigade* have the necessary equipment to undertake search, rescue and fire-fighting operations; and
- (d) to other parts of the building; and
- (e) between buildings.

Performance Requirements

E1P1 Fire hose reels

A fire hose reel system must be installed to the degree necessary to allow occupants to safely undertake initial attack on a fire appropriate to—

- (a) the size of the *fire compartment*; and
- (b) the function or use of the building; and
- (c) any other *fire safety systems* installed in the building; and
- (d) the *fire hazard*.

E1P2 Fire extinguishers

Fire extinguishers must be installed to the degree necessary to allow occupants to undertake initial attack on a fire appropriate to—

- (a) the function or use of the building; and
- (b) any other *fire safety systems* installed in the building; and
- (c) the *fire hazard*.

E1P3 Fire hydrants

A fire hydrant system must be provided to the degree necessary to facilitate the needs of the *fire brigade* appropriate to—

- (a) fire-fighting operations; and
- (b) the *floor area* of the building; and
- (c) the *fire hazard*.

Applications

E1P3 only applies to a building where a *fire brigade* is available to attend.

E1P4 Automatic fire suppression systems

An *automatic* fire suppression system must be installed to the degree necessary to control the development and spread of fire appropriate to—

- (a) the size of the *fire compartment*; and
- (b) the function or use of the building; and
- (c) the *fire hazard*; and
- (d) the height of the building.

E1P5 Fire-fighting services in buildings under construction

Suitable means of fire-fighting must be installed to the degree necessary in a building under construction to allow initial fire attack by construction workers and for the *fire brigade* to undertake attack on the fire appropriate to—

- (a) the *fire hazard*; and
- (b) the height the building has reached during its construction.

E1P6 Fire control centres

Suitable facilities must be provided to the degree necessary in a building to co-ordinate *fire brigade* intervention during an emergency appropriate to—

- (a) the function or use of the building; and
- (b) the *floor area* of the building; and
- (c) the height of the building.

TAS E1P7

Verification Methods

E1V1 Fire Safety Verification Method

Compliance with E1P1, E1P2, E1P3, E1P4 and E1P6 is verified when a building is designed in accordance with C1V4.

Deemed-to-Satisfy Provisions

TAS E1D1

E1D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* E1P1 to E1P6 are satisfied by complying with—
 - (a) E1D2 to E1D17; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) in a building in an *alpine area*, Part G4; and
 - (d) for a building containing an *occupiable outdoor area*, Part G6; and
 - (e) for additional requirements for Class 9b buildings, Part I1; and
 - (f) for *farm buildings* and *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

E1D2 Fire hydrants

- (1) A fire hydrant system must be provided to serve a building—
 - (a) having a total *floor area* greater than 500 m²; and
 - (b) where a *fire brigade station* is—
 - (i) no more than 50 km from the building as measured along roads; and
 - (ii) equipped with equipment capable of utilising a fire hydrant.
- (2) The fire hydrant system must be installed in accordance with—
 - (a) AS 2419.1; or
 - (b) AS 2118.6, where applicable; or
 - (c) FPAA101H, where applicable.
- (3) Notwithstanding (2)—
 - (a) a Class 8 *electricity network substation* need not comply with clause 4.1.2 of AS 2419.1 if—
 - (i) it cannot be connected to a town main supply; and
 - (ii) one hour water storage is provided for fire-fighting; and
 - (b) plastic pipes and fittings must not be used above-ground in combined sprinkler and hydrant systems.
- (4) Where internal fire hydrants are provided, they must serve only the *storey* on which they are located except that a *sole-occupancy unit*—

- (a) in a Class 2 or 3 building or Class 4 part of a building may be served by a single fire hydrant located at the level of egress from that *sole-occupancy unit*; or
- (b) of not more than 2 *storeys* in a Class 5, 6, 7, 8 or 9 building may be served by a single fire hydrant located at the level of egress from that *sole-occupancy unit* provided the fire hydrant can provide coverage to the whole of the *sole-occupancy unit*.

SA E1D2(5)

SA E1D2(6)

SA E1D2(7)

SA E1D2(8)

SA Figure E1D2

SA Table E1D2

E1D3 Fire hose reels

SA E1D3(1)

- (1) E1D3 does not apply to—
 - (a) a Class 2, 3 or 5 building or Class 4 part of a building; or
 - (b) a Class 8 *electricity network substation*; or
 - (c) a Class 9c building; or
 - (d) classrooms and associated corridors in a primary or secondary *school*; or
 - (e) Please refer to NCC 2025 Preview Draft Omissions for missing text
- (2) A fire hose reel system must be provided—
 - (a) to serve the whole building where one or more internal fire hydrants are installed; or
 - (b) where internal fire hydrants are not installed, to serve any *fire compartment* with a *floor area* greater than 500 m².
- (3) The fire hose reel system must—
 - (a) have fire hose reels installed in accordance with AS 2441; and
 - (b) provide fire hose reels to serve only the *storey* at which they are located, except a *sole-occupancy unit* of not more than 2 *storeys* in a Class 6, 7, 8 or 9 building may be served by a single fire hose reel located at the level of egress from that *sole-occupancy unit* provided the fire hose reel can provide coverage to the whole of the *sole-occupancy unit*.
- (4) Fire hose reels must be located internally, externally or in combination, to achieve the system coverage specified in AS 2441.
- (5) In achieving system coverage, one or a combination of the following criteria for individual internally located fire hose reels must be met in determining the layout of any fire hose reel system:
 - (a) Fire hose reels must be located adjacent to an internal fire hydrant (other than one within a fire-isolated *exit*), except that a fire hose reel need not be located adjacent to every fire hydrant, provided system coverage can be achieved.
 - (b) Fire hose reels must be located within 4 m of an *exit*, except that a fire hose reel need not be located adjacent to every *exit*, provided system coverage can be achieved.
 - (c) Where system coverage is not achieved by compliance with (a) and (b), additional fire hose reels may be located in paths of travel to an *exit* to achieve the *required* coverage.
- (6) Fire hose reels must be located so that the fire hose will not need to pass through doorways fitted with fire or smoke doors, except—
 - (a) doorways in walls referred to in C3D6(1)(e) in a Class 9a building and C3D6(3)(d) in a Class 9c building, separating ancillary use areas of high potential *fire hazard*; and
 - (b) doorways in walls referred to in C3D13 or C3D14 separating equipment or electrical supply systems; and
 - (c) doorway openings to *shafts* referred to in C4D14.

- (7) Where the normal water supply cannot achieve the flow and pressures required by AS 2441, or is unreliable—
- (a) a pump; or
 - (b) water storage facility; or
 - (c) both a pump and water storage facility,
- must be installed to provide the minimum flow and pressures required by clause 6.1 of AS 2441.

E1D4 Sprinklers

A sprinkler system must—

- (a) be installed in a building or part of a building when *required* by E1D5 to E1D13 as applicable; and
- (b) comply with *Specification 17* and *Specification 18* as applicable.

Notes

- (1) See *Specification 5* for use of sprinklers in Class 2 buildings and *carparks* generally.
- (2) See *Part E2* for use of sprinklers to satisfy smoke hazard management provisions.
- (3) See *C2D13* and *Specification 5* for use of sprinklers in buildings where *C2D13* is applied.

E1D5 Where sprinklers are required: all classifications

Sprinklers are *required* throughout the whole building if any part of the building has an *effective height* of more than 25 m.

Exemptions

E1D5 does not apply to—

- (1) a class 7a *open-deck carpark* that is a separate building; or
- (2) a Class 8 *electricity network substation* with a *floor area* not more than 200 m² located within a multi-classified building.

E1D6 Where sprinklers are required: Class 2 and 3 buildings other than residential care buildings

- (1) In a Class 2 or 3 building, or any multi-classified building containing a Class 2 or 3 part, sprinklers are *required* throughout the whole building if any part of the building has—
 - (a) a *rise in storeys* of 4 or more; and
 - (b) an *effective height* of not more than 25 m.
- (2) The requirements of (1) do not apply to—
 - (a) a *residential care building*; and
 - (b) a Class 8 *electricity network substation* with a *floor area* not more than 200 m² located within a multi-classified building.

VIC E1D7

E1D7 Where sprinklers are required: Class 3 building used as a residential care building

Sprinklers are *required* throughout—

- (a) a Class 3 building used as a *residential care building*; and
- (b) any *fire compartment* containing a Class 3 part used for residential care.

E1D8 Where sprinklers are required: Class 6 building

In a Class 6 building, sprinklers are *required* in *fire compartments* where either of the following apply:

- (a) A *floor area* of more than 3 500 m².
- (b) A *volume* of more than 21 000 m³.

E1D9 Where sprinklers are required: Class 7a building

In a Class 7a building, other than an *open-deck carpark* which is a separate building, sprinklers are *required* in *fire compartments* where—

- (a) more than 40 vehicles are accommodated; or
- (b) a carstacker is installed.

Notes

A carstacker is a machine that stores 2 or more cars in a vertical arrangement such that one or more cars may not be accessible from floor level.

NT E1D10

E1D10 Where sprinklers are required: Class 9a health-care building used as a residential care building and Class 9c buildings

- (1) In a Class 9a *health-care building* used as a *residential care building*, sprinklers are *required* throughout the building and in any *fire compartment* containing a Class 9a part used for residential care.
- (2) In a Class 9c building, sprinklers are *required* throughout the building and in any *fire compartment* containing a Class 9c part.

E1D11 Where sprinklers are required: Class 9b buildings

- (1) In a Class 9b building, other than an *early childhood centre*, see [Part I1](#).
- (2) In a Class 9b *early childhood centre* and in a building containing a Class 9b *early childhood centre*, sprinklers are *required* throughout the whole building, including any part of another class.

Exemptions

E1D11(2) does not apply to a Class 9b *early childhood centre*—

- (a) wholly within a [storey](#) that provides direct egress to a road or [open space](#); or
- (b) with a [rise in storeys](#) of not more than 2, where the Class 9b [early childhood centre](#) is the only use in the building.

E1D12 Where sprinklers are required: additional requirements

- (1) For sprinkler requirements for [atriums](#), see [Part G3](#).
- (2) For sprinkler requirements for large isolated buildings, see [C3D4](#).

E1D13 Where sprinklers are required: occupancies of excessive hazard

- (1) In occupancies of excessive hazard, sprinklers are [required](#) in [fire compartments](#) where either of the following apply:
 - (a) A [floor area](#) of more than 2000 m².
 - (b) A [volume](#) of more than 12000 m³.

[VIC E1D13\(2\)](#)

- (2) For the purposes of (1), occupancies of excessive [fire hazard](#) comprise buildings which contain—
 - (a) hazardous processes or storage including the following:
 - (i) Aircraft hangars.
 - (ii) Cane furnishing manufacture, processing and storage.
 - (iii) Fire-lighter and fireworks manufacture and warehousing.
 - (iv) Foam plastic and foam plastic goods manufacture, processing and warehousing e.g. furniture factory.
 - (v) Hydrocarbon based sheet product, manufacture, processing and warehousing e.g. vinyl floor coverings.
 - (vi) Woodwool and other flammable loose fibrous material manufacture.
 - (b) combustible goods with an aggregate [volume](#) exceeding 1000 m³ and stored to a height greater than 4 m including the following:
 - (i) Aerosol packs with flammable contents.
 - (ii) Carpets and clothing.
 - (iii) Electrical appliances.
 - (iv) Combustible compressed fibreboards (low and high density) and plywoods.
 - (v) Combustible cartons, irrespective of content.
 - (vi) Esparto and other fibrous combustible material.
 - (vii) Furniture including timber, cane and composite, where foamed rubber or plastics are incorporated.
 - (viii) Paper storage (all forms of new or waste) e.g. bales, sheet, horizontal or vertical rolls, waxed coated or processed.
 - (ix) Textiles raw and finished, e.g. rolled cloth, clothing and manchester.
 - (x) Timber storage including sheets, planks, boards, joists and cut sizes.
 - (xi) Vinyl, plastic, foamed plastic, rubber and other combustible sheets, offcuts and random pieces and rolled material storage, e.g. carpet, tar paper, linoleum, wood veneer and foam mattresses.
 - (xii) All materials having wrappings or preformed containers of foamed plastics.

E1D14 Portable fire extinguishers

- (1) Portable fire extinguishers must be—

- (a) provided as listed in (3) and (4); and
 - (b) for a Class 2, 3 or 5 building or Class 4 part of a building, provided—
 - (i) to serve the whole Class 2, 3 or 5 building or Class 4 part of a building where one or more internal fire hydrants are installed; or
 - (ii) where internal fire hydrants are not installed, to serve any *fire compartment* with a *floor area* greater than 500 m², and for the purposes of this clause, a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building is considered to be a *fire compartment*; and
 - (c) subject to (2), selected, located and distributed in accordance with Sections 1, 2, 3 and 4 of AS 2444.
- (2) Portable fire extinguishers provided in a Class 2 or 3 building or Class 4 part of a building must be—
- (a) an ABE type fire extinguisher; and
 - (b) a minimum size of 2.5 kg; and
 - (c) distributed outside a *sole-occupancy unit*—
 - (i) to serve only the *storey* at which they are located; and
 - (ii) so that the travel distance from the entrance doorway of any *sole-occupancy unit* to the nearest fire extinguisher is not more than 10 m.
- (3) In Class 2 to 9 buildings (except within *sole-occupancy units* of a Class 9c building), portable fire extinguishers must be provided as follows:
- (a) To cover Class AE or E fire risks associated with emergency services switchboards.
 - (b) To cover Class F fire risks involving cooking oils and fats in kitchens.
 - (c) To cover Class B fire risks in locations where flammable liquids in excess of 50 litres are stored or used (not including that held in fuel tanks of vehicles).
 - (d) To cover Class A fire risks in normally occupied *fire compartments* less than 500 m² not provided with fire hose reels (excluding *open-deck carparks*).
 - (e) To cover Class A fire risks in classrooms and associated corridors in primary and secondary schools not provided with fire hose reels.
 - (f) To cover Class A fire risks associated with a Class 2, 3 or 5 building or Class 4 part of a building.
- (4) In addition to the requirements of (3), portable fire extinguishers must be provided to cover Class A and E fire risks in the following occupancies in buildings, or parts of a building:
- (a) A Class 9a *health-care building*, including a Class 9a building used as a *residential care building*.
 - (b) Class 3 parts of detention and correctional occupancies.
 - (c) Class 3 accommodation for children, aged persons and people with disabilities, including a Class 3 building used as a *residential care building*.
 - (d) A Class 9c building.
- (5) For the purposes of (3) and (4):
- (a) Fire risks are defined in accordance with AS 2444.
 - (b) An emergency services switchboard is one which sustains emergency equipment operating in the emergency mode.
 - (c) Additional extinguishers may be required to cover fire risks in relation to special hazards provided for in E1D17.
 - (d) The fire risks in a Class 2 or 3 building or Class 4 part of a building must include risks within any *sole-occupancy units*, however portable fire extinguishers are not required to be located within a *sole-occupancy unit* unless the *sole-occupancy unit* has a *floor area* greater than 500 m².
- (6) For the purposes of (4), where applicable, a Class E fire extinguisher need only be located at each nurses' station, supervisors' station or the like.

SA E1D14(7)

SA E1D14(8)

E1D15 Fire control centres

A fire control centre facility in accordance with [Specification 19](#) must be provided for—

- (a) a building with an [effective height](#) of more than 25 m; and
- (b) a Class 6, 7, 8 or 9 building with a total [floor area](#) of more than 18 000 m².

E1D16 Fire precautions during construction

In a building under construction—

- (a) not less than one fire extinguisher to suit Class A, B and C fires and electrical fires must be provided at all times on each [storey](#) adjacent to each [required exit](#) or temporary stairway or [exit](#); and
- (b) after the building has reached an [effective height](#) of 12 m—
 - (i) the [required](#) fire hydrants and fire hose reels must be operational in at least every [storey](#) that is covered by the roof or the floor structure above, except the 2 uppermost [storeys](#); and
 - (ii) any [required](#) booster connections must be installed.

E1D17 Provision for special hazards

Suitable additional provision must be made if special problems of fighting fire could arise because of—

- (a) the nature or quantity of materials stored, displayed or used in a building or on the allotment; or
- (b) the location of the building in relation to a water supply for fire-fighting purposes.

TAS E1D17

Explanatory Information: Cross-volume considerations

Part B4 of NCC Volume Three sets out the requirements for access for maintenance of fire-fighting water services.

Part E2 Smoke hazard management

Introduction to this Part

This Part is intended to reduce the risk of injury or loss of life for occupants due to the effects of smoke, including inhalation, if a fire occurs in a building. It provides for *automatic* warning of the presence of smoke or fire, and measures to ensure conditions within evacuation routes remain tenable long enough for occupants evacuate safely and to facilitate *fire brigade* intervention.

Objectives

E201 Objective

The Objective of this Part is to—

- (a) safeguard occupants from illness or injury by warning them of a fire so that they may safely evacuate; and
- (b) safeguard occupants from illness or injury while evacuating during a fire.

Functional Statements

E2F1 Adequate safeguards

A building is to be provided with safeguards so that—

- (a) occupants are warned of a fire in the building so that they may safely evacuate; and
- (b) occupants have time to safely evacuate before the environment in any *evacuation route* becomes untenable from the effects of fire.

Performance Requirements

E2P1 Automatic warning for sleeping occupants

In a building providing sleeping accommodation, occupants must be provided with *automatic* warning on the detection of smoke so they may evacuate in the event of a fire to a *safe place*.

Applications

E2P1 only applies to a Class 2, 3, 9a or 9c building or Class 4 part of a building.

E2P2 Safe evacuation routes

(1) In the event of a fire in a building the conditions in any *evacuation route* must be maintained for the period of time occupants take to evacuate the part of the building so that—

- (a) the temperature will not endanger human life; and

- (b) the level of visibility will enable the *evacuation route* to be determined; and
 - (c) the level of toxicity will not endanger human life.
- (2) The period of time occupants take to evacuate referred to in (1) must be appropriate to—
- (a) the number, mobility and other characteristics of the occupants; and
 - (b) the function or use of the building; and
 - (c) the travel distance and other characteristics of the building; and
 - (d) the *fire load*; and
 - (e) the potential *fire intensity*; and
 - (f) the *fire hazard*; and
 - (g) any active *fire safety systems* installed in the building; and
 - (h) *fire brigade* intervention.

Limitations

E2P2 does not apply to an *open-deck carpark* or *open spectator stand*.

Verification Methods

E2V1 Fire Safety Verification Method

Compliance with E2P1 and E2P2 is verified when a building is designed in accordance with C1V4.

Deemed-to-Satisfy Provisions

E2D1 Deemed-to-Satisfy Provisions

SA E2D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* E2P1 and E2P2 are satisfied by complying with—
- (a) E2D2 to E2D21; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) in a building in an *alpine area*, Part G4; and
 - (d) for additional requirements for Class 9b buildings, Part I1.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

E2D2 Application of part

- (1) The *Deemed-to-Satisfy Provisions* of this Part do not apply to—
- (a) an *open-deck carpark*; or
 - (b) an *open spectator stand*; or
 - (c) a Class 8 *electricity network substation* with a *floor area* not more than 200 m², located within a multi-classified building.

- (2) In addition to the *Deemed-to-Satisfy Provisions* of E2D3 to E2D13, the following specific *Deemed-to-Satisfy Provisions* apply to the following Class 6 and Class 9b buildings:
- (a) For Class 6 buildings, in *fire compartments* more than 2000 m²—
 - (i) not containing an enclosed common walkway or mall serving more than one Class 6 *sole-occupancy unit* — must comply with E2D14; or
 - (ii) containing an enclosed common walkway or mall serving more than one Class 6 *sole-occupancy unit* — must comply with E2D15.
 - (b) For Class 9b *assembly buildings*—
 - (i) nightclubs, discotheques and the like — must comply with E2D16; and
 - (ii) exhibition halls — must comply with E2D17; and
 - (iii) theatres and public halls — must comply with E2D18; and
 - (iv) theatres and public halls (not covered by E2D18) including lecture theatres and cinema/auditorium complexes — must comply with E2D19; and
 - (v) other *assembly buildings* (not listed in (i) to (iv)) excluding *schools* — must comply with E2D20.
- (3) The smoke exhaust and *smoke-and-heat vent* provisions of this Part do not apply to any area not used by occupants for an extended period of time such as a storeroom with a *floor area* less than 30 m², *sanitary compartment*, plant room or the like.

E2D3 General requirements

- (1) An air-handling system which does not form part of a smoke hazard management system in accordance with E2D4 to E2D20 and which recycles air from one *fire compartment* to another *fire compartment* or operates in a manner that may unduly contribute to the spread of smoke from one *fire compartment* to another *fire compartment* must, subject to (2), be designed and installed—
 - (a) to operate as a shutdown system in accordance with AS 1668.1; or
 - (b) such that it—
 - (i) incorporates smoke dampers complying with AS 1682.1 where the air-handling ducts penetrate any elements separating the *fire compartments* served; and
 - (ii) is arranged such that the air-handling system is shut down and the smoke dampers are activated to close *automatically* by smoke detectors complying with clause 7.5 of AS 1670.1.
- (2) For the purposes of (1), each *sole-occupancy unit* in a Class 2 or 3 building is treated as a separate *fire compartment*.
- (3) Miscellaneous air-handling systems covered by Sections 5 and 6 of AS 1668.1 serving more than one *fire compartment* (other than a *carpark* ventilation system) and not forming part of a smoke hazard management system must comply with these Sections of the Standard.
- (4) A smoke detection system must be installed in accordance with S20C6 to operate AS 1668.1 systems that are provided for zone pressurisation and *automatic* air pressurisation for fire-isolated *exits*.

E2D4 Fire-isolated exits

- (1) A part of a building listed in (2) must be provided with—
 - (a) an *automatic* air pressurisation system for fire-isolated *exits* in accordance with AS 1668.1; or
 - (b) open access ramps or balconies in accordance with D3D6.
- (2) The requirements of (1) apply to—
 - (a) a *required fire-isolated stairway*, including any associated *fire-isolated passageway* or *fire-isolated ramp* serving—
 - (i) any *storey* above an *effective height* of 25 m; or
 - (ii) more than 2 below ground *storeys*, not counted in the *rise in storeys* in accordance with C2D3; or

- (iii) an *atrium* to which Part G3 applies; or
 - (iv) a Class 9a building with a *rise in storeys* of more than 2; or
 - (v) a Class 9c building with a *rise in storeys* of more than 2; or
 - (vi) a Class 3 building used as a *residential care building* with a *rise in storeys* of more than 2; and
 - (b) a *required fire-isolated passageway* or *fire-isolated ramp* with a length of travel more than 60 m to a road or open space.
- (3) An *automatic* air pressurisation system for a fire-isolated *exit* must serve the entire *exit*.

Notes

Refer to D2D12(4) for pressurisation of a fire-isolated *exit* having more than 2 access doorways from within the same *storey*.

E2D5 Buildings more than 25 m in effective height: Class 2 and 3 buildings and Class 4 parts of a building

An *automatic* smoke detection and alarm system complying with Specification 20 must be provided to the following:

- (a) A Class 2 or 3 building which is more than 25 m in *effective height*.
- (b) A Class 2 or 3 part of a building, or a Class 4 part of a building, in a building which is more than 25 m in *effective height*.

Notes

Refer to C3D15 for division of *public corridors* greater than 40 m in length.

E2D6 Buildings more than 25 m in effective height: Class 5, 6, 7b, 8 and 9b buildings

- (1) A Class 5, 6, 7b, 8 or 9b building or part of a building must be provided with a zone pressurisation system between vertically separated *fire compartments* in accordance with AS 1668.1, if the building is more than 25 m in *effective height*.
- (2) The requirements of (1) do not apply to a building that has a *fire compartment* containing a Class 5, 6, 7b, 8 or 9b part (or a combination of these classes in the same *fire compartment*) where there is only one *fire compartment* containing these classifications in an otherwise Class 2, 3, 9a or 9c building.
- (3) For the purposes of (1), 'vertically separated *fire compartments*' are *fire compartments* above and below each other, and not *fire compartments* within the same *storey*.

Notes

Refer to E2D14 to E2D20 for specific provisions applicable to a Class 6 (in a *fire compartment* having a *floor area* of more than 2000 m²) and Class 9b building or part of a building.

E2D7 Buildings more than 25 m in effective height: Class 9a buildings

- (1) A Class 9a building must be provided with—
 - (a) an *automatic* smoke detection and alarm system complying with Specification 20; and
 - (b) a zone pressurisation system between vertically separated *fire compartments* in accordance with AS 1668.1,

if the building is more than 25 m in *effective height*.

- (2) For the purposes of (1), 'vertically separated *fire compartments*' are *fire compartments* above and below each other, and not *fire compartments* within the same *storey*.

Notes

A building more than 25 m in *effective height* requires a sprinkler system under E1D4.

E2D8 Buildings not more than 25 m in effective height: Class 2 and 3 buildings and Class 4 part of a building

In a Class 2 and 3 building or part of a building, or Class 4 part of a building, if the building is not more than 25 m in *effective height*—

- (a) it must be provided with an *automatic* smoke detection and alarm system complying with *Specification 20*; and
- (b) where a *required fire-isolated stairway* serving the Class 2 or 3 parts also serves one or more *storeys* of Class 5, 6, 7 (other than an *open-deck carpark*), 8 or 9b parts—
 - (i) the *fire-isolated stairway*, including any associated *fire-isolated passageway* or *fire-isolated ramp*, must be provided with an *automatic* air pressurisation system for fire-isolated *exits* in accordance with AS 1668.1; or
 - (ii) the Class 5, 6, 7 (other than an *open-deck carpark*), 8 and 9b parts must be provided with—
 - (A) an *automatic* smoke detection and alarm system complying with *Specification 20*; or
 - (B) a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*; and
- (c) where a *required fire-isolated stairway* serving the Class 4 part also serves one or more *storeys* of Class 5, 6, 7 (other than an *open-deck carpark*), 8 or 9b parts—
 - (i) a system complying with (b)(i) or (b)(ii) must be installed; or
 - (ii) a smoke alarm or detector system complying with *Specification 20* must be provided except that alarms or detectors need only be installed adjacent to each doorway into each *fire-isolated stairway* (set back horizontally from the doorway by a distance of not more than 1.5 m) to initiate a building occupant warning system for the Class 4 part.

Notes

- (1) Refer to C3D15 for division of *public corridors* greater than 40 m in length.
- (2) Refer to E2D14 to E2D20 for specific provisions applicable to a Class 6 (in a *fire compartment* having a *floor area* of more than 2000 m²) and Class 9b building or part of a building.

E2D9 Buildings not more than 25 m in effective height: Class 5, 6, 7b, 8 and 9b buildings

- (1) A building not more than 25 m in *effective height* that—
- (a) is a Class 5 or 9b *school* building or part of a building having a *rise in storeys* of more than 3; or
 - (b) is a Class 6, 7b, 8 or 9b building (other than a *school*) or part of a building having a *rise in storeys* of more than 2; or
 - (c) has a *rise in storeys* of more than 2 and contains—
 - (i) a Class 5 or 9b *school* part; and
 - (ii) a Class 6, 7b, 8 or 9b (other than a *school*) part,

must meet the requirements of (2).

- (2) A building referred to in (1) must be provided with—
 - (a) in each *required fire-isolated stairway*, including any associated *fire-isolated passageway* or *fire-isolated ramp*, an *automatic* air pressurisation system for fire-isolated *exits* in accordance with AS 1668.1; or
 - (b) a zone pressurisation system between vertically separated *fire compartments* in accordance with AS 1668.1, if the building has more than one *fire compartment*; or
 - (c) an *automatic* smoke detection and alarm system complying with *Specification 20*; or
 - (d) a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*.
- (3) For the purposes of (2), vertically separated *fire compartments* are *fire compartments* above and below each other, and not *fire compartments* within the same *storey*.

NSW E2D10

E2D10 Buildings not more than 25 m in effective height: large isolated buildings subject to C3D4

- (1) In a Class 7 or 8 building of not more than 25 m in *effective height*, and which does not exceed 18 000 m² in *floor area* nor exceed 108 000 m³ in *volume*, the building must be provided with—
 - (a) a sprinkler system complying with *Specification 17*, and provided with perimeter vehicular access complying with *C3D5(2)*; or
 - (b) an *automatic* fire detection and alarm system complying with AS 1670.1 and monitored in accordance with *S20C8*; or
 - (c) an *automatic* smoke exhaust system in accordance with *Specification 21*; or
 - (d) *automatic smoke-and-heat vents* in accordance with *Specification 22*; or
 - (e) natural smoke venting, with ventilation openings distributed as evenly as practicable and comprising permanent openings at roof level with a free area not less than 1.5% of *floor area* and low level openings which may be permanent or readily openable with a free area not less than 1.5% of *floor area*.
- (2) In a Class 5, 6, 7, 8 or 9 building of not more than 25 m in *effective height*, and which exceeds 18 000 m² in *floor area* or 108 000 m³ in *volume*, the building must be provided with—
 - (a) if the ceiling height of the *fire compartment* is not more than 12 m—
 - (i) an *automatic* smoke exhaust system in accordance with *Specification 21*; or
 - (ii) *automatic smoke-and-heat vents* in accordance with *Specification 22*; or
 - (b) if the ceiling height of the *fire compartment* is more than 12 m, an *automatic* smoke exhaust system in accordance with *Specification 21*.
- (3) For the purposes of (1) and (2), reference to ‘the building’ being provided with specified measures, means to the nominated classes within the building.

Notes

- (1) Refer to *E2D14* to *E2D20* for specific provisions applicable to a Class 6 (in a *fire compartment* having a *floor area* of more than 2000 m²) and Class 9b building or part of a building.
- (2) Refer to *E2D5* and *E2D8* where a Class 5, 6, 7b, 8 and 9b building contains a Class 2, 3 or 4 part.

E2D11 Buildings not more than 25 m in effective height: Class 9a and 9c buildings

- (1) A Class 9a *health-care building* or a Class 9c building, or a building containing a part thereof, which is not more than 25 m in *effective height*, must be provided throughout with—
 - (a) an *automatic* smoke detection and alarm system complying with *Specification 20*; and

- (b) *automatic* shutdown of any air-handling system which does not form part of a zone pressurisation system (other than individual room units with a capacity not more than 1000 L/s, systems serving critical treatment areas and ventilation systems installed in accordance with Sections 5 and 6 of AS 1668.1) on the activation of—
 - (i) smoke detectors installed in accordance with (a); and
 - (ii) any other installed fire detection and alarm system including a sprinkler system complying with [Specification 17](#); and
- (c) in a building having a *rise in storeys* of more than 2 and not more than 25 m *effective height* (not being a Class 9c building)—
 - (i) a zone pressurisation system between vertically separated *fire compartments* in accordance with AS 1668.1; or
 - (ii) a sprinkler system complying with [Specification 17](#) throughout with residential sprinkler heads in *patient care areas*.
- (2) For the purposes of (1), 'vertically separated *fire compartments*' are *fire compartments* above and below each other, and not *fire compartments* within the same *storey*.

Notes

Refer to [S11C2](#) for the provisions for smoke dampers.

E2D12 Class 7a buildings

In a Class 7a building, including a basement, provided with a mechanical ventilation system in accordance with AS 1668.2, the *carpark* ventilation system must be designed and installed as a carpark ventilation system in accordance with AS 1668.1.

E2D13 Basements (other than Class 7a buildings)

- (1) A basement, other than a Class 7a basement, not counted in the *rise in storeys* in accordance with [C2D3](#), must—
 - (a) comply with measures in accordance with this Part applicable to the building generally; and
 - (b) where the basement has a total *floor area* of more than 2000 m², be provided with—
 - (i) if not more than 2 below ground *storeys*—
 - (A) a zone pressurisation system between vertically separated *fire compartments* in accordance with AS 1668.1, if the basement has more than one *fire compartment*; or
 - (B) an *automatic* smoke detection and alarm system complying with [Specification 20](#); or
 - (C) a sprinkler system (other than a FPAA101D or FPAA101H system) complying with [Specification 17](#); or
 - (ii) if more than 2 below ground *storeys*, a sprinkler system (other than a FPAA101D or FPAA101H system) complying with [Specification 17](#).
- (2) For the purposes of (1), 'vertically separated *fire compartments*' are *fire compartments* above and below each other, and not *fire compartments* within the same *storey*.

Notes

- (1) Refer to [E2D14](#) to [E2D20](#) for specific provisions applicable to a Class 6 (in a *fire compartment* having a *floor area* of more than 2000 m²) and Class 9b building or part of a building.
- (2) Basements with more than 3 below ground *storeys* or containing Class 6 or 9b occupancies with a large number of occupants may require special consideration in accordance with [E2D21](#).

E2D14 Class 6 buildings – in fire compartments more than 2000 m²: Class 6 building (not containing an enclosed common walkway or mall serving more than one Class 6 sole-occupancy unit)

- (1) This clause applies to a Class 6 building not containing an enclosed common walkway or mall serving more than one Class 6 *sole-occupancy unit*, except for—
 - (a) a Class 6 *sole-occupancy unit* that—
 - (i) has a *floor area* of not more than 2000 m²; and
 - (ii) is single *storey* with a main public entrance opening to a road or *open space*; and
 - (iii) is separated from other parts of the *fire compartment* by construction, including openings, penetrations and junctions with other building elements, that prevents the free passage of smoke; and
 - (b) parts of any other classification that are smoke separated from a Class 6 part by construction complying with (a)(iii).
- (2) Where the *floor area* of a Class 6 part of a *fire compartment* referred to in (1) is more than 2000 m², the *fire compartment* must be provided with—
 - (a) an *automatic* smoke exhaust system complying with *Specification 21*; or
 - (b) if the building is single *storey*, *automatic smoke-and-heat vents* complying with *Specification 22*; or
 - (c) if the *floor area* of the *fire compartment* is not more than 3500 m² and the building—
 - (i) is single *storey*, an *automatic* smoke detection and alarm system complying with *Specification 20*; or
 - (ii) has a *rise in storeys* of not more than 2, a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*.

E2D15 Class 6 buildings – in fire compartments more than 2000 m²: Class 6 building (containing an enclosed common walkway or mall serving more than one Class 6 sole-occupancy unit)

- (1) This clause applies to a Class 6 building containing an enclosed common walkway or mall serving more than one Class 6 *sole-occupancy unit*, except for—
 - (a) a Class 6 *sole-occupancy unit* that—
 - (i) opens onto the enclosed common walkway or mall if the Class 6 *sole-occupancy unit* has a *floor area* of not more than 1000 m²; or
 - (ii) does not open onto the enclosed common walkway or mall if the Class 6 *sole-occupancy unit*—
 - (A) has a *floor area* of not more than 2000 m²; and
 - (B) is single *storey* with a main entrance opening to a road or *open space*; and
 - (C) is separated from other parts of the *fire compartment* by construction, including openings, penetrations and junctions with other building elements, that prevents the free passage of smoke; and
 - (b) parts of any other classification that are smoke separated from a Class 6 part by construction complying with (a)(ii)(C).
- (2) Where the *floor area* of a Class 6 part of a *fire compartment* referred to in (1) is more than 2000 m², the *fire compartment*, including the enclosed common walkway or mall, must be provided with—
 - (a) an *automatic* smoke exhaust system complying with *Specification 21*; or
 - (b) if the building is single *storey*, *automatic smoke-and-heat vents* complying with *Specification 22*; or
 - (c) if the *floor area* of the *fire compartment* is not more than 3500 m² and the building has a *rise in storeys* of not more than 2, a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*.

Notes

A *fire compartment* having a *floor area* of more than 3500 m² in a Class 6 building requires a sprinkler system under E1D4.

NSW E2D16

E2D16

Class 9b – assembly buildings: nightclubs, discotheques and the like

A Class 9b *assembly building* which is a nightclub, discotheque or the like must be provided with—

- (a) *automatic* shutdown of any air-handling system (other than miscellaneous exhaust air systems installed in accordance with Sections 5 and 6 of AS 1668.1) which does not form part of the smoke hazard management system, on the activation of—
 - (i) smoke detectors installed complying with S20C6; and
 - (ii) any other installed fire detection and alarm system, including a sprinkler system complying with Specification 17; and
- (b) at least one of the following:
 - (i) An *automatic* smoke exhaust system complying with Specification 21.
 - (ii) If the building is single *storey*, *automatic smoke-and-heat vents* complying with Specification 22.
 - (iii) A sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 with quick response sprinkler heads.

NSW E2D17

E2D17

Class 9b – assembly buildings: exhibition halls

A Class 9b *assembly building* which is an exhibition hall must be provided with—

- (a) *automatic* shutdown of any air-handling system (other than miscellaneous exhaust air systems installed in accordance with Sections 5 and 6 of AS 1668.1) which does not form part of the smoke hazard management system, on the activation of—
 - (i) smoke detectors installed complying with Specification 20; and
 - (ii) any other installed fire detection and alarm system, including a sprinkler system complying with Specification 17; and
- (b) where the *floor area* is more than 2000 m² and not more than 3500 m²—
 - (i) an *automatic* smoke exhaust system complying with Specification 21; or
 - (ii) if the building is single *storey*, *automatic smoke-and-heat vents* complying with Specification 22; or
 - (iii) a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17; and
- (c) where the *floor area* is more than 3500 m², a sprinkler system (other than a FPAA101D or FPAA101H system) complying with Specification 17 and—
 - (i) an *automatic* smoke exhaust system complying with Specification 21; or
 - (ii) *automatic smoke-and-heat vents* complying with Specification 22, if the building is single *storey*.

NSW E2D18

E2D18

Class 9b – assembly buildings: theatres and public halls

- (1) This clause applies to a Class 9b *assembly building* where the building or part of the building is used as a theatre or public hall which—

- (a) is a *school* assembly, church or community hall, and has a *stage* and any *backstage* area with a total *floor area* of more than 300 m²; or
 - (b) is not a *school* assembly, church or community hall, and has a *stage* and any *backstage* area with a total *floor area* of more than 200 m²; or
 - (c) has a *stage* with an associated rigging loft.
- (2) A building or part of a building referred to in (1) must be provided with—
- (a) an *automatic* smoke exhaust system complying with *Specification 21*; or
 - (b) if the building is single *storey*, *automatic smoke-and-heat vents* complying with *Specification 22*.

NSW E2D19

E2D19 Class 9b – assembly buildings: theatres and public halls (not listed in E2D18) including lecture theatres and cinema/auditorium complexes

- (1) This clause applies to a Class 9b *assembly building* where the building or part of the building is used as a theatre or public hall not listed in *E2D18* and includes lecture theatres and cinema/auditorium complexes.
- (2) A building or part of a building referred to in (1)—
- (a) must be provided with *automatic* shutdown of any air-handling system (other than ventilation systems installed in accordance with Sections 5 and 6 of AS 1668.1) which does not form part of the smoke hazard management system, on the activation of—
 - (i) smoke detectors installed complying with *Specification 20*; and
 - (ii) any other installed fire detection and alarm system, including a sprinkler system complying with *Specification 17*; and
 - (b) other than in the case of a *school* lecture theatre, where the *floor area* of the Class 9b part of a *fire compartment* is more than 2000 m², the Class 9b building or part must be provided with—
 - (i) an *automatic* smoke exhaust system complying with *Specification 21*; or
 - (ii) if the building is single *storey*, *automatic smoke-and-heat vents* complying with *Specification 22*; or
 - (iii) if the *floor area* of the *fire compartment* is not more than 5000 m² and the building has a *rise in storeys* of not more than 2—
 - (A) an *automatic* smoke detection and alarm system complying with *Specification 20*; or
 - (B) a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*.

NSW E2D20

E2D20 Class 9b assembly buildings: other assembly buildings (not listed in E2D16 to E2D19)

- (1) The requirements of (2)—
- (a) apply to a Class 9b *assembly building* where the building or part of the building is used for a purpose other than—
 - (i) as described in *E2D16* to *E2D19*; or
 - (ii) a *school*; and
 - (b) do not apply to—
 - (i) sporting complexes (including sports halls, gymnasiums, *swimming pools*, ice and roller rinks, and the like) other than an indoor sports stadium with total spectator seating for more than 1000; or
 - (ii) churches and other places used solely for religious worship.
- (2) Each *fire compartment*, other than one in a building referred to in (1)(b), where the *floor area* of the Class 9b part is

more than 2000 m² must be provided with—

- (a) an *automatic* smoke exhaust system complying with [Specification 21](#); or
 - (b) if the building is single *storey*, *automatic smoke-and-heat vents* complying with [Specification 22](#); or
 - (c) if the *floor area* of the *fire compartment* is not more than 5000 m² and the building has a *rise in storeys* of not more than 2—
 - (i) an *automatic* smoke detection and alarm system complying with [Specification 20](#); or
 - (ii) a sprinkler system (other than a FPAA101D or FPAA101H system) complying with [Specification 17](#).
- (3) A building containing a Class 9b *early childhood centre* must be provided with an *automatic* smoke detection and alarm system complying with [Specification 20](#) throughout the whole building, including any part of another class.

E2D21 Provision for special hazards

Additional smoke hazard management measures may be necessary due to the—

- (a) special characteristics of the building; or
- (b) special function or use of the building; or
- (c) special type or quantity of materials stored, displayed or used in a building; or
- (d) special mix of classifications within a building or *fire compartment*,

which are not addressed in [E2D4](#) to [E2D20](#).

SA E2D22

Part E3 Lift installations

Introduction to this Part

This Part is intended to ensure that lifts are safe to use, including by people with a disability and emergency services personnel. This Part is also intended to ensure occupants know when lifts should not be used (e.g. during a fire) and, in the event of lift malfunction, for conditions in a lift car to remain tenable and occupants to be able to call for assistance.

Objectives

E3O1 Objective

The Objective of this Part is to—

- (a) facilitate the safe movement of occupants; and
- (b) facilitate access for emergency services personnel to carry out emergency procedures and assist in the evacuation of occupants.

Functional Statements

E3F1 Passenger lifts

Where a passenger lift is provided, it is to facilitate safe and easy—

- (a) movement for occupants with a disability; and
- (b) evacuation of occupants, who due to illness or injury need stretcher assistance.

E3F2 Emergency lifts

A building is to be provided with one or more passenger lifts to facilitate—

- (a) the safe access for emergency services personnel; and
- (b) safe and easy evacuation of occupants who due to illness, injury or disability cannot use stairways in the event of an emergency.

Applications

E3F2 only applies to—

- (a) a building with an *effective height* of more than 25 m; and
- (b) a Class 9a building in which *patient care area* are located above a level with direct access to a road or *open space*.

E3F3 Emergency alerts

A building having a passenger lift is to be provided with measures to alert occupants about the use of the lift in an emergency.

Performance Requirements

E3P1 Stretcher facilities

Stretcher facilities must be provided, to the degree necessary—

- (a) in at least one emergency lift *required* by E3P2; or
- (b) where an emergency lift is not *required* and a passenger lift is provided, in at least one lift, to serve each floor in the building served by the passenger lift.

E3P2 Emergency lifts

One or more passenger lifts fitted as emergency lifts to serve each floor served by the lifts in a building must be installed to facilitate the activities of the *fire brigade* and other emergency services personnel.

Applications

E3P2 only applies to—

- (a) a building with an *effective height* of more than 25 m; and
- (b) a Class 9a building in which *patient care areas* are located at a level that does not have direct access to a road or *open space*.

E3P3 Emergency alerts

Signs or other means must be provided to alert occupants about the use of a lift during an emergency.

E3P4 Lift access for people with a disability

When a passenger lift is provided in a building *required* to be *accessible*, it must be suitable for use by people with a disability.

Verification Methods

E3V1 Fire Safety Verification Method

Compliance with E3P2 is verified when a building is designed in accordance with C1V4.

E3V2 Emergency alerts on the use of lifts

- (1) Compliance with E3P3 is verified when building occupants are provided with *automatic* warning that lifts must not be used during a fire emergency.
- (2) The *automatic* warning must—
 - (a) be initiated by a smoke hazard management system complying with Part E2; and

- (b) be provided via a sound system complying with the relevant provisions of AS 1670.4; and
- (c) have a flashing warning sign installed in accordance with AS 1670.4 displaying the words “do not use lift”.

Deemed-to-Satisfy Provisions

E3D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements E3P1 to E3P4* are satisfied by complying with—
 - (a) *E3D2 to E3D12*; and
 - (b) for a building containing an *occupiable outdoor area*, *Part G6*; and
 - (c) for public transport buildings, *Part I2*.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with *A2G2(3)* and *A2G4(3)* as applicable.

E3D2 Lift installations

An *electric passenger lift* installation and an *electrohydraulic passenger lift* installation must comply with *Specification 24*.


E3D3 Stretcher facility in lifts

- (1) A stretcher facility in accordance with (2) must be provided—
 - (a) in at least one emergency lift *required* by *E3D5*; or
 - (b) where an emergency lift is not *required*, if passenger lifts are installed to serve any storey above an *effective height* of 12 m, in at least one of those lifts to serve each floor served by the lifts.
- (2) A stretcher facility must accommodate a raised stretcher with a patient lying on it horizontally by providing a clear space not less than 600 mm wide x 2000 mm long x 1400 mm high above the floor level.

E3D4 Warning against use of lifts in fire

- (1) A warning sign must be displayed where it can be readily seen near every call button for a passenger lift or group of lifts throughout a building.
- (2) The requirements of (1) do not apply to a small lift such as a dumb-waiter or the like that is for the transport of goods only.
- (3) Each warning sign *required* by (1) must comply with the details and dimensions of *Figure E3D4* and consist of—
 - (a) incised, inlaid or embossed letters in a colour contrasting with the background on a metal, wood, plastic or similar plate securely and permanently attached to the wall; or
 - (b) Letters in a colour contrasting with the background incised or inlaid directly into the surface of the material forming the wall.

Figure E3D4: Warning sign for passenger lifts

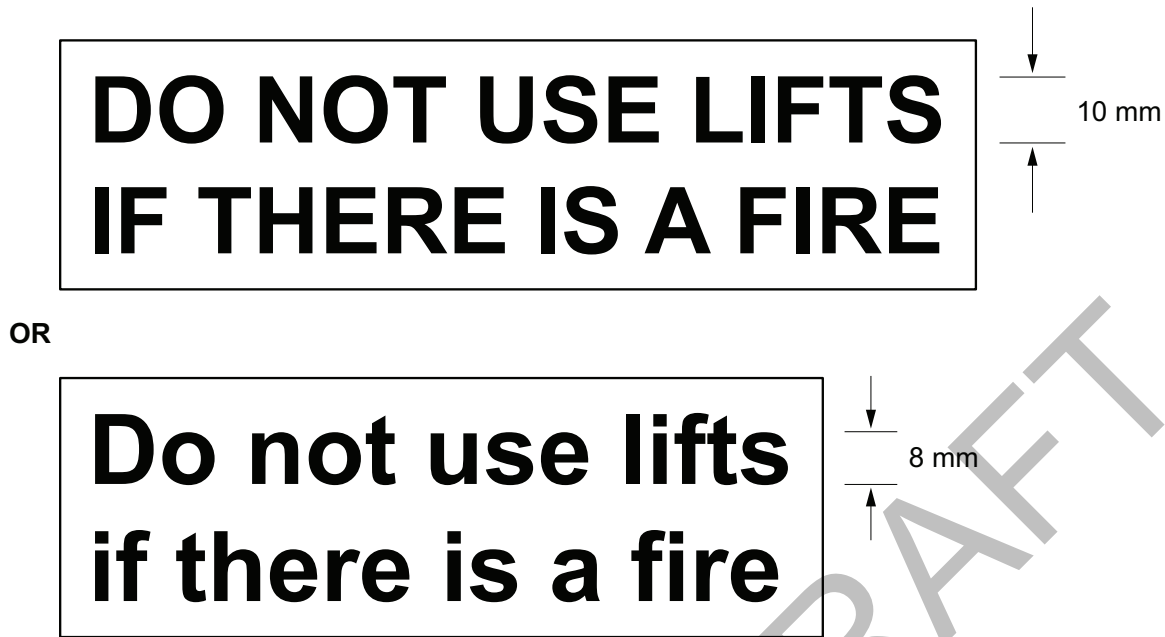

E3D5 Emergency lifts

- (1) At least one emergency lift complying with (5) must be installed in—
 - (a) a building which has an *effective height* of more than 25 m; and
 - (b) a Class 9a building in which *patient care areas* are located at a level that does not have direct egress to a road or *open space*.
- (2) An emergency lift may be combined with a passenger lift and must serve those *storeys* served by the passenger lift so that all *storeys* of the building served by passenger lifts are served by at least one emergency lift.
- (3) Where a *storey* is served by two or more passenger lifts, that *storey* must be served by at least two emergency lifts.
- (4) Where a *storey* is served by two or more lift shafts, the emergency lifts *required* by (3) must not be provided in the same *shaft*.
- (5) An emergency lift must—
 - (a) be contained within a *fire-resisting shaft* in accordance with C3D11; and
 - (b) in a Class 9a building serving a *patient care area*—
 - (i) have minimum dimensions, measured clear of all obstructions, including handrails, etc complying with Table E3D5; and
 - (ii) be connected to a standby power supply system where installed; and
 - (c) if the building has an *effective height* of more than 75 m, have a rating of at least—
 - (i) 600 kg if not provided with a stretcher facility; or
 - (ii) 900 kg if provided with a stretcher facility.

Explanatory Information

E3D5 does not prevent emergency lifts from being located in the same *fire-resisting shaft* as non-emergency lifts.

Table E3D5: Minimum emergency lift dimensions in Class 9a buildings

Lift component	Minimum dimension (mm)
Minimum depth of car	2280
Minimum width of car	1600

Lift component	Minimum dimension (mm)
Minimum floor to ceiling height	2300
Minimum door height	2100
Minimum door width	1300

E3D6 Landings

Access and egress to and from lift well landings must comply with [Parts D2, D3 and D4](#).

E3D7 Passenger lift types and their limitations

- (1) In an [accessible](#) building, every passenger lift must be one of the following lift types, subject to the limitations (if any) of each lift type:
- (a) There are no limitations on the use of [electric passenger lifts](#), [electrohydraulic passenger lifts](#) or [inclined lifts](#).
 - (b) [Stairway platform lifts](#) must not—
 - (i) be used to serve a space in a building accommodating more than 100 persons calculated according to [D2D18](#); or
 - (ii) be used in a high traffic public use area such as a theatre, cinema, auditorium, transport interchange, shopping centre or the like; or
 - (iii) be used where it is possible to install another type of passenger lift; or
 - (iv) connect more than 2 [storeys](#); or
 - (v) where more than 1 stairway lift is installed, serve more than 2 consecutive [storeys](#); or
 - (vi) when in the folded position, encroach on the minimum width of a stairway [required](#) by [D2D8](#) to [D2D11](#).
 - (c) A [low-rise platform lift](#) must not travel more than 1000 mm.
 - (d) A [low-rise, low-speed constant pressure lift](#) must not—
 - (i) for an enclosed type, travel more than 4 m; or
 - (ii) for an unenclosed type, travel more than 2 m; or
 - (iii) be used in a high traffic public use areas in buildings such as a theatre, cinema, auditorium, transport interchange, shopping complex or the like.
- (2) A passenger lift referred to in (1) must not rely on a constant pressure device for its operation if the lift car is fully enclosed.

E3D8 Accessible features required for passenger lifts

In an [accessible](#) building, every passenger lift must have the following features where applicable:

- (a) A handrail complying with the provisions for a mandatory handrail in AS 1735.12 for all lifts except—
 - (i) a [stairway platform lift](#); and
 - (ii) a [low-rise platform lift](#).
- (b) Lift floor dimensions of not less than 1400 mm wide x 1600 mm deep for all lifts which travel more than 12 m.
- (c) Lift floor dimensions of not less than 1100 mm wide x 1400 mm deep for all lifts which travel not more than 12 m, except a [stairway platform lift](#).
- (d) Lift floor dimensions of not less than 810 mm wide x 1200 mm deep for a [stairway platform lift](#).
- (e) Minimum clear door opening complying with AS 1735.12 for all lifts except a [stairway platform lift](#).

- (f) Passenger protection system complying with AS 1735.12 for all lifts with power-operated doors.
- (g) Lift landing doors at the upper landing for all lifts except a *stairway platform lift*.
- (h) Lift car and landing control buttons complying with AS 1735.12 for all lifts except—
 - (i) a *stairway platform lift*; and
 - (ii) a *low-rise platform lift*.
- (i) Lighting in accordance with AS 1735.12 for all enclosed lift cars.
- (j) For all lifts serving more than 2 levels—
 - (i) automatic audible information within the lift car to identify the level each time the car stops; and
 - (ii) audible and visual indication at each lift landing to indicate the arrival of the lift car; and
 - (iii) audible information and audible indication *required* by (i) and (ii) is to be provided in a range of between 20 - 80 dB(A) at a maximum frequency of 1500 Hz.
- (k) Emergency hands-free communication, including a button that alerts a call centre of a problem and a light to signal that the call has been received, for all lifts except a *stairway platform lift*.

E3D9 Fire service controls

Where lifts serve any *storey* above an *effective height* of 12 m, the following must be provided:

- (a) A fire service recall control switch complying with E3D11 for—
 - (i) a group of lifts; or
 - (ii) a single lift not in a group that serves the *storey*.
- (b) A lift car fire service drive control switch complying with E3D12 for every lift.

E3D10 Residential care buildings

- (1) Where residents in a Class 9c *residential care building* are on levels which do not have direct access to a road or *open space*, the building must be provided with either—
 - (a) at least one lift to accommodate a stretcher in accordance with E3D3(2); or
 - (b) a ramp in accordance with AS 1428.1.
- (2) The lift or ramp *required* by (1) must discharge at a level providing direct access to a road or *open space*.

E3D11 Fire service recall control switch

- (1) Each group of lifts must be provided with a single fire service recall control switch *required* by E3D9 that activates the fire service recall operation at (6).
- (2) The switch *required* by (1) must—
 - (a) be located at the landing nominated by the *appropriate authority*; and
 - (b) be labelled “FIRE SERVICE” in indelible white lettering on a red background; and
 - (c) have two positions with an “OFF” and an “ON” position identified; and
 - (d) be operable only by the use of a key that is removable in either the “OFF” position or the “ON” position.
- (3) Adhesive labels must not be used for compliance with (2)(b) and (c).
- (4) The key in (2)(d) must be able to turn all fire service recall control switches in the building and must have a different key combination to other keys used for lifts in the building.
- (5) The fire service recall operation must be activated by—

- (a) switching the fire service recall control switch in (1) to “ON”; or
 - (b) a signal from a fire management system approved by the *appropriate authority*.
- (6) The activation of the fire service recall operation at (5) must—
- (a) cancel all registered car and landing calls; and
 - (b) inactivate all door reopening devices that may be affected by smoke; and
 - (c) ensure lift cars travelling toward the nominated floor continue to the nominated floor without stopping; and
 - (d) ensure lift cars travelling away from the nominated floor stop at or before the next available floor without opening the doors (either automatically or by the door open button), reverse direction and travel without stopping to the nominated floor; and
 - (e) for lifts stopped at a floor other than the nominated floor, close the doors and travel without stopping to the nominated floor; and
 - (f) ensure that lifts stay at the nominated floor with doors open; and
 - (g) permit all lifts to return to normal service if the fire service recall control switch at (1) is switched to the “OFF” position during or after the fire service recall operation.
- (7) The requirements of (6) do not apply to lifts on inspection service or when the lift car fire service control switch *required* by E3D12 is in the “ON” position.
- (8) Lifts having manual controls must signal an alert to the lift for the lift to return to the nominated floor containing the recall switch that activated the signal.
- (9) A key *required* by (2)(d) must be stored within a secure enclosure in accordance with (10) located—
- (a) if there is FDCIE, beside the FDCIE; or
 - (b) if there is no FDCIE—
 - (i) within the fire control centre; or
 - (ii) adjacent to the fire service recall switch.
- (10) The secure enclosure in (9) must—
- (a) be securely attached to the wall; and
 - (b) be openable using a device suitable for use by the *fire brigade*; and
 - (c) be labelled “FIRE SERVICE LIFT KEYS” in capital letters not less than 20 mm in height and in a colour contrasting with the background.

E3D12 Lift car fire service drive control switch

- (1) The lift car fire service drive control switch *required* by E3D9 must be activated from within the lift car.
- (2) The switch must—
- (a) be located between 600 mm and 1500 mm above the lift car floor; and
 - (b) be labelled “FIRE SERVICE” by indelible white lettering on a red background; and
 - (c) have two positions with an “OFF” and an “ON” position identified; and
 - (d) operate only by the use of a key that is removable in either the “OFF” position or the “ON” position.
- (3) Adhesive labels must not be used for compliance with (2)(b) or (c).
- (4) When the lift car fire service drive control switch at (1) is turned to the “ON” position, the lift must—
- (a) not respond to the fire service recall control switch; and
 - (b) cancel all registered lift car and landing calls; and
 - (c) override all lift car call access control systems; and
 - (d) inactivate all door reopening devices that may be affected by smoke; and
 - (e) allow the registration of lift car call by lift car call buttons, however the lift doors must not close in response to the registration of lift car calls; and

- (f) activate door closing by constant pressure being applied on the “door close” button unless the button is released before the doors are fully closed, in which case the doors must reopen and any registered lift car calls must be cancelled; and
 - (g) when the doors are closed, move the lift in response to registered lift car calls while allowing additional lift car calls to also be registered; and
 - (h) travel to the first possible floor in response to registered lift car calls and cancel all registered lift car calls after the lift stops; and
 - (i) ensure doors do not open automatically, rather by constant pressure being applied on the “door open” button unless the button is released before the doors are fully open, in which case the doors must re-close.
- (5) The requirements of (4) do not apply to a lift operating on inspection service.
- (6) A multi-deck lift installation must have systems in place that—
- (a) are able to communicate to the fire officer that the fire service drive control switch will not operate until all decks have been cleared of passengers; and
 - (b) ensure there is an appropriate method of clearing all deck landings of passengers; and
 - (c) maintain all doors to deck landings not containing the fire service control switch closed and inoperative while the lift is on fire service drive control.
- (7) A key *required* by (2)(d) must be stored in the enclosure *required* by E3D11(9).

Part E4 Visibility in an emergency, exit signs and warning systems

Introduction to this Part

This Part is intended to provide a minimum level of visibility in *evacuation routes* in an emergency, including emergency lighting and signage to assist in locating and identifying *exits*. This part also includes requirements for emergency warning and intercom systems to alert occupants and assist evacuation.

Objectives

E401 Objective

The Objective of this Part is, in an emergency, to safeguard occupants from injury by—

- (a) having adequate visibility; and
- (b) having adequate identification of *exits* and paths of travel to *exits*; and
- (c) being made aware of the emergency.

Functional Statements

E4F1 Visibility in an emergency, exit signs and warning systems

A building is to be provided with—

- (a) adequate visibility upon failure of normal artificial lighting during an emergency; and
- (b) adequate means—
 - (i) of warning occupants to evacuate; and
 - (ii) to manage the evacuation process; and
 - (iii) to identify *exits* and paths of travel to an *exit*.

Performance Requirements

E4P1 Visibility in an emergency

To facilitate safe evacuation in an emergency, a building must be provided with a system that—

- (a) ensures a level of visibility sufficient to enable *exits*, paths of travel to *exits* and any obstacles along a path of travel to an *exit* to be identified; and
- (b) activates instantaneously upon the failure of an artificial lighting system, to the degree necessary, appropriate to—
 - (i) the function or use of the building; and
 - (ii) the *floor area* of the building; and
 - (iii) the distance of travel to an *exit*.

Limitations

E4P1 does not apply to the internal parts of a *sole-occupancy unit* in a Class 2, 3 or 9c building or Class 4 part of a building.

E4P2 Identification of exits

To facilitate evacuation, suitable signs or other means of identification must, to the degree necessary—

- (a) be provided to identify the location of *exits*; and
- (b) guide occupants to *exits*; and
- (c) be clearly visible to occupants; and
- (d) operate in the event of a power failure of the main lighting system for sufficient time for occupants to safely evacuate.

Limitations

E4P2 does not apply to the internal parts of a *sole-occupancy unit* in a Class 2 or 3 or Class 4 part of a building.

E4P3 Emergency warning and intercom systems

To warn occupants of an emergency and assist evacuation of a building, an emergency warning and intercom system must be provided, to the degree necessary, appropriate to—

- (a) the *floor area* of the building; and
- (b) the function or use of the building; and
- (c) the height of the building.

Verification Methods

E4V1 Emergency lighting

- (1) Compliance with E4P1 is verified for the level of visibility for safe evacuation in an emergency and instantaneous activation, when an emergency lighting system satisfies the requirements of (2) to (5).
- (2) The calculated horizontal *illuminance* is not less than—
 - (a) 0.2 lux at floor level in the path of travel to an *exit*; and
 - (b) 1 lux at each floor level or tread in every *required*—
 - (i) *fire-isolated stairway*; or
 - (ii) *fire-isolated passageway*; or
 - (iii) *fire-isolated ramp*; or
 - (iv) non-*fire-isolated stairway*; or
 - (v) non-*fire-isolated ramp*.
- (3) The emergency lighting provides a level of *illuminance* not less than—
 - (a) 10% of that *required* by (2) within 1 second of energisation; and
 - (b) 80% of that *required* by (2) within 15 seconds of energisation.
- (4) The full level of illumination *required* by (2) must be achieved within 60 seconds of energisation.

- (5) An emergency lighting system must operate at not less than the minimum *required* level of *illuminance* for not less than 90 minutes.

E4V2 Fire Safety Verification Method

Compliance with E4P1, E4P2 and E4P3 is verified when a building is designed in accordance with C1V4.

Deemed-to-Satisfy Provisions

E4D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* E4P1 to E4P3 are satisfied by complying with—
 - (a) E4D2 to E4D9; and
 - (b) in a building containing an *atrium*, Part G3; and
 - (c) in a building in an *alpine area*, Part G4; and
 - (d) for a building containing an *occupiable outdoor area*, Part G6; and
 - (e) for additional requirements for Class 9b buildings, Part I1; and
 - (f) for *farm buildings* and *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

SA E4D2

E4D2 Emergency lighting requirements

An emergency lighting system must be installed—

- (a) in every *fire-isolated stairway*, *fire-isolated passageway* or *fire-isolated ramp*; and
- (b) in every *storey* of a Class 5, 6, 7, 8 or 9 building where the *storey* has an area more than 300 m²—
 - (i) in every passageway, corridor, hallway, or the like, that is part of the path of travel to an *exit*; and
 - (ii) in any room having a *floor area* more than 100 m² that does not open to a corridor or space that has emergency lighting or to a road or *open space*; and
 - (iii) in any room having a *floor area* more than 300 m²; and
- (c) in every passageway, corridor, hallway, or the like, having a length of more than 6 m from the entrance doorway of any *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building to the nearest doorway opening directly to—
 - (i) a *fire-isolated stairway*, *fire-isolated passageway* or *fire-isolated ramp*; or
 - (ii) an external stairway serving instead of a *fire-isolated stairway* under D2D13; or
 - (iii) an external balcony leading to a *fire-isolated stairway*, *fire-isolated passageway* or *fire-isolated ramp*; or
 - (iv) a road or *open space*; and
- (d) in every *required* non-*fire-isolated stairway*; and
- (e) in a *sole-occupancy unit* in a Class 5, 6 or 9 building if—
 - (i) the *floor area* of the unit is more than 300 m²; and
 - (ii) an *exit* from the unit does not open to a road or *open space* or to an external stairway, passageway, balcony or ramp, leading directly to a road or *open space*; and

- (f) in every room or space to which there is public access in every *storey* in a Class 6 or 9b building if—
 - (i) the *floor area* in that *storey* is more than 300 m²; or
 - (ii) any point on the floor of that *storey* is more than 20 m from the nearest doorway leading directly to a stairway, ramp, passageway, road or *open space*; or
 - (iii) egress from that *storey* involves a vertical rise within the building of more than 1.5 m, or any vertical rise if the *storey* concerned does not admit sufficient light; or
 - (iv) the *storey* provides a path of travel from any other *storey required* by (i), (ii) or (iii) to have emergency lighting; and
- (g) in a Class 9a *health-care building*—
 - (i) in every passageway, corridor, hallway, or the like, serving a *treatment area* or a *ward area*; and
 - (ii) in every room having a *floor area* of more than 120 m² in a *patient care area*; and
- (h) in every Class 9c building excluding within *sole-occupancy units*; and
 - (i) in every *required* fire control centre.

E4D3 Measurement of distance

Distances, other than vertical rise, must be measured along the shortest path of travel whether by straight lines, curves or a combination of both.

E4D4 Design and operation of emergency lighting

Every *required* emergency lighting system must comply with AS/NZS 2293.1.

SA E4D5

E4D5 Exit signs

An *exit* sign must be clearly visible to persons approaching the *exit*, and must be installed on, above or adjacent to each—

- (a) door providing direct egress from a *storey* to—
 - (i) an enclosed stairway, passageway or ramp serving as a *required exit*; and
 - (ii) an external stairway, passageway or ramp serving as a *required exit*; and
 - (iii) an external access balcony leading to a *required exit*; and
- (b) door from an enclosed stairway, passageway or ramp at every level of discharge to a road or *open space*; and
- (c) *horizontal exit*; and
- (d) door serving as, or forming part of, a *required exit* in a *storey required* to be provided with emergency lighting in accordance with E4D2.

NSW E4D6

E4D6 Direction signs

If an *exit* is not readily apparent to persons occupying or visiting the building then *exit* signs must be installed in appropriate positions in corridors, hallways, lobbies, and the like, indicating the direction to a *required exit*.

E4D7 Class 2 and 3 buildings and Class 4 parts: exemptions

E4D5 does not apply to—

- (a) a Class 2 building in which every door referred to is clearly and legibly labelled on the side remote from the *exit* or balcony—
 - (i) with the word “EXIT” in capital letters 25 mm high in a colour contrasting with that of the background; or
 - (ii) by some other suitable method; and
- (b) an entrance door of a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building.

SA E4D8

E4D8 Design and operation of exit signs

Every *required exit* sign must—

- (a) comply with—
 - (i) AS/NZS 2293.1; or
 - (ii) for a passive photoluminescent *exit* sign, *Specification 25*; or
 - (iii) for a hybrid photoluminescent *exit* sign, SA TS 5367; and
- (b) be clearly visible at all times when the building is occupied by any person having the right of legal entry to the building.

E4D9 Emergency warning and intercom systems

An emergency warning and intercom system complying, where applicable, with AS 1670.4 must be installed—

- (a) in a building with an *effective height* of more than 25 m; and
- (b) in a Class 3 building having a *rise in storeys* of more than 2 and used as—
 - (i) the residential part of a primary or secondary *school*; or
 - (ii) accommodation for the aged, children or people with a disability; and
- (c) in a Class 3 building used as a *residential care building*, except that the system—
 - (i) must be arranged to provide a warning for occupants; and
 - (ii) in areas used by the residents, may have its alarm adjusted in volume and content to minimise trauma consistent with the type and condition of residents; and
- (d) in a Class 9a building having a *floor area* of more than 1000 m² or a *rise in storeys* of more than 2, and the system—
 - (i) must be arranged to provide a warning for occupants; and
 - (ii) in a *ward area*, may have its alarm adjusted in volume and content to minimise trauma consistent with the type and condition of patients; and
- (e) in a Class 9b building—
 - (i) used as a *school* and having a *rise in storeys* of more than 3; or
 - (ii) used as a theatre, public hall, or the like, having a *floor area* more than 1000 m² or a *rise in storeys* of more than 2.

Specification 17

Fire sprinkler systems

S17C1 Scope

This Specification sets out requirements for the design and installation of fire sprinkler systems.

VIC S17C2

S17C2 Application of automatic fire sprinkler standards

Subject to this Specification, an *automatic* fire sprinkler system must comply with—

- (a) for all building classifications: AS 2118.1; or
- (b) for a Class 2 or 3 building with an *effective height* of not more than 25 m and a *rise in storeys* of 4 or more: *Specification 18* and the relevant provisions of this Specification as applicable; or
- (c) for Class 5, 6, 7, 8, 9a (other than a *residential care building*) or 9b (other than a Class 9b *early childhood centre*) parts of a building with an *effective height* not more than 25 m, which also contains Class 2 or 3 parts: a sprinkler system in accordance with *Specification 18* as for a Class 2 or 3 building and the relevant provisions of this Specification except—
 - (i) a FPAA101D sprinkler system cannot be used where the Class 5, 6, 7, 8, 9a (other than a *residential care building*) or 9b parts—
 - (A) contain more than 2 *storeys*; or
 - (B) are more than 25% of the total floor area of the building; or
 - (C) are located above the fourth *storey*; and
 - (ii) a FPAA101D or FPAA101H sprinkler system cannot be used where the Class 7a part accommodates more than 40 vehicles; or
- (d) for a combined sprinkler and fire hydrant system: AS 2118.6; or
- (e) for a Class 9a *health-care building* used as a *residential care building*: AS 2118.4 as applicable; or
- (f) for a Class 2, 3 or 9c building: AS 2118.4 as applicable.

S17C3 Separation of sprinklered and non-sprinklered areas

Where a part of a building is not protected with sprinklers, the sprinklered and non-sprinklered parts must be fire-separated with a wall or floor which must—

- (a) comply with any specific requirement of the *Deemed-to-Satisfy Provisions* of the BCA; or
- (b) where there is no specific requirement, comply with the relevant part of AS 2118, FPAA101D or FPAA101H.

S17C4 Protection of openings

Any openings, including those for service penetrations, in construction separating sprinklered and non-sprinklered parts of a building, including the construction separating the areas nominated for omitted protection in AS 2118.1, must be protected in accordance with the *Deemed-to-Satisfy Provisions* of *Part C4*.

S17C5 Quick response sprinklers

Quick response sprinklers may be installed only if they are suitable for the type of application proposed and it is demonstrated that the sprinkler system is designed to accommodate their use.

S17C6 Sprinkler valve enclosures

- (1) Sprinkler alarm valves must be located in a secure room or enclosure which has direct egress to a road or open space.
- (2) All sprinkler valve rooms and enclosures must be secured with a system suitable for use by the *fire brigade*.

S17C7 Water supply

- (1) A *required* sprinkler system must be provided with at least one water supply.
- (2) A *required* sprinkler system in a building greater than 25 m in *effective height* must be provided with a dual water supply except that a secondary water supply storage capacity of 25,000 litres may be used if—
 - (a) the storage tank is located at the topmost *storey* of the building; and
 - (b) the building occupancy is classified as no more hazardous than Ordinary Hazard 2 (OH2) under AS 2118.1; and
 - (c) an operational *fire brigade* service is available to attend a building fire.

S17C8 Building occupant warning system

A *required* sprinkler system, except a FPAA101D sprinkler system, must be connected to and activate a building occupant warning system complying with S20C7.

S17C9 Connection to other systems

Where a smoke hazard management system is installed and is actuated by smoke detectors, the sprinkler system must, wherever practicable, be arranged to also activate the smoke hazard management system.

S17C10 Anti-tamper devices

- (1) Where a sprinkler system is installed—
 - (a) over any *stage* area in a theatre, public hall or the like, visual and audible status indication of sprinkler valves must be provided at the location normally used by the *stage* manager; or
 - (b) in a space housing lift electrical and control equipment (including machine rooms, secondary floors and sheave rooms), any valves provided to control sprinklers in these spaces must be located adjacent to the space.
- (2) Any valves provided to control sprinklers required by (1) must be fitted with anti-tamper monitoring devices connected to a monitoring panel.

S17C11 Sprinkler systems in carpark

A sprinkler system protecting a *carpark* complying with S5C19(3) in a multi-classified building must—

- (a) be independent of the sprinkler system protecting any part of the building not used as a *carpark*; or
- (b) if forming part of a sprinkler system protecting a part of the building not used as a *carpark*, be designed such that the section protecting the non-*carpark* part can be isolated without interrupting the water supply or otherwise affecting the effective operation of the section protecting the *carpark*.

S17C12 Residential care buildings

(1) In addition to the provisions of AS 2118.4, a sprinkler system in—

- (a) a Class 3 building used as a *residential care building*; or
- (b) a Class 9a *health-care building* used as a *residential care building*; or
- (c) a Class 9c building,

must comply with sub-clause (2).

(2) Any sprinkler system referred to in (1) must—

- (a) be provided with a monitored main stop valve in accordance with AS 2118.1; and
- (b) be permanently connected with a direct data link or other approved monitoring system to a fire station or fire station dispatch centre.

S17C13 Sprinkler systems in lift installations

(1) Where sprinklers are installed in a space housing lift electrical and control equipment, including machine rooms, secondary floors and sheave rooms, sprinklers in these spaces must—

- (a) have heads protected from accidental damage by way of a guard that will not impair the performance of the head; and
- (b) be capable of being isolated and drained, either separately or collectively, without isolating any other sprinklers within the building.

(2) Valves provided to control sprinklers referred to in (1) must be installed in accordance with S17C10(2).

S17C14 Early childhood centres

Quick response sprinklers must be provided to a Class 9b *early childhood centre required* to have an *automatic* fire sprinkler system.

Limitations

S17C14 does not apply to a Class 9b *early childhood centre*—

- (a) wholly within a *storey* that provides direct egress to a road or *open space*; or
- (b) with a *rise in storeys* of not more than 2, where the Class 9b *early childhood centre* is the only use in that building.

Specification 18

Class 2 and 3 buildings not more than 25 m in effective height

S18C1 Scope

This Specification sets out requirements for the design and installation of fire sprinkler systems, and concessions for Class 2 and 3 buildings not more than 25 m in *effective height* with a *rise in storeys* of 4 or more.

S18C2 Application

The *Deemed-to-Satisfy Provisions* of this Specification take precedence where there is a difference to the *Deemed-to-Satisfy Provisions* of Sections C, D and E.

S18C3 System requirements

VIC S18C3(1)

- (1) A *required automatic* fire sprinkler system installed in a Class 2 or 3 building with an *effective height* of not more than 25 m and a *rise in storeys* of 4 or more must comply with—
 - (a) AS 2118.1; or
 - (b) AS 2118.4, as applicable; or
 - (c) FPAA101D, except for *residential care buildings*; or
 - (d) FPAA101H, except for *residential care buildings*.
- (2) A Class 2 or 3 building not more than 25 m in *effective height* with a *rise in storeys* of 4 or more provided with an *automatic* fire sprinkler system under (1)(a) or (1)(b) may be constructed in accordance with S18C4(1), as applicable, provided—
 - (a) the *automatic* fire sprinkler system is permanently connected to a fire alarm monitoring system connected to a fire station or fire station dispatch centre in accordance with Specification 23 if—
 - (i) the system has more than 100 sprinkler heads; or
 - (ii) in the case of a *residential care building*, the building will accommodate more than 32 residents; and
 - (b) the *automatic* fire sprinkler system is fitted with sprinklers complying with clauses 4.4, 4.5 and 5.5.2 of AS 2118.4 in bedrooms; and
 - (c) an *automatic* smoke detection and alarm system is installed in accordance with Specification 20 except that it need not be connected to a fire alarm monitoring system connected to a fire station or fire station dispatch centre, and in the case of a *residential care building* it must be installed in accordance with—
 - (i) S20C4; or
 - (ii) both—
 - (A) S20C3, provided S20C3(1)(b) is applied as if the building was not protected with a sprinkler system; and
 - (B) Specification 23; and
 - (d) in a *residential care building*, the *automatic* smoke detection and alarm system and the *automatic* fire sprinkler system are connected to a local fire indicator panel provided in accordance with Specification 23; and
 - (e) fire orders are provided in a Class 3 building in accordance with G4D8 as for a building in an *alpine area*.

S18C4 Permitted concessions

- (1) The following concessions are permitted for Class 2 and 3 buildings provided with a *required automatic* fire sprinkler system in accordance with S18C3(1)(a) or (1)(b):
 - (a) The FRL for *self-closing* fire doors, as *required* by C4D9 and C4D12, may be reduced to not less than –/30/30.
 - (b) The FRL for—
 - (i) all non-*loadbearing internal walls* and *shafts* constructed of *fire-protected timber*, as *required* by Specification 5 to have FRLs greater than –/60/60, may be reduced to –/60/60 and service penetrations through non-*loadbearing internal walls* and *shafts* constructed of *fire-protected timber*, *required* by C4D15, may be reduced to not less than –/60/15; and
 - (ii) all other non-*loadbearing internal walls*, as *required* by Specification 5, may be reduced to –/45/45 and the FRL for service penetrations through non-*loadbearing internal walls* and *shafts*, as *required* by C4D15, may be reduced to –/45/15.
 - (c) The FRL for *fire-isolated stairways* enclosed with non-*loadbearing* construction, as *required* by D2D4, may be reduced to –/45/45.
 - (d) Except in a *residential care building*, the maximum distance of travel, as *required* by D2D5(1)(a)(i), may be increased from 6 m to 12 m.
 - (e) The maximum distance of travel from a single *exit* serving the *storey* at the level of egress to a road or *open space*, as *required* by D2D5(1)(a)(ii), may be increased from 20 m to 30 m.
 - (f) The maximum distance between alternative *exits*, as *required* by D2D6(c)(i), may be increased from 45 m to 60 m.
 - (g) Internal fire hydrants in accordance with E1D2 are not *required* where—
 - (i) the building is served by external fire hydrants that provide compliant coverage installed in accordance with E1D2, except that in a *residential care building* the nozzle at the end of the length of hose need only reach the entry door of any *sole-occupancy unit* to be considered as covering the area within the *sole-occupancy unit*; or
 - (ii) a dry fire hydrant system that otherwise complies with AS 2419.1 is installed in the building and—
 - (A) each fire hydrant head is located in accordance with E1D2 and fitted with a blank end cap or plug; and
 - (B) the pipework is installed in accordance with E1D2 (as for a *required* fire main) except that it need not be connected to a water supply; and
 - (C) a hydrant booster inlet connection is provided in accordance with E1D2; and
 - (D) an external street or feed hydrant capable of providing the *required* system flow is located within 60 m of the hydrant booster connection.
 - (h) An emergency warning and intercom system need not be provided in a *residential care building* in accordance with E4D9 if a warning system with an override public address facility is installed in accordance with Specification 23.
- (2) The following concessions are permitted for Class 2 and 3 buildings provided with a *required automatic* fire sprinkler system in accordance with S18C3(1)(c):
 - (a) Window openings need not be protected in accordance with C4D12(8) provided the room served by the window is sprinkler protected.
 - (b) The FRL for—
 - (i) service penetrations through non-*loadbearing internal walls* and *shafts*, as *required* by C4D15, may be reduced to –/60/15; and
 - (ii) non-*loadbearing fire-resisting* lift and stair *shafts*, as *required* by Specification 5, may be reduced to –/60/60.
 - (c) The maximum distance of travel, as *required* by D2D5(1)(a)(i), may be increased from 6 m to 12 m.
 - (d) The maximum distance of travel from a single *exit* serving the *storey* at the level of egress to a road or *open space*, as *required* by D2D5(1)(a)(ii), may be increased from 20 m to 30 m.
 - (e) The maximum distance between alternative *exits*, as *required* by D2D6(c)(i), may be increased from 45 m to 60 m.

- (f) Internal fire hydrants in accordance with E1D2 are not *required* where—
- (i) the building is served by external fire hydrants that provide compliant coverage installed in accordance with E1D2; or
 - (ii) a dry fire hydrant system that otherwise complies with AS 2419.1 is installed in the building except—
 - (A) the system pipework is not connected to the water supply; and
 - (B) an on-site fire pumpset is not *required*; and
 - (C) the minimum fire hydrant outlet flow of 6 L/s may be achieved when boosted by a *fire brigade* pumping appliance; and
 - (D) the minimum pipe sizes specified in AS 2419.1 do not apply.
- (g) Where a dry fire hydrant system is installed for the purposes of (f)—
- (i) each fire hydrant head must be located in accordance with E1D2 and fitted with a blank end cap or plug; and
 - (ii) a hydrant booster inlet connection must be provided in accordance with E1D2; and
 - (iii) an external street or feed hydrant capable of providing the *required* system flow must be located within 60 m of the hydrant booster connection.
- (3) The following concessions are permitted for Class 2 and 3 buildings provided with a *required automatic* fire sprinkler system in accordance with S18C3(1)(d):
- (a) Window openings need not be protected in accordance with C4D12(8) provided the room served by the window is sprinkler protected.
 - (b) The FRL for—
 - (i) service penetrations through non-*loadbearing internal walls* and *shafts*, as *required* by C4D15, may be reduced to –/60/15; and
 - (ii) non-*loadbearing fire-resisting* lift and stair *shafts*, as *required* by Specification 5, may be reduced to –/60/60.
 - (c) The maximum distance of travel, as *required* by D2D5(1)(a)(i), may be increased from 6 m to 12 m.
 - (d) The maximum distance of travel from a single *exit* serving the *storey* at the level of egress to a road or *open space*, as *required* by D2D5(1)(a)(ii), may be increased from 20 m to 30 m.
 - (e) The maximum distance between alternative *exits*, as *required* by D2D6(c)(i), may be increased from 45 m to 60 m.

Specification 19 Fire control centres

S19C1 Scope

- (1) This Specification describes the construction and content of *required* fire control centres and rooms.
- (2) A fire control room is a fire control centre in a dedicated room with additional specific requirements.

S19C2 Application

- (1) S19C3 to S19C6 apply to fire control centres (including fire control rooms).
- (2) S19C7 to S19C13 apply additional requirements to fire control rooms.

S19C3 Purpose and content of fire control centre

A fire control centre must—

- (a) provide an area from which fire-fighting operations or other emergency procedures can be directed or controlled; and
- (b) contain controls, panels, telephones, furniture, equipment and the like associated with the *required* fire services in the building; and
- (c) not be used for any purpose other than the control of—
 - (i) fire-fighting activities; and
 - (ii) other measures concerning the occupant safety or security.

S19C4 Location of fire control centre

A fire control centre must be so located in a building that egress from any part of its floor, to a road or *open space*, does not involve changes in level which in aggregate exceed 300 mm.

S19C5 Equipment not permitted within a fire control centre

An internal combustion engine, pumps, sprinkler control valves, pipes and pipe fittings must not be located in a fire control centre, but may be located in rooms accessed through the fire control centre.

S19C6 Ambient sound level for a fire control centre

- (1) The ambient sound level within the fire control centre measured when all fire safety equipment is operating in the manner in which it operates in an emergency must not exceed 65 dB(A).
- (2) The measurement must be taken for a sufficient time to characterise the effects of all sound sources.
- (3) Where there is not a great variation in noise level, a measurement time of 60 seconds may be used.

S19C7 Construction of a fire control room

A fire control centre in a building more than 50 m in *effective height* must be in a separate room where—

- (a) the enclosing construction is of concrete, masonry or the like, sufficiently impact resistant to withstand the impact of any likely falling debris, and with an FRL of not less than 120/120/120; and
- (b) any material used as a finish, surface, lining or the like within the room complies with the requirements of *Specification 7*; and
- (c) services, pipes, ducts and the like that are not directly *required* for the proper functioning of the fire control room do not pass through it; and
- (d) openings in the walls, floors or ceiling which separate the room from the interior of the building are confined to doorways, ventilation and other openings for services necessary for the proper functioning of the facility.

S19C8 Protection of openings in a fire control room

Openings permitted by *S19C7* must be protected as follows:

- (a) Openings for *windows*, doorways, ventilation, service pipes, conduits and the like, in an *external wall* of the building that faces a road or *open space*, must be protected in accordance with the *Deemed-to-Satisfy Provisions* of *Part C4*.
- (b) Openings in the floors, ceilings and *internal walls* enclosing a fire control room must, except for doorways, be protected in accordance with the *Deemed-to-Satisfy Provisions* of *Part C4*.
- (c) A door opening in the *internal walls* enclosing a fire-control room, must be fitted with a *self-closing* –/120/30 smoke sealed fire door.
- (d) Openings associated with natural or mechanical ventilation must—
 - (i) not be made in any ceiling or floor immediately above or below the fire control room; and
 - (ii) be protected by a –/120/– fire damper if the opening is for a duct through a wall *required* to have an FRL, other than an *external wall*.

S19C9 Doors to a fire control room

- (1) *Required* doors to a fire control room must open into the room, be lockable and located so that persons using escape routes from the building will not obstruct or hinder access to the room.
- (2) The fire control room must be accessible via two paths of travel—
 - (a) one from the front entrance of the building; and
 - (b) one direct from a public place or *fire-isolated passageway* which leads to a public place and has a door with an FRL of not less than –/120/30.

S19C10 Size and contents of a fire control room

- (1) A fire control room must contain—
 - (a) a Fire Indicator Panel and necessary control switches and visual status indication for all *required* fire pumps, smoke control fans and other *required* fire safety equipment installed in the building; and
 - (b) a telephone connected to the telecommunications network; and
 - (c) a blackboard or whiteboard not less than 1200 mm wide x 1000 mm high; and
 - (d) a pin-up board not less than 1200 mm wide x 1000 mm high; and
 - (e) a raked plan layout table of a size suitable for laying out the plans provided under (f); and

- (f) colour-coded, durable, tactical fire plans.
- (2) In addition, a fire control room may contain—
 - (a) master emergency control panels, lift annunciator panels, remote switching controls for gas or electrical supplies and emergency generator backup; and
 - (b) building security, surveillance and management systems if they are completely segregated from all other systems.
- (3) A fire control room must—
 - (a) have a **floor area** of not less than 10 m² and the length of any internal side must be not less than 2.5 m; and
 - (b) if only the minimum prescribed equipment is installed — have a net **floor area** of not less than 8 m² with a clear space of not less than 1.5 m² in front of the Fire Indicator Panel; and
 - (c) if additional equipment is installed — have an additional area of not less than 2 m² net **floor area** for each additional facility and a clear space of not less than 1.5 m² in front of each additional control or indicator panel; and
 - (d) be constructed such that the area **required** for any path of travel through the room to other areas is provided in addition to the requirements (b) and (c).

S19C11 Ventilation and power supply for a fire control room

- (1) A fire control room must be ventilated by—
 - (a) natural ventilation from a **window** or doorway in an **external wall** of the building which opens directly into the fire control room from a road or **open space**; or
 - (b) a pressurisation system that only serves the fire control room, and—
 - (i) is installed in accordance with AS 1668.1, except airflow rates nominated by clause 10.3 are replaced with not less than 30 air changes per hour, as though the room is a **fire-isolated stairway**; and
 - (ii) is activated **automatically** by operation of the fire alarm, or sprinkler system complying with **Specification 17**, installed in the building and manually by an over-riding control in the room; and
 - (iii) has fans, motors and ductwork that form part of the system but not contained within the fire control room protected by enclosing construction with an FRL of not less than 120/120/120; and
 - (iv) has any electrical supply to the fire control room or equipment necessary for its operation connected to the supply side of the main disconnection switch for the building.
- (2) No openable devices, other than necessary doorways, pressure controlled relief louvres and **windows** that are openable by a key, must be constructed in the fire control room.

S19C12 Sign for a fire control room

The external face of the door to the fire control room must have a sign with the words—

FIRE CONTROL ROOM

in letters not less than 50 mm high and of a colour which contrasts with that of the background.

S19C13 Lighting for a fire control room

Emergency lighting in accordance with the **Deemed-to-Satisfy Provisions** of **Part E4** must be provided in a fire control room, except that an illumination level of not less than 400 lux must be maintained at the surface of the plan table.

Specification 20

Smoke detection and alarm systems

S20C1 Scope

This Specification describes the installation and operation of *automatic* smoke detection and alarm systems.

S20C2 Type of system

A *required automatic* smoke detection and alarm system must be provided in accordance with the following:

- (a) Class 2 buildings and Class 4 parts of a building—
 - (i) a smoke alarm system complying with S20C3; or
 - (ii) a smoke detection system complying with S20C4; or
 - (iii) a combination of a smoke alarm system and a smoke detection system complying with S20C5.
- (b) Class 3 buildings—
 - (i) with a Class 3 part located more than 2 *storeys* above ground level — a smoke detection system complying with S20C4; or
 - (ii) which accommodate more than 20 residents and are the residential part of a *school*, accommodation for the aged, children or people with a disability — a smoke detection system complying with S20C4; or
 - (iii) all other Class 3 buildings—
 - (A) a smoke alarm system complying with S20C3; or
 - (B) a smoke detection system complying with S20C4; or
 - (C) a combination of a smoke alarm system and a smoke detection system complying with S20C5.
- (c) Class 5, 6, 7, 8, 9b and 9c buildings — a smoke detection system complying with S20C4
- (d) Class 9a *health-care buildings*—
 - (i) where more than 6 bed patients are accommodated — a smoke detection system complying with S20C4; or
 - (ii) where 6 or less bed patients are accommodated—
 - (A) a smoke alarm system complying with S20C3; or
 - (B) a smoke detection system complying with S20C4.

S20C3 Smoke alarm system

- (1) In all Class 2 to 9 buildings provided with a smoke alarm system, the following applies:
 - (a) A smoke alarm system must—
 - (i) consist of smoke alarms complying with AS 3786; and
 - (ii) be powered from the consumer mains source.
 - (b) In kitchens and other areas where the use of the area is likely to result in smoke alarms causing spurious signals, subject to (c)—
 - (i) any other alarm deemed suitable in accordance with AS 1670.1 may be installed provided that smoke alarms are installed elsewhere in the *sole-occupancy unit* in accordance with (2)(a) and (2)(b); or
 - (ii) an alarm acknowledgement facility may be installed.
 - (c) Where a kitchen or other area referred to in (b) is in a building protected with a sprinkler system complying with

Specification 17 (other than a FPAA101D system), alarms need not be installed in the kitchen or other area likely to result in spurious signals.

- (2) In a Class 2 or 3 building or Class 4 part of a building provided with a smoke alarm system, the following applies:
- (a) Alarms must be installed within each *sole-occupancy unit*, and located on or near the ceiling in any *storey*—
 - (i) containing bedrooms—
 - (A) between each part of the *sole-occupancy unit* containing bedrooms and the remainder of the *sole-occupancy unit*; and
 - (B) where bedrooms are served by a hallway, in that hallway; and
 - (ii) not containing any bedrooms, in egress paths.
 - (b) Where there is more than one alarm installed within a *sole-occupancy unit*, alarms must be interconnected within that *sole-occupancy unit*.
 - (c) Subject to (d), alarms must be—
 - (i) installed in *public corridors* and other internal public spaces, located in accordance with the requirements for smoke detectors in AS 1670.1; and
 - (ii) connected to activate a building occupant warning system in accordance with S20C7.
 - (d) In a Class 2 or 3 building or Class 4 part of a building protected with a sprinkler system complying with **Specification 17** (other than a FPAA101D system), alarms are not *required* in *public corridors* and other internal public spaces.
- (3) In a Class 9a building provided with a smoke alarm system, smoke alarms must be—
- (a) installed in every room, *public corridor* and other internal public space; and
 - (b) located in accordance with the requirements for smoke detectors in AS 1670.1; and
 - (c) interconnected to provide a common alarm; and
 - (d) have manual call points installed in *evacuation routes* so that no point on a floor is more than 30 m from a manual call point.

S20C4 Smoke detection system

- (1) In all Class 2 to 9 buildings provided with a smoke detection system, the following applies:
- (a) A smoke detection system must—
 - (i) subject to (2), (3) and (4), comply with AS 1670.1; and
 - (ii) activate a building occupant warning system in accordance with S20C7.
 - (b) In kitchens and other areas where the use of the area is likely to result in smoke detectors causing spurious signals, subject to (c)—
 - (i) any other detector deemed suitable in accordance with AS 1670.1 may be installed provided that smoke detectors are installed elsewhere in the *sole-occupancy unit* in accordance with the requirements for alarms in S20C3(2)(a) and (2)(b); or
 - (ii) an alarm acknowledgement facility may be installed.
 - (c) Where a kitchen or other area referred to in (b) is in a building protected with a sprinkler system complying with **Specification 17** (other than a FPAA101D or FPAA101H system), detectors need not be installed in the kitchen or other areas likely to result in spurious signals.
- (2) In a Class 2 or 3 building or Class 4 part of a building provided with a smoke detection system, the following applies:
- (a) Smoke detectors must be installed—
 - (i) within each *sole-occupancy unit*, in accordance with the requirements for alarms in S20C3(2)(a) and (2)(b); and
 - (ii) subject to (b), in *public corridors* and other internal public spaces.
 - (b) In a Class 2 or 3 building or Class 4 part of a building protected with a sprinkler system complying with **Specification 17** (other than a FPAA101D or FPAA101H system), smoke detectors are not *required* in *public*

corridors and other internal public spaces.

- (3) In a Class 9a *health-care building* provided with a smoke detection system, the following applies:
- (a) Except as provided in (b)—
 - (i) photoelectric type smoke detectors must be installed in *patient care areas* and in paths of travel to *exits* from *patient care areas*; and
 - (ii) in areas other than *patient care areas* and paths of travel to *exits* from *patient care areas*, where the use of the area is likely to result in smoke detectors causing spurious signals, any other detector deemed suitable in accordance with AS 1670.1 may be installed in lieu of smoke detectors.
 - (b) The requirements of (a) do not apply where an area is protected with a sprinkler system complying with *Specification 17*, smoke detectors need not be installed where the use of the area is likely to result in spurious signals.
 - (c) Manual call points must be installed in *evacuation routes* so that no point on a floor is more than 30 m from a manual call point.

VIC S20C4(4)

- (4) In a Class 9c building provided with a smoke detection system, the following applies:
- (a) remote automatic indication of each zone must be given in each smoke compartment by means of—
 - (i) mimic panels with an illuminated display; or
 - (ii) annunciator panels with alpha numeric display; and
 - (b) if the building accommodates more than 20 residents, manual call points must be installed in paths of travel so that no point on a floor is more than 30 m from a manual call point.

S20C5 Combined smoke alarm and smoke detection system

- (1) A Class 2 or 3 building or Class 4 part of a building provided with a combination of a smoke alarm system and smoke detection system in accordance with *S20C2* must—
- (a) be provided with a smoke alarm system complying with *S20C3* within *sole-occupancy units*; and
 - (b) subject to (2), be provided with a smoke detection system complying with *S20C4* in areas not within *sole-occupancy units*.
- (2) In a Class 2 or 3 building or Class 4 part of a building protected with a sprinkler system complying with *Specification 17* (other than a FPAA101D or FPAA101H system), smoke detectors are not *required* in *public corridors* and other internal public spaces.

S20C6 Smoke detection for smoke control systems

- (1) Smoke detectors *required* to activate air pressurisation systems for fire-isolated *exits* and zone pressurisation systems must—
- (a) be installed in accordance with Section 7 of AS 1670.1; and
 - (b) have additional smoke detectors installed adjacent to each bank of lift landing doors set back horizontally from the door openings by a distance of not more than 3 m.
- (2) Smoke detectors *required* to activate—
- (a) *automatic* shutdown of air-handling systems in accordance with *E2D16*, *E2D17* or *E2D19*; or
 - (b) a smoke exhaust system in accordance with *Specification 21*,
- must comply with the requirements of (3).
- (3) Smoke detectors referred to in (2) must—
- (a) be spaced—
 - (i) not more than 20 m apart and not more than 10 m from any wall, bulkhead or smoke curtain; and

- (ii) in enclosed malls and walkways in a Class 6 building not more than 15 m apart and not more than 7.5 m from any wall, bulkhead or curtain; and
- (b) have a sensitivity—
 - (i) in accordance with Section 7 of AS 1670.1 in areas other than a multi-storey walkway and mall in a Class 6 building; and
 - (ii) not exceeding 0.5% smoke obscuration per metre with compensation for external airborne contamination as necessary, in a multi-storey walkway and mall in a Class 6 building.
- (4) Smoke detectors provided to activate a smoke control system must—
 - (a) either—
 - (i) form part of a building fire or smoke detection system complying with AS 1670.1; or
 - (ii) be a separate dedicated system incorporating control and indicating equipment complying with AS 1670.1; and
 - (b) activate a building occupant warning system complying with S20C7, except that smoke detectors provided solely to initiate automatic shutdown of air-handling systems in accordance with (2)(a) need not activate a building occupant warning system.

S20C7 Building occupant warning system

Subject to E4D9, a building occupant warning system provided as part of a smoke hazard management system must comply with clause 3.22 of AS 1670.1 to sound through all occupied areas except—

- (a) in a Class 2 and 3 building or Class 4 part of a building provided with a smoke alarm system in accordance with S20C3(2)(c)—
 - (i) the sound pressure level need not be measured within a sole-occupancy unit if a level of not less than 85 dB(A) is provided at the door providing access to the sole-occupancy unit; and
 - (ii) the inbuilt sounders of the smoke alarms may be used to wholly or partially meet the requirements; and
- (b) in a Class 2 and 3 building or Class 4 part of a building provided with a smoke detection system in accordance with S20C4(2), the sound pressure level from a building occupant warning system need not be measured within a sole-occupancy unit if a level of not less than 100 dB(A) is provided at the door providing access to the sole-occupancy unit; and
- (c) in a Class 3 building used as a residential care building, the system—
 - (i) must be arranged to provide a warning for occupants; and
 - (ii) in areas used by residents, may have its alarm adjusted in volume and content to minimise trauma consistent with the type and condition of residents; and
- (d) in a Class 9a health-care building, in a patient care area, the system—
 - (i) must be arranged to provide a warning for occupants; and
 - (ii) in a ward area, may have its alarm adjusted in volume and content to minimise trauma consistent with the type and condition of the patients; and
- (e) in a Class 9c building, the system—
 - (i) must be arranged to provide a warning for occupants; and
 - (ii) must notify staff caring for the residents of the building; and
 - (iii) in areas used by residents, may have its alarm adjusted in volume and content to minimise trauma consistent with the type and condition of residents.

NSW S20C8

VIC S20C8

S20C8**System monitoring**

The following installations must be connected to a fire alarm monitoring system connected to a fire station or fire station dispatch centre in accordance with AS 1670.3:

- (a) A smoke detection system in a Class 3 building provided in accordance with [S20C2\(b\)\(i\)](#) or [S20C2\(b\)\(ii\)](#).
- (b) A smoke detection system in a Class 9a *health-care building*, if the building accommodates more than 20 patients.
- (c) A smoke detection system in a Class 9c building.
- (d) Smoke detection in accordance with [S20C6](#) provided to activate—
 - (i) a smoke exhaust system in accordance with [Specification 21](#); or
 - (ii) *smoke-and-heat vents* in accordance with [Specification 22](#).
- (e) An *automatic* fire detection and alarm system *required* by [E2D10](#) for large isolated buildings subject to [C3D4](#).

PREVIEW DRAFT

Specification 21

Smoke exhaust systems

S21C1 Scope

This Specification describes the requirements for mechanical smoke exhaust systems.

S21C2 Smoke exhaust capacity

- (1) Smoke exhaust fans must have a sufficient capacity to contain the smoke layer—
 - (a) within a smoke reservoir formed in accordance with S21C4 and not less than 2 m above the highest floor level; and
 - (b) above the top of any openings interconnecting different smoke reservoirs.
- (2) Exhaust rates must be determined in accordance with Figure S21C2, with the height measurement taken from the lowest floor level to the underside of the smoke layer and the *fire load* determined in accordance with Table S21C2.


Table S21C2: Fire load (MW)

Classification	Fire load (MW) for unsprinklered buildings	Fire load (MW) for sprinklered buildings
Class 2, 3 or 5	5	1.5
Class 6	10	5
Class 7 or 8	15	5
Class 9 — generally	5	1.5
Class 9b buildings covered by Part 11 (see Note) or exhibition halls	10	5

Table Notes

If the smoke reservoir above the *stage* is smoke separated from the audience area, the *fire load* specified applies to the *stage* area only and the *fire load* for the audience area is as per Class 9 generally.

Figure S21C2: Smoke exhaust rate

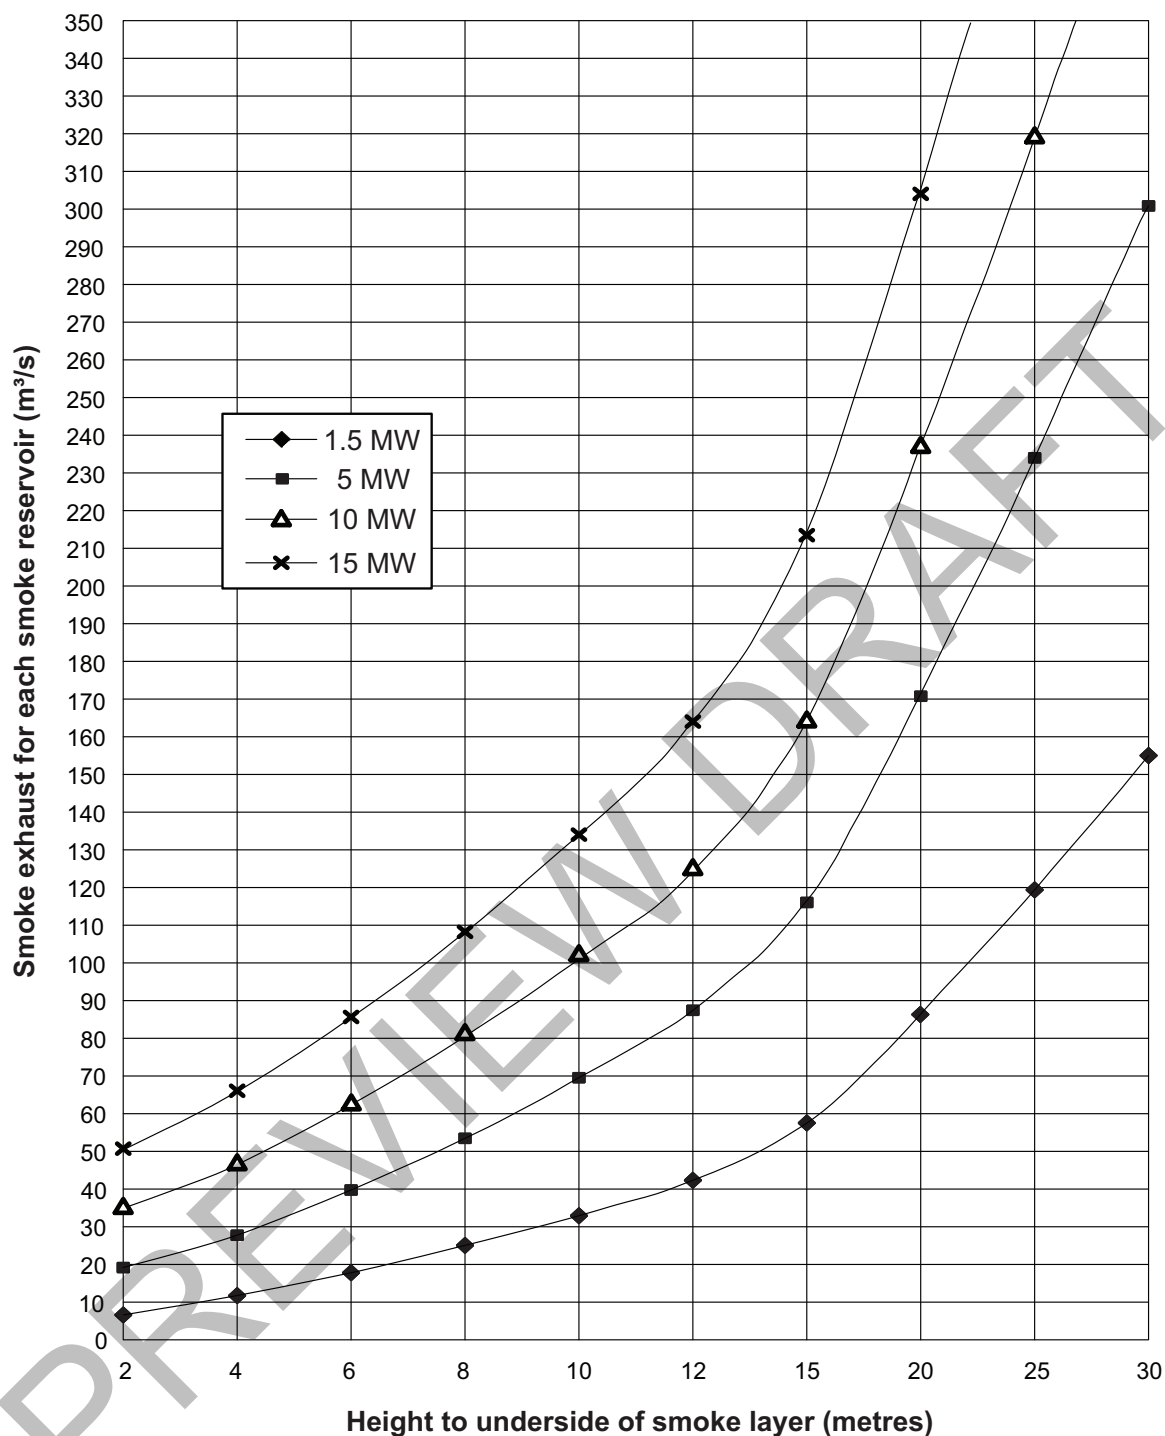

S21C3 Smoke exhaust fans

Each smoke exhaust fan, complete with its drive, flexible connections, control gear and wiring must—

- be constructed and installed so that it is capable of continuous operation (exhausting the *required* volumetric flow rate at the installed system resistance) at a temperature of 200°C for a period of not less than 1 hour; and
- in a building not fitted with a sprinkler system, be capable of continuous operation at a temperature of 300°C for a period of not less than 30 minutes; and
- be rated to handle the *required* volumetric flow rate at ambient temperature to be capable of exhausting cool smoke during the early stages of a fire and to allow routine testing; and
- have any high temperature overload devices installed, *automatically* overridden during the smoke exhaust

operation.

S21C4 Smoke reservoirs

- (1) A *fire compartment* must be divided at ceiling level into smoke reservoirs formed by smoke baffles/curtains of *non-combustible* and non-shatterable construction.
- (2) The horizontal area of a smoke reservoir must not exceed 2000 m² and in enclosed walkways and malls of a Class 6 building must not exceed 60 m in length.
- (3) Smoke reservoirs must be of sufficient depth to contain the smoke layer and must not be less than 500 mm below an imperforate ceiling or roof.
- (4) Within a multi-*storey fire compartment*—
 - (a) a *non-combustible* bulkhead or smoke baffle/curtain must be provided around the underside of each opening into a building void to minimise the spread of smoke to other *storeys*; and
 - (b) the depth of the bulkhead or smoke baffle must be not less than the depth of the smoke reservoir provided under (3) plus an additional 400 mm.

S21C5 Smoke exhaust fan and vent location

Smoke exhaust fans and vents must be located—

- (a) such that each smoke reservoir is served by one or more fans with the maximum exhaust rate at any one point limited to avoid extracting air from below the smoke layer; and
- (b) to prevent the formation of stagnant regions resulting in excessive cooling and downward mixing of smoke; and
- (c) at natural collection points for the hot smoky gases within each smoke reservoir having due regard to the ceiling geometry and its effect on the migratory path of the smoke; and
- (d) away from the intersection of walkways or malls; and
- (e) to ensure that any voids containing escalators and/or stairs commonly used by the public are not used as a smoke exhaust path; and
- (f) to discharge directly to outdoor with a velocity of not less than 5 m/s, at a suitable point not less than 6 m from any air intake point or *exit*.

S21C6 Make-up air

- (1) Low level make-up air must be provided either *automatically* or via permanent ventilation openings to replace the air exhausted so as to minimise—
 - (a) any disturbance of the smoke layer due to turbulence created by the incoming air; and
 - (b) the risk of smoke migration to areas remote from the fire due to the effect of make-up air on the air balance of the total system.
- (2) The velocity of make-up air through doorways must not exceed 2.5 m/s.
- (3) Within a multi-*storey fire compartment*, make-up air must be provided across each vertical opening from a building void to the fire-affected *storey* at an average velocity of 1 m/s so as to minimise the spread of smoke from the fire-affected *storey* to other *storeys*.

S21C7 Smoke exhaust system control

- (1) Each smoke exhaust fan must be activated sequentially by smoke detectors complying with *Specification 20* and arranged in zones to match the smoke reservoir served by the fan(s).

- (2) Subject to (3) and (4), an air handling system (other than individual room units less than 1000 L/s and ventilation systems installed in accordance with Sections 5 and 6 of AS 1668.1) which does not form part of the smoke hazard management system must be *automatically* shut down on the activation of the smoke exhaust system.
- (3) In a single *storey fire compartment*, air handling systems in all non fire-affected zones may operate on 100% *outdoor air* to provide make-up air to the fire-affected zone.
- (4) Within a multi-*storey fire compartment*, air handling systems in all non fire-affected zones and *storeys* must operate at 100% *outdoor air* to provide make-up air to the fire-affected *storey* via building voids connecting *storeys*.
- (5) Manual override control and indication together with operating instructions for use by emergency personnel must be provided adjacent to the fire indicator panel in accordance with the control and indication requirements and the smoke control operating instructions of AS 1668.1.
- (6) Manual control for the smoke exhaust system must also be provided at a location normally used by the *stage* manager in a theatre.
- (7) Electrical installations, including power supply wiring to exhaust fans together with detection, control indication circuits (and where necessary, *automatic* make-up air supply) must comply with the requirements of AS 1668.1.

S21C8 Smoke detection

A smoke detection system must be installed in accordance with [Specification 20](#) to activate the smoke exhaust system.

Specification 22

Smoke-and-heat vents

S22C1 Scope

This Specification contains requirements for *automatic smoke-and-heat vents*.

S22C2 Adoption of AS 2665

Automatic smoke-and-heat vents must be installed as a system complying with AS 2665 except that permanently open vents may form part of the smoke/heat venting system provided they comply with the relevant criteria for *automatic smoke-and-heat vents* in AS 2665.

S22C3 Controls

Where a *smoke-and-heat vent* system is installed to comply with E2D14 to E2D20, then, in addition to thermally released link operation, *smoke-and-heat vents* must also be initiated by smoke detection complying with S20C6 and S20C8 and arranged in zones to match the smoke reservoirs.

Specification 23

Residential fire safety systems

S23C1 Scope

This Specification describes the requirements for residential fire safety systems referenced in [Specification 18](#).

S23C2 Application

- (1) Clauses [S23C3](#) to [S23C7](#)—
 - (a) apply to Class 3 *residential care buildings*; and
 - (b) cover installation requirements for local fire indicator panels (or alarm panels) that provide information to staff when a fire alarm is activated.
- (2) Clauses [S23C8](#) and [S23C9](#) describe requirements for connecting residential sprinkler systems in Class 2 and 3 buildings, or a *residential care building*, to a fire station or other approved monitoring service.

S23C3 General requirements

- (1) The installation of a residential local fire alarm system must consist of a system of smoke alarms powered either—
 - (a) directly from the *low voltage* supply mains; or
 - (b) from an *extra-low voltage* power source originating at a local fire indicator panel with a battery back-up facility.
- (2) A smoke detector complying with AS 1670.1 Clause 2.1.2(a)(ii), (xi) or (xv) may be substituted for a smoke alarm, provided an audible alarm device is associated with each detector.
- (3) The sound pressure level provided by a warning device must be equivalent to that required in Clause 3.22 of AS 1670.1, except that the sound pressure level need not be measured inside a *sole-occupancy unit*, provided that a level of not less than 85 dB(A) is attained at the access door to the unit.
- (4) The alarm system must be wired for *low voltage* or *extra-low voltage* wiring.
- (5) The system must be designed so—
 - (a) an audible alarm is given in the area in which the smoke alarm activates; and
 - (b) visible and audible indication of an alarm is provided at the local fire indicator panel; and
 - (c) an audible alarm is given in any area (including sleeping quarters and staff outbuildings) set aside for staff use.
- (6) The maximum number of smoke alarms on any one *alarm zone* must—
 - (a) be determined by the maximum current output rating of the system source; and
 - (b) not exceed 10.
- (7) Each *alarm zone* must be located around a single central access passageway, corridor or similar thoroughfare, to enable staff to readily identify the source of the alarm.
- (8) Where the smoke alarm is functionally dependent on an external power source—
 - (a) an audible fault signal must sound at the local fire indicator panel if that power source fails; and
 - (b) the local fire indicator panel must be permanently connected to a reliable 240 V separate *low voltage* final sub-circuit; and
 - (c) source power must be protected by a separate circuit breaker, or fuse, supplied from the live side of the main switch.
- (9) The smoke alarm system is not required to be connected to a fire alarm monitoring system (refer to [S18C3\(2\)\(c\)](#)).

S23C4 Local fire indicator panel

- (1) The local fire indicator panel must be located in a central area, such as a reception area, so that it is readily accessible by staff at all times.
- (2) The local fire indicator panel must be *fixed wired*.
- (3) The local fire indicator panel must incorporate the following:
 - (a) A suitable mains power supply with battery back-up (capable of operating the system for 12 hours) for the local fire indicator panel and *extra-low voltage* smoke alarms supplied directly from the local fire indicator panel.
 - (b) Terminals for input signal conductors from the smoke alarm and residential sprinkler system and, if the signal source is from a *low voltage* smoke alarm, external isolation must be provided.
 - (c) Visible indication of the *alarm zone* in which the actuating device is located.
 - (d) *Automatic* audible and visible indication of the following faults:
 - (i) A break in the wiring of any circuit between smoke alarms or *sprinkler alarm switch* and the local fire indicator panel.
 - (ii) Low battery condition.
 - (e) Automatic visible indication of mains power failure.
 - (f) Initiation of any ancillary control facilities such as smoke door release or air-conditioning shut-down.
 - (g) Local operation of individual smoke alarms, in the event of *alarm zone* isolation at the local fire indicator panel.
- (4) If the local fire indicator panel is also used for other non-fire related purposes such as security, then these functions—
 - (a) must be on separate and distinct circuits; and
 - (b) when disabled or isolated, must not interfere with the operation of fire alarm circuitry.
- (5) The local fire indicator panel must comply with AS 1670.1.
- (6) The local fire indicator panel must have the capacity to incorporate heat detectors deemed suitable in accordance with AS 1670.1 on either the same or separate *alarm zones* as the smoke alarms.

S23C5 Smoke alarms

- (1) *Extra-low voltage* smoke alarms must be compatible with the local fire indicator panel.
- (2) *Low voltage* smoke alarms must be configured to send an output alarm signal to the local fire indicator panel.
- (3) Unless there is internal isolation of the signal output conductors, they must at all times be treated as *low voltage* conductors.

S23C6 Signal isolation interface units

- (1) Signal isolation interface units must isolate any *low voltage* connected to the smoke alarms from the local fire indicator panel.
- (2) Signal isolation interface units must be certified by an *Accredited Testing Laboratory* as compatible with the specific types of smoke alarms used in the system.
- (3) Signal isolation interface units must be accepted by the electricity supply authority.
- (4) Units must be marked in a clearly visible location, with letters greater than or equal to 35 mm containing the following information:

SMOKE ALARM SIGNAL ISOLATION UNIT WARNING – 240 V
Isolate power supply before removing cover

S23C7

Wiring

- (1) Smoke alarms and associated equipment must be *fixed wired* for *low voltage* or *extra-low voltage* wiring systems, as applicable.
- (2) All *extra-low voltage* wiring must be red sheathed 0.6/1 kV stranded, with conductors having a cross sectional area of not less than 0.75 mm².
- (3) Clear and concise “as-installed” single line drawings to a suitable scale, showing rooms, external and internal walls, fixed partitions, doorways etc., are to be provided for each installation at the local fire indicator panel.
- (4) Drawings must also include the actual location of fire alarms, smoke alarms, sprinkler flow switches (where installed), alarm connection points and local fire indicator panel, to enable easy identification of alarm system elements and their relationship to the building layout.
- (5) Symbols used in the drawings referred to in (4) must be as shown in Figures S23C7a, S23C7b, S23C7c, S23C7d, S23C7e or S23C7f.

Figure S23C7a: Flow switch symbol



Figure S23C7b: Heat detector symbol




Figure S23C7c: Smoke detector symbol





Figure S23C7d: End-of-line device symbol



Figure S23C7e: Fire indicator panel symbol



Figure S23C7f: Smoke alarm symbol



S23C8 Connection to monitoring service

- (1) Connection of a residential sprinkler system to a fire station or other approved monitoring service must be via a *sprinkler alarm switch*, connected to alarm signalling equipment.
- (2) The connection from the alarm signalling equipment must be in accordance with AS 1670.3.
- (3) The alarm signalling equipment must be installed—
 - (a) in a secure, accessible position; and
 - (b) in a weatherproof housing, if located externally; and
 - (c) not more than 500 mm from the system flow switch.

S23C9 Indication at the fire indicator panel

The fire signal from the alarm signalling equipment must be mimicked by an audible and visible signal at the fire indicator panel.

Specification 24**Lift installations****S24C1 Scope**

This Specification contains requirements for *electric passenger lift* installations and *electrohydraulic passenger lift* installations.

S24C2 Lift cars exposed to solar radiation

- (1) A lift car exposed to solar radiation directly, or indirectly by re-radiation, must have—
- (a) mechanical ventilation at a rate of one air change per minute; or
 - (b) mechanical cooling.
- (2) A 2 hour alternative power source for ventilation or mechanical cooling at (1) must be provided in the event of normal power loss.

S24C3 Lift car emergency lighting

A lift car must have an emergency lighting system designed—

- (a) to come on automatically upon failure of the normal lighting supply; and
- (b) to provide at least 20 lux of lighting for 2 hours on the alarm initiation button.

S24C4 Cooling of lift shaft

While a lift in a lift *shaft* is in service, the cooling of the lift *shaft* must—

- (a) ensure that the dry bulb air temperature in the lift *shaft* does not exceed 40°C; and
- (b) if the cooling is by a ventilation system, be provided with an air change rate determined using a temperature rise of no more than 5 K.

S24C5 Lift foyer access

Where there is a security foyer in a building, access may be via locked security doors provided—

- (a) security doors revert to the unlocked state in the event of—
 - (i) power failure; or
 - (ii) fire alarm; and
- (b) locked foyer areas are monitored by closed circuit television and intercom system to a 24 hour staffed location.

S24C6 Emergency access doors in enclosed lift shafts

- (1) Where lifts are installed in enclosed lift *shafts*, having a distance between normal landing entrances greater than 11 m, emergency access doors must be provided and constructed as follows:

- (a) The clear opening size of emergency doors must be not less than 600 mm wide x 2 m high.
- (b) Hinged doors must not open towards the interior of the lift *shaft*.
- (c) Doors must be *self-closing* and self-locking.
- (d) Doors must be marked on the landing side with the following words in letters not less than 35 mm high:

DANGER LIFTWELL ACCESS

KEEP FURNITURE AND FIXTURES CLEAR

- (e) Doors from the landing side must only be openable by a tool.
 - (f) Each emergency door must be provided with a positive breaking electrical contact, wired into the control circuit to prevent movement of the lift until the emergency door is both closed and locked.
- (2) Emergency egress from the lift car must be provided in single enclosed lift *shafts* where—
- (a) ropes are installed; and
 - (b) the vertical distance between the lift car sill and the landing door head is less than 600 mm; and
 - (c) the counterweight is resting on its fully compressed buffer.
- (3) Emergency egress *required* by (2) must be in the form of an interlocked door with clear opening dimensions not less than 600 mm x 600 mm, accessible from the lift car entrance or the lift car roof (where the door is located in the wall of the lift *shaft*).

Specification 25**Passive photoluminescent exit signs****S25C1 Scope**

This Specification contains requirements for passive photoluminescent *exit* signs.

S25C2 Application

A passive photoluminescent *exit* sign must comply with Section 5 and Appendix D of AS/NZS 2293.1, except where varied by this Specification.

S25C3 Illumination

A passive photoluminescent *exit* sign must—

- (a) be maintained in a continuously charged state by a minimum illumination of 100 lux at the face of the sign by a dedicated light source with a colour temperature not less than 4000 K; and
- (b) in the event of a power failure, continue to provide a minimum luminance of 30 mcd/m² for not less than 90 minutes; and
- (c) have its performance verified by testing in accordance with ASTM E2073-10, except the activation illumination in clause 8.3 is replaced with 54 lux.

S25C4 Pictorial elements

Pictorial elements on a passive photoluminescent *exit* sign must—

- (a) where the colour white is used, be replaced with a photoluminescent material; and
- (b) be not less than 1.3 times larger than that specified in Table 5.1 of AS/NZS 2293.1; and
- (c) have a border of photoluminescent material that extends not less than 15 mm beyond the pictorial elements.

S25C5 Viewing distance

The maximum viewing distance in clause 5.6 of AS/NZS 2293.1 must not be more than 24 m.

S25C6 Smoke control systems

Smoke control systems required by clause 5.3 of AS/NZS 2293.1 do not apply to a passive photoluminescent *exit* sign.

Section F Health and amenity

Part F1

Water management

Objectives

F1O1 Objective

Functional Statements

F1F1 Protection from water

F1F2 Resistance to rising damp and ground water

Performance Requirements

F1P1 Managing rainwater impact on the building and adjoining properties

Verification Methods

F1V1 Weatherproofing

Deemed-to-Satisfy Provisions

F1D1 Deemed-to-Satisfy Provisions

F1D2 Application of Part

F1D3 Stormwater drainage

F1D4 Provision of drainage and grading to external areas

F1D5 Substrate materials

F1D6 Exposed joints

F1D7 External waterproofing membranes

F1D8 Damp-proofing

F1D9 Damp-proofing of floors on the ground

F1D10 Surface finishes

F1D11 Subfloor ventilation

F1D12 Roof coverings

F1D13 Sarking

F1D14 Glazed assemblies

F1D15 Wall cladding

Part F2

Wet areas and overflow protection

Objectives

F2O1 Objective

Functional Statements

F2F1 Wet areas

F2F2 Overflow from bathrooms and laundries

Performance Requirements

F2P1 Wet area overflows

F2P2 Wet areas

Verification Methods

F2V1 Overflow protection

Deemed-to-Satisfy Provisions

F2D1 Deemed-to-Satisfy Provisions

F2D2 Wet area construction

F2D3 Rooms containing urinals

Part F3 * * * * * F2D4 Floor wastes

Part F4 **Sanitary and other facilities**

Objectives

F4O1 Objectives

Functional Statements

F4F1 Sanitary facilities

F4F2 Laundry facilities

F4F3 Food preparation facilities

F4F4 Removal of unconscious occupant

Performance Requirements

F4P1 Personal hygiene facilities

F4P2 Laundry facilities

F4P3 Kitchen facilities

F4P4 Disposal of contaminated water from containers

F4P5 Construction of sanitary compartments to allow removal of unconscious people

F4P6 Microbial control for water systems

Verification Methods

F4V1 Sanitary facilities

Deemed-to-Satisfy Provisions

F4D1 Deemed-to-Satisfy Provisions

F4D2 Facilities in residential buildings

F4D3 Calculation of number of occupants and facilities

F4D4 Facilities in Class 3 to 9 buildings

F4D5 Accessible sanitary facilities

F4D6 Accessible unisex sanitary compartments

F4D7 Accessible unisex showers

F4D8 Construction of sanitary compartments

F4D9 Interpretation: urinals and washbasins

F4D10 Microbial (legionella) control

F4D11 Waste management

F4D12 Accessible adult change facilities

Part F5 **Room heights**

Objectives

F5O1 Objective

Functional Statements

F5F1 Room or space heights

Performance Requirements

F5P1 Room or space heights

Verification Methods

F5V1 Room or space heights

Deemed-to-Satisfy Provisions

F5D1 Deemed-to-Satisfy Provisions

F5D2 Height of rooms and other spaces

Part F6

Light and ventilation

Objectives

F6O1	Objective

Functional Statements

F6F1	Natural light
F6F2	Artificial light
F6F3	Ventilation

Performance Requirements

F6P1	Natural lighting
F6P2	Artificial lighting
F6P3	Outdoor air supply
F6P4	Mechanical ventilation to control odours and contaminants
F6P5	Disposal of contaminated air

Verification Methods

F6V1	Verification of suitable indoor air quality
F6V2	Verification of suitable indoor air quality for carparks
F6V3	Verification of suitable provision of natural light

Deemed-to-Satisfy Provisions

F6D1	Deemed-to-Satisfy Provisions
F6D2	Provision of natural light
F6D3	Methods and extent of natural light
F6D4	Natural light borrowed from adjoining room
F6D5	Artificial lighting
F6D6	Ventilation
F6D7	Natural ventilation
F6D8	Ventilation borrowed from adjoining room
F6D9	Restriction on location of sanitary compartments
F6D10	Airlocks
F6D11	Carparks
F6D12	Kitchen local exhaust ventilation

Part F7

Sound transmission and insulation

Objectives

F7O1	Objective

Functional Statements

F7F1	Sound transmission and insulation

Performance Requirements

F7P1	Sound transmission through floors
F7P2	Sound transmission through walls
F7P3	Sound transmission through floors in a residential care building
F7P4	Sound transmission through walls in a residential care building

Verification Methods

F7V1	Sound transmission through floors [F7P1]
F7V2	Sound transmission through walls [F7P2(a)]
F7V3	Sound transmission through floors [F7P3]
F7V4	Sound transmission through walls [F7P4(1)(a) and (2)]

Deemed-to-Satisfy Provisions

F7D1	Deemed-to-Satisfy Provisions
F7D2	Application of Part
F7D3	Determination of airborne sound insulation ratings
F7D4	Determination of impact sound insulation ratings
F7D5	Sound insulation rating of floors
F7D6	Sound insulation rating of walls
F7D7	Sound insulation rating of internal services
F7D8	Sound isolation of pumps

Part F8

Condensation management

Objectives

F8O1	Objective

Functional Statements

F8F1	Condensation

Performance Requirements

F8P1	Condensation and water vapour management

Verification Methods

F8V1	Condensation management

Deemed-to-Satisfy Provisions

F8D1	Deemed-to-Satisfy Provisions
F8D2	Application of Part
F8D3	External wall construction
F8D4	Exhaust systems
F8D5	Ventilation of a roof space with the primary insulation layer not parallel to the roof plane
F8D6	Ventilation of a roof space with the primary insulation layer parallel to the roof plane

Specification 26 Waterproofing and water-resistance requirements for building elements in wet areas

S26C1	Scope
S26C2	Application
S26C3	Shower area (enclosed and unenclosed)
S26C4	Area outside shower area
S26C5	Areas adjacent to baths and spas without showers
S26C6	Other areas

Specification 27 Accessible adult change facilities

S27C1	Scope
S27C2	General requirements
S27C3	Hoist
S27C4	Toilet pan, seat, backrest and grabrails
S27C5	Washbasin and tap
S27C6	Fixtures and fittings
S27C7	Change table
S27C8	Changing rails
S27C9	Door and door controls

S27C10	Signage
S27C11	Operating instructions

Specification 28 Sound insulation for building elements

S28C1	Scope
S28C2	Discontinuous construction
S28C3	Construction Deemed-to-Satisfy
S28C4	Acceptable forms of construction for walls — masonry
S28C5	Acceptable forms of construction for walls — concrete
S28C6	Acceptable forms of construction for walls — autoclaved aerated concrete
S28C7	Acceptable forms of construction for walls — timber and steel framing
S28C8	Acceptable forms of construction for floors — concrete
S28C9	Acceptable forms of construction for floors — autoclaved aerated concrete
S28C10	Acceptable forms of construction for floors — timber

Specification 29 Impact sound – test of equivalence

S29C1	Scope
S29C2	Construction to be tested
S29C3	Method

Part F1 Water management

Introduction to this Part

This Part is intended to minimise the risk of water leaking into or accumulating within a building and causing unhealthy conditions or damaging building elements. It is also intended to prevent water redirected away from the building damaging nearby properties.

Objectives

F101 Objective

The Objective of this Part is to—

- (a) safeguard occupants from illness or injury and protect the building from damage caused by the entry of *water*; and
- (b) protect *other property* from damage caused by redirected *water*.

Functional Statements

F1F1 Protection from water

A building, including any associated *sitework*, is to be constructed in a way that protects—

- (a) people from the adverse effects of *water*; and
- (b) *other property* from the adverse effects of redirected *water*.

F1F2 Resistance to rising damp and ground water

A building is to be resistant to the effects of *water* from the ground.

Performance Requirements

F1P1 Managing rainwater impact on the building and adjoining properties

- (1) *Water*, including *water* on the surface of the *allotment* that is *collected* by a building or associated *sitework*, must be *redirected* to a *drainage system* to prevent—
 - (a) unhealthy or unsafe conditions, or loss of amenity for occupants within the building; and
 - (b) undue damage to internal surfaces and other building elements; and
 - (c) undue damage or nuisance to other buildings and any *other property*.
- (2) *Water*, *required* to be drained and resulting from a rain event with an *annual exceedance probability*, with a five-minute duration period, of 5% satisfies (1) if it is—
 - (a) disposed of in a way that avoids the likelihood of damage to the building; and

- (b) conveyed through a *drainage system* to an appropriate *outfall*.
- (3) *Water* resulting from a rain event with an *annual exceedance probability*, with a five-minute duration period, of 1% collected or concentrated by building elements satisfies (1) if it is disposed of in a way that prevents—
 - (a) unhealthy or unsafe conditions, or loss of amenity for occupants within the building; and
 - (b) undue damage to internal surfaces and other building elements.
- (4) *Water* resulting from a rain event in (2) and (3), subject to wind action with an *annual exceedance probability*, of 4% collected or concentrated by a building satisfies (1) if it is disposed of in a way that prevents—
 - (a) unhealthy or unsafe conditions, or loss of amenity for occupants within the building; and
 - (b) undue damage to internal surfaces and other building elements.

Notes

For the purposes of F1P1(3)—

- (a) building elements include external walls, openings around windows and external doors, roofs, balconies, podiums, attached awnings, similar horizontal surface parts of a building and stormwater overflow systems; and
- (b) an *annual exceedance probability* of 5% can be applied to awnings and roofs with or without eaves gutters and where overflow, if applicable, is external to the building.

Exemptions

F1P1(1), F1P1(3) and F1P1(4) do not apply to—

- (a) *condensation*; or
- (b) a *private garage*, tool shed, *sanitary compartment* or the like separate from, or forming part of, a building used for other purposes; or
- (c) parts of a building below the ground surface where an *appropriate authority* determines drainage is not permitted; or
- (d) an *open spectator stand* or *open-deck carpark*.

Verification Methods

F1V1 Weatherproofing

- (1) Compliance with F1P1 for weatherproofing of an *external wall* is verified when—
 - (a) a prototype passes the procedure described in (2); and
 - (b) the *external wall*—
 - (i) has a risk score of 20 or less, when the sum of all risk factor scores are determined in accordance with Table F3V1a; and
 - (ii) includes only *windows* that comply with AS 2047.
- (2) The test procedure referred to in (1)(a) must be as follows:
 - (a) The test specimen is in accordance with the requirements of (3).
 - (b) The test procedure is in accordance with the requirements of (4) or (5) as applicable.
 - (c) The test specimen does not fail the criteria in (6).
 - (d) The test is recorded in accordance with the requirements of (7).
- (3) Test specimen: The test specimen must be a minimum of 2.4 m high and 2.4 m wide and incorporate—
 - (a) representative samples of openings and joints, including—
 - (i) vertical and horizontal control joints; and

- (ii) wall junctions; and
- (iii) *windows* or doors; and
- (iv) electrical boxes; and
- (v) balcony drainage and parapet flashings; and
- (vi) footer and header termination systems; and
- (b) for a *cavity wall*—
 - (i) a transparent material for a proportion of the internal wall lining (to provide an unobstructed view of the *external wall* cladding) with sufficient structural capability and similar air tightness to resist the applied wind pressures; and
 - (ii) a 15 mm diameter hole in the internal wall lining below a *window*.
- (4) The test procedure for a *direct fix cladding wall* or *unique wall* must be as follows:
 - (a) Apply 100% positive and negative serviceability wind pressures to the external face of the test specimen for a period of not less than 1 minute each.
 - (b) Apply static pressure of either 300 Pa or 30% serviceability wind pressure, whichever is higher, in accordance with the water penetration test procedure at clause 8.5.2 of AS/NZS 4284.
 - (c) Apply cyclic pressure in accordance with—
 - (i) the three stages of Table F1V1b; and
 - (ii) the water penetration test procedure at clause 8.6.2 of AS/NZS 4284.
- (5) The test procedure for a *cavity wall* must be as follows:
 - (a) Apply 100% positive and negative serviceability wind pressures to the external face of the test specimen for a period of not less than 1 minute each.
 - (b) Apply static pressure of either 300 Pa or 30% serviceability wind pressure, whichever is higher, in accordance with the water penetration test procedure at clause 8.5.2 of AS/NZS 4284.
 - (c) Apply cyclic pressure in accordance with—
 - (i) stage 3 of Table F1V1b; and
 - (ii) the water penetration test procedure at clause 8.6.2 of AS/NZS 4284.
 - (d) To simulate the failure of the primary weather-defence or sealing, the following procedure must be applied to the test specimen:
 - (i) Insert 6 mm diameter holes through the external face of the *cavity wall* in all places specified below:
 - (A) Wall/*window* or wall/door junctions at $\frac{3}{4}$ height.
 - (B) Immediately above the head flashing.
 - (C) Through external sealing of the horizontal and vertical joints.
 - (D) Above any other penetration detail not covered by (A) to (C).
 - (ii) Repeat the static and cyclic pressure tests of (b) and (c).
 - (iii) Within 30 minutes of the completion of (ii), remove the internal lining of the *cavity wall* and check for compliance with (6).
 - (iv) With the internal lining removed, apply a final static pressure test at 50 Pa for a period of 15 minutes and check for compliance with (6).
- (6) Compliance is determined as follows:
 - (a) A *direct fix cladding wall* and *unique wall* are verified for compliance with F1P1 if there is no presence of water on the inside surface of the facade.
 - (b) A *cavity wall* is verified for compliance with F1P1 if there is no presence of water on the removed surface of the *cavity*, except that during the simulation of the failure of the primary weather-defence or sealing, water may—
 - (i) transfer to the removed surface of the *cavity* due to the introduced defects (6 mm holes); and
 - (ii) contact, but not pool on, battens and other cavity surfaces.
- (7) The test report must include the following information:

- (a) Name and address of the person supervising the test.
- (b) Test report number.
- (c) Date of the test.
- (d) Cladding manufacturer's name and address.
- (e) Construction details of the test specimen, including a description, and drawings and details of the components, showing modifications, if any.
- (f) Test sequence with the pressures used in all tests.
- (g) For each of the static and cyclic pressure tests, full details of all leakages, including position, extent and timing.

Table F1V1a: Risk factors and scores

Risk factor	Category	Risk severity	Score
Wind region	Region A0-5 (AS/NZS 1170.2)	Low to medium	0
	Region B1-2 (AS/NZS 1170.2)		
	Region C (AS/NZS 1170.2)	High	1
	Region D (AS/NZS 1170.2)	Very high	2
Number of <i>storeys</i>	One <i>storey</i>	Low	0
	Two <i>storeys</i> in part	Medium	1
	Two <i>storeys</i>	High	2
	More than two <i>storeys</i>	Very high	4
Roof/wall junctions	Roof-to-wall junctions fully protected	Low	0
	Roof-to-wall junctions partially exposed	Medium	1
	Roof-to-wall junctions fully exposed	High	3
	Roof elements finishing within the boundaries formed by the <i>external walls</i>	Very high	5
Eaves width	More than 600 mm for single <i>storey</i>	Low	0
	451-600 mm for single <i>storey</i>	Medium	1
	More than 600 mm for two <i>storey</i>		
	101-450 mm for single <i>storey</i>	High	2
	451-600 mm for two <i>storey</i>		
	More than 600 mm for above two <i>storey</i>		
	0-100 mm for single <i>storey</i>	Very high	5
	0-450 mm for two <i>storey</i>		
	Less than 600 mm for above two <i>storey</i>		
Envelope complexity	Simple shape with single cladding type	Low	0
	Complex shape with not more than two cladding types	Medium	1
	Complex shape with more than two cladding types	High	3
	As for high risk but with fully exposed roof-to-wall junctions	Very high	6
Decks, porches and balconies	None	Low	0
	Timber slat deck or porch at ground level		
	Fully covered in plan view by roof	Medium	2
	Timber slat deck attached at first or second floor level		
	Balcony exposed in plan view at first floor	High	4

Risk factor	Category	Risk severity	Score
	level	Very high	6
	Balcony cantilevered at first floor level		
	Balcony exposed in plan view at second floor level or above		
	Balcony cantilevered at second floor level or above		

Table Notes

- (1) Eaves width is measured horizontally from the external face of any wall cladding to the outer edge of any overhang, including fascia and external gutters.
- (2) Barriers to prevent falling and parapets are considered as 0 mm eaves.

Table F1V1b: Cyclic pressure

Stage number	Serviceability wind pressure (%)	
	Min	Max
1	15	30
2	20	40
3	30	60

Deemed-to-Satisfy Provisions

F1D1 Deemed-to-Satisfy Provisions

SA F1D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements F1P1* is satisfied by complying with F1D2 to F1D15.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

F1D2 Application of Part

- (1) F1D4 to F1D7 and F1D10 do not apply to a roof with a covering complying with F1D12(a) to (d).
- (2) F1D3 to F1D7 and F1D10 do not apply to—
 - (a) timber decking or other perforated flooring to a balcony, podium or similar horizontal surface part of a building; or
 - (b) a balcony, podium or similar horizontal surface part of a building which is located directly above ground.
- (3) F1D3 to F1D15 do not apply to horizontal or near horizontal surfaces created by window hoods, spandrels, tops of parapets and other features.
- (4) For the purpose of this Part, reference to a horizontal element includes reference to a near horizontal element.

F1D3 Stormwater drainage

Stormwater drainage must be designed and constructed in accordance with AS/NZS 3500.3.

Explanatory Information

Where stormwater drainage does not comply with F1D3, a *Performance Solution* is to be used to demonstrate compliance with the relevant *Performance Requirements*.

F1D4 Provision of drainage and grading to external areas

A concrete roof, balcony, podium or similar part of a building must have—

- (a) a *drainage system* complying with F1D3 that incorporates sufficient overflow provision; and
- (b) its *structural substrate* graded with a minimum fall of 1:80 in the plane of the substrate to suit the *drainage system required* by (a); and
- (c) a minimum 70 mm step down from the surface level of the internal floor *structural substrate* to the adjacent surface level of the external *structural substrate*, where applicable; and
- (d) a monolithic hob that is integral with the *structural substrate*, at least 70 mm high, installed at the outer perimeter, except where the perimeter of the roof, balcony, podium or similar part of the building drains directly to a gutter.

Notes

- (1) The invert level of overflow provision referred to in F1D4(a) must be installed not less than 20 mm below any adjacent internal floor *structural substrate*.
- (2) For the purposes of Section F, the plane of the floor or substrate is taken to mean the predominant fall of the surface in question, typically perpendicular to bounding walls and is not a reference to the diagonal intersection between planes.
- (3) For the purposes of this Part, a tile bed, screed, topping or similar component is not considered a *structural substrate* except within planter boxes where it can be used to achieve the minimum fall of 1:80.
- (4) F1D4(d) does not prevent penetration of a hob for the provision of overflow.
- (5) The minimum 70 mm step down reference in F1D4(c) is not intended to refer to the minimum waterproofing termination height specified in AS 4654.2. Where AS 4654.2 requires a termination height greater than 70 mm, the waterproof membrane termination can be extended by suitable means above the 70 mm concrete set down.

Explanatory Information

Note that F1D7(1)(b), by reference to AS 4654.2, may require in some circumstances a step down greater than 70 mm. Similarly, other provisions may also specify gradient requirements. For example, D4D2 may prevent gradients steeper than 1:40.

F1D5 Substrate materials

- (1) In a building or part of a building, where a roof, balcony, podium, or similar part of a building is constructed of concrete, it must comply with AS 3600.
- (2) The surface of *structural substrates* in (1) must be prepared in accordance with F1D7(1)(b) to be suitable for application of a membrane.

F1D6 Exposed joints

Exposed joints in the drainage surface on a roof, balcony, podium or similar horizontal surface part of a building must—

- (a) be located on the ridge line or high point of the *structural substrate*; and
- (b) be protected in accordance with Section 2.9 of AS 4654.2; and

- (c) not be located beneath or run through a planter box, water feature or similar part of the building.

Notes

For the purposes of F1D6, an exposed joint is a construction joint, control joint, expansion joint, contraction joint or movement joint and includes an exposed joint which is directly below a drainage surface.

F1D7 External waterproofing membranes

- (1) A roof, balcony, podium or similar horizontal surface part of a building must be provided with a *waterproofing membrane*—
 - (a) consisting of materials complying with AS 4654.1; and
 - (b) designed and installed in accordance with AS 4654.2.
- (2) Where a membrane *required* by (1) is applied to a concrete roof, balcony, podium or similar horizontal surface, the membrane must be installed directly on a *structural substrate* complying with F1D5.

F1D8 Damp-proofing

- (1) Except for a building covered by (3), moisture from the ground must be prevented from reaching—
 - (a) the lowest floor timbers and the walls above the lowest floor joists; and
 - (b) the walls above the *damp-proof course*; and
 - (c) the underside of a suspended floor constructed of a material other than timber, and the supporting beams or girders.

SA F1D8(2)

- (2) Where a *damp-proof course* is provided, it must consist of—
 - (a) a material that complies with AS/NZS 2904; or
 - (b) impervious sheet material in accordance with AS 3660.1.
- (3) The following buildings need not comply with (1):
 - (a) A *private garage*, tool shed, *sanitary compartment*, or the like, separate from or forming part of a building used for other purposes.
 - (b) An *open spectator stand* or *open-deck carpark*.

SA F1D7

F1D9 Damp-proofing of floors on the ground

- (1) If a floor of a room is laid on the ground or on fill, moisture from the ground must be prevented from reaching the upper surface of the floor and adjacent walls by the insertion of a vapour barrier in accordance with AS 2870.
- (2) The requirements of (1) do not apply where—
 - (a) weatherproofing is not *required*; or
 - (b) the floor is the base of a stair, lift or similar *shaft* which is adequately drained by gravitation or mechanical means.

F1D10 Surface finishes

In a building or part of a building, the flooring or *surface finish* of a roof, balcony, terrace, podium, or similar part of a building must be—

- (a) *self-draining*; or
- (b) directly fixed to a membrane complying with F1D7.

Limitations

F1D10(a) does not apply to areas subject to vehicular traffic or limited trafficability stone/pebble coverings (ballast) to roof membranes

F1D11 Subfloor ventilation

- (1) Subfloor spaces must—
 - (a) be provided with openings in *external walls* and internal subfloor walls in accordance with Table F1D11 for the climatic zones given in Figure F1D11; and
 - (b) have clearance between the ground surface and the underside of the lowest horizontal member in the subfloor in accordance with Table F1D11.
- (2) In addition to (1), a subfloor space must—
 - (a) be cleared of all building debris and vegetation; and
 - (b) have the ground beneath the suspended floor graded to prevent *water* ponding under the building; and
 - (c) contain no dead air spaces; and
 - (d) have openings evenly spaced as far as practicable; and
 - (e) have openings placed not more than 600 mm in from corners.
- (3) In double leaf masonry walls, openings specified in (1) must be provided in both leaves of the masonry, with openings being aligned to allow an unobstructed flow of air.
- (4) Openings in internal subfloor walls specified in (1) must have an unobstructed area equivalent to that *required* for the adjacent external openings.
- (5) Where the ground or subfloor space is excessively damp or subject to frequent flooding, in addition to the requirements of (1) to (4)—
 - (a) the subfloor ventilation *required* in (1) must be increased by 50%; or
 - (b) the ground within the subfloor space must be sealed with an impervious *membrane*; or
 - (c) subfloor framing must be—
 - (i) where above ground, above-ground durability Class 1 or 2 timbers or H3 preservative treated timbers in accordance with AS 1684.2, AS 1684.3 or AS 1684.4; or
 - (ii) where in ground, in-ground durability Class 1 or 2 timbers or H5 preservative treated timbers in accordance with AS 1684.2, AS 1684.3 or AS 1684.4; or
 - (iii) steel in accordance with NASH Standard 'Residential and Low-Rise Steel Framing' Part 2.

Table F1D11: Subfloor openings and ground clearance

Climatic zone (see Figure F1D11)	Minimum aggregate subfloor ventilation openings without a <i>membrane</i> (mm ² /m of wall)	Minimum aggregate subfloor ventilation openings having the ground sealed with an impervious <i>membrane</i> (mm ² /m of wall)	Minimum ground clearance height where termite inspection or management system is not required (mm)	Minimum ground clearance height where termite inspection is required (mm) ^{Note 1}
A	2000	1000	150	400
B	4000	2000	150	400
C	6000	3000	150	400

Table Notes

- (1) 400 mm clearance *required* only where termite management systems are installed that need to be inspected (see B1D4).
- (2) On sloping sites, the 400 mm clearance *required* by (1) may be reduced to 150 mm within 2 m of *external walls*.
- (3) In situations where openings in *external walls* and internal subfloor walls are not able to be provided, additional measures must be provided to ensure that the overall level of ventilation of the subfloor space is maintained.
- (4) Additional measures referred to in (3) may include measures similar to those in F1D11(5), such as providing durability class timbers, or having the ground sealed in the subfloor space with an impervious *membrane*.

Figure F1D11: Climatic zones based on relative humidity

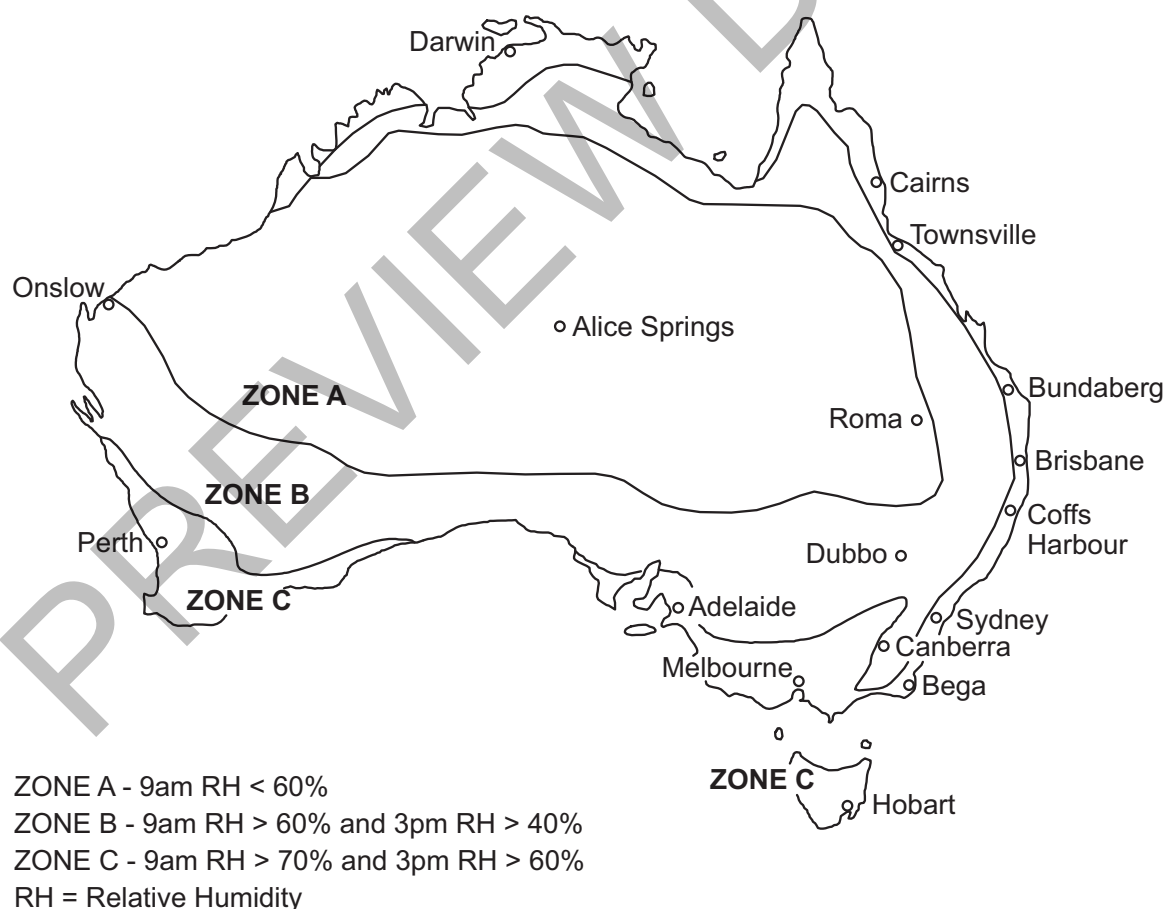


Figure Notes

The season with the highest relative humidity is used. Generally this will be July for southern Australia and January for northern Australia.

F1D12 Roof coverings

A roof must be covered with—

- (a) roof tiles complying with AS 2049, fixed in accordance with AS 2050; or
- (b) metal sheet roofing complying with AS 1562.1; or
- (c) plastic sheet roofing designed and installed in accordance with AS 1562.3; or
- (d) terracotta, fibre-cement and timber slates and shingles designed and installed in accordance with AS 4597, except in cyclonic areas; or
- (e) an external waterproofing *membrane* complying with F1D7.

F1D13 Sarking

Sarking-type material used for weatherproofing of roofs and walls must comply with AS 4200.1 and AS 4200.2.

F1D14 Glazed assemblies

- (1) Subject to (2) and (3), the following glazed assemblies in an *external wall*, must comply with AS 2047 requirements for resistance to water penetration:
 - (a) Windows.
 - (b) Sliding and swinging glazed doors with a frame, including french and bi-fold doors with a frame.
 - (c) Adjustable louvres.
 - (d) Shopfronts.
 - (e) Window walls with one piece framing.
- (2) The following buildings need not comply with (1):
 - (a) A *private garage*, tool shed, *sanitary compartment*, or the like, forming part of a building used for other purposes, except where the construction of the garage, tool shed, *sanitary compartment* or the like contributes to the weatherproofing of the other part of the building.
 - (b) An *open spectator stand* or *open-deck carpark*.
- (3) The following glazed assemblies need not comply with (1):
 - (a) All glazed assemblies not in an *external wall*.
 - (b) Revolving doors.
 - (c) Fixed louvres.
 - (d) Skylights, roof lights and windows in other than the vertical plane.
 - (e) Sliding and swinging glazed doors without a frame.
 - (f) Windows constructed on site and architectural one-off windows, which are not design tested in accordance with AS 2047.
 - (g) Second-hand windows, re-used windows and recycled windows.
 - (h) Heritage windows.

F1D15 Wall cladding

- (1) External wall cladding must comply with one or a combination of the following:
 - (a) Masonry, including masonry veneer, unreinforced and reinforced masonry: AS 3700.

- (b) Autoclaved aerated concrete: AS 5146.3.
 - (c) Metal wall cladding: AS 1562.1.
- (2) The following buildings need not comply with (1):
- (a) A *private garage*, tool shed, *sanitary compartment*, or the like, forming part of a building used for other purposes, except where the construction of the garage, tool shed, *sanitary compartment* or the like contributes to the weatherproofing of another part of the building that is *required* to be weatherproofed.
 - (b) An *open spectator stand* or *open deck carpark*.

PREVIEW DRAFT

Part F2 Wet areas and overflow protection

Introduction to this Part

This Part is intended to minimise the risk of water from internal *wet areas* accumulating within a building and causing musty, damp or unhealthy conditions or damaging building elements by corrosion or other degradation. It is also intended to prevent water from internal parts of a building causing damage to *other property* or parts of a building.

Objectives

F201 Objective

The Objective of this Part is to—

- (a) safeguard occupants from illness or injury and protect buildings from damage caused by—
 - (i) internal water from *wet areas*; and
 - (ii) the accumulation of internal moisture in the building; and
- (b) protect *other property* from damage caused by redirected internal water from *wet areas*.

Functional Statements

F2F1 Wet areas

A building including internal *wet areas* is to be constructed in a way that protects people, the building and *other property* from the adverse effects of internal water from *wet areas*.

F2F2 Overflow from bathrooms and laundries

A building is to be constructed to avoid the likelihood of—

- (a) the creation of unhealthy or dangerous conditions; and
- (b) damage to building elements,

caused by dampness or water overflow from bathrooms, laundries and the like.

Performance Requirements

SA F2P1

F2P1 Wet area overflows

Overflow from a bathroom, laundry facility or the like must be prevented from penetrating to—

- (a) another *sole-occupancy unit* used for sleeping accommodation; and
- (b) a public space,

in a *storey* below in the same building.

F2P2 Wet areas

To protect the structure of the building and to maintain the *amenity* of the occupants, water must be prevented from penetrating—

- (a) behind fittings and linings; and
- (b) into concealed spaces,

of *sanitary compartments*, bathrooms, laundries and the like.

SA F2P3

Verification Methods

F2V1 Overflow protection

Compliance with F2P1 is verified when the flow rate of the in-built overflow for all *vessels* in the room is greater than the flow rate of the source filling the *vessel*.

Applications

F2V1 only applies to bathrooms, laundries and the like in a Class 2 or 3 building or a Class 4 part of a building.

Deemed-to-Satisfy Provisions

F2D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* F2P1 and F2P2 are satisfied by complying with F2D2 to F2D4.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

F2D2 Wet area construction

SA F2D2(1)

- (1) In a Class 2 and 3 building and a Class 4 part of a building, building elements in *wet areas* must—
 - (a) be *water resistant* or *waterproof* in accordance with *Specification 26*; and
 - (b) comply with AS 3740.
- (2) In a Class 5, 6, 7, 8 or 9 building, building elements in a bathroom or shower room, a slop hopper or sink compartment, a laundry or *sanitary compartment* must—
 - (a) be *water resistant* or *waterproof* in accordance with *Specification 26*; and
 - (b) comply with AS 3740,

as if they were in a Class 2 or 3 building or a Class 4 part of a building.

F2D3 Rooms containing urinals

- (1) Where a slab or stall type urinal is installed—
 - (a) the floor surface of the room containing the urinal must be an impervious material; and
 - (i) where no step is installed, must—
 - (A) be graded to the urinal channel for a distance of 1.5 m from the urinal channel; and
 - (B) have the remainder of the floor graded to a *floor waste*; and
 - (ii) where a step is installed—
 - (A) the step must have an impervious surface and be graded to the urinal channel; and
 - (B) the floor behind the step must be graded to a *floor waste*; and
 - (b) the junction between the floor surface and the urinal channel must be impervious.
- (2) Where a wall hung urinal is installed—
 - (a) the wall must be surfaced with impervious material extending from the floor to not less than 50 mm above the top of the urinal and not less than 225 mm on each side of the urinal; and
 - (b) the floor must be surfaced with an impervious material and be graded to a *floor waste*.
- (3) In a room with timber or steel-framed walls and containing a urinal—
 - (a) the wall must be surfaced with an impervious material extending from the floor to not less than 100 mm above the floor surface; and
 - (b) the junction of the floor surface and the wall surface must be impervious.

SA F2D4

F2D4 Floor wastes

- (1) In a Class 2 or 3 building or Class 4 part of a building, a bathroom or laundry located at any level above a *sole-occupancy unit* or public space must have a *floor waste*.
- (2) Where a *floor waste* is installed—
 - (a) the minimum continuous fall of a floor plane to the waste must be 1:80; and
 - (b) the maximum continuous fall of a floor plane to the waste must be 1:50.

Part F3

* * * * *

The content of Part F3, which exists in NCC 2022, has been removed. The Part number has been retained so as not to change the numbering of the current NCC from that of NCC 2022.

PREVIEW DRAFT

Part F4 Sanitary and other facilities

Introduction to this Part

This Part focuses on reducing risk of illness and loss of *amenity* due to inadequate toilets, bathrooms and laundries, on ensuring occupants in residential buildings have access to a kitchen, and on microbial control in air-conditioning and *heated water* systems.

Objectives

F401 Objectives

The Objective of this Part is to—

- (a) safeguard occupants from illness caused by infection; and
- (b) safeguard occupants from loss of *amenity* arising from the absence of adequate personal hygiene facilities; and
- (c) enable occupants to carry out laundering; and
- (d) provide for facilities to enable food preparation; and
- (e) enable unconscious occupants of *sanitary compartments* to be removed from the compartment.

Functional Statements

F4F1 Sanitary facilities

A building is to be provided with—

- (a) suitable sanitary facilities and space and facilities for personal hygiene; and
- (b) adequate means for the prevention of contaminants to hot water, warm water and cooling water systems.

F4F2 Laundry facilities

A building is to be provided with—

- (a) space or facilities for laundering; and
- (b) suitable means for the sanitary disposal of waste water.

Applications

F4F2 only applies to—

- (a) a Class 2 building or a Class 4 part of a building; and
- (b) a Class 9a *health-care building*; and
- (c) a Class 9b *early childhood centre*; and
- (d) a Class 9c building.

F4F3 Food preparation facilities

A building is to be provided with—

- (a) space and facilities for the preparation and cooking of food; and
- (b) suitable means for the sanitary disposal of associated waste water.

Applications

F4F3 only applies to—

- (a) a Class 2 building or a Class 4 part of a building; and
- (b) a Class 9a *health-care building*; and
- (c) a Class 9b *early childhood centre*; and
- (d) a Class 9c building.

F4F4 Removal of unconscious occupant

A *sanitary compartment* is to have sufficient space or other means to permit an unconscious occupant to be removed from the compartment.

Performance Requirements

F4P1 Personal hygiene facilities

Suitable sanitary facilities for personal hygiene must be provided in a convenient location within or associated with a building, to the degree necessary, appropriate to—

- (a) the function or use of the building; and
- (b) the number and gender of the occupants; and
- (c) the disability or other particular needs of the occupants.

VIC F4P2

F4P2 Laundry facilities

Laundrying facilities or space for laundrying facilities and the means for the sanitary disposal of waste water must be provided in a convenient location within or associated with a building appropriate to the function or use of the building.

Applications

F4P2 only applies to—

- (a) a Class 2 building or Class 4 part of a building; and
- (b) a Class 9a *health-care building*; and
- (c) a Class 9b *early childhood centre*; and
- (d) a Class 9c building.

F4P3 Kitchen facilities

A facility must be provided which includes—

- (a) a means for food rinsing, utensil washing and the sanitary disposal of associated waste water; and
- (b) a means for cooking food; and
- (c) a space for food preparation.

Applications

F4P3 only applies to—

- (a) a Class 2 building or Class 4 part of a building; and
- (b) a Class 9a *health-care building*; and
- (c) a Class 9b *early childhood centre*; and
- (d) a Class 9c building.

F4P4 Disposal of contaminated water from containers

Suitable means must be provided in a building containing wards or bedrooms to facilitate the emptying of sewage or dirty water from containers.

Applications

F4P4 only applies to a Class 9a or 9c building.

F4P5 Construction of sanitary compartments to allow removal of unconscious people

A *sanitary compartment* must be constructed with sufficient space or other means to permit an unconscious occupant to be removed from the compartment.

NSW F4P6

F4P6 Microbial control for water systems

Hot water, warm water and cooling water systems installed in a building must control the accumulation of harmful levels of micro-organisms.

Limitations

F4P6 does not apply to a system serving only a single *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building.

Verification Methods

F4V1 Sanitary facilities

- (1) Compliance with [F4P1](#), for the number of sanitary facilities, is verified when queuing modelling predicts that occupant waiting time for sanitary facilities is at least equivalent to the waiting time predicted using the respective [Deemed-to-Satisfy Provisions](#).
- (2) For calculations performed under (1), the occupant waiting time is determined as the 90th percentile wait time at maximum population.
- (3) Queuing modelling in (1) must reflect the following:
 - (a) Function or use of the building.
 - (b) Number and gender of occupants.
 - (c) The disability or other particular needs of the occupants.
 - (d) Occupant usage patterns.

Deemed-to-Satisfy Provisions

F4D1 Deemed-to-Satisfy Provisions

VIC F4D1(1)

- (1) Where a [Deemed-to-Satisfy Solution](#) is proposed, [Performance Requirements F4P1 to F4P6](#) are satisfied by complying with—
 - (a) [F4D2 to F4D12](#); and
 - (b) for public transport buildings, [Part I2](#); and
 - (c) for *farm sheds*, [Part I3](#).
- (2) Where a [Performance Solution](#) is proposed, the relevant [Performance Requirements](#) must be determined in accordance with [A2G2\(3\)](#) and [A2G4\(3\)](#) as applicable.

F4D2 Facilities in residential buildings

- (1) For facilities in Class 2 buildings, the following applies:
 - (a) Within each [sole-occupancy unit](#), provide—
 - (i) a kitchen sink and facilities for the preparation and cooking of food; and
 - (ii) a bath or shower; and
 - (iii) a closet pan; and
 - (iv) a washbasin.
 - (b) For laundry facilities, provide either—
 - (i) in each [sole-occupancy unit](#)—
 - (A) clothes washing facilities, comprising at least one washtub and a space for a washing machine; and
 - (B) clothes drying facilities comprising clothes line or a hoist with not less than 7.5 m of line, or space for one heat operated drying cabinet or appliance in the same room as the clothes washing facilities; or
 - (ii) a separate laundry for each 4 [sole-occupancy units](#), or part thereof, that must comprise—
 - (A) clothes washing facilities, comprising at least one washtub and a space for a washing machine; and
 - (B) clothes drying facilities comprising clothes line or a hoist with not less than 7.5 m of line per [sole-occupancy unit](#), or space for one heat operated drying cabinet or appliance.
 - (c) For the purposes of (a) and (b), a kitchen sink or washbasin must not be counted as a laundry washtub.

- (2) For facilities in Class 3 buildings other than *residential care buildings*, the following applies:
- (a) For residents in each building or group of buildings, for each 10 residents for whom private facilities are not provided, provide—
 - (i) a bath or shower; and
 - (ii) a closet pan; and
 - (iii) a washbasin.
 - (b) Notwithstanding (a), if one urinal is provided for each 25 males up to 50 and one additional urinal for each additional 50 males or part thereof, one closet pan for each 12 males may be provided.
 - (c) Facilities for employees must be provided in accordance with F4D4.
 - (d) Facilities *required* by (a), (b) or (c) need not be situated in the same building.
- (3) For facilities in Class 3 *residential care buildings*, the following applies:
- (a) For residents in each building or group of buildings, provide—
 - (i) a shower, closet pan and wash basin for each 8 residents or part thereof where private facilities are not provided; and
 - (ii) a suitable bath for each 30 residents or part thereof.
 - (b) For the purposes of (a), urinals must not be taken into consideration in calculating the number of facilities.
- (4) For facilities in a Class 4 part of a building, the following applies:
- (a) For the *sole-occupancy unit*, provide—
 - (i) a kitchen sink and facilities for the preparation and cooking of food; and
 - (ii) a bath or shower; and
 - (iii) a closet pan; and
 - (iv) a washbasin; and
 - (v) clothes washing facilities, comprising a washtub and space in the same room for a washing machine; and
 - (vi) a clothes line or hoist, or space for a heat-operated drying cabinet or similar appliance for the exclusive use of the occupants.
 - (b) For the purposes of (a), a kitchen sink or washbasin must not be counted as a laundry washtub.
- (5) For facilities in Class 9c buildings, the following applies:
- (a) For residents in each building or group of buildings, provide—
 - (i) a closet pan and wash basin for each 6 residents or part thereof where private facilities are not provided; and
 - (ii) a shower for each 7 residents or part thereof for where private facilities are not provided; and
 - (iii) a suitable bath, fixed or mobile.
 - (b) In addition to the facilities *required* by (a), provide—
 - (i) one kitchen or other adequate facility for the preparation and cooking or reheating of food including a kitchen sink and washbasin; and
 - (ii) laundry facilities for the cleansing and drying of linen and clothing or adequate facilities for holding and dispatch or treatment of soiled linen and clothing and the like and the receipt and storage of clean linen; and
 - (iii) one clinical hand washing basin for each 16 residents or part thereof.
 - (c) For the purposes of (a), urinals must not be taken into consideration in calculating the number of facilities.

F4D3 Calculation of number of occupants and facilities

- (1) The number of persons accommodated must be calculated according to D2D18 if it cannot be more accurately determined by other means.

- (2) Unless the premises are used predominantly by one sex, sanitary facilities must be provided on the basis of equal numbers of males and females.
- (3) In calculating the number of sanitary facilities to be provided under F4D2 and F4D4, a unisex facility *required* for people with a disability (other than a facility provided under F4D12) may be counted once for each sex.
- (4) For the purposes of this Part, a unisex facility comprises one closet pan, one washbasin and means for the disposal of sanitary products.

F4D4 Facilities in Class 3 to 9 buildings

- (1) Except where permitted by (3), (4), (7), (12), F4D5(a), F4D5(b) and F4D12(1), separate sanitary facilities for males and females must be provided for Class 3, 5, 6, 7, 8 or 9 buildings in accordance with Tables F4D4a, F4D4b, F4D4c, F4D4d, F4D4e, F4D4f, F4D4g, F4D4h, F4D4i, F4D4j, F4D4k and F4D4l, as appropriate.
- (2) In Tables F4D4a, F4D4b, F4D4c, F4D4d, F4D4e, F4D4f, F4D4g, F4D4h, F4D4i, F4D4j, F4D4k and F4D4l—
 - (a) 'Number' means the number of facilities *required*; and
 - (b) '>' means greater than; and
 - (c) a hyphen means no data (refer to the row above for the highest value applicable); and
 - (d) 'N/A' means not applicable; and
 - (e) a reference to—
 - (i) 'employees' includes owners and managers using the building; and
 - (ii) 'add 1 per 100 or 150, 250, 500, etc.' includes any part thereof of that number.
- (3) If not more than 10 people are employed, a unisex facility may be provided instead of separate facilities for each sex.
- (4) If the majority of employees are of one sex, not more than 2 employees of the other sex may share toilet facilities if the facilities are separated by means of walls, partitions and doors to afford privacy.
- (5) Employees and the public may share the same facilities in a Class 6 and 9b building (other than a *school* or *early childhood centre*) provided the number of facilities provided is not less than the total number of facilities *required* for employees plus those *required* for the public.
- (6) Sanitary facilities must comply with the following:
 - (a) In all sanitary facilities, adequate means of disposal of sanitary products must be provided.
 - (b) In sanitary facilities for use by females, a dispenser for sanitary products must be provided.
- (7) Separate sanitary facilities for males and females need not be provided for patients in a *ward area* of a Class 9a building.
- (8) A Class 9a *health-care building* must be provided with—
 - (a) one kitchen or other adequate facility for the preparation and cooking or reheating of food including a kitchen sink and washbasin; and
 - (b) laundry facilities for the cleansing and drying of linen and clothing or adequate facilities for holding and dispatch or treatment of soiled linen and clothing, sanitary products and the like and the receipt and storage of clean linen; and
 - (c) one shower for each 8 patients or part thereof; and
 - (d) one island-type plunge bath in each *storey* containing a *ward area*.

VIC F4D4(9)

- (9) A Class 9b *early childhood centre* must be provided with—
 - (a) a kitchen or food preparation area with a kitchen sink, separate hand washing facilities, space for a refrigerator and space for cooking facilities, with—
 - (i) the facilities protected by a door or gate with child proof latches to prevent unsupervised access to the facilities by children younger than 5 years old; and
 - (ii) the ability to facilitate supervision of children from the facilities if the *early childhood centre* accommodates children younger than 2 years old; and

- (b) one bath, shower or shower-bath; and
- (c) if the centre accommodates children younger than 3 years old—
 - (i) a laundry facility comprising a washtub and space in the same room for a washing machine; and
 - (ii) a bench type baby bath, which is within 1 m of the nappy change bench; and
 - (iii) a nappy changing bench which—
 - (A) is within 1 m of separate adult hand washing facilities and bench type baby bath; and
 - (B) must be not less than 0.9 m² in area and at a height of not less than 850 mm, but not more than 900 mm above the finished floor level; and
 - (C) must have a space not less than 800 mm high, 500 mm wide and 800 mm deep for the storage of steps; and
 - (D) is positioned to permit a staff member changing a nappy to have visibility of the play area at all times.
- (10) Class 9b theatres and sporting venues must be provided with one shower for each 10 participants or part thereof.
- (11) Not less than one washbasin must be provided where closet pans or urinals are provided.
- (12) All gender sanitary facilities may be provided in lieu of sanitary facilities for males and females provided in accordance with (1) in accordance with the following:
 - (a) Where (1) requires in total 1 closet pan for males and 1 closet pan for females — all *required* closet pans and washbasins may be provided in all gender facilities.
 - (b) Where (1) requires in total 3 closet pans or urinals — 1 closet pan may be provided in an all-gender facility where 1 closet pan is provided for use by males and 1 closet pan is provided for use by females.
 - (c) Where (1) requires in total 4 or more closet pans or urinals — up to half of *required* closet pans or urinals for use by males and up to half of *required* closet pans for use by females may be provided in all gender facilities where the proportion of facilities deducted from males and the proportion of facilities deducted from females is equal.
 - (d) Where (c) is applied, the number of washbasins *required* by (1) for use by males and females may be reduced by the proportion applied to closet pans and urinals
- (13) For the purposes of this part, an all gender sanitary facility comprises 1 closet pan and 1 washbasin within the same compartment.
- (14) An all gender sanitary facility must—
 - (a) be located so that it can be entered without crossing an area reserved for one sex only; and
 - (b) be identified by signage that states “all gender”.

VIC F4D4(12)

Explanatory Information

- All gender facilities provided under F4D4(12) are for the use of females, besides others. Therefore, F4D4(6)(b) applies to all gender sanitary facilities.
- A bank of toilets designated for use by females is a sanitary facility. Therefore, a single menstruation product dispenser is sufficient for a bank of toilets designated for use by females.

Table F4D4a: Sanitary facilities in Class 3, 5, 6 and 9 buildings other than schools

User group	Facility type	Design occupancy	Number
Male employees	Closet pans	1 - 20	1
		>20	Add 1 per 20
	Urinals	1 - 10	0
		11 - 25	1
		26 - 50	2
		>50	Add 1 per 50
	Washbasins	1 - 30	1
		>30	Add 1 per 30

Health and amenity

User group	Facility type	Design occupancy	Number
Female employees	Closet pans	1 - 15	1
		>15	Add 1 per 15
	Washbasins	1 - 30	1
		>30	Add 1 per 30

Table F4D4b: Sanitary facilities in Class 7 and 8 buildings

User group	Facility type	Design occupancy	Number
Male employees	Closet pans	1 - 20	1
		>20	Add 1 per 20
	Urinals	1 - 10	0
		11 - 25	1
		26 - 50	2
		>50	Add 1 per 50
	Washbasins	1 - 20	1
		>20	Add 1 per 20
Female employees	Closet pans	1 - 15	1
		>15	Add 1 per 15
	Washbasins	1 - 20	1
		>20	Add 1 per 20

Table Notes

Sanitary facilities need not be provided for a Class 8 *electricity network substation*.

Table F4D4c: Sanitary facilities in Class 6 buildings – department stores, shopping centres

User group	Facility type	Design occupancy	Number
Male patrons	Closet pans	1 - 1200	1
		>1200	Add 1 per 1200
	Urinals	1 - 600	1
		>600	Add 1 per 1200
	Washbasins	1 - 600	1
		>600	Add 1 per 1200
Female patrons	Closet pans	1 - 300	1
		301 - 600	2
		>600	Add 1 per 1200
	Washbasins	1-600	1
		601 - 1200	2
		>1200	Add 1 per 1200

Table Notes

Sanitary facilities need not be provided for patrons if the total number of persons accommodated in the building is not more than 600.

Table F4D4d: Sanitary facilities in Class 6 buildings – restaurants, cafes, bars

User group	Facility type	Design occupancy	Number
Male patrons	Closet pans	1 - 100	1
		101 - 300	2
		>300	Add 1 per 200
	Urinals	1 - 50	1
		51 - 100	2
		101 - 150	3
		151 - 200	4
		201 - 250	5
		>250	Add 1 per 100
	Washbasins	1 - 50	1
		51 - 200	2
		>200	Add 1 per 200
Female patrons	Closet pans	1 - 25	1
		26 - 50	2
		51 - 100	3
		101 - 150	4
		151 - 200	5
		201 - 250	6
		>250	Add 1 per 100
	Washbasins	1 - 50	1
		51 - 150	2
		>150	Add 1 per 200

Table Notes

Sanitary facilities need not be provided for patrons if the total number of persons accommodated in the building is not more than 20.

Table F4D4e: Sanitary facilities in Class 9a health-care buildings

User group	Facility type	Design occupancy	Number
Male patients	Closet pans	1 - 16	2
		>16	Add 1 per 8
	Washbasins	1 - 8	1
		>8	Add 1 per 8
Female patients	Closet pans	1 - 16	2
		>16	Add 1 per 8
	Washbasins	1 - 8	1
		>8	Add 1 per 8

Table Notes

Urinals are not required for a Class 9a *health-care building*.

Table F4D4f: Sanitary facilities in Class 9b buildings – schools

User group	Facility type	Design occupancy	Number
Male employees	Closet pans	1 - 20	1
		>20	Add 1 per 20
	Urinals	1 - 10	0
		11 - 20	1
		21 - 45	2
		>45	Add 1 per 30
	Washbasins	1 - 30	1
		>30	Add 1 per 30
Female employees	Closet pans	1 - 5	1
		>5	Add 1 per 15
	Washbasins	1 - 30	1
		>30	Add 1 per 30
Male students	Closet pans	1 - 25	1
		26 - 75	2
		76 - 150	3
		151 - 200	4
		>200	Add 1 per 100
	Urinals	1 - 50	1
		51 - 100	2
		>100	Add 1 per 100
	Washbasins	1 - 10	1
		11 - 50	2
		51 - 100	3
		>100	Add 1 per 75
Female students	Closet pans	1 - 10	1
		11 - 25	2
		26 - 100	Add 1 per 25
		>100	Add 1 per 50
	Washbasins	1 - 10	1
		11 - 50	2
		51 - 100	3
		>100	Add 1 per 75

VIC Table F4D4g

Table F4D4g: Sanitary facilities in Class 9b buildings – early childhood centres

User group	Facility type	Design occupancy	Number
Children	Closet pans	1 - 30	2
		>30	Add 1 per 15
	Washbasins	1 - 30	2
		>30	Add 1 per 15

Table Notes

(1) Urinals are not *required* for a Class 9b *early childhood centre*.

(2) Facilities for use by children must be—

- (a) junior pans; and
- (b) washbasins with a rim height not exceeding 600 mm; and
- (c) accessible from both indoor and outdoor play areas.

Table F4D4h: Sanitary facilities in Class 9b buildings – theatres and cinemas with multiple auditoria, art galleries and the like

User group	Facility type	Design occupancy	Number
Male participants	Closet pans	1 - 20	1
		>20	Add 1 per 20
	Urinals	1 - 10	1
		>10	Add 1 per 10
	Washbasins	1 - 10	1
		>10	Add 1 per 10
Female participants	Closet pans	1 - 10	1
		>10	Add 1 per 10
	Washbasins	1 - 10	1
		>10	Add 1 per 10
Male spectators or patrons	Closet pans	1 - 250	1
		251 - 500	2
		>500	Add 1 per 500
	Urinals	1 - 100	1
		>100	Add 1 per 100
	Washbasins	1 - 150	1
		>150	Add 1 per 150
Female spectators or patrons	Closet pans	1 - 10	1
		11 - 50	2
		>50	Add 1 per 60
	Washbasins	1 - 80	1
		81 - 250	2
		251 - 430	3
		>430	Add 1 per 200

Table F4D4i: Sanitary facilities in Class 9b buildings – single auditorium theatres and cinemas

User group	Facility type	Design occupancy	Number
Male patrons	Closet pans	1 - 50	0
		51 - 250	1
		251 - 500	2
		>500	Add 1 per 500
	Urinals	1 - 50	0
		51 - 100	1
		>100	Add 1 per 100
	Washbasins	1 - 50	0
		51 - 150	1
		>150	Add 1 per 150

User group	Facility type	Design occupancy	Number
Female patrons	Closet pans	1 - 50	0
		51 - 75	4
		76 - 110	5
		111 - 170	6
		171 - 230	7
		231 - 250	9
		>250	Add 1 per 60
	Washbasins	1 - 50	0
		51 - 150	1
		>150	Add 1 per 150

Table F4D4j: Sanitary facilities in Class 9b buildings – sports venues or the like

User group	Facility type	Design occupancy	Number
Male participants	Closet pans	1 - 20	1
		>20	Add 1 per 20
	Urinals	1 - 10	1
		>10	Add 1 per 10
	Washbasins	1 - 10	1
		>10	Add 1 per 10
Female participants	Closet pans	1 - 10	1
		>10	Add 1 per 10
	Washbasins	1 - 10	1
		>10	Add 1 per 10
Male spectators or patrons	Closet pans	1 - 250	1
		251 - 500	2
		>500	Add 1 per 500
	Urinals	1 - 100	1
		>100	Add 1 per 100
	Washbasins	1 - 150	1
		>150	Add 1 per 150
Female spectators or patrons	Closet pans	1 - 15	1
		16 - 60	2
		61 - 120	3
		>120	Add 1 per 70
	Washbasins	1 - 60	1
		61 - 200	2
		201 - 350	3
		>350	Add 1 per 150

Table F4D4k: Sanitary facilities in Class 9b buildings – churches, chapels or the like

User group	Facility type	Design occupancy	Number
Male patrons	Closet pans	1 - 300	1
		>300	Add 1 per 500
	Urinals	1 - 200	1
		>200	Add 1 per 200
	Washbasins	1 - 250	1
		>250	Add 1 per 250
Female patrons	Closet pans	1 - 150	1
		>150	Add 1 per 150
	Washbasins	1 - 250	1
		>250	Add 1 per 250

Table F4D4l: Sanitary facilities in Class 9b buildings – public halls, function rooms or the like

User group	Facility type	Design occupancy	Number
Male patrons	Closet pans	1 - 100	1
		>100	Add 1 per 200
	Urinals	1 - 50	1
		51 - 100	2
		101 - 150	3
		151 - 200	4
		201 - 250	5
		>250	Add 1 per 100
	Washbasins	1 - 50	1
		51 - 200	2
		>200	Add 1 per 200
Female patrons	Closet pans	1 - 25	1
		26 - 50	2
		51 - 100	3
		101 - 150	4
		151 - 200	5
		201 - 250	6
		>250	Add 1 per 100
	Washbasins	1 - 50	1
		51 - 150	2
		>150	Add 1 per 200

Table Notes

Sanitary facilities need not be provided for patrons if the total number of persons accommodated in the building is not more than 20.

F4D5 Accessible sanitary facilities

In a building *required* to be *accessible*—

- (a) *accessible* unisex *sanitary compartments* must be provided in *accessible* parts of the building in accordance with F4D6; and
- (b) *accessible* unisex showers must be provided in accordance with F4D7; and
- (c) at each bank of toilets where there is one or more toilets in addition to an *accessible* unisex *sanitary compartment* at that bank of toilets, not less than one *sanitary compartment* suitable for a person with an ambulant disability for use by males and not less than one *sanitary compartment* suitable for a person with an ambulant disability for use by females, each in accordance with AS 1428.1, must be provided; and
- (d) an *accessible* unisex *sanitary compartment* must contain a closet pan, washbasin, shelf or bench top and adequate means of disposal of sanitary products; and
- (e) the circulation spaces, fixtures and fittings of all *accessible* sanitary facilities provided in accordance with F4D6 and F4D7 must comply with the requirements of AS 1428.1; and
- (f) an *accessible* unisex sanitary facility must be located so that it can be entered without crossing an area reserved for one sex only; and
- (g) where two or more of each type of *accessible* unisex sanitary facility are provided, the number of left and right handed mirror image facilities must be provided as evenly as possible; and
- (h) where male sanitary facilities are provided at a separate location to female sanitary facilities, *accessible* unisex sanitary facilities are only *required* at one of those locations; and
- (i) an *accessible* unisex *sanitary compartment* or an *accessible* unisex shower need not be provided on a *storey* or level that is not *required* by D4D4(f) to be provided with a passenger lift or ramp complying with AS 1428.1.

F4D6 Accessible unisex sanitary compartments

SA F4D6(1)

- (1) Where *required* by F4D5(a), the minimum number of *accessible* unisex *sanitary compartments* for each class of building is as follows:
 - (a) For a Class 1b building—
 - (i) not less than 1; and
 - (ii) where private *accessible* unisex *sanitary compartments* are provided for every *accessible* bedroom, common *accessible* unisex *sanitary compartments* need not be provided.
 - (b) For a Class 2 building, where *sanitary compartments* are provided in common areas, not less than 1.
 - (c) For Class 3 and Class 9c buildings—
 - (i) in every *accessible sole-occupancy unit* provided with *sanitary compartments* within the *accessible sole-occupancy unit*, not less than 1; and
 - (ii) at each bank of *sanitary compartments* containing male and female *sanitary compartments* provided in common areas, not less than 1.
 - (d) For Class 5, 6, 7, 8 or 9 buildings, where F4D4 requires closet pans—
 - (i) 1 on every *storey* containing *sanitary compartments*; and
 - (ii) where a *storey* has more than 1 bank of *sanitary compartments* containing male and female *sanitary compartments*, at not less than 50% of those banks.
 - (e) For a Class 10a building, at each bank of *sanitary compartments* containing male and female *sanitary compartments*, not less than 1.
- (2) The requirements of (1)(d) do not apply within a *ward area* of a Class 9a *health-care building*.
- (3) The requirements of (1)(e) do not apply to—
 - (a) a Class 10a appurtenant to another class of building; or
 - (b) a *sanitary compartment* dedicated to a single caravan/camping site.

F4D7 Accessible unisex showers

SA F4D7(1)

- (1) Where *required* by F4D5(b), the minimum number of *accessible* unisex showers for each class of building is as follows:
 - (a) For a Class 1b building—
 - (i) not less than 1; and
 - (ii) where private *accessible* unisex showers are provided for every *accessible* bedroom, common *accessible* unisex showers need not be provided.
 - (b) For a Class 2 building, where showers are provided in common areas, not less than 1.
 - (c) For Class 3 and 9c buildings—
 - (i) in every *accessible sole-occupancy unit* provided with showers within the *accessible sole-occupancy unit*, not less than 1; and
 - (ii) 1 for every 10 showers or part thereof provided in common areas.
 - (d) For Class 5, 6, 7, 8 or 9 buildings, where F4D4 requires 1 or more showers, not less than 1 for every 10 showers or part thereof.
 - (e) For a Class 10a building, where showers are provided, 1 for every 10 showers or part thereof.
- (2) The requirements of (1)(d) do not apply within a *ward area* of a Class 9a *health-care building*.
- (3) The requirements of (1)(e) do not apply to—
 - (a) a Class 10a appurtenant to another class of building; and
 - (b) a *sanitary compartment* dedicated to a single caravan/camping site.


F4D8 Construction of sanitary compartments

- (1) Other than in an *early childhood centre*, *sanitary compartments* must have doors and partitions that separate adjacent compartments and extend—
 - (a) from floor level to the ceiling in the case of a unisex facility or all gender facility; or
 - (b) to a height of not less than 1.5 m above the floor if primary *school* children are the principal users; or
 - (c) 1.8 m above the floor in all other cases.
- (2) Unless there is a clear space of at least 1.2 m, measured in accordance with Figure F4D8, between the closet pan within the *sanitary compartment* and the doorway, the door to a fully enclosed *sanitary compartment* must—
 - (a) open outwards; or
 - (b) slide; or
 - (c) be readily removable from the outside of the *sanitary compartment*.

VIC F4D8(3)

- (3) In an *early childhood centre*, facilities for use by children must have each *sanitary compartment* screened by a partition which, except for the doorway, is opaque for a height of at least 900 mm but not more than 1200 mm above the floor level.

Figure F4D8: Construction of sanitary compartments

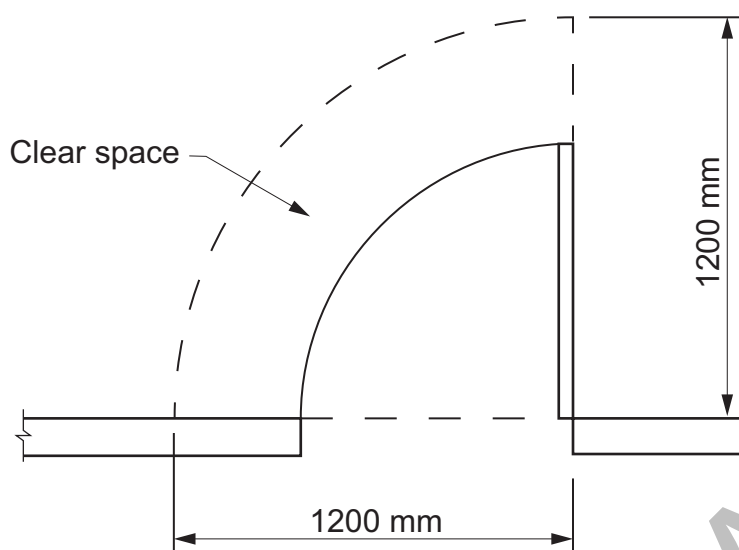

F4D9 Interpretation: urinals and washbasins

- (1) A urinal may be—
 - (a) an individual stall or wall-hung urinal; or
 - (b) each 600 mm length of a continuous urinal trough; or
 - (c) a closet pan used in place of a urinal.
- (2) A washbasin may be—
 - (a) an individual basin; or
 - (b) a part of a hand washing trough served by a single water tap.

NSW F4D10

F4D10 Microbial (legionella) control

Hot water, warm water and cooling water systems in a building other than a system serving only a single *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building must be installed in accordance with AS/NZS 3666.1.

F4D11 Waste management

- (1) In a Class 9a *health-care building*, at least one slop-hopper or other device, other than a water closet pan or urinal, must be provided—
 - (a) on any *storey* containing *ward areas* or bedrooms to facilitate emptying of containers of sewage or dirty water; and
 - (b) with a flushing apparatus, tap and grating.
- (2) In a Class 9c building, the following facilities must be provided for every 60 beds or part thereof on each storey containing *resident use areas*:
 - (a) One slop-hopper or other device other than a water closet pan or urinal for the safe handling and disposal of liquid and solid wastes with a flushing apparatus, tap and grating.
 - (b) An appliance for the disinfection of pans or an adequate means to dispose of receptacles.

F4D12 Accessible adult change facilities

- (1) One unisex **accessible** adult change facility must be provided in an **accessible** part of a—
 - (a) Class 6 building that is a shopping centre having a design occupancy of not less than 3,500 people, calculated on the basis of the **floor area** and containing a minimum of 2 **sole-occupancy units**; and
 - (b) Class 9b sports venue or the like that—
 - (i) has a design occupancy of not less than 35,000 spectators; or
 - (ii) contains a **swimming pool** that has a perimeter of not less than 70 m and that is **required** by D4D2 to be **accessible**; and
 - (c) museum, art gallery or the like having a design occupancy of not less than 1,500 patrons; and
 - (d) theatre or the like having a design occupancy of not less than 1,500 patrons; and
 - (e) passenger use area of an airport terminal building within an airport that accepts domestic and/or international flights that are public transport services as defined in the Disability Standards for Accessible Public Transport 2002.
- (2) **Accessible** adult change facilities **required** by (1)—
 - (a) must be constructed in accordance with **Specification 27**; and
 - (b) cannot be combined with another **sanitary compartment**.
- (3) For the purposes of (1), design occupancy must be calculated in accordance with D2D18, but excluding any area that—
 - (a) can only be accessed by staff, employees, contractors, maintenance personnel and the like; or
 - (b) is subject to an exemption under D4D5.

TAS F4D13

TAS F4D14

VIC F4D13

Explanatory Information: Cross-volume considerations

NCC Volume Three contains a number of plumbing and drainage provisions which are relevant to facilities and the design of buildings. These include, but are not limited to, those listed in Table F4.

Some Volume Three provisions necessitate the inclusion of spaces in buildings for plumbing and **drainage** systems, as well as the ability to access concealed systems for the purpose of maintenance. Therefore, building designers should consider Volume Three provisions alongside those found in the BCA and co-ordinate with plumbing and **drainage** systems designs where necessary.

Table F4: Cross-volume considerations

Item	NCC Volume Three - Plumbing Code of Australia
Access for maintenance of plumbing and drainage	B1 Cold water services
	B2 Heated water services
	B3 Non-drinking water services
	C1 Sanitary plumbing systems
	C2 Sanitary drainage systems
	C3 On-site wastewater management
Heated water temperature control for facilities used for personal hygiene	B2 Heated water services

Part F5 Room heights

Introduction to this Part

This Part is intended to prevent the construction of rooms or other spaces with insufficient ceiling heights, which can cause injury or loss of amenity for building occupants.

Objectives

F501 Objective

The Objective of this Part is to safeguard occupants from injury or loss of *amenity* caused by inadequate height of a room or space.

Functional Statements

F5F1 Room or space heights

A building is to be constructed to provide height in a room or space suitable for the intended use.

Performance Requirements

VIC F5P1

F5P1 Room or space heights

A *habitable room* or space must have sufficient height that does not unduly interfere with its intended function.

Verification Methods

F5V1 Room or space heights

VIC F5V1(1)

- (1) Compliance with **F5P1** is verified where the height of a *habitable room* or space provides an appropriate *activity support level* that does not unduly interfere with its intended function.
- (2) For the purposes of (1), the *activity support level* must consider the dimensions of—
 - (a) doors, *required exits*, ramps, barriers, stairs and *windows*; and
 - (b) fixed fittings and services; and
 - (c) fixed and moveable equipment or furniture; and
 - (d) occupant circulation spaces.

Deemed-to-Satisfy Provisions

VIC F5D1

F5D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirement F5P1* is satisfied by complying with—
 - (a) *F5D2*; and
 - (b) for *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with *A2G2(3)* and *A2G4(3)* as applicable.

F5D2 Height of rooms and other spaces

- (1) The height of rooms and other spaces in a Class 2 or 3 building or Class 4 part of a building must be not less than—
 - (a) for a kitchen, laundry, or the like — 2.1 m; and
 - (b) for a corridor, passageway or the like — 2.1 m; and
 - (c) for a *habitable room* excluding a kitchen — 2.4 m; and
 - (d) in a *habitable room*, or space within a *habitable room*, with a sloping ceiling or projections below the ceiling line—
 - (i) in an attic — a height of not less than 2.2 m for not less than two-thirds of the *floor area* of the room or space; and
 - (ii) in other rooms — a height of not less than 2.4 m for not less than two-thirds of the *floor area* of the room or space; and
 - (e) in a non-habitable room, or space within a non-habitable room, with a sloping ceiling or projections below the ceiling line — a height of not less than 2.1 m for not less than two-thirds of the *floor area* of the room or space.
- (2) For the purposes of (1), when calculating the *floor area* of a room or space, any part that has a ceiling height of less than 1.5 m is not included.
- (3) The height of rooms and other spaces in a Class 5, 6, 7 or 8 building must be not less than—
 - (a) except as allowed in (b) and (8) — 2.4 m; and
 - (b) for a corridor, passageway, or the like — 2.1 m.
- (4) The height of rooms and other spaces in a Class 9a *health-care building* must be not less than—
 - (a) for a *patient care area* — 2.4 m; and
 - (b) for an operating theatre or delivery room — 3 m; and
 - (c) for a treatment room, clinic, waiting room, passageway, corridor, or the like — 2.4 m.
- (5) The height of rooms and other spaces in a Class 9b building must be not be less than—
 - (a) for a *school* classroom or other *assembly building* or part that accommodates not more than 100 persons — 2.4 m; and
 - (b) for a theatre, public hall or other *assembly building* or part that accommodates more than 100 persons — 2.7 m; and
 - (c) for a corridor—
 - (i) that serves an *assembly building* or part that accommodates not more than 100 persons — 2.4 m; or
 - (ii) that serves an *assembly building* or part that accommodates more than 100 persons — 2.7 m.
- (6) For the purposes of (5) the number of persons accommodated must be calculated according to *D2D18*.
- (7) The height of rooms and other spaces in a Class 9c building must be not be less than—

- (a) for a kitchen, laundry, or the like — 2.1 m; and
 - (b) for a corridor, passageway or the like — 2.4 m; and
 - (c) for a *habitable room* excluding a kitchen — 2.4 m.
- (8) The height of rooms and other spaces in any building must be not be less than—
- (a) for a bathroom, shower room, *sanitary compartment*, other than an *accessible* adult change facility, airlock, tea preparation room, pantry, store room, garage, car parking area, or the like — 2.1 m; and
 - (b) for a commercial kitchen — 2.4 m; and
 - (c) above a stairway, ramp (other than a *threshold ramp*), landing or the like — 2 m measured vertically above the nosing line of stairway treads or the floor surface of the ramp, landing or the like; and
 - (d) for a *required accessible* adult change facility — 2.4 m.

VIC F5D3

PREVIEW DRAFT

Part F6 Light and ventilation

Introduction to this Part

This Part is intended to ensure that building occupants have access to natural and artificial lighting, and fresh air, to prevent illness, injury or loss of *amenity*. This part also includes provisions for the location of *sanitary compartments* to reduce health risks and the spread of odours, airlocks and *carpark* and kitchen local exhaust ventilation.

Objectives

F601 Objective

The Objective of this Part is to—

- (a) safeguard occupants from injury, illness or loss of *amenity* due to—
 - (i) isolation from natural light; and
 - (ii) lack of adequate artificial lighting; and
- (b) safeguard occupants from illness or loss of *amenity* due to lack of air freshness.

Functional Statements

F6F1 Natural light

A space within a building used by occupants is to be provided with openings to admit natural light consistent with its function or use.

F6F2 Artificial light

A space within a building used by occupants is to be provided with artificial lighting consistent with its function or use which, when activated in the absence of suitable natural light, will enable safe movement.

F6F3 Ventilation

A space used by occupants within a building is to be provided with adequate ventilation consistent with its function or use.

Performance Requirements

F6P1 Natural lighting

Sufficient openings must be provided and distributed in a building, appropriate to the function or use of that part of the building so that natural light, when available, provides an *average daylight factor* of not less than 2%.

Applications

F6P1 only applies to a Class 2, 3 or 9 building, or a Class 4 part of a building.

F6P2 Artificial lighting

Artificial lighting must be installed to provide an *illuminance* of not less than 20 lux appropriate to the function or use of the building to enable safe movement by occupants.

F6P3 Outdoor air supply

A space in a building used by occupants must be provided with means of ventilation with *outdoor air* which will maintain adequate air quality.

F6P4 Mechanical ventilation to control odours and contaminants

A mechanical air-handling system installed in a building must control—

- (a) the circulation of objectionable odours; and
- (b) the accumulation of harmful contamination by micro-organisms, pathogens and toxins.

F6P5 Disposal of contaminated air

Contaminated air must be disposed of in a manner which does not unduly create a nuisance or hazard to people in the building or *other property*.

Verification Methods

F6V1 Verification of suitable indoor air quality

For a Class 2, 3, 5, 6, 9b or 9c building or Class 4 part of a building, compliance with F6P3 and F6P4(a) is verified when it is determined that the building under typical conditions in use is provided with sufficient ventilation with *outdoor air* such that contaminant levels do not exceed the limits specified in Table F6V1.

Table F6V1: Maximum contaminant limits for acceptable indoor air quality

Pollutant	Averaging time	Maximum air quality value
Carbon dioxide, CO ₂	8 hours	850 ppm ^{Note 1}
Carbon monoxide, CO	15 minutes	90 ppm
Carbon monoxide, CO	30 minutes	50 ppm
Carbon monoxide, CO	1 hour	25 ppm
Carbon monoxide, CO	8 hours	10 ppm
Formaldehyde, CH ₂ O	30 minutes	0.1 mg/m ³
Nitrogen dioxide, NO ₂	1 year	40 µg/m ³ (0.0197 ppm) ^{Note 2}

Pollutant	Averaging time	Maximum air quality value
Nitrogen dioxide, NO ₂	1 hour	200 µg/m ³ (0.0987 ppm)
Ozone, O ₃	8 hour, daily maximum	100 µg/m ³ (0.0473 ppm)
Particulate matter, PM _{2.5}	1 year	10 µg/m ³
Particulate matter, PM _{2.5}	24 hour (99th percentile)	25 µg/m ³
Particulate matter, PM ₁₀	1 year	20 µg/m ³
Particulate matter, PM ₁₀	24 hour (99th percentile)	50 µg/m ³
Total volatile organic compounds	1 hour	500 µg/m ³

Table Notes

- (1) Based on body odour metric (i.e. 450 ppm above ambient CO₂ level of 400 ppm and demand control ventilation provisions in AS 1668.2).
- (2) Based on pressure of 101.325 kPa and temperature of 25°C (i.e. the conversion is mg/m³ = ppm (molecular weight/24.4)).

F6V2 Verification of suitable indoor air quality for carparks

For a Class 7a building, compliance with F6P3 and F6P4(a) is verified when it is determined that the building is provided with sufficient ventilation with *outdoor air* such that carbon monoxide exposure levels do not exceed the limits specified in Table F6V2.

Table F6V2: Maximum carbon monoxide exposure for carparks

Concentration (ppm)	Total exposure duration per day
100	Not to be exceeded
90	15 minutes
60	1 hour
30	8 hours

Table Notes

Various government work health and safety regulations specify workplace exposure limits for airborne contaminants in the workplace.

F6V3 Verification of suitable provision of natural light

Compliance with F6P1 is verified for the provision of natural light when the *average daylight factor* for each *window* is

determined in accordance with the formula:
$$\text{Average Daylight Factor} = \frac{W}{A} \frac{T\theta}{(1 - R^2)}$$
, where—

- (a) W = the net area of the light transmitting *window* (m²); and
- (b) A = the total area of the *internal wall*, floor and ceiling surfaces (m²); and
- (c) T = the diffuse light transmittance of the *window*; and
- (d) θ = visible sky angle in degrees, measured in a vertical plane normal to and from the centre of the *window*; and
- (e) R = the area-weighted average reflectance of area A .

Applications

F6V3 only applies to—

- (a) *habitable rooms* of Class 2 buildings and Class 4 parts of buildings; and
- (b) bedrooms and dormitories of Class 3 buildings; and
- (c) rooms used for sleeping purposes in Class 9a and 9c buildings; and
- (d) general purpose classrooms in primary and secondary *school* and playrooms or the like for the use of children in an *early childhood centre* in Class 9b buildings.

Deemed-to-Satisfy Provisions

F6D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* F6P1 to F6P5 are satisfied by complying with—
 - (a) F6D2 to F6D12; and
 - (b) for a building containing an *occupiable outdoor area*, Part G6; and
 - (c) for *farm buildings* and *farm sheds*, Part I3.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

F6D2 Provision of natural light

Natural light must be provided in:

- (a) A Class 2 building and a Class 4 part of a building — to all *habitable rooms*.
- (b) A Class 3 building — to all bedrooms and dormitories.
- (c) Class 9a and 9c buildings — to all rooms used for sleeping purposes.
- (d) A Class 9b building — to all general purpose classrooms in primary or secondary *schools* and all playrooms or the like for the use of children in an *early childhood centre*.

F6D3 Methods and extent of natural light

- (1) *Required* natural light must be provided by—
 - (a) *windows*, excluding *roof lights*, that—
 - (i) have an aggregate light transmitting area measured exclusive of framing members, glazing bars or other obstructions of not less than 10% of the *floor area* of the room; and
 - (ii) are open to the sky or face a court or other space open to the sky or an open verandah, carport or the like; or
 - (b) *roof lights*, that—
 - (i) have an aggregate light transmitting area measured exclusive of framing members, glazing bars or other obstructions of not less than 3% of the *floor area* of the room; and
 - (ii) are open to the sky; or
 - (c) a proportional combination of *windows* and *roof lights required* by (a) and (b).
- (2) Except in a Class 9c *aged care building*, in a Class 2, 3 or 9 building or Class 4 part of a building, a *required window* that faces a boundary of an adjoining allotment or a wall of the same building or another building on the allotment

must not be less than a horizontal distance from that boundary or wall that is the greater of—

- (a) generally — 1 m; and
 - (b) in a *patient care area* or other room used for sleeping purposes in a Class 9a building — 3 m; and
 - (c) 50% of the square root of the exterior height of the wall in which the *window* is located, measured in metres from its sill.
- (3) In a Class 9c *aged care building*, a *required window* must be transparent and located—
- (a) in an *external wall* with the *window* sill not more than 1 m above the floor level; and
 - (b) where the *window* faces an adjoining allotment, another building or another wall of the same building, it must not be less than a horizontal distance of 3 m from the adjoining allotment, other building or wall.
- (4) In a Class 9b *early childhood centre*, the sills of 50% of *windows* in children's rooms must be located not more than 500 mm above the floor level.

F6D4 Natural light borrowed from adjoining room

- (1) Natural light to a room in a Class 2 building or Class 4 part of a building or in a *sole-occupancy unit* of a Class 3 building, may come through one or more glazed panels or openings from an adjoining room (including an enclosed verandah) if—
- (a) both rooms are within the same *sole-occupancy unit* or the enclosed verandah is on common property; and
 - (b) the glazed panels or openings have an aggregate light transmitting area of not less than 10% of the *floor area* of the room to which it provides light; and
 - (c) the adjoining room has—
 - (i) *windows*, excluding *roof lights*, that—
 - (A) have an aggregate light transmitting area of not less than 10% of the combined *floor areas* of both rooms; and
 - (B) are open to the sky or face a court or other space open to the sky or an open verandah, carport or the like; or
 - (ii) *roof lights*, that—
 - (A) have an aggregate light transmitting area of not less than 3% of the combined *floor areas* of both rooms; and
 - (B) are open to the sky; or
 - (iii) a proportional combination of *windows* and *roof lights required* by (i) and (ii).
- (2) The areas specified in (1)(b) and (c) may be reduced as appropriate if direct natural light is provided from another source.

F6D5 Artificial lighting

- (1) Artificial lighting must be provided—
- (a) in *required* stairways, passageways, and ramps; and
 - (b) if natural light of a standard equivalent to that *required* by F6D3 is not available, and the periods of occupation or use of the room or space will create undue hazard to occupants seeking egress in an emergency, in—
 - (i) a Class 4 part of a building — to *sanitary compartments*, bathrooms, shower rooms, airlocks and laundries; and
 - (ii) a Class 2 building — to *sanitary compartments*, bathrooms, shower rooms, airlocks, laundries, common stairways and other spaces used in common by the occupants of the building; and
 - (iii) Class 3, 5, 6, 7, 8 and 9 buildings — to all rooms that are frequently occupied, all spaces *required* to be *accessible*, all corridors, lobbies, internal stairways, other circulation spaces and paths of egress.

- (2) The artificial lighting system must comply with AS/NZS 1680.0.
- (3) The system may provide a lesser level of illumination to the following spaces during times when the level of lighting would be inappropriate for the use:
 - (a) A theatre, cinema or the like, when performances are in progress, with the exception of aisle lighting *required* by [Part I1](#).
 - (b) A museum, gallery or the like, where sensitive displays require low lighting levels.
 - (c) A discotheque, nightclub or the like, where to create an ambience and character for the space, low lighting levels are used.

NSW F6D6

SA F6D6

F6D6 Ventilation

A *habitable room*, office, shop, factory, workroom, *sanitary compartment*, bathroom, shower room, laundry and any other room or space occupied by a person for any purpose must have—

- (a) natural ventilation complying with—
 - (i) [F6D7](#); or
 - (ii) AS 1668.4; or
- (b) a mechanical ventilation or air-conditioning system complying with AS 1668.2 and AS/NZS 3666.1.

F6D7 Natural ventilation

- (1) Natural ventilation provided in accordance with [F6D6\(a\)](#) must consist of openings, *windows*, doors or other devices which can be opened—
 - (a) with a ventilating area not less than 5% of the *floor area* of the room *required* to be ventilated; and
 - (b) open to—
 - (i) a suitably sized court, or space open to the sky; or
 - (ii) an open verandah, carport, or the like; or
 - (iii) an adjoining room in accordance with [F6D8](#).
- (2) The requirements of (1)(a) do not apply to a Class 8 *electricity network substation*.

F6D8 Ventilation borrowed from adjoining room

Natural ventilation to a room may come through a *window*, opening, door or other device from an adjoining room (including an enclosed verandah) if both rooms are within the same *sole-occupancy unit* or the enclosed verandah is common property, and—

- (a) in a Class 2 building, a *sole-occupancy unit* of a Class 3 building or Class 4 part of a building—
 - (i) the room to be ventilated is not a *sanitary compartment*; and
 - (ii) the *window*, opening, door or other device has a ventilating area of not less than 5% of the *floor area* of the room to be ventilated; and
 - (iii) the adjoining room has a *window*, opening, door or other device with a ventilating area of not less than 5% of the combined *floor areas* of both rooms; and
- (b) in a Class 5, 6, 7, 8 (except a Class 8 *electricity network substation*) or 9 building—
 - (i) the *window*, opening, door or other device has a ventilating area of not less than 10% of the *floor area* of the room to be ventilated, measured not more than 3.6 m above the floor; and

- (ii) the adjoining room has a *window*, opening, door or other device with a ventilating area of not less than 10% of the combined *floor areas* of both rooms; and
- (c) the ventilating areas specified in (a) and (b) may be reduced as appropriate if direct natural ventilation is provided from another source.

F6D9 Restriction on location of sanitary compartments

A *sanitary compartment* must not open directly into—

- (a) a kitchen or pantry; or
- (b) a public dining room or restaurant; or
- (c) a dormitory in a Class 3 building; or
- (d) a room used for public assembly (which is not an *early childhood centre*, primary *school* or *open spectator stand*); or
- (e) a workplace normally occupied by more than one person.

F6D10 Airlocks

If a *sanitary compartment* is prohibited under F6D9 from opening directly to another room—

- (a) in a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building—
 - (i) access must be by an airlock, hallway or other room; or
 - (ii) the *sanitary compartment* must be provided with mechanical exhaust ventilation; and
- (b) in a Class 5, 6, 7, 8 or 9 building (which is not an *early childhood centre*, primary *school* or *open spectator stand*)—
 - (i) access must be by an airlock, hallway or other room with a *floor area* of not less than 1.1 m² and fitted with *self-closing* doors at all access doorways; or
 - (ii) the *sanitary compartment* must be provided with mechanical exhaust ventilation and the doorway to the room adequately screened from view.

F6D11 Carparks

Every *storey* of a *carpark*, except an *open-deck carpark*, must have—

- (a) a system of mechanical ventilation complying with AS 1668.2; or
- (b) a system of natural ventilation complying with Section 4 of AS 1668.4.

F6D12 Kitchen local exhaust ventilation

A kitchen must be provided with a kitchen exhaust hood system complying with AS 1668.1 and AS 1668.2 where—

- (a) any cooking apparatus has—
 - (i) a total maximum electrical power input exceeding 8 kW; or
 - (ii) a total gas power input exceeding 29 MJ/hour; or
- (b) the total maximum power input to more than one apparatus exceeds, per m² of *floor area* of the room or enclosure—
 - (i) 0.5 kW electrical power; or

- (ii) 1.8 MJ/hour gas.

PREVIEW DRAFT

Part F7 Sound transmission and insulation

NT Part F7

Introduction to this Part

This Part is intended to reduce the likelihood of illness or loss of *amenity* as result of undue noise transmission between different parts of a building or adjoining buildings. This Part contains minimum requirements for sound insulation for walls, floors and penetrations through walls and floors for services such as pipework.

Objectives

F7O1 Objective

The Objective of this Part is to safeguard occupants from illness or loss of *amenity* as a result of undue sound being transmitted—

- (a) between adjoining *sole-occupancy units*; and
- (b) from common spaces to *sole-occupancy units*; and
- (c) from parts of different classifications to *sole-occupancy units*.

Applications

F7O1 only applies to a Class 2 or 3 building or a Class 9c building.

Functional Statements

F7F1 Sound transmission and insulation

A part of a building that separates—

- (a) *sole-occupancy units*; or
- (b) a *sole-occupancy unit* from a part of another classification in the building; or
- (c) a *sole-occupancy unit* from a common space,

is to be constructed to prevent undue sound transmission.

Applications

F7F1 only applies to a Class 2 or 3 building or a Class 9c building.

Performance Requirements

F7P1 Sound transmission through floors

A floor separating *sole-occupancy units* or a *sole-occupancy unit* from a plant room, lift *shaft*, stairway, *public corridor*,

public lobby, or the like, or parts of a different classification, must minimise the transmission of airborne and impact generated sound such that the separating floor, including the effect of services and their penetrations, has—

- (a) a weighted standardised level difference with spectrum adaptation term ($D_{nT,w} + C_{tr}$) not less than 45 for airborne sound; and
- (b) a weighted standardised impact sound pressure level ($L_{nT,w}$) not more than 62 for impact generated sound.

Applications

F7P1 only applies to a Class 2 or 3 building.

F7P2 Sound transmission through walls

A wall, including services and their penetrations, must minimise the transmission of sound such that—

- (a) for airborne sound—
 - (i) a wall separating *sole-occupancy units* has a weighted standardised level difference with spectrum adaptation term ($D_{nT,w} + C_{tr}$) not less than 45; and
 - (ii) a wall separating a *sole-occupancy unit* from a plant room, lift *shaft*, stairway, *public corridor*, public lobby, or the like, or parts of a different classification, has a weighted standardised level difference ($D_{nT,w}$) not less than 45; and
 - (iii) any door assembly located in a wall that separates a *sole-occupancy unit* from a stairway, *public corridor*, public lobby, or the like, has a weighted standardised level difference ($D_{nT,w}$) not less than 25; and
- (b) for impact generated sound, a wall must have sufficient sound insulation to prevent illness or loss of amenity to the occupants if the wall separates—
 - (i) a bathroom, *sanitary compartment*, laundry or kitchen in one *sole-occupancy unit* from a *habitable room* (other than a kitchen) in an adjoining *sole-occupancy unit*; or
 - (ii) a *sole-occupancy unit* from a plant room or lift *shaft*.

Applications

F7P2 only applies to a Class 2 or 3 building.

F7P3 Sound transmission through floors in a residential care building

A floor separating *sole-occupancy units* must minimise the transmission of airborne and impact generated sound such that the separating floor, including the effect of services and their penetrations, has—

- (a) a weighted standardised level difference ($D_{nT,w}$) not less than 40 for airborne sound; and
- (b) a weighted standardised impact sound pressure level ($L_{nT,w}$) not more than 62 for impact generated sound.

Applications

F7P3 only applies to a Class 9c building.

F7P4 Sound transmission through walls in a residential care building

(1) A wall separating *sole-occupancy units*, or a *sole-occupancy unit* from a kitchen, bathroom, *sanitary compartment* (not being an associated ensuite), laundry, plant room or utilities room, including the effect of services and their penetrations, must minimise the transmission of—

- (a) airborne sound such that the wall has a weighted standardised level difference ($D_{nT,w}$) not less than 40; and

- (b) impact generated sound, if the wall separates a *sole-occupancy unit* from a kitchen or laundry.
- (2) Sound insulation *required* by (1) must be sufficient to prevent illness or loss of amenity to the occupants.

Applications

F7P4 only applies to a Class 9c building.

Verification Methods

F7V1 Sound transmission through floors [F7P1]

Compliance with **F7P1** to avoid the transmission of airborne and impact generated sound through floors is verified when it is measured in-situ that the separating floor has—

- (a) airborne: a weighted standardised level difference with spectrum adaptation term ($D_{nT,w} + C_{tr}$) not less than 45 when determined under AS ISO 717.1; and
- (b) impact: a weighted standardised impact sound pressure level ($L_{nT,w}$) not more than 62 when determined under AS ISO 717.2.

F7V2 Sound transmission through walls [F7P2(a)]

Compliance with **F7P2(a)** to avoid the transmission of airborne sound through walls is verified when it is measured in-situ that—

- (a) a wall separating *sole-occupancy units* has a weighted standardised level difference with spectrum adaptation term ($D_{nT,w} + C_{tr}$) not less than 45 when determined under AS ISO 717.1; or
- (b) a wall separating a *sole-occupancy unit* from a plant room, lift *shaft*, stairway, *public corridor*, public lobby, or the like, or parts of a different classification, has a weighted standardised level difference ($D_{nT,w}$) not less than 45 when determined under AS ISO 717.1; or
- (c) any door assembly located in a wall that separates a *sole-occupancy unit* from a stairway, *public corridor*, public lobby, or the like, has a weighted standardised level difference ($D_{nT,w}$) not less than 25 when determined under AS ISO 717.1.

F7V3 Sound transmission through floors [F7P3]

Compliance with **F7P3** to avoid the transmission of airborne and impact generated sound through floors is verified when it is measured in-situ that the separating floor has—

- (a) airborne: a weighted standardised level difference ($D_{nT,w}$) not less than 40 when determined under AS ISO 717.1; and
- (b) impact: a weighted standardised impact sound pressure level ($L_{nT,w}$) not more than 62 when determined under AS ISO 717.2.

F7V4 Sound transmission through walls [F7P4(1)(a) and (2)]

Compliance with **F7P4(1)(a)** and **(2)** to avoid the transmission of airborne sound through walls is verified when it is measured in-situ that—

- (a) a wall separating *sole-occupancy units* has a weighted standardised level difference ($D_{nT,w}$) not less than 40 when determined under AS ISO 717.1; or

- (b) a wall separating a *sole-occupancy unit* from a kitchen, bathroom, sanitary compartment (not being an associated ensuite), laundry, plant room or utilities room has a weighted standardised level difference ($D_{nT,w}$) not less than 40 when determined under AS ISO 717.1.

Deemed-to-Satisfy Provisions

F7D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements F7P1 to F7P4* are satisfied by complying with F7D2 to F7D8.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

F7D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part apply to Class 2 and 3 buildings and Class 9c buildings.

F7D3 Determination of airborne sound insulation ratings

A form of construction *required* to have an airborne sound insulation rating must—

- (a) have the *required* value for weighted sound reduction index (R_w) or weighted sound reduction index with spectrum adaptation term ($R_w + C_{tr}$) determined in accordance with AS ISO 717.1 using results from laboratory measurements; or
- (b) comply with *Specification 28*.

F7D4 Determination of impact sound insulation ratings

(1) A floor in a building *required* to have an impact sound insulation rating must—

- (a) have the *required* value for weighted normalised impact sound pressure level ($L_{n,w}$) determined in accordance with AS ISO 717.2 using results from laboratory measurements; or
- (b) comply with *Specification 28*.

(2) A wall in a building *required* to have an impact sound insulation rating must—

- (a) for a Class 2 or 3 building be of discontinuous construction and
- (b) for a Class 9c building, must—
 - (i) for other than masonry, be two or more separate leaves without rigid mechanical connection except at the periphery; or
 - (ii) be identical with a prototype that is no less resistant to the transmission of impact sound when tested in accordance with *Specification 29* than a wall listed in S28C4 to S28C7.

(3) For the purposes of this Part, discontinuous construction means a wall having a minimum 20 mm cavity between 2 separate leaves, and—

- (a) for masonry, where wall ties are required to connect leaves, the ties are of the resilient type; and
- (b) for other than masonry, there is no mechanical linkage between leaves except at the periphery.

F7D5 Sound insulation rating of floors

- (1) A floor in a Class 2 or 3 building must have an $R_w + C_{tr}$ (airborne) not less than 50 and an $L_{n,w}$ (impact) not more than 62 if it separates—
 - (a) *sole-occupancy units*; or
 - (b) a *sole-occupancy unit* from a plant room, lift *shaft*, stairway, *public corridor*, public lobby or the like, or parts of a different classification.
- (2) A floor in a Class 9c building separating *sole-occupancy units* must have an R_w not less than 45.

F7D6 Sound insulation rating of walls

- (1) A wall in a Class 2 or 3 building must—
 - (a) have an $R_w + C_{tr}$ (airborne) not less than 50, if it separates *sole-occupancy units*; and
 - (b) have an R_w (airborne) not less than 50, if it separates a *sole-occupancy unit* from a plant room, lift *shaft*, stairway, *public corridor*, public lobby or the like, or parts of a different classification; and
 - (c) comply with F7D4(2) if it separates—
 - (i) a bathroom, *sanitary compartment*, laundry or kitchen in one *sole-occupancy unit* from a *habitable room* (other than a kitchen) in an adjoining unit; or
 - (ii) a *sole-occupancy unit* from a plant room or lift *shaft*.
- (2) A door may be incorporated in a wall in a Class 2 or 3 building that separates a *sole-occupancy unit* from a stairway, *public corridor*, public lobby or the like, provided the door assembly has an R_w not less than 30.
- (3) A wall in a Class 9c building must have an R_w not less than 45 if it separates—
 - (a) *sole-occupancy units*; or
 - (b) a *sole-occupancy unit* from a kitchen, bathroom, *sanitary compartment* (not being an associated ensuite), laundry, plant room or utilities room.
- (4) In addition to (3), a wall separating a *sole-occupancy unit* in a Class 9c building from a kitchen or laundry must comply with F7D4(2).
- (5) Where a wall *required* to have sound insulation has a floor above, the wall must continue to—
 - (a) the underside of the floor above; or
 - (b) a ceiling that provides the sound insulation *required* for the wall.
- (6) Where a wall *required* to have sound insulation has a roof above, the wall must continue to—
 - (a) the underside of the roof above; or
 - (b) a ceiling that provides the sound insulation *required* for the wall.

F7D7 Sound insulation rating of internal services

- (1) If a duct or soil, waste or water supply pipe, including a duct or pipe that is located in a wall or floor cavity, serves or passes through more than one *sole-occupancy unit*, the duct or pipe must be separated from the rooms of any *sole-occupancy unit* by construction with an $R_w + C_{tr}$ (airborne) not less than—
 - (a) 40 if the adjacent room is a *habitable room* (other than a kitchen); or
 - (b) 25 if the adjacent room is a kitchen or non-*habitable room*.
- (2) If a stormwater pipe passes through a *sole-occupancy unit*, it must be separated in accordance with (1)(a) and (b).

F7D8

Sound isolation of pumps

A flexible coupling must be used at the point of connection between the service pipes in a building and any circulating or other pump.

PREVIEW DRAFT

Part F8 Condensation management

Introduction to this Part

This Part is intended to reduce the risk of illness or loss of *amenity* due to the occurrence of condensation inside a building. It does this by requiring features that enable moisture-laden air to be removed from inside the building and the building structure.

Objectives

F8O1 Objective

The Objective of this Part is to safeguard occupants from illness or loss of *amenity* as a result of excessive internal moisture.

Applications

F8O1 only applies to a *sole-occupancy unit* of a Class 2 building or Class 4 part of a building.

Functional Statements

F8F1 Condensation

A building is to be constructed to avoid the likelihood of excessive internal moisture accumulating within the building structure.

Applications

F8F1 only applies to a *sole-occupancy unit* of a Class 2 building or Class 4 part of a building.

Performance Requirements

TAS F8P1

F8P1 Condensation and water vapour management

Risks associated with water vapour and *condensation* must be managed to minimise their impact on the health of occupants.

Applications

F8P1 only applies to a *sole-occupancy unit* of a Class 2 building or Class 4 part of a building.

Verification Methods

F8V1 Condensation management

- (1) Compliance with *Performance Requirement F8P1* is verified for a roof or *external wall* assembly when it is determined that a mould index of greater than 3, as defined by Section 6 of AIRAH DA07, does not occur on—
 - (a) the interior surface of the *water control layer*; or
 - (b) the surfaces of building *fabric* components interior to the *water control layer*.
- (2) The calculation method for (1) must use—
 - (a) input assumptions in accordance with AIRAH DA07; and
 - (b) the intermediate method for calculating indoor design humidity in Section 4.3.2 of AIRAH DA07.

Deemed-to-Satisfy Provisions

F8D1 Deemed-to-Satisfy Provisions

- (1) Compliance with *Performance Requirement F8P1* is satisfied by complying with *Deemed-to-Satisfy Provisions F8D2* to *F8D6*.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with *A2G2(3)* and *A2G4(3)* as applicable.

Explanatory Information

The intent of these requirements is to assist in the mitigation of *condensation* within a building. The implementation of a *condensation* management strategy may not prevent *condensation* from occurring.

F8D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part only apply to a *sole-occupancy unit* of a Class 2 building and a Class 4 part of a building.

F8D3 External wall construction

- (1) Where a *pliable building membrane* or a *sarking-type material* is installed as a *control layer* in an *external wall*, it must—
 - (a) comply with AS 4200.1; and
 - (b) be installed in accordance with AS 4200.2.
- (2) Subject to (5), any *control layer* incorporated between the cladding and the exterior side of the *primary insulation layer* in an *external wall* must achieve the *vapour permeance* specified in *Table F8D3*.
- (3) Subject to (4) and (5), an *external wall* without a *pliable building membrane* or a water barrier between the cladding and the exterior side of the *primary insulation layer*, must incorporate a drained and ventilated *cavity*.
- (4) Subject to (5), for the purposes of (2) and (3), a drained and ventilated *cavity* must—
 - (a) be located between the cladding and the external side of the *primary insulation layer*, or the outermost *control layer*; and
 - (b) constructed from cavity battens, spacers or the like where applicable with a depth of at least 12 mm; and

- (c) be unobstructed by any *control layer*; and
 - (d) be drained to the exterior, including where *cavities* are vertically compartmentalised in a multi-*storey* building; and
 - (e) have openings with a free area of no less than 1,000 mm²/m of wall provided at—
 - (i) the base and top of the cavity; or
 - (ii) each *storey* or level to where the cavity is closed.
- (5) The requirements of (2), (3) and (4) do not apply to a—
- (a) single skin masonry wall; or
 - (b) single skin concrete wall; or
 - (c) wall constructed from insulated sandwich panels for the full extent of the *external wall*; or
 - (d) wall that does not form part of the building *envelope*; or
 - (e) portion of the *external wall* below natural ground level.

Table F8D3: Vapour permeance requirements

Climate zone	Wall construction	Vapour permeance (µg/N.s)
1	No cavity	≥ 0.0022 to < 1.1403
	Drained and ventilated cavity	≥ 0 to < 1.1403
3	No cavity	≥ 0.1429
	Drained and ventilated cavity	≥ 0.0022
4, 5	No cavity	≥ 1.1403
	Drained and ventilated cavity	≥ 0.1429
6, 7, 8	No cavity	X
	Drained and ventilated cavity	≥ 1.1403

Table Notes

X = A cavity must be provided in *climate zones* 6, 7 and 8.

Explanatory Information

In cooler climates, a continuous air or vapour control layer or a water barrier with higher *vapour permeance* is desirable to allow outward drying of internal moisture. In tropical climates, materials with a relatively lower *vapour permeance* are desirable to limit outdoor moisture being driven inward.

Open-cell insulation, such as mineral wool or fibreglass, typically has a high *vapour permeance*, while closed-cell insulation such as polystyrene typically has a low *vapour permeance*.

Deemed-to-Satisfy Provisions require *external walls* without a *pliable building membrane* or water barrier and those that form part of the building *envelope* of *sole-occupancy units* in *climate zones* 6, 7 and 8 to incorporate a drained and vented cavity, unless the wall is constructed from insulated sandwich panels.

Devices which restrict vermin entry or service penetrations may be used if they facilitate drainage and ventilation as *required* by this Part.

The *vapour permeance* range listed in *Table F8D3* corresponds to the classes (as defined in AS 4200.1) listed in *Explanatory Table F8D3*, when tested in accordance with ASTM-E96 Procedure B — Water Method at 23°C and 50% relative humidity.

Table F8D3 (explanatory): Vapour permeance classes

Climate zone	Wall construction	Vapour permeance class as defined in AS 4200.1
1	No cavity	2 or 3
	Drained and ventilated cavity	1, 2 or 3

Climate zone	Wall construction	Vapour permeance class as defined in AS 4200.1
3	No cavity	3 or 4
	Drained and ventilated cavity	2, 3 or 4
4, 5	No cavity	4
	Drained and ventilated cavity	3 or 4
6, 7, 8	No cavity	X
	Drained and ventilated cavity	4

Table Notes

X = not permitted.

F8D4 Exhaust systems

- (1) An exhaust system installed in a kitchen, bathroom, *sanitary compartment* or laundry must have a minimum flow rate of—
 - (a) 25 L/s for a bathroom or *sanitary compartment*; and
 - (b) 40 L/s for a kitchen or laundry.
- (2) Exhaust from a kitchen, kitchen range hood, bathroom, *sanitary compartment* or laundry must discharge directly or via a shaft or duct to *outdoor air*.
- (3) Where space for a clothes drying appliance is provided in accordance with F4D2(1)(b), space must also be provided for ducting from the clothes drying appliance to *outdoor air*.
- (4) (3) does not apply if a condensing-type clothes drying appliance is installed.
- (5) An exhaust system that is not run continuously and is serving a bathroom or *sanitary compartment* that is not ventilated in accordance with F6D7 must—
 - (a) be interlocked with the room's light switch; and
 - (b) include a run-on timer so that the exhaust system continues to operate for 10 minutes after the light switch is turned off.
- (6) Except for rooms that are ventilated in accordance with F6D7, a room with space for ducting a clothes drying appliance to *outdoor air* in accordance with (3) must be provided with make-up air in accordance with AS 1668.2.

Explanatory Information

A range hood installed in a kitchen must comply with F8D4(2).

Part F6 includes other ventilation requirements which must be met, including a requirement for make-up air to be provided to mechanically ventilated rooms in accordance with AS 1668.2.

F8D5 Ventilation of a roof space with the primary insulation layer not parallel to the roof plane

- (1) In *climate zones* 6, 7 and 8, a roof with the *primary insulation layer* not parallel to the roof plane must have a roof space that—
 - (a) has a height not less than 18 mm at any point between the *primary insulation layer* and the underside of the roof or a *control layer*; and
 - (b) is located immediately above the *primary insulation layer*; and
 - (c) is ventilated to *outdoor air*, in accordance with Table F8D5.

- (2) The requirements of (1) do not apply to a—
- (a) concrete roof; or
 - (b) roof that is made of insulated sandwich panels; or
 - (c) roof that is subject to Bushfire Attack Level FZ requirements in accordance with AS 3959.
 - (d) tiled roof without a *control layer*.

Table F8D5: Roof space ventilation requirements

Roof pitch	Ventilation openings
<10°	20,000 mm ² /m provided at eaves or low level, or at each of two opposing ends for gable roofs
	For roofs less than 10 m ² , 7,000 mm ² /m provided at eaves or low level roof perimeter and 5,000 mm ² /m provided at ridge or high level for skillion roofs
	20,000 mm ² /m provided at the eaves or low level and 5,000 mm ² /m provided at ridge or high level for skillion roofs
≥10° and <75°	7,000 mm ² /m provided at the eaves or low level and 5,000 mm ² /m provided at high level or ridge

Table Notes

- (1) Ventilation openings are specified as a minimum free open area per metre length. The longest total plan dimension is based on the roof length irrespective of the number of storeys beneath.
- (2) Total low level ventilation openings are calculated based on twice the longest total plan dimension of the roof, except for mono pitch or skillion roofs that are calculated based on the longest total plan dimension of the roof. Total high level ventilation is calculated based on the longest total plan dimension of the roof.
- (3) High level openings are openings provided at the ridge or not more than 900 mm below the ridge or highest point of the roof space, measured vertically or 1/3 of the height of the roof below highest point of the roof, whichever is least.

Explanatory Information

Ventilation openings are to be evenly distributed to avoid creating pockets of stagnant air.

Multi-*storey* construction does not require the duplication of the longest plan dimension of a roof for the purposes of calculating the ventilation opening requirement.

Openings created by roof cladding profile can help meet ventilation opening requirements. Examples include openings underneath a metal cladding profile or inherent openings in a profiled tile roof, provided these openings are directly connected to the roof void to be ventilated and remain unobstructed.

Typical fasteners used in roofing application that may intrude into the ventilation open area will not cause excessive resistance to airflow. Components such as spacers, battens and the like greater than 18 mm in height are acceptable provided they do not create excessive resistance to airflow. Components such as meshes which may restrict the entry of vermin, ember or corrosive aerosols, or the like may also be used if they facilitate drainage and ventilation as required by this part.

For roof pitches greater than 10 degrees, total low level ventilation openings must be greater than total high level ventilation openings to minimise drawing air from occupied spaces and ensure intake of *outdoor air*. For roof pitches less than 10 degrees (excluding skillion roofs), ventilation of the roof space is facilitated by cross ventilation at opposing ends. High level ventilation is not necessary.

Explanatory Figure F8D5a is an example of a roof space with low level ventilation.

Explanatory Figure F8D5b is an example on calculating high and low level ventilation openings.

Explanatory Figure F8D5c is an example of when a roof is comprised of one roof type (ceiling not parallel to roof plane) but has multiple pitches e.g. a mansard roof. As the roof at the lower level has a pitch of 40 degrees, the low level and high level ventilation opening requirement of 7,000 mm²/m and 5000 mm²/m would apply. Additionally, mansard roofs with a restricted air space of similar magnitudes to ceilings parallel to the roof plane shall follow the requirements in *F8D6*.

Figure F8D5a (explanatory): Example of roof space with low level of ventilation


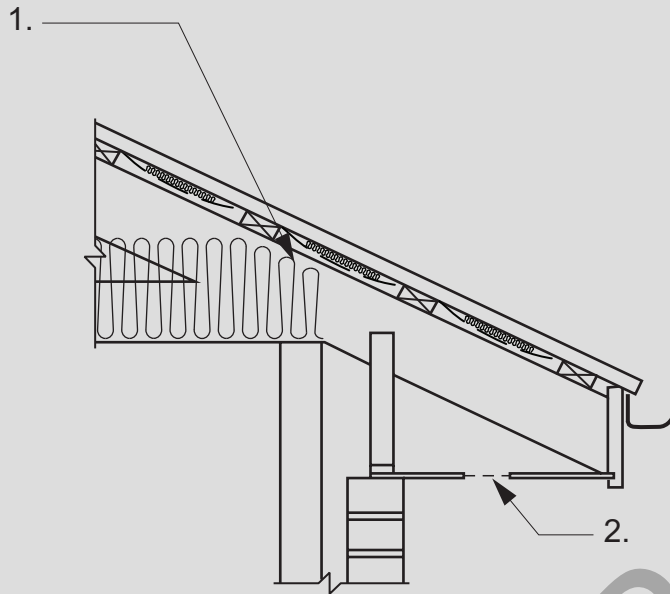


Figure Notes

- (1) Minimum 18 mm gap maintained between insulation and sarking.
- (2) Eave or low level *ventilation opening* in accordance with [Table F8D5](#).

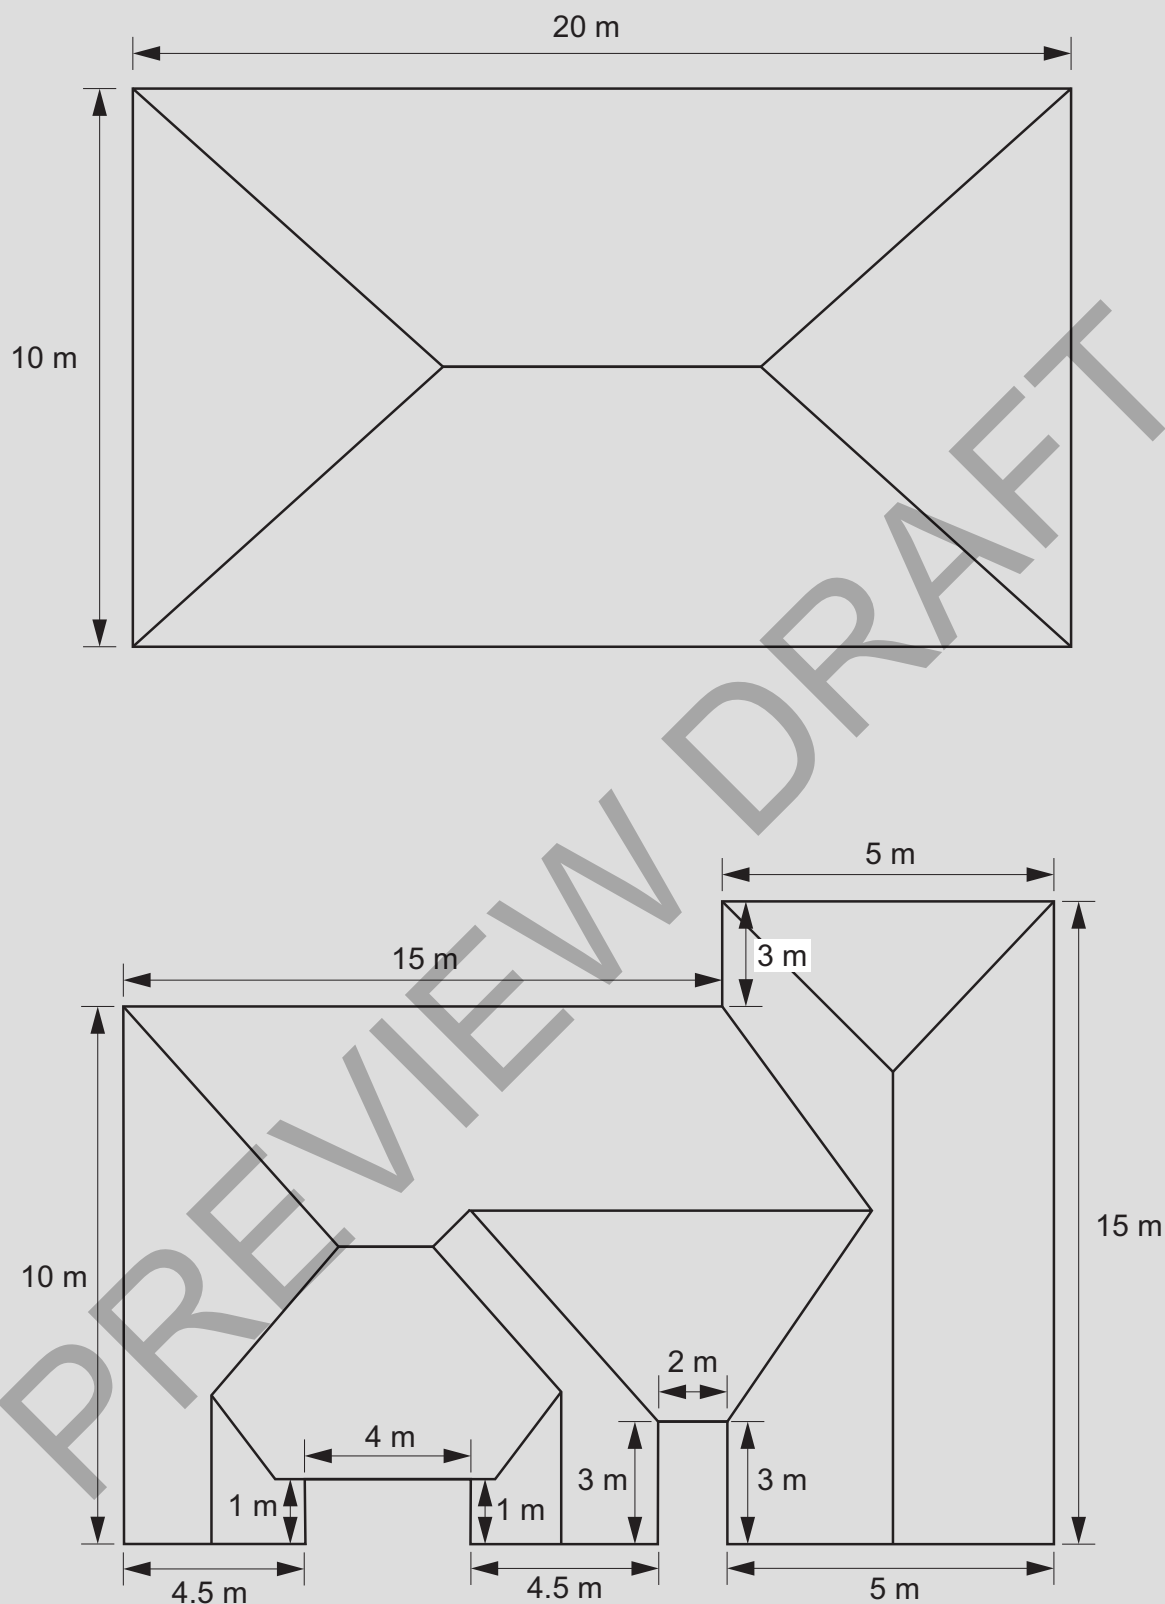

- (1) For a pitch $\geq 10^\circ$ and $< 75^\circ$: Both have a clear longest total plan dimension of 20 m
- (2) Total low level ventilation = $2 \times 20 \times 7,000 \text{ mm}^2/\text{m}$
- (3) Total high level ventilation = $20 \times 5000 \text{ mm}^2/\text{m}$

Figure F8D5c (explanatory):: Example of a multi-pitched roof space

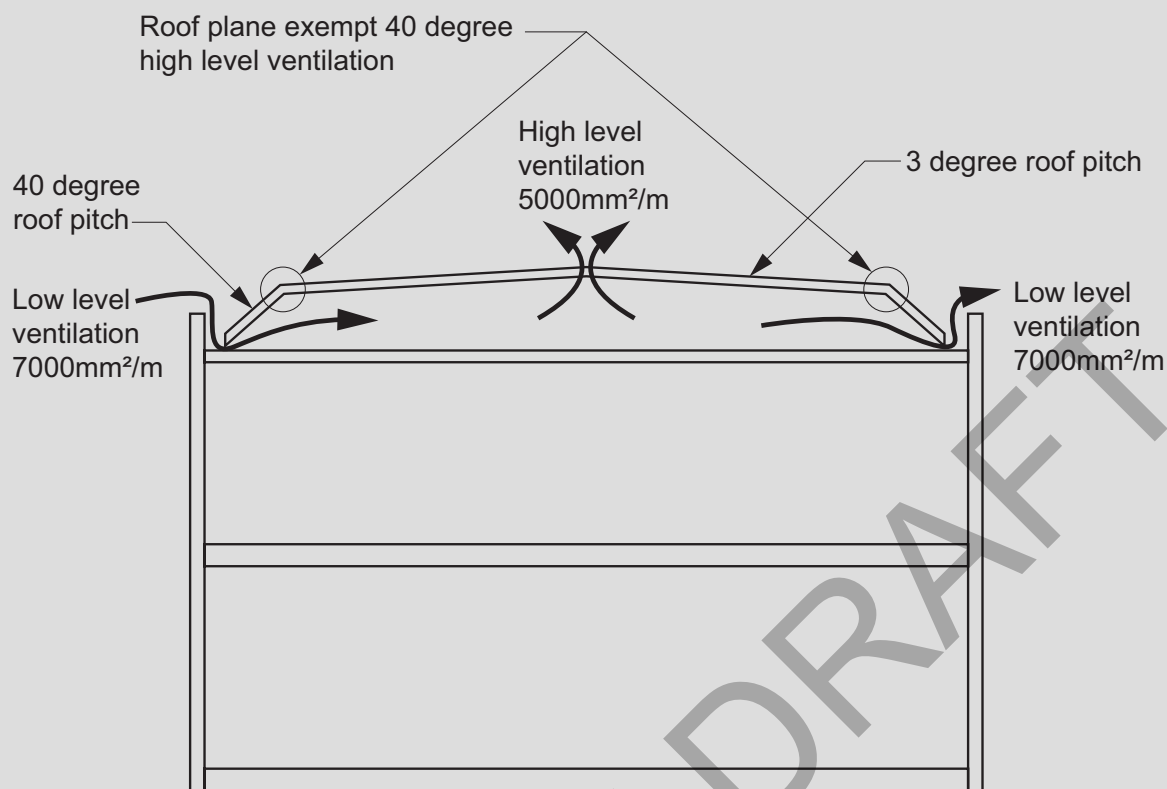


Figure Notes

- (1) High level *ventilation openings* are not required where the 40 degree roof pitch intersects with the 3 degree roof pitch (shown in circles).

F8D6 Ventilation of a roof space with the primary insulation layer parallel to the roof plane

- (1) In *climate zones* 6, 7 and 8, a roof system with the *primary insulation layer* installed parallel to the roof plane must have a roof space that—
 - (a) is located immediately above—
 - (i) the *primary insulation layer*; or
 - (ii) any *control layer* installed immediately above the *primary insulation layer*; and
 - (b) is not obstructed by insulation; and
 - (c) has a height not less than 18 mm, as measured perpendicular to the plane of the roof; and
 - (d) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (e) Please refer to NCC 2025 Preview Draft Omissions for missing text
- (2) Where a *control layer* is installed immediately above the *primary insulation layer* in *climate zones* 6, 7 and 8, it must have a *vapour permeance* of not less than 1.14 µg/N.s.
- (3) The requirements of (1) do not apply to a—
 - (a) concrete roof; or
 - (b) roof that is made of insulated sandwich panels with or without an additional ceiling linings; or
 - (c) roof that is subject to Bushfire Attack Level FZ requirement in accordance with AS 3959; or
 - (d) tiled roof without a *control layer* located above the *primary insulation layer*.

Explanatory Information

Explanatory Figure F8D6a is an example of when a roof comprises of one roof space with multiple roof types, combining requirements for F8D5 and F8D6. In this instance the low level ventilation requirements for each roof type are applicable, however, only one high level opening is required at the ridge as the lower roof opening is discharging into the larger roof space.

Explanatory Figure F8D6b is an example of a roof type complying with F8D6(1)(a)(i), where the roof space is above the *primary insulation layer*.

Explanatory Figure F8D6c is an example of a roof type complying with F8D6(1)(a)(ii), where the roof space is above the *control layer* installed immediately above the *primary insulation layer*.

Figure F8D6a (explanatory): Practical example of a roof space with multiple roof types and requirements

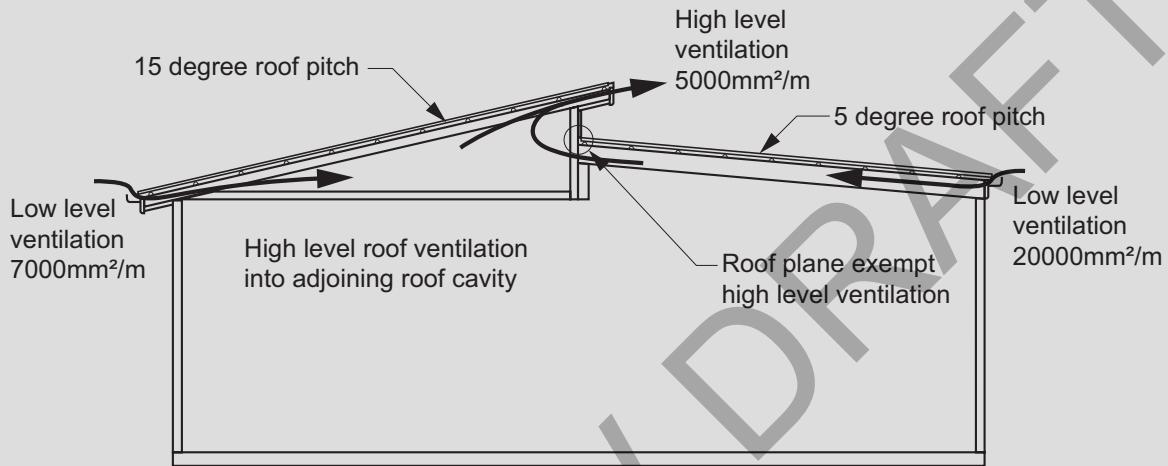


Figure Notes

- (1) High level ventilation opening is not required at the intersection of the two roof types, as the air gets discharged into the larger roof space

Figure Figure F8D6(b) (explanatory): Example of a roof space in accordance with F8D6(1)(a)(i)

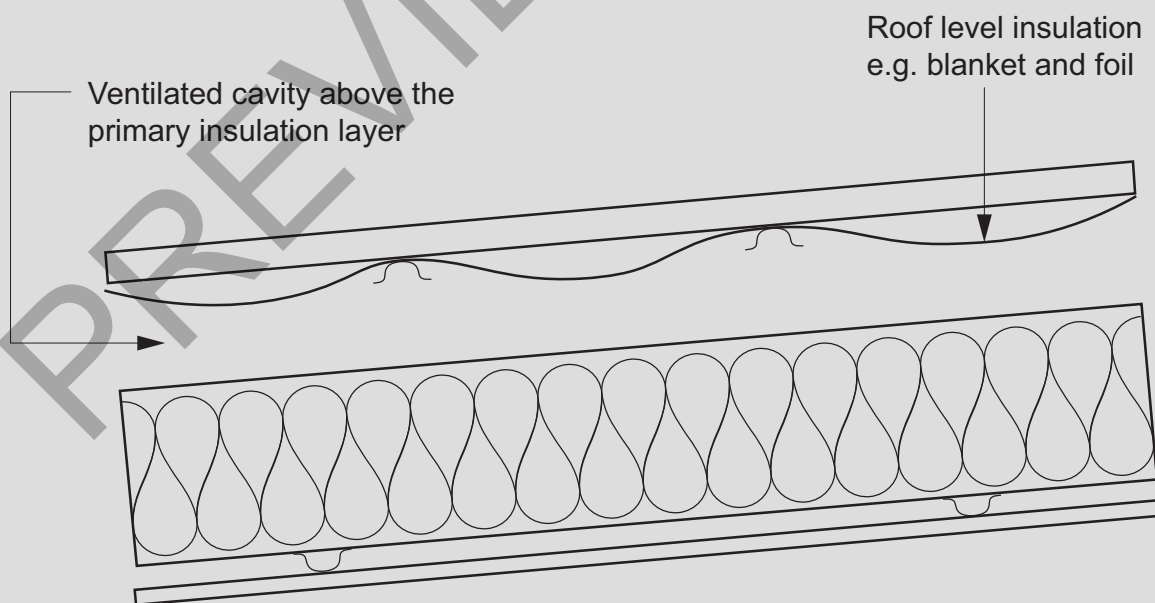


Figure Notes

- (1) Roof space above the *primary insulation layer*.
- (2) Roof level insulation – e.g. blanket and foil.

Figure F8D6c (explanatory): Example of a roof space in accordance with F8D6(1)(a)(ii)

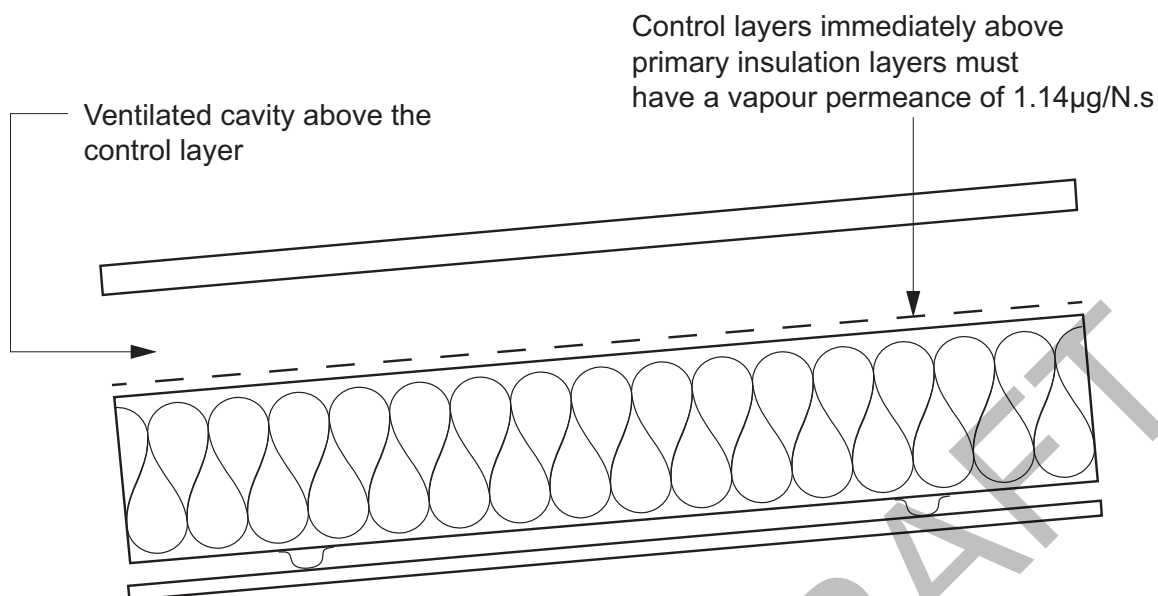


Figure Notes

- (1) Roof space above the *control layer*, water barrier or sheathing.
- (2) *Control layers* immediately above *primary insulation layer* must have a *vapour permeance* of $1.14\mu\text{g/N.s}$.

Specification 26

Waterproofing and water-resistance requirements for building elements in wet areas

S26C1 Scope

This Specification sets out requirements for building elements in *wet areas* that are *required* to be—

- (a) *water resistant*; or
- (b) *waterproof*.

S26C2 Application

- (1) The requirements of this Specification apply to—
 - (a) *shower areas* (enclosed and unenclosed); and
 - (b) areas outside a *shower area*; and
 - (c) areas adjacent to baths and spas; and
 - (d) other areas as set out in clause S26C6.
- (2) Where a shower is above a bath or spa, use requirements for a shower.

S26C3 Shower area (enclosed and unenclosed)

- (1) For a *shower area* with a hob, step-down or level threshold, the following applies:
 - (a) The floor of the *shower area* must be *waterproof*, including any hob or step-down; and
 - (b) The walls of the *shower area* must be *waterproof* not less than 1800 mm above the floor substrate.
 - (c) Wall junctions and joints within the *shower area* must be *waterproof*.
 - (d) Wall/floor junctions within the *shower area* must be *waterproof*.
 - (e) Penetrations within the *shower area* must be *waterproof*.
- (2) A shower with a *preformed shower base* must also comply with the requirements of (1), except for (a) which is not applicable.

S26C4 Area outside shower area

- (1) For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be *water resistant*.
- (2) For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be *waterproof*.
- (3) Wall/floor junctions must be *waterproof*.

S26C5 Areas adjacent to baths and spas without showers

- (1) For areas adjacent to a bath and spa, the following applies:
 - (a) For concrete, compressed fibre-cement and fibre-cement sheet flooring, the floor of the room must be *water*

resistant.

- (b) For timber floors including particleboard, plywood and other timber based flooring materials, the floor of the room must be *waterproof*.
 - (c) Tap and spout penetrations must be *waterproof* where they occur in horizontal surfaces.
- (2) For areas adjacent to a non-freestanding bath and spa, the following applies:
- (a) Walls must be *water resistant*—
 - (i) to a height of not less than 150 mm above the *vessel*, for the extent of the *vessel*, where the *vessel* is within 75 mm of a wall; and
 - (ii) at all exposed surfaces below *vessel* lip.
 - (b) Wall junctions and joints must be *water resistant* within 150 mm above a *vessel* for the extent of the *vessel*.
 - (c) Wall/floor junctions must be *waterproof* for the extent of the *vessel*.
- (3) For inserted baths and spas, the following applies:
- (a) For floors and horizontal surfaces:
 - (i) Any shelf area adjoining the bath or spa must be *waterproof* and include a *waterstop* under the *vessel* lip.
 - (ii) There are no requirements for the floor under a bath or spa.
 - (b) For walls:
 - (i) *Waterproof* to not less than 150 mm above the lip of a bath or spa.
 - (ii) There are no requirements for walls beneath the lip of a bath or spa.
 - (c) For wall junctions and joints:
 - (i) *Waterproof* junctions within 150 mm of a bath or spa.
 - (ii) There are no requirements for junctions and joints in walls beneath the lip of a bath or spa.
 - (d) Tap and spout penetrations must be *waterproof* where they occur in horizontal surfaces.

S26C6 Other areas

- (1) For walls adjoining other types of *vessels* (e.g. sink, basin or laundry tub), the following applies:
- (a) Walls must be *water resistant* to a height of not less than 150 mm above the *vessel*, for the extent of the *vessel*, where the *vessel* is within 75 mm of a wall.
 - (b) *Waterproof* wall junctions where a *vessel* is fixed to a wall.
 - (c) *Waterproof* tap and spout penetrations where they occur in surfaces *required* to be *waterproof* or *water resistant*.
- (2) For laundries and WCs, other than WCs as described in (3), the following applies:
- (a) *Water resistant* floor of the room.
 - (b) *Water resistant* wall/floor junctions.
 - (c) *Waterproof* penetrations where they occur in surfaces *required* to be *waterproof*.
- (3) For WCs with a handheld bidet spray installation, the following applies:
- (a) *Waterproof* floor of the room.
 - (b) Walls must be—
 - (i) *waterproof* within a 1500 mm radius from the wall connection of the handheld bidet spray device to a height of not less than 150 mm above the floor substrate; and
 - (ii) *water resistant* within a 1500 mm radius from the wall connection of the handheld bidet spray device to a height of not less than 1200 mm above the finished floor level of the WC.
 - (c) *Waterproof* wall junctions within the WC area within 1500 mm radius from the wall connection of the handheld bidet spray device.
 - (d) *Waterproof* wall/floor junctions within the WC area within 1500 mm radius from the wall connection of the handheld bidet spray device.

- (e) *Waterproof* penetrations in WC area.
- (4) For bathrooms and laundries *required* to be provided with a *floor waste* by F2D4, the following applies:
 - (a) *Waterproof* floor of the room.
 - (b) *Waterproof* wall/floor junctions.
 - (c) *Waterproof* penetrations where they occur through the floor.

PREVIEW DRAFT

Specification 27

Accessible adult change facilities

S27C1 Scope

This Specification contains the requirements for *accessible* adult change facilities.

S27C2 General requirements

- (1) Each *accessible* adult change facility must—
 - (a) be constructed so that all *required* equipment and fixtures are contained within the same room; and
 - (b) if it is a unisex facility, be located such that it can be entered without crossing an area reserved for one sex only.
- (2) In each *accessible* adult change facility, the following must be provided:
 - (a) A hoist complying with S27C3.
 - (b) A toilet pan, seat, backrest and grabrails complying with S27C4.
 - (c) A washbasin and tap complying with S27C5.
 - (d) Fixtures and fittings as specified in S27C6.
 - (e) A change table complying with S27C7.
 - (f) Changing rails complying with S27C8.
 - (g) An automated sliding entrance door complying with S27C9.
 - (h) Signage complying with S27C10.
 - (i) Operating instructions for the hoist and change table in accordance with S27C11.
 - (j) Circulation spaces complying with Figures S27C2a, S27C2b and S27C2c.
- (3) The floor surface must have a slip resistance classification of not less than R10 or P3 when tested in accordance with AS 4586.
- (4) For the purposes of Figures S27C2a, S27C2b and S27C2c, the following applies:
 - (a) The Roman numerals shown in Figures S27C2a, S27C2b and S27C2c indicate the following *required* circulation spaces:
 - (i) Turning space: a full circle of 1125 mm radius.
 - (ii) Each side of the pan: 900 mm (measured from each edge of the pan).
 - (iii) In front of the pan: 2350 mm (measured from the wall behind the pan, and therefore includes the pan itself).
 - (iv) For a washbasin: the width of the basin (450 mm) increasing to a width of 1350 mm measured at a distance of 750 mm out from the wall against which the washbasin is mounted then continuing at that width for a further 800 mm (to a total of 1550 mm out from the wall).
 - (v) For changing rails: the width of the rails increasing to a width of 1350 mm at a distance of 750 mm out from the wall to which the rails are fixed then continuing at that width for a further 800 mm (to a total of 1550 mm out from the wall).
 - (b) All *required* circulation spaces must extend for a minimum height of 2000 mm above finished floor level.
 - (c) *Required* circulation spaces may be overlapped.

Figure S27C2a: Required circulation spaces — Turning space, each side of the pan and in front of the pan

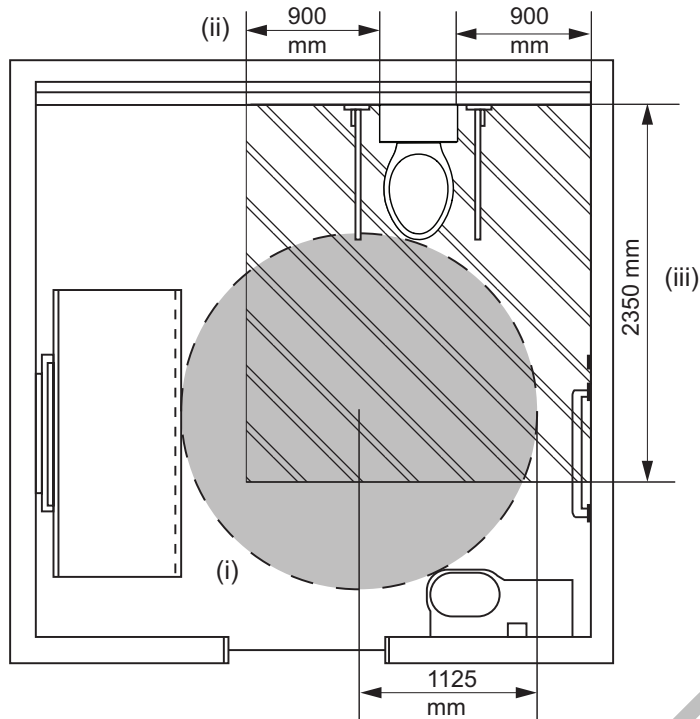


Figure S27C2b: Required circulation spaces — Turning space and circulation space for a washbasin


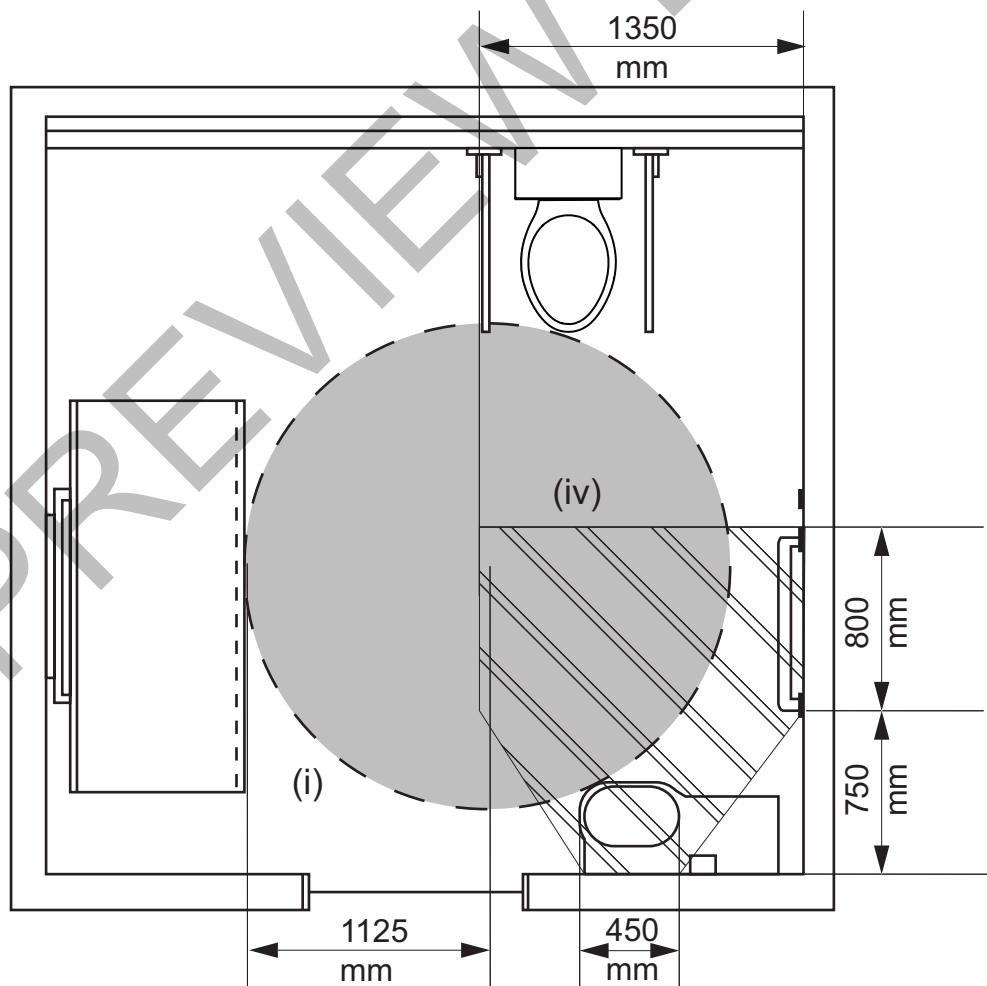


Figure S27C2c: Required circulation spaces — Turning space and circulation space for changing rails

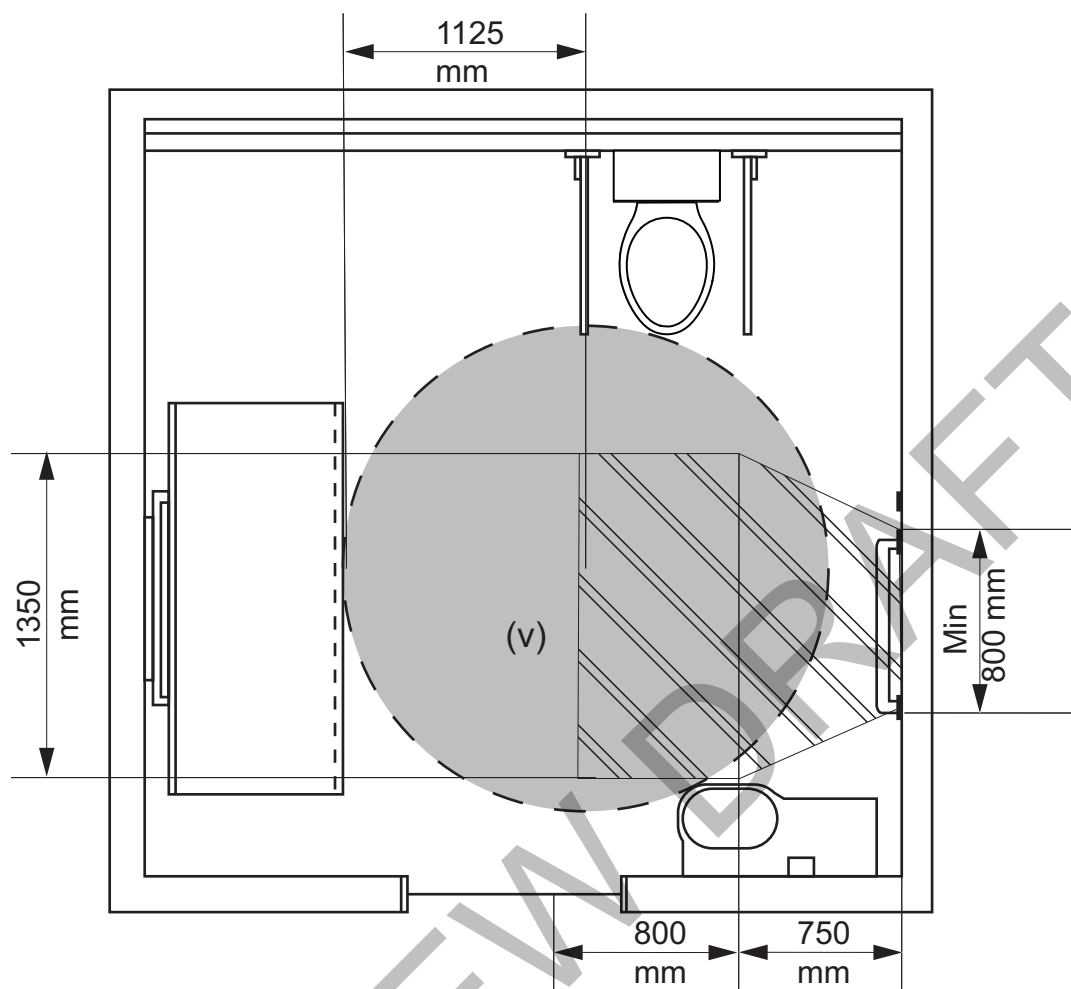

S27C3 Hoist

The hoist must—

- provide a constant charge in-line room coverage hoist system (also known as an “XY” system or gantry) including 2 parallel fixed rails and a moving traverse rail; and
- provide coverage over the entire room; and
- have a maximum safe working load of not less than 180 kg; and
- be capable of sustaining a static load of not less than 1.5 times the rated load; and
- have a minimum lifting height of 2100 mm.

S27C4 Toilet pan, seat, backrest and grabrails

- The toilet pan must be of the centrally located (“peninsula-type”) design.
- The toilet pan must be installed so that—
 - the front edge of the pan is 800 mm (± 10 mm) from the rear wall; and
 - the top of the seat is between 460 mm and 480 mm above finished floor level; and
 - there is a minimum clearance of 900 mm, measured horizontally, between each side of the pan and any adjacent wall or privacy screen.
- The toilet seat must—

- (a) be of the full-round type (not open-fronted) with minimal contours to the top surface; and
 - (b) be securely fixed in position when in use; and
 - (c) have seat fixings that provide lateral stability to the seat when the seat is in use; and
 - (d) be load-rated to 150 kg; and
 - (e) have a minimum *luminance contrast* of 30% against the pan, wall or floor; and
 - (f) remain in the fully upright position when raised.
- (4) A hand-operated flushing control must—
- (a) be located on the centreline of the toilet, at a height above finished floor level of—
 - (i) not less than 600 mm; and
 - (ii) not more than 1100 mm; and
 - (b) not be located within the area *required* for any grabrails or backrest; and
 - (c) have the button mounted so that it is proud of the wall surface, and activates the flushing operation before the button becomes level with the surrounding surface.
- (5) An automatically activated flushing system need not comply with the requirements of (4).
- (6) The backrest must—
- (a) be capable of withstanding a force, in any direction, of not less than 1100 N; and
 - (b) have a minimum height, between the lower edge of the backrest and the top of the seat, of between 120 mm and 150 mm; and
 - (c) have a vertical height, between the upper and lower edges of the backrest, of between 150 mm and 200 mm; and
 - (d) have a width of between 350 mm and 400 mm; and
 - (e) be positioned such that the face of the backrest achieves an angle of between 95° and 100° back from the seat, when the seat is in use.
- (7) Grabrails must be installed adjacent to each side of the pan and must be—
- (a) of the drop-down type; and
 - (b) located such that—
 - (i) the top of each rail is between 800 mm and 810 mm above finished floor level; and
 - (ii) the rails are between 750 mm and 770 mm apart, measured centre-to-centre, and equidistant to the centreline of the pan; and
 - (c) at least 850 mm long; and
 - (d) with a diameter of between 30 mm and 40 mm; and
 - (e) securely fixed to withstand a force, in any direction, of not less than 1100 N; and
 - (f) provided with a toilet paper dispenser on one side; and
 - (g) capable of being lifted up or swung away when not in use, so as to allow unimpeded access to the toilet pan.

S27C5 Washbasin and tap

- (1) The washbasin must be installed so that the rim of the basin is between 800 mm and 830 mm above finished floor level.
- (2) Exposed *heated water* supply pipes must be insulated or located so as not to pose a hazard.
- (3) Water supply or sanitary *drainage* pipes must not encroach on the space under the basin.
- (4) The washbasin must have an integrated shelf not less than 300 mm long.
- (5) Water taps must have a single lever flick-mixer handle or a sensor plate or the like.
- (6) Where lever handles are provided, they must be installed with a clear space of not less than 50 mm between the tap and any adjacent surface.

(7) *Heated water* must be provided and temperature controlled in accordance with Part B2 of NCC Volume Three.

S27C6 Fixtures and fittings

- (1) A vertical mirror must be provided at the washbasin, with a reflective surface that—
 - (a) is not less than 600 mm wide; and
 - (b) has its bottom edge not more than 900 mm above finished floor level; and
 - (c) has its top edge not less than 1850 mm above finished floor level.
- (2) If a second vertical mirror is provided in the facility, it must have a reflective surface that—
 - (a) is not less than 600 mm wide; and
 - (b) has its bottom edge not less than 600 mm above finished floor level; and
 - (c) has its top edge not less than 1850 mm above finished floor level.
- (3) Towel dispensers, hand dryers, soap dispensers and the like must be operable using one hand, and must be installed with their output or operative components—
 - (a) between 900 mm and 1100 mm above finished floor level; and
 - (b) not less than 500 mm from any internal corner.
- (4) A soap dispenser must be installed above the integrated shelf *required* by S27C5(4).
- (5) A clothing hook must be installed so that it is located—
 - (a) at a height of between 1200 mm and 1350 mm above finished floor level; and
 - (b) adjacent to the washbasin; and
 - (c) not less than 500 mm from any internal corner.
- (6) A sling hook with a minimum projection of 50 mm from the wall must be installed beside the change table at a height of 1500 mm above finished floor level.
- (7) Disposal bins must be provided as follows:
 - (a) A sanitary disposal bin in the corner adjacent to the toilet pan.
 - (b) An incontinence pad disposal bin in the corner adjacent to the change table.

Explanatory Information

The purpose of the sling hook is to store the sling when it is not in use.

S27C7 Change table

- (1) The change table must be—
 - (a) permanently installed, with one of the long edges up against a wall and with a retractable safety rail on the opposite side; and
 - (b) motorised for the purposes of height adjustment; and
 - (c) height adjustable between 450 mm and 900 mm above finished floor level; and
 - (d) not less than 700 mm wide; and
 - (e) not less than 1800 mm long.
- (2) The change table must have a maximum safe working load of not less than 180 kg, including when raising or lowering the table.
- (3) The change table must not encroach on any *required* circulation space.
- (4) A dispenser for sanitary wipes must be provided.

- (5) A shelf not less than 400 mm long and 150 mm wide must be provided.

S27C8 Changing rails

Changing rails must be installed as two horizontal and parallel rails fixed to a wall, not less than 800 mm long, each with a diameter between 30 mm and 40 mm, and—

- (a) the lower rail must be installed between 800 mm and 810 mm above finished floor level; and
- (b) the upper rail must be installed between 1000 mm and 1010 mm above finished floor level; and
- (c) the rails must be able to withstand a force of not less than 1100 N in any direction.

S27C9 Door and door controls

The entrance door and associated door controls must be automated and must comply with the following:

- (a) The threshold must incorporate a smooth transition without a step or lip.
- (b) The minimum clear opening width must be—
 - (i) 1100 mm in locations where beach wheelchairs are likely to be used; or
 - (ii) 950 mm in all other locations.
- (c) The doorway must achieve a *luminance contrast* of at least 30% between—
 - (i) door leaf and door jamb; or
 - (ii) door leaf and adjacent wall; or
 - (iii) architraves (where used) and adjacent wall; or
 - (iv) door leaf and architrave (where used); or
 - (v) door jamb and adjacent wall.
- (d) The operation of the door must be calibrated such that—
 - (i) it has a gentle opening and closing movement; and
 - (ii) there is sufficient dwell time for a user to safely travel through the doorway.
- (e) The door must be fitted with a fail-safe opening mechanism that opens the door if an obstruction is detected during its closing movement.
- (f) Door controls must be located internally and externally—
 - (i) between 900 mm and 1200 mm above finished floor level; and
 - (ii) not less than 500 mm from any internal corner.
- (g) Door control buttons must—
 - (i) have a minimum diameter of 25 mm; and
 - (ii) be proud of the surrounding surface; and
 - (iii) activate the door operation before the button becomes level with the surrounding surface; and
 - (iv) be of a contrasting colour to the surrounding plate.
- (h) The surrounding plates of both internal and external door controls must include the words “Push to Open”.
- (i) The following indicator lights must be provided:
 - (i) “Occupied” and “Vacant” on the external plate.
 - (ii) “Locked” and “Unlocked” on the internal plate.
- (j) Braille and tactile signage complying with [Specification 15](#) must identify the door controls.

S27C10 Signage

- (1) External signage must incorporate—
 - (a) the symbol shown in [Figure S27C10](#); and
 - (b) the words “Accessible Adult Change Facility”.
- (2) The symbol *required* by (1)(a) must have a blue (B21, ultramarine) background with the hoist and table elements shown in white.
- (3) Signage must be braille and tactile signage complying with [Specification 15](#).

Figure S27C10: Accessible adult change facility symbol

**S27C11 Operating instructions**

Signage provided within the facility must include the following information for the hoist and change table:

- (a) Operating instructions.
- (b) Safe working load limits.

Specification 28

Sound insulation for building elements

NT S28C1

S28C1 Scope

This Specification lists the weighted sound reduction index R_w for some common forms of construction.

NT S28C2

S28C2 Discontinuous construction

Wall systems listed in S28C4 to S28C7 having a minimum 20 mm cavity between 2 separate leaves are deemed to be discontinuous construction if—

- (a) for masonry, where wall ties are required to connect leaves, the ties are of the resilient type; and
- (b) for other than masonry, there is no mechanical linkage between leaves except at the periphery.

NT S28C3

S28C3 Construction Deemed-to-Satisfy

- (1) The forms of wall construction described in S28C4 to S28C7 and floor construction described in S28C8 to S28C10, are considered to have the R_w , $R_w + C_{tr}$ and $L_{n,w}$ stated in those clauses.
- (2) The forms of construction referred to in (1) must be installed as follows:
 - (a) Masonry units must be laid with all joints filled solid, including those between the masonry and any adjoining construction.
 - (b) Joints between concrete slabs or panels and any adjoining construction must be filled solid.
 - (c) For sheeting materials—
 - (i) if one layer is *required* on both sides of a wall, it must be fastened to the studs with joints staggered on opposite sides; and
 - (ii) if two layers are *required*, the second layer must be fastened over the first layer so that the joints do not coincide with those of the first layer; and
 - (iii) joints between sheets or between sheets and any adjoining construction must be taped and filled solid.
 - (d) Timber or steel-framed construction — perimeter framing members must be securely fixed to the adjoining structure and—
 - (i) bedded in resilient compound; or
 - (ii) the joints must be caulked so that there are no voids between the framing members and the adjoining structure.
 - (e) Services must not be chased into concrete or masonry elements.
 - (f) A door or panel *required* to have a certain $R_w + C_{tr}$ that provides access to a duct, pipe or other service must—
 - (i) not open into any *habitable room* (other than a kitchen); and
 - (ii) be firmly fixed so as to overlap the frame or rebate of the frame by not less than 10 mm, be fitted with a sealing gasket along all edges and be constructed of—
 - (A) wood, particleboard or blockboard not less than 33 mm thick; or
 - (B) compressed fibre-reinforced cement sheeting not less than 9 mm thick; or

(C) other suitable material with a mass per unit area not less than 24.4 kg/m².

- (g) A water supply pipe must—
 - (i) only be installed in the *cavity* of discontinuous construction; and
 - (ii) in the case of a pipe that serves only one *sole-occupancy unit*, not be fixed to the wall leaf on the side adjoining any other *sole-occupancy unit* and have a clearance not less than 10 mm to the other wall leaf.
- (h) Electrical outlets must be offset from each other—
 - (i) in masonry walling, not less than 100 mm; and
 - (ii) in timber or steel-framed walling, not less than 300 mm.

S28C4 Acceptable forms of construction for walls — masonry

- (1) Acceptable forms of construction for masonry walls are set out in (2) to (9).
- (2) Two leaves of 110 mm clay brick masonry with—
 - (a) a *cavity* of not less than 50 mm between leaves; and
 - (b) 50 mm thick glass wool insulation with a density of 11 kg/m³ or 50 mm thick polyester insulation with a density of 20 kg/m³ in the *cavity*,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in Figure S28C4a.
- (3) Two leaves of 110 mm clay brick masonry with—
 - (a) a *cavity* of not less than 50 mm between leaves; and
 - (b) 13 mm cement render on each outside face,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, when constructed as shown in Figure S28C4b.
- (4) A single leaf of 110 mm clay brick masonry with—
 - (a) a row of 70 mm x 35 mm timber studs or 64 mm steel studs at 600 mm centres, spaced 20 mm from the masonry wall; and
 - (b) 50 mm thick glass or mineral wool insulation with a density of 11 kg/m³ positioned between studs; and
 - (c) one layer of 13 mm plasterboard fixed to outside face of studs and outside face of masonry,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in Figure S28C4c.
- (5) A single leaf of 90 mm clay brick masonry with—
 - (a) a row of 70 mm x 35 mm timber studs or 64 mm steel studs at 600 mm centres, spaced 20 mm from each face of the masonry wall; and
 - (b) 50 mm thick glass or mineral wool insulation with a density of 11 kg/m³ positioned between studs in each row; and
 - (c) one layer of 13 mm plasterboard fixed to studs on each outside face,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in Figure S28C4d.
- (6) A single leaf of 150 mm brick masonry with 13 mm cement render on each face has an R_w of not less than 50 if constructed as shown in Figure S28C4e.
- (7) A single leaf of 220 mm brick masonry with 13 mm cement render on each face has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in Figure S28C4f.
- (8) 110 mm thick brick masonry with 13 mm cement render on each face has an R_w of not less than 45 if constructed as shown in Figure S28C4g.
- (9) 110 mm thick concrete brickwork has an R_w of not less than 45 if constructed as shown in Figure S28C4h.

Figure S28C4a: Two leaves of 110 mm clay brick masonry (method 1)

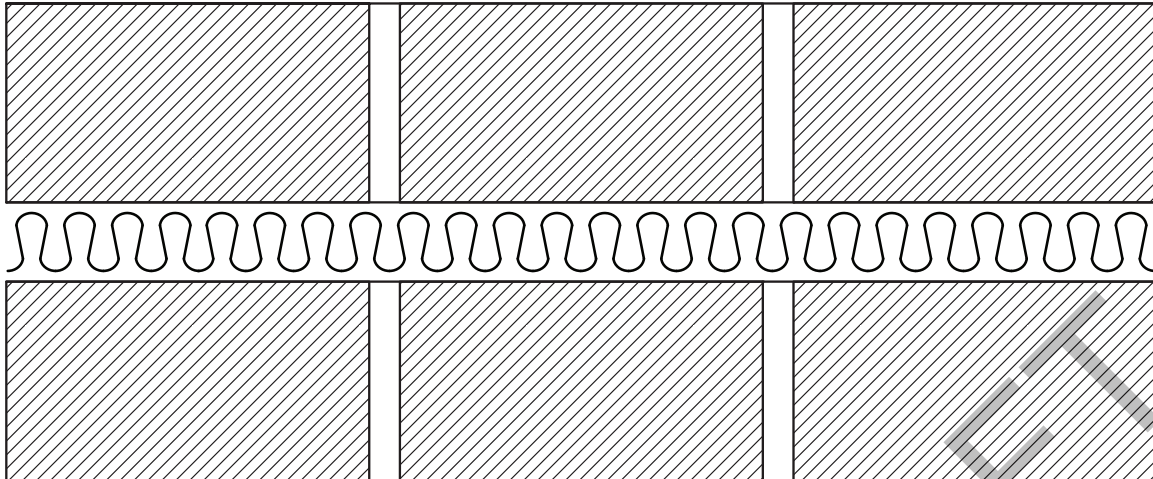


Figure S28C4b: Two leaves of 110 mm clay brick masonry (method 2)

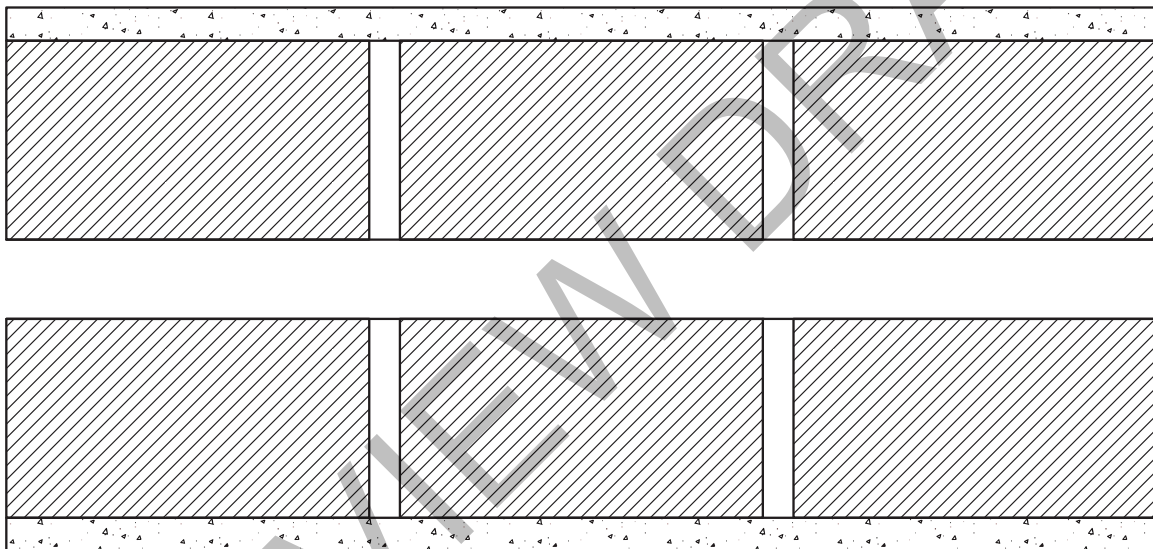


Figure S28C4c: Single leaf of 110 mm clay brick masonry

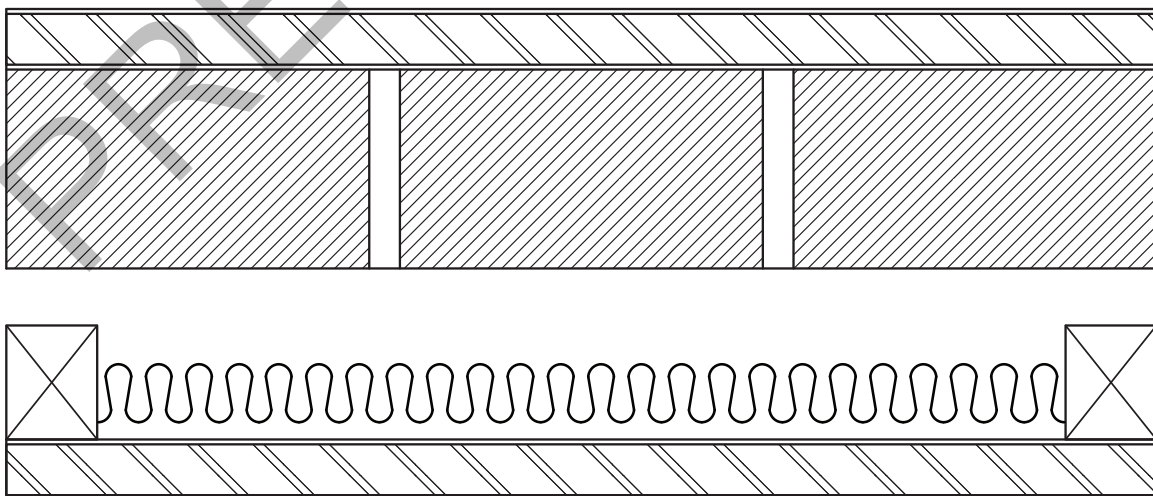


Figure S28C4d: Single leaf of 90 mm clay brick masonry

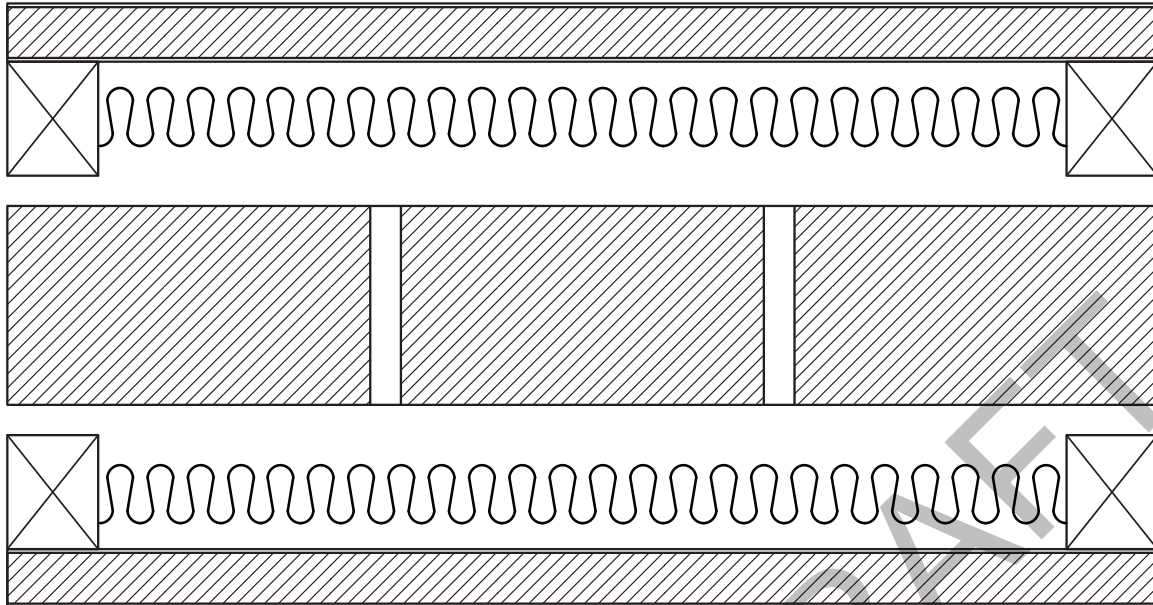


Figure S28C4e: Single leaf of 150 mm brick masonry with 13 mm cement render on each face

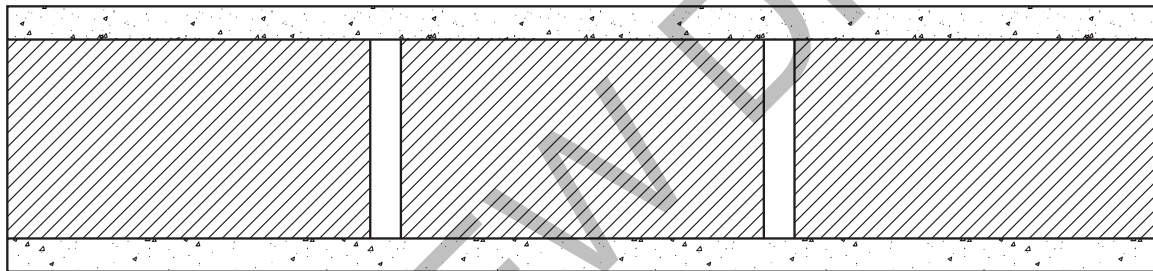


Figure S28C4f: Single leaf of 220 mm brick masonry with 13 mm cement render on each face

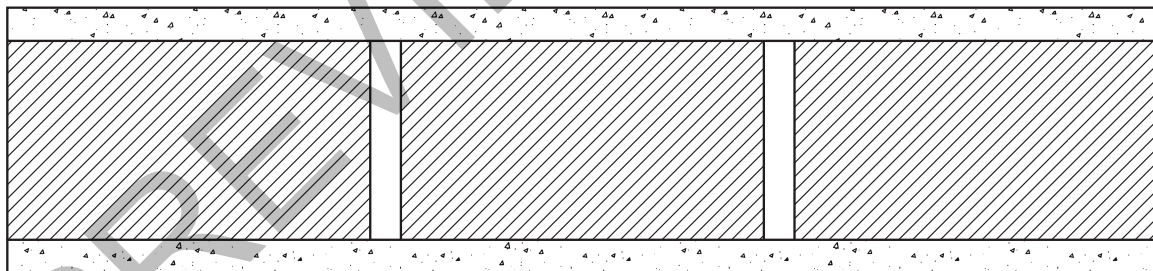


Figure S28C4g: 110 mm thick brick masonry with 13 mm cement render on each face


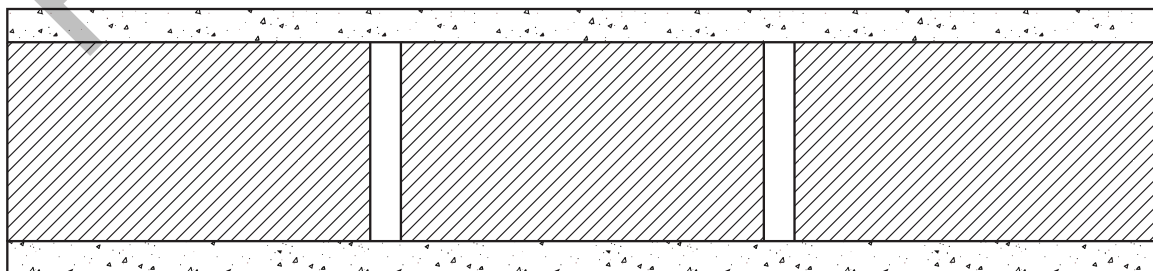


Figure S28C4h: 110 mm thick concrete brickwork

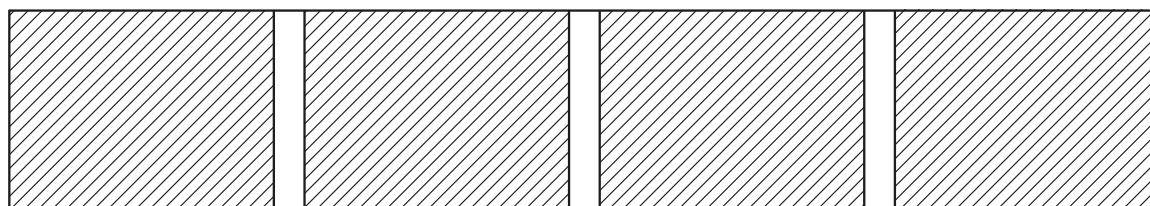

S28C5 Acceptable forms of construction for walls — concrete

- (1) Acceptable forms of construction for concrete walls are set out in (3) to (12).
- (2) For the purposes of this clause, the term 'concrete panel' is a reference to a solid in-situ concrete panel or solid pre-cast concrete panel.
- (3) A 150 mm thick concrete panel has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C5a](#).
- (4) A 150 mm thick concrete panel with one layer of 10 mm plasterboard fixed to 28 mm metal furring channels on each face, has an R_w of not less than 50, if constructed as shown in [Figure S28C5b](#).
- (5) A 200 mm thick concrete panel with one layer of 13 mm plasterboard or 13 mm cement render on each face has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C5c](#).
- (6) A 100 mm thick concrete panel with—
 - (a) a row of 64 mm steel studs at 600 mm centres, spaced 25 mm from the concrete panel; and
 - (b) 80 mm thick polyester insulation or 50 mm thick glass wool insulation with a density of 11 kg/m³, positioned between studs; and
 - (c) two layers of 13 mm plasterboard fixed to outside face of studs and one layer of 13 mm plasterboard fixed to outside face of concrete panel,
 has an with an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed in accordance with [Figure S28C5d](#).
- (7) A 125 mm thick concrete panel with—
 - (a) a row of 64 mm steel studs at 600 mm centres, spaced 20 mm from the concrete panel; and
 - (b) 70 mm polyester insulation with a density of 9 kg/m³, positioned between studs; and
 - (c) one layer of 13 mm plasterboard fixed to the outside face of the studs,
 has an with an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed in accordance with [Figure S28C5e](#).
- (8) A 125 mm thick concrete panel has an R_w of not less than 50, if constructed as shown in [Figure S28C5f](#).
- (9) A 100 mm concrete panel with 13 mm cement render or one layer of 13 mm plasterboard on each face has an R_w of not less than 50, if constructed as shown in [Figure S28C5g](#).
- (10) A 190 mm thick concrete blockwork has an R_w of not less than 45, if constructed as shown in [Figure S28C5h](#).
- (11) 140 mm thick concrete blockwork, the face shell thickness of the blocks being not less than 44 mm and with—
 - (a) 50 mm x 50 mm timber battens spaced at not more than 610 mm centres screw-fixed on one face of the blocks into resilient plugs with rubber inserts between battens and the wall; and
 - (b) the face of the battens clad with 13 mm plasterboard,
 has an R_w of not less than 45, if constructed as shown in [Figure S28C5i](#).
- (12) A concrete panel, 100 mm thick, has an R_w of not less than 45, if constructed as shown in [Figure S28C5j](#).

Figure S28C5a: 150 mm thick concrete panel

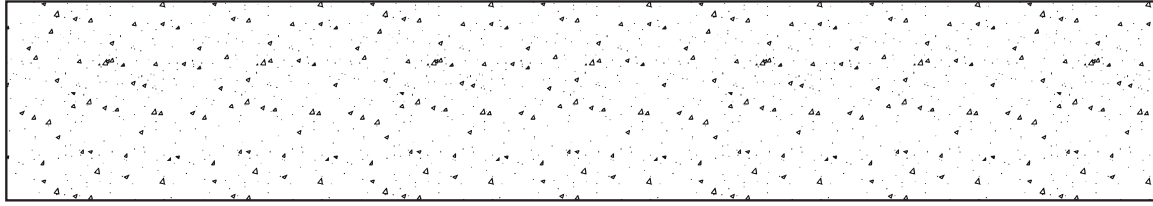


Figure S28C5b: 150 mm thick concrete panel with one layer of 10 mm plasterboard fixed to 28 mm metal furring channels on each face

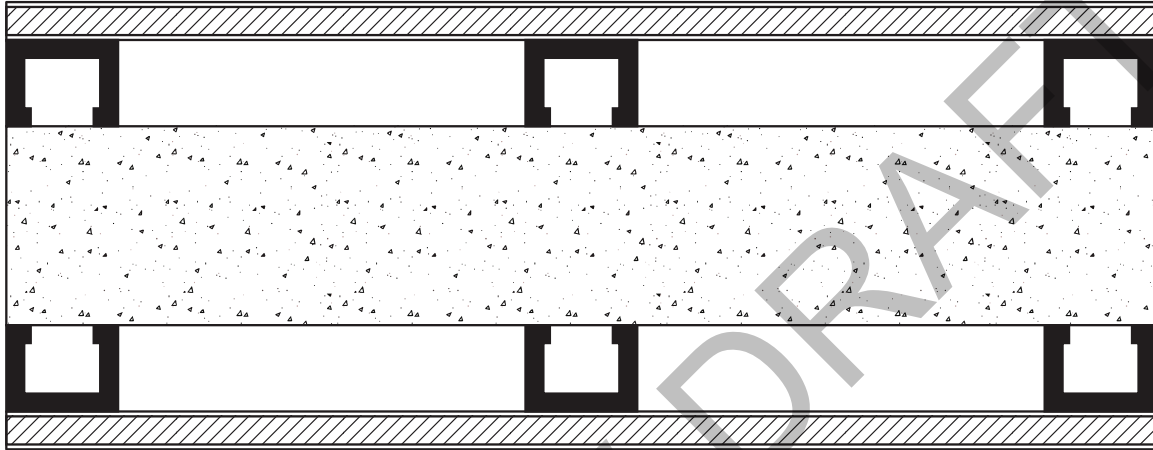


Figure S28C5c: 200 mm thick concrete panel with one layer of 13 mm plasterboard or 13 mm cement render on each face

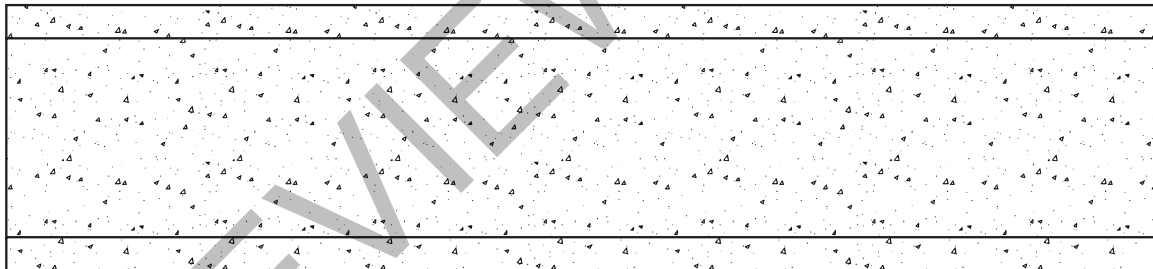


Figure S28C5d: 100 mm thick concrete panel with studs, insulation and plasterboard

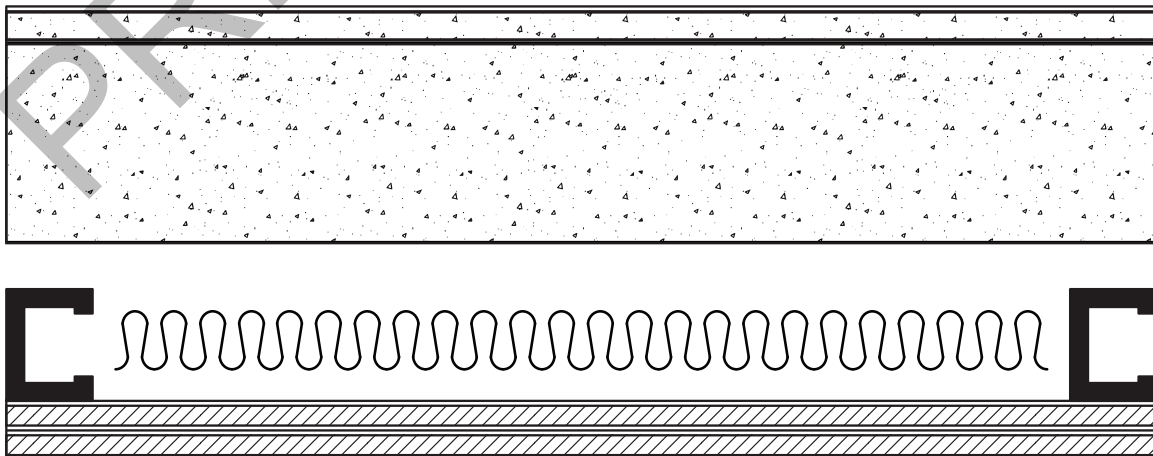


Figure S28C5e: 125 mm thick concrete panel with studs, insulation and plasterboard

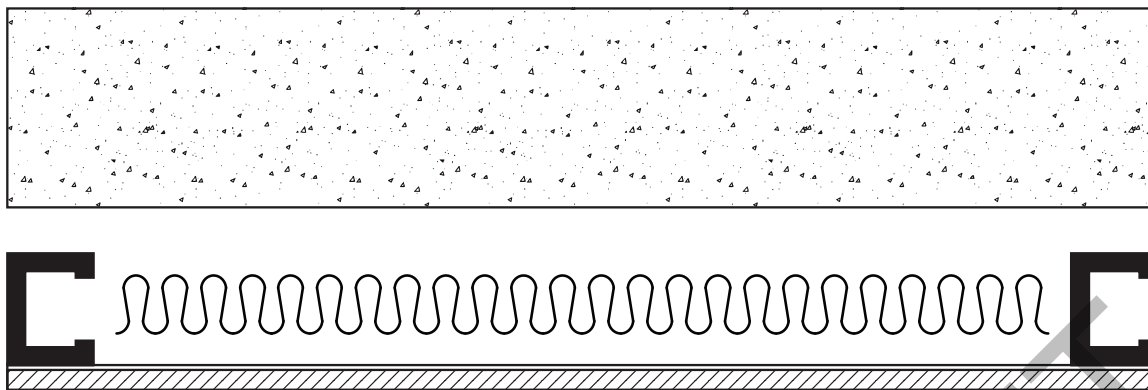


Figure S28C5f: 125 mm thick concrete panel

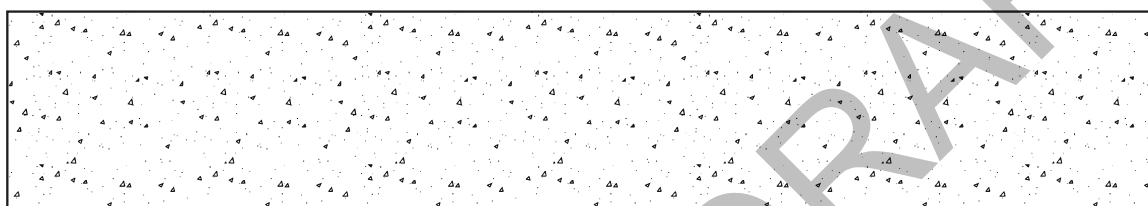


Figure S28C5g: 100 mm concrete panel with 13 mm cement render or one layer of 13 mm plasterboard on each face

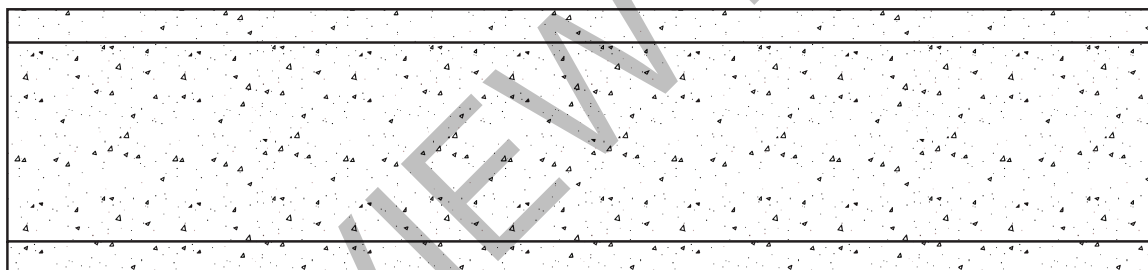


Figure S28C5h: 190 mm thick concrete blockwork

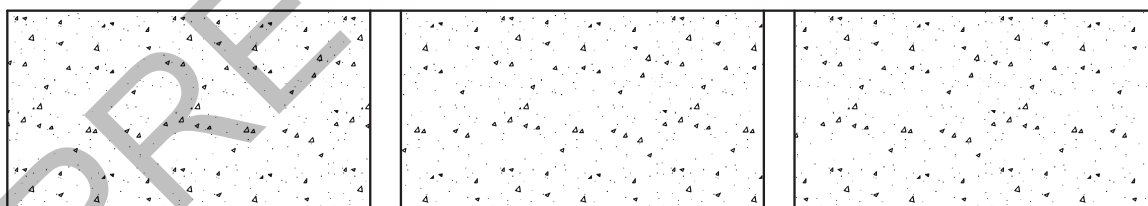


Figure S28C5i: 140 mm thick concrete blockwork with timber battens and 13 mm plasterboard


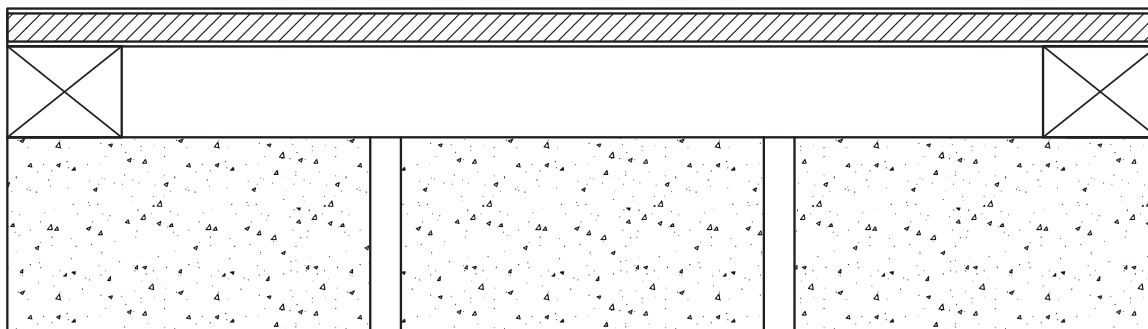


Figure S28C5j: 100 mm thick concrete panel

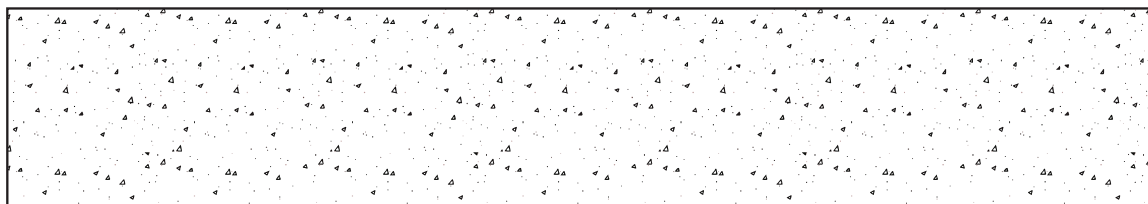

S28C6 Acceptable forms of construction for walls — autoclaved aerated concrete

- (1) Acceptable forms of construction for autoclaved aerated concrete walls are set out in (2) to (5).
- (2) A 75 mm thick autoclaved aerated concrete wall panel with—
 - (a) a row of 64 mm steel studs at 600 mm centres, spaced 20 mm from the autoclaved aerated concrete wall panel; and
 - (b) 75 mm thick glass wool insulation with a density of 11 kg/m³ positioned between studs; and
 - (c) one layer of 10 mm moisture resistant plasterboard or 13 mm fire protective grade plasterboard fixed to outside face of studs and outside face of autoclaved aerated concrete wall panel,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C6a](#).
- (3) A 75 mm thick autoclaved aerated concrete wall panel with—
 - (a) a row of 64 mm steel studs at 600 mm centres, spaced 35 mm from the autoclaved aerated concrete panel wall; and
 - (b) 28 mm metal furring channels fixed to the outside face of the autoclaved aerated concrete wall panel, with 50 mm thick polyester insulation with a density of 9 kg/m³ positioned between furring channels and one layer of 13 mm fire protective grade plasterboard fixed to furring channels; and
 - (c) 105 mm thick glass wool insulation with a density of 7 kg/m³ positioned between studs; and
 - (d) one layer of 13 mm fire protective grade plasterboard fixed to the outside face of the studs,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C6b](#).
- (4) Two leaves of 75 mm autoclaved aerated concrete wall panel with—
 - (a) a cavity not less than 30 mm between panels containing 50 mm glass wool insulation with a density of 11 kg/m³; and
 - (b) one layer of 10 mm plasterboard fixed to outside face of each panel,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C6c](#).
- (5) A 75 mm thick autoclaved aerated concrete wall panel with—
 - (a) one layer of 10 mm moisture resistant plasterboard on one face; and
 - (b) 28 mm metal furring channels and resilient mounts, 75 mm polyester insulation with a density of 9 kg/m³ and 13 mm fire-protective grade plasterboard fixed to the other face,
 has an R_w of not less than 50, if constructed as shown in [Figure S28C6d](#).

Figure S28C6a: 75 mm thick autoclaved aerated concrete wall panel (method 1)

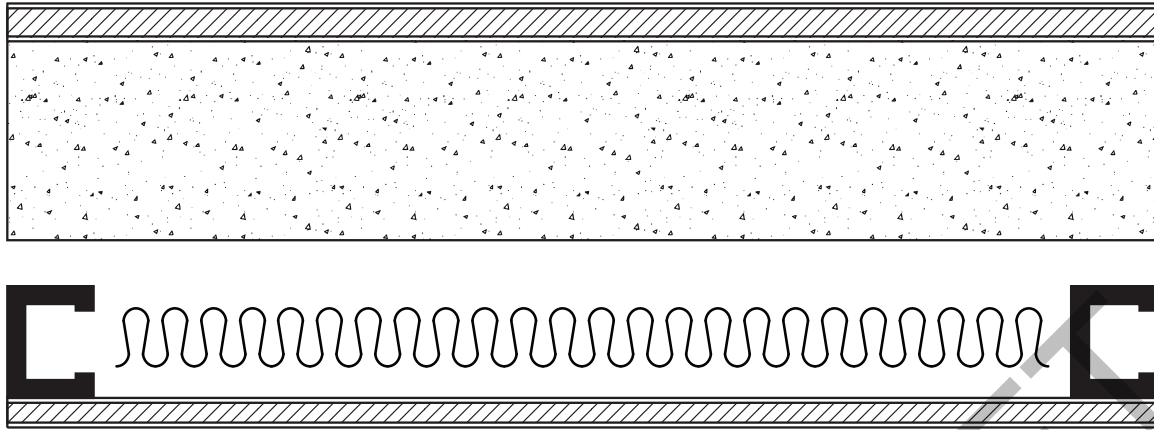


Figure S28C6b: 75 mm thick autoclaved aerated concrete wall panel (method 2)

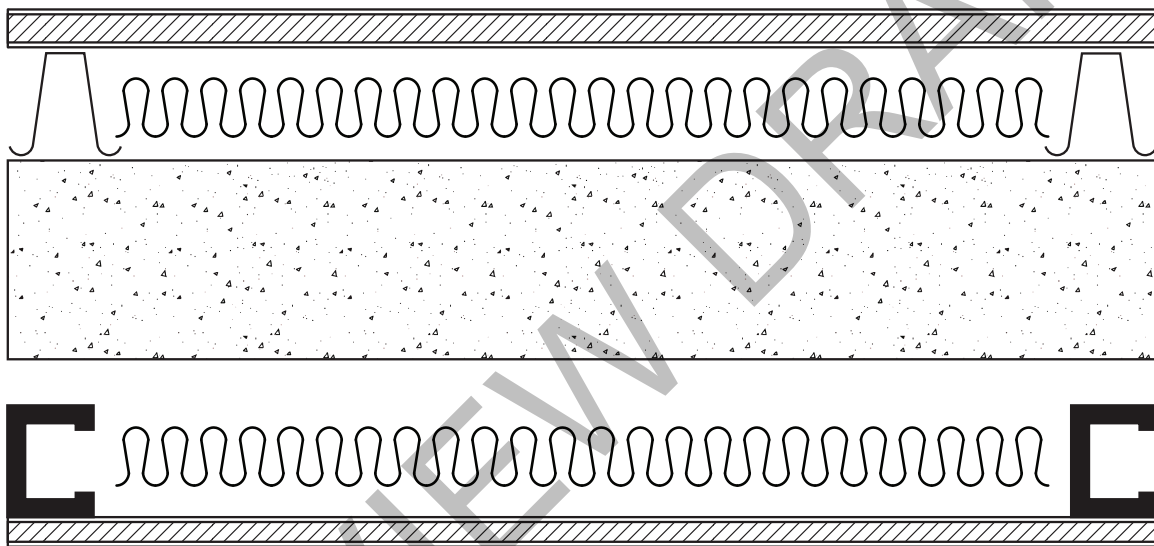


Figure S28C6c: Two leaves of 75 mm autoclaved aerated concrete wall panel


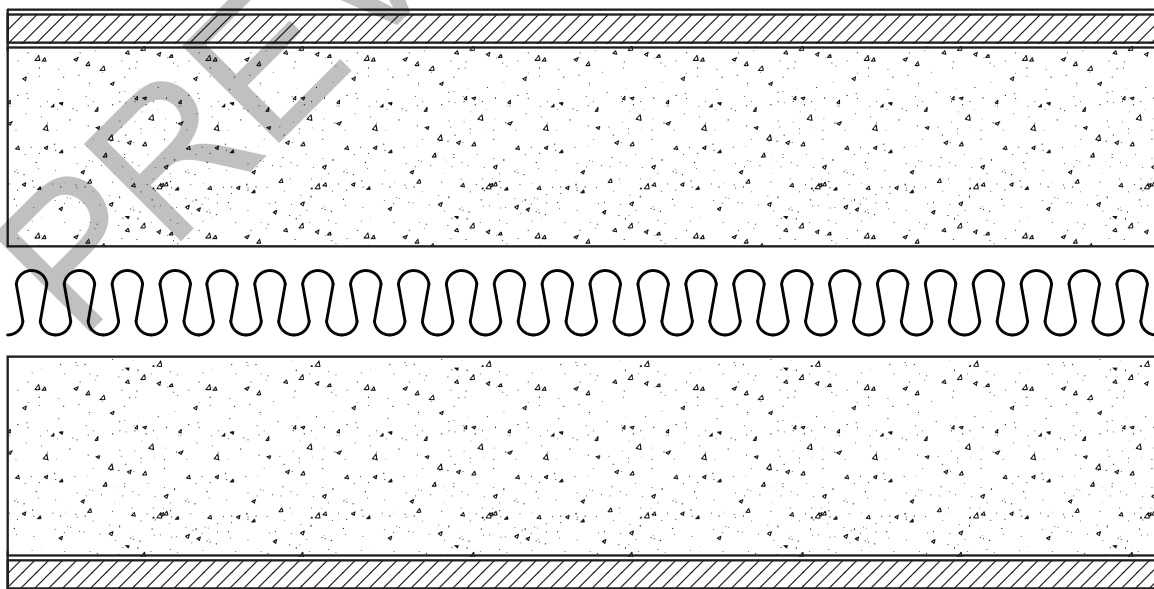


Figure S28C6d: 75 mm thick autoclaved aerated concrete wall panel (method 3)

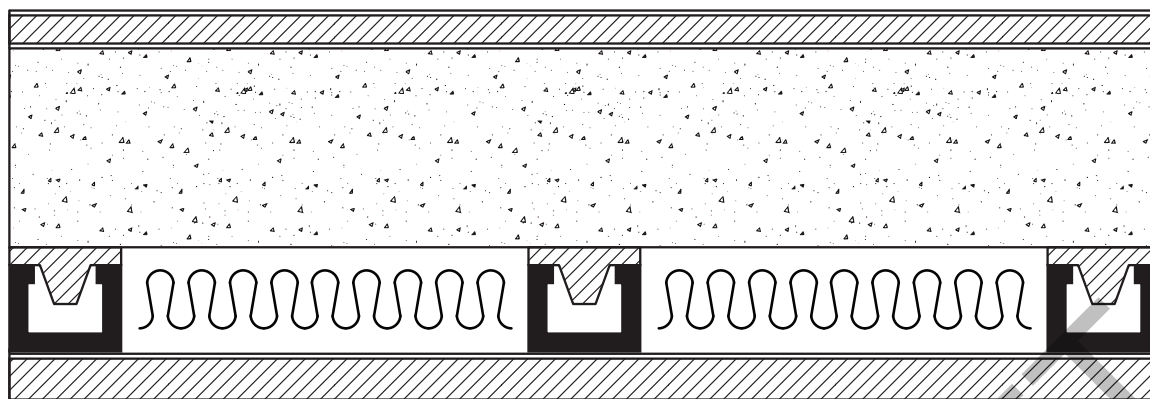

S28C7 Acceptable forms of construction for walls — timber and steel framing

- (1) Acceptable forms of construction for timber and steel framing walls are set out in (2) to (11).
- (2) Two rows of 70 x 35 mm timber studs at 450 mm centres with—
 - (a) an air gap not less than 20 mm between the rows of studs; and
 - (b) 75 mm thick glass or mineral wool insulation with a density of 8 kg/m³ or 60 mm thick polyester insulation with a density of 11 kg/m³ positioned between one row of studs; and
 - (c) two layers of 13 mm fire-protective grade plasterboard or one layer of 6 mm fibre-cement sheet and one layer of 13 mm fire-protective grade plasterboard, fixed to outside face of studs,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C7a](#).
- (3) One row of 70 mm x 35 mm staggered timber studs, without noggings between adjacent studs, at not less than 450 mm centres, fixed to 90 mm x 35 mm wall plates with—
 - (a) 75 mm thick glass or mineral wool insulation with a minimum density of 8 kg/m³ positioned between studs; and
 - (b) two layers of 13 mm fire-protective grade plasterboard fixed to outside face of studs,
 has an R_w of not less than 50, if constructed as shown in [Figure S28C7b](#).
- (4) One row of 70 mm x 35 mm timber studs at not less than 600 mm centres with—
 - (a) 75 mm thick glass or mineral wool insulation with a minimum density of 8 kg/m³ positioned between studs; and
 - (b) two layers of 13 mm fire-protective grade plasterboard fixed to outside face of studs,
 has an R_w of not less than 45, if constructed as shown in [Figure S28C7c](#).
- (5) One row of 70 mm x 35 mm timber studs at not less than 450 mm centres with—
 - (a) 28 mm furring channels installed horizontally on one side; and
 - (b) two layers of 13 mm fire-protective plasterboard fixed on each face,
 has an R_w of not less than 45, if constructed as shown in [Figure S28C7d](#).
- (6) Two rows of 64 mm steel studs at 600 mm centres with—
 - (a) an air gap not less than 20 mm between the rows of studs; and
 - (b) 50 mm thick glass wool insulation or 60 mm thick polyester insulation with a density of 11 kg/m³ positioned between one row of studs; and
 - (c) two layers of 13 mm fire-protective grade plasterboard or one layer of 6 mm fibre-cement sheet and one layer of 13 mm fire-protective grade plasterboard, fixed to outside face of studs,
 has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C7e](#).
- (7) Two rows of 64 mm steel studs at 600 mm centres with—
 - (a) an air gap not less than 80 mm between the rows of studs; and
 - (b) 200 mm thick polyester insulation with a density of 14 kg/m³ positioned between studs; and

- (c) one layer of 13 mm fire-protective grade plasterboard and one layer 13 mm plasterboard on one outside face and one layer of 13 mm fire-protective grade plasterboard on the other outside face,
has an $R_w + C_{tr}$ of not less than 50 and an R_w of not less than 50, if constructed as shown in [Figure S28C7f](#).
- (8) One row of 92 mm steel studs at 600 mm centres with—
- 50 mm thick glass wool insulation with a density of 11 kg/m³ or 60 mm thick polyester insulation with a density of 8 kg/m³, positioned between studs; and
 - two layers of 13 mm fire-protective grade plasterboard or one layer of 6 mm fibre-cement sheet and one layer of 13 mm fire-protective grade plasterboard, fixed to each face,
- has an R_w of not less than 50, if constructed as shown in [Figure S28C7g](#).
- (9) One row of 64 mm steel studs with 2 layers of 16 mm fire-protective grade plasterboard fixed to each face has an R_w of not less than 45, if constructed as shown in [Figure S28C7h](#).
- (10) One row of 64 mm steel studs with—
- one layer of 16 mm fire-protective grade plasterboard fixed to one face; and
 - 50 mm thick glass or mineral wool insulation with a density of 11 kg/m³ positioned between the studs; and
 - two layers of fire-protective grade plasterboard fixed to the other face, the inner layer being 16 mm thick and the outer layer being 13 mm,
- has an R_w of not less than 45, if constructed as shown in [Figure S28C7i](#).
- (11) One row of 64 mm steel studs with two layers of 13 mm plasterboard on each face has an R_w of not less than 45, if constructed as shown in [Figure S28C7j](#).

Figure S28C7a: Two rows of 70 mm x 35 mm timber studs

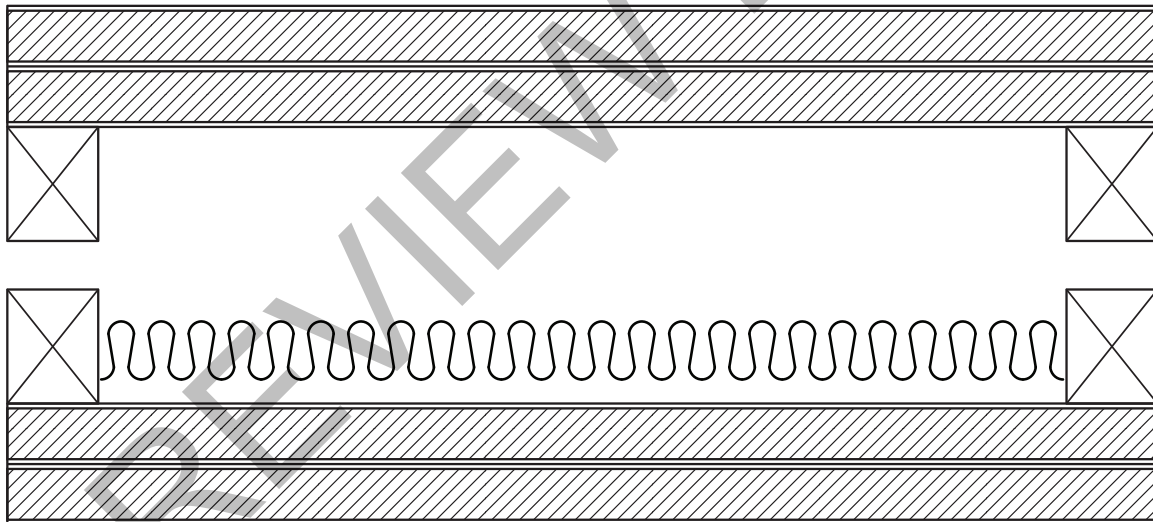


Figure S28C7b: One row of 70 mm x 35 mm staggered timber studs without noggings between adjacent studs




Figure S28C7c: One row of 70 mm x 35 mm timber studs at not less than 600 mm centres




Figure S28C7d: One row of 70 mm x 35 mm timber studs at not less than 450 mm centres




Figure S28C7e: Two rows of 64 mm steel studs at 600 mm centres (Method 1)




Figure S28C7f: Two rows of 64 mm steel studs at 600 mm centres (Method 2)

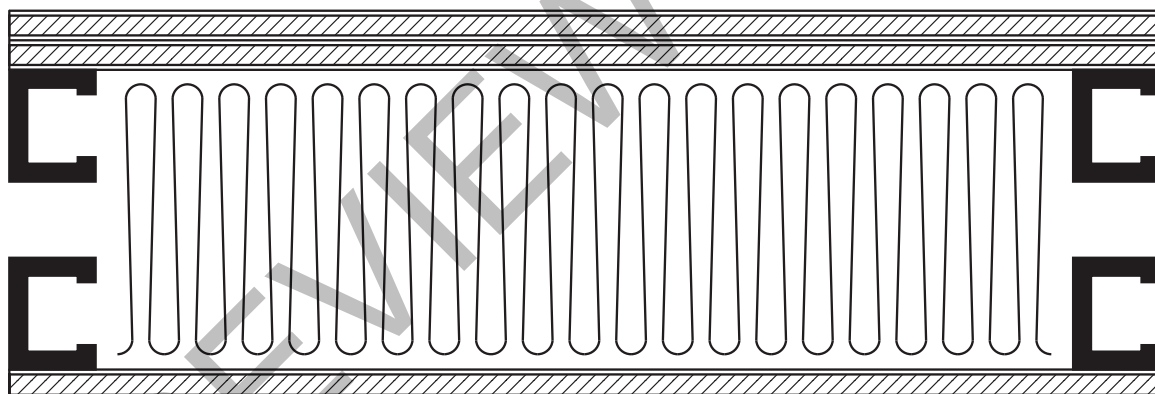


Figure S28C7g: One row of 92 mm steel studs

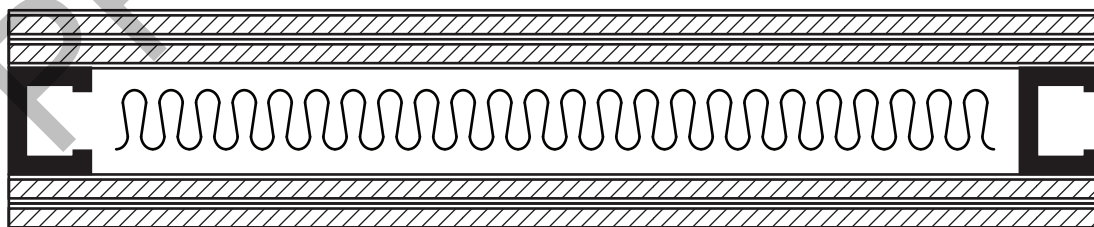


Figure S28C7h: One row of 64 mm steel studs with 2 layers of 16 mm fire-protective grade plasterboard

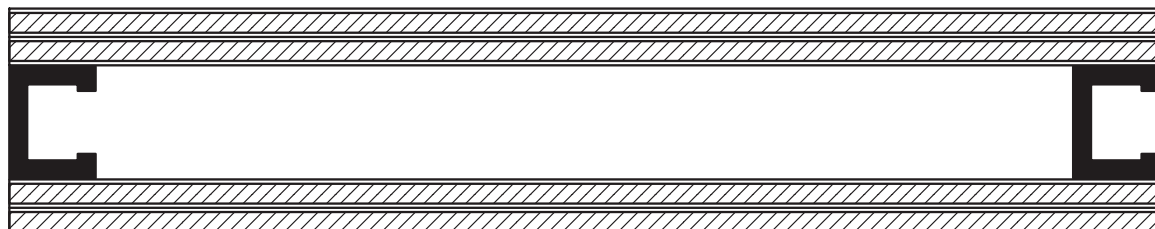


Figure S28C7i: One row of 64 mm steel studs


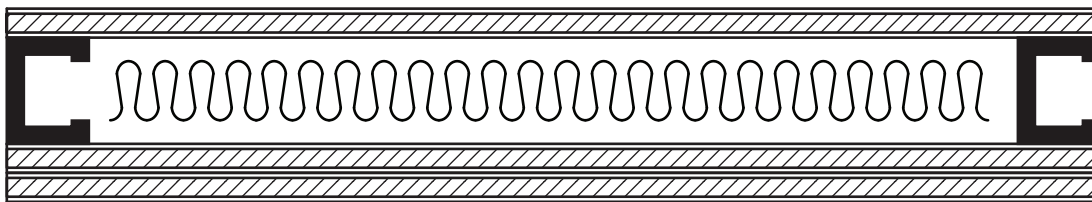


Figure S28C7j: One row of 64 mm steel studs with two layers of 13 mm plasterboard on each face

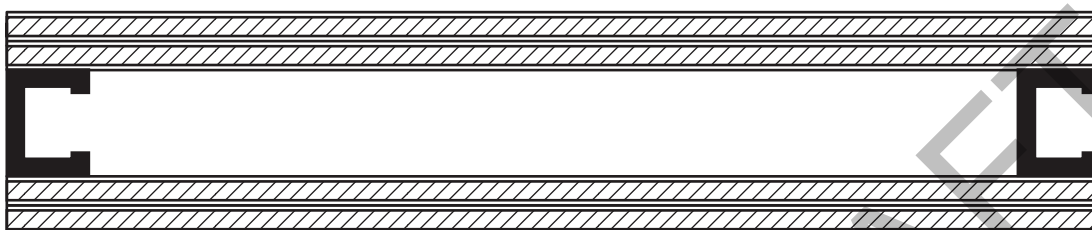

S28C8 Acceptable forms of construction for floors — concrete

- (1) Acceptable forms of construction for concrete floors are set out in (2) to (4).
- (2) 150 mm thick concrete slab with—
 - (a) 28 mm metal furring channels and isolation mounts fixed to underside of slab, at 600 mm centres; and
 - (b) 65 mm thick polyester insulation with a density of 8 kg/m³, positioned between furring channels; and
 - (c) one layer of 13 mm plasterboard fixed to furring channels,
 has an $R_w + C_{tr}$ of not less than 50, an $L_{n,w}$ of not more than 62 and an R_w of not less than 50, if constructed as shown in [Figure S28C8a](#).
- (3) 200 mm thick concrete slab with carpet on underlay has an $R_w + C_{tr}$ of not less than 50, an $L_{n,w}$ of not more than 62 and an R_w of not less than 50, if constructed as shown in [Figure S28C8b](#).
- (4) 100 mm thick concrete slab has an $R_w + C_{tr}$ of not less than 45 and an R_w of not less than 45, if constructed as shown in [Figure S28C8c](#).

Figure S28C8a: 150 mm thick concrete slab

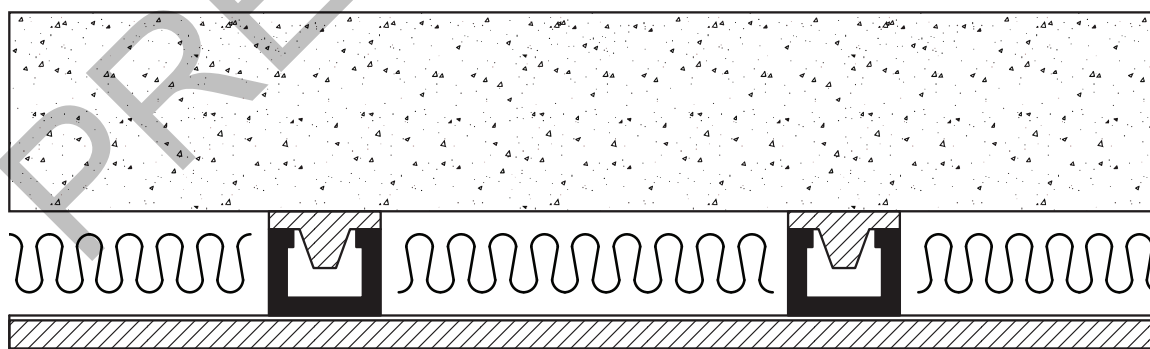


Figure S28C8b: 200 mm thick concrete slab with carpet on underlay


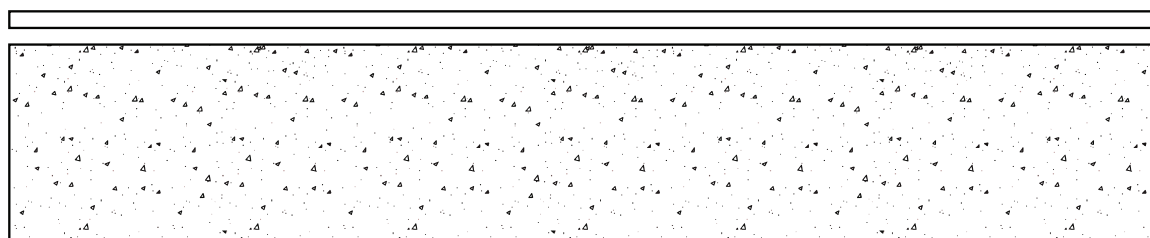



Figure S28C8c: 100 mm thick concrete slab

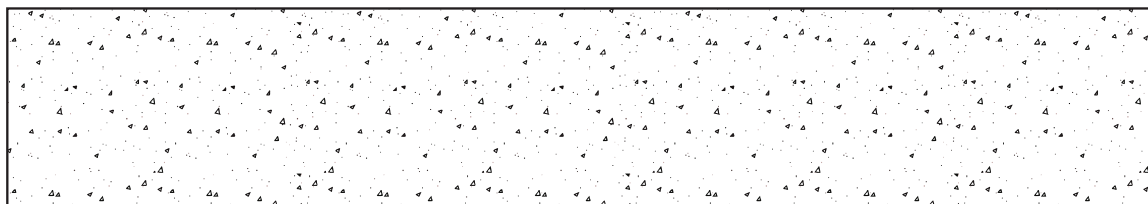

S28C9 Acceptable forms of construction for floors — autoclaved aerated concrete

- (1) An acceptable form of construction for autoclaved aerated concrete floors is set out in (2).
- (2) 75 mm thick autoclaved aerated concrete floor panel with—
 - (a) 8 mm ceramic tiles with flexible adhesive and *waterproof membrane*, located above the slab; and
 - (b) timber joists at 600 mm centres; and
 - (c) R1.5 glass wool insulation positioned between timber joists; and
 - (d) 28 mm metal furring channels and resilient mounts fixed to underside of joists; and
 - (e) two layers of 13 mm plasterboard fixed to furring channels,
 has an $R_w + C_{tr}$ of not less than 50, an $L_{n,w}$ of not more than 62 and an R_w of not less than 50, if constructed as shown in Figure S28C9.

Figure S28C9: 75 mm thick autoclaved aerated concrete floor panel

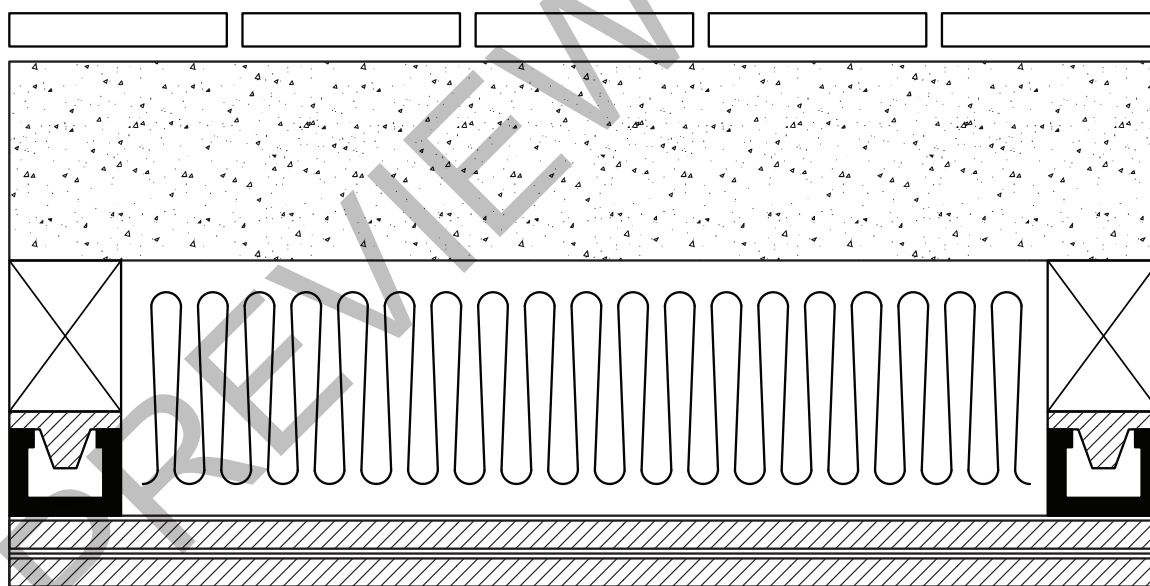

S28C10 Acceptable forms of construction for floors — timber

- (1) Acceptable forms of construction for timber floors are set out in (2) and (3).
- (2) 19 mm thick particleboard floor sheeting with—
 - (a) 190 mm x 45 mm timber joists at 450 mm centres; and
 - (b) R2.5 glass or mineral wool insulation positioned between timber joists; and
 - (c) 28 mm metal furring channels and isolation mounts fixed to underside of joists, isolation mounts to be of natural rubber with a dynamic factor of not more than 1.1 and static deflection of not less than 3 mm at actual operating load; and

- (d) two layers of 16 mm fire-protective grade plasterboard fixed to furring channels, has an $R_w + C_{tr}$ of not less than 50, an $L_{n,w}$ of not more than 62 and an R_w of not less than 50, if constructed as shown in Figure S28C10a.
- (3) Timber flooring with minimum 8.5 kg/m² mass, over 19 mm thick particleboard floor sheeting with—
- (a) 190 mm x 45 mm timber joists at not less than 450 mm centres; and
 - (b) R2.5 glass or mineral wool insulation positioned between timber joists; and
 - (c) 28 mm metal furring channels fixed to underside of joists at 600 mm centres by clip or mount; and
 - (d) one layer of 13 mm acoustic grade plasterboard fixed to furring channels,
- has an $R_w + C$ of not less than 45 and an R_w of not less than 45, if constructed as shown in Figure S28C10b.

Figure S28C10a: 19 mm thick particleboard floor sheeting


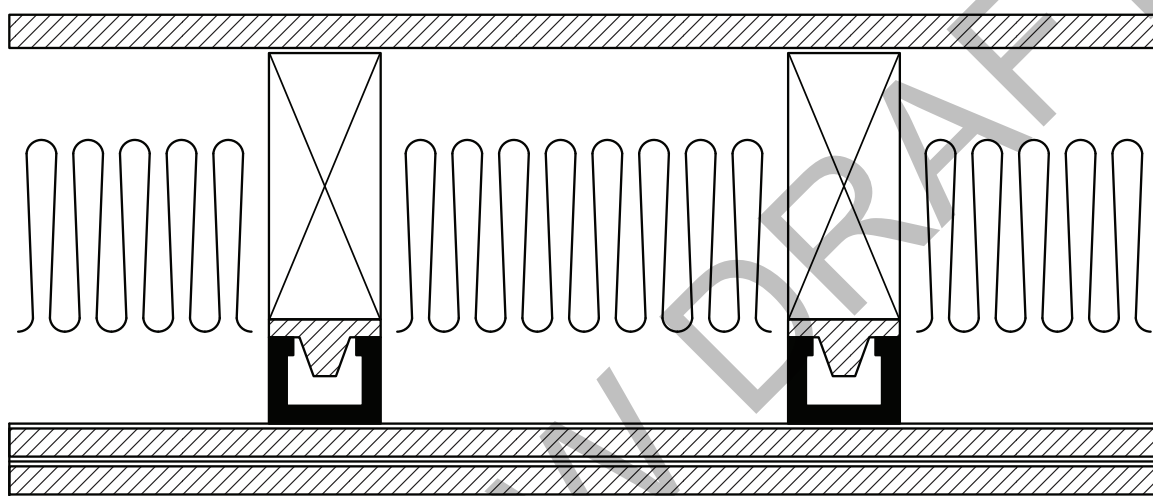


Figure S28C10b: Timber flooring with minimum 8.5kg/m² mass, over 19 mm thick particleboard floor sheeting

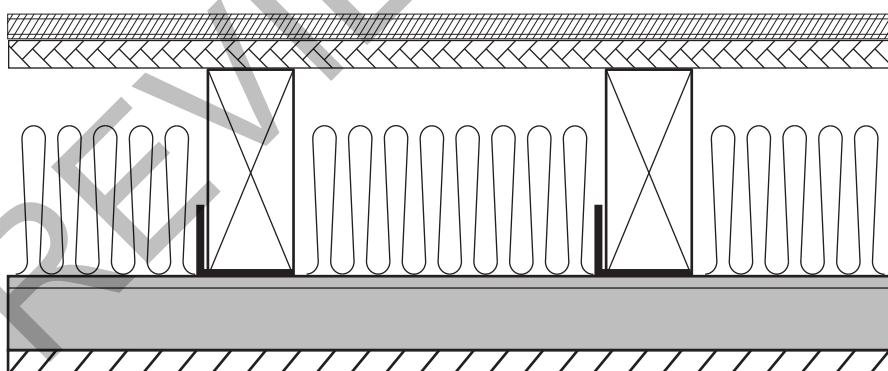

Specification 29**Impact sound – test of equivalence***NT S29C1***S29C1****Scope**

This Specification describes a method of test to determine the comparative resistance of walls to the transmission of impact sound.

*NT S29C2***S29C2****Construction to be tested**

- (1) The test is conducted on a specimen of prototype wall construction and on a specimen of one or other of the constructions specified in [S28C4](#) to [S28C7](#).
- (2) The testing of a construction specified in [S28C4](#) to [S28C7](#) need not be repeated for subsequent comparisons provided complete records of the results, the test equipment and the technique of testing are kept so that identical equipment can be employed and an identical technique can be adopted in the testing of specimens of prototype wall construction.

*NT S29C3***S29C3****Method**

- (1) The wall constructions to be compared must be tested in accordance with AS 1191.
- (2) A horizontal steel platform 510 mm x 460 mm x 10 mm thick must be placed with one long edge in continuous and direct contact with the wall to be tested on the side of the wall on which the impact sound is to be generated.
- (3) A tapping machine complying with ISO 140/6 — 1998 (E) must be mounted centrally on the steel platform.
- (4) The sound transmission through the wall must be determined in accordance with AS 1191 except that the tapping machine as mounted on the steel platform must be used as the source of sound.
- (5) The impact sound pressure levels measured in the receiving room must be converted into normalised levels using a reference equivalent absorption area of 10 m².

Section G

Ancillary provisions

Part G1

Minor structures and components**Objectives**

G1O1 Objective

Functional Statements

G1F1 Swimming pool drainage

G1F2 Swimming pools — access by young children and safety of recirculation systems

G1F3 Accidental locking in small spaces

G1F4 Early childhood centres

Performance Requirements

G1P1 Swimming pool drainage

G1P2 Swimming pool access and water recirculation systems

G1P3 Cool rooms

G1P4 Vaults

G1P5 Outdoor play spaces in early childhood centres

Deemed-to-Satisfy Provisions

G1D1 Deemed-to-Satisfy Provisions

G1D2 Swimming pools

G1D3 Refrigerated chambers, strong-rooms and vaults

G1D4 Outdoor play spaces

G1D5 Swimming pool drainage

Part G2

Boilers, pressure vessels, heating appliances, fireplaces, chimneys and flues**Objectives**

G2O1 Objective

Functional Statements

G2F1 Combustion appliances

G2F2 Boilers and pressure vessels

Performance Requirements

G2P1 Combustion heating appliances

G2P2 Boilers and pressure vessels

Verification Methods

G2V1 Combustion appliances

Deemed-to-Satisfy Provisions

G2D1 Deemed-to-Satisfy Provisions

G2D2 Installation of appliances

G2D3 Open fireplaces

G2D4 Incinerator rooms

Part G3

Atrium construction**Deemed-to-Satisfy Provisions**

G3D1 Application of Part

G3D2 Dimensions of atrium well

G3D3	Separation of atrium by bounding walls
G3D4	Construction of bounding walls
G3D5	Construction at balconies
G3D6	Separation at roof
G3D7	Means of egress
G3D8	Fire and smoke control systems

Part G4

Construction in alpine areas

Objectives

G4O1	Objective

Functional Statements

G4F1	Construction in alpine areas

Performance Requirements

G4P1	External doorways
G4P2	Structures forming pathways in snow conditions
G4P3	Control of falling ice and snow
G4P4	Fire safety systems in alpine areas

Deemed-to-Satisfy Provisions

G4D1	Deemed-to-Satisfy Provisions
G4D2	Application of Part
G4D3	External doors
G4D4	Emergency lighting
G4D5	External trafficable structures
G4D6	Clear space around buildings
G4D7	Fire-fighting services and equipment
G4D8	Fire orders

Part G5

Construction in bushfire prone areas

Objectives

G5O1	Objective

Functional Statements

G5F1	Construction in bushfire prone areas

Performance Requirements

G5P1	Bushfire resistance
G5P2	Additional bushfire requirements for certain Class 9 buildings

Verification Methods

G5V1	Buildings in bushfire prone areas

Deemed-to-Satisfy Provisions

G5D1	Deemed-to-Satisfy Provisions
G5D2	Application of Part
G5D3	Protection — residential buildings
G5D4	Protection — certain Class 9 buildings

Part G6

Occupiable outdoor areas

Deemed-to-Satisfy Provisions

G6D1	Application of Part
G6D2	Fire hazard properties
G6D3	Fire separation

G6D4	Provision for escape
G6D5	Construction of exits
G6D6	Fire fighting equipment
G6D7	Lift installations
G6D8	Visibility in an emergency, exit signs and warning systems
G6D9	Light and ventilation
G6D10	Fire orders

Part G7

Livable housing design

Objectives

G7O1	Objective

Functional Statements

G7F1	Livable housing design

Performance Requirements

G7P1	Livable housing design

Deemed-to-Satisfy Provisions

G7D1	Deemed-to-Satisfy Provisions
G7D2	Livable housing design

Specification 30 Installation of boilers and pressure vessels

S30C1	Scope
S30C2	Explosion relief
S30C3	Floors and drainage
S30C4	Protection from heat

Specification 31 Fire and smoke control systems in buildings containing atriums

S31C1	Scope
S31C2	General requirement — automatic fire sprinkler system
S31C3	Roof protection
S31C4	Atrium floor protection
S31C5	Sprinkler systems to glazed walls
S31C6	Stop valves
S31C7	General requirements — smoke control system
S31C8	Operation of atrium mechanical air-handling systems
S31C9	Activation of smoke control system
S31C10	Smoke exhaust system
S31C11	Upward air velocity
S31C12	Exhaust fans
S31C13	Smoke-and-heat vents
S31C14	Make-up air supply
S31C15	General requirements—fire detection and alarm system
S31C16	Smoke detection system
S31C17	Smoke detection in spaces separated from the atrium by bounding walls
S31C18	Alarm systems
S31C19	Emergency warning and intercom systems
S31C20	Standby power system
S31C21	System for excluding smoke from fire-isolated exits

Specification 43 Bushfire protection for certain Class 9 buildings

S43C1	Scope
S43C2	Separation from classified vegetation
S43C3	Separation between buildings
S43C4	Separation from allotment boundaries and carparking areas
S43C5	Separation from hazards
S43C6	Non-combustible path around building
S43C7	Access pathways
S43C8	Exposed external areas
S43C9	Internal tenability
S43C10	Building envelope
S43C11	Supply of water for fire-fighting purposes
S43C12	Emergency power supply
S43C13	Signage
S43C14	Vehicular access

PREVIEW DRAFT

Part G1 Minor structures and components

Introduction to this Part

This Part is intended to reduce the likelihood of illness or injury due to the design or construction of certain minor structures and components including *swimming pool* fencing, drainage and recirculation systems, cool rooms and vaults, and outdoor play spaces in *early childhood centres*.

Objectives

G101

Objective

The Objective of this Part is to—

- (a) safeguard people from illness caused by the discharge of *swimming pool* waste water; and
- (b) protect *other property* from damage caused by the discharge of *swimming pool* waste water; and
- (c) safeguard young children from drowning or injury in a *swimming pool*; and
- (d) safeguard people from drowning or injury due to suction by a *swimming pool* water recirculation system; and
- (e) safeguard occupants from illness or injury resulting from being accidentally locked inside spaces which are designed to be entered for short periods of time only and in which occupation for longer periods may be hazardous; and
- (f) safeguard young children in outdoor play spaces.

Applications

- (1) G101(d) only applies to a *swimming pool* with a depth of water more than 300 mm.
- (2) G101(f) only applies to a Class 9b *early childhood centre*.

Functional Statements

G1F1

Swimming pool drainage

Adequate means for the disposal of *swimming pool* water and drainage is to be provided to a *swimming pool*.

G1F2

Swimming pools — access by young children and safety of recirculation systems

A *swimming pool* is to be provided with—

- (a) means of restricting access by young children to it; and
- (b) means to reduce the possibility of a person being entrapped or injured due to suction by a water recirculation system.

Applications

G1F2(b) only applies to a *swimming pool* with a depth of water more than 300 mm.

G1F3 Accidental locking in small spaces

Any refrigerated or cooling chamber, strong-room and vault or the like that is capable of accommodating a person is to have safety measures to facilitate escape and for alerting people outside such a space in the event of an emergency.

G1F4 Early childhood centres

An outdoor play space is to be provided with a means of restricting the passage of children to outside of the play space.

Applications

G1F4 only applies to a Class 9b *early childhood centre*.

Performance Requirements

NT G1P1

G1P1 Swimming pool drainage

A *swimming pool* must have adequate means of draining the pool in a manner which will not—

- (a) cause illness to people; or
- (b) affect *other property*.

NSW G1P2

NT G1P2

QLD G1P2

SA G1P2

TAS G1P2

VIC G1P2

G1P2 Swimming pool access and water recirculation systems

(1) A barrier must be provided to a *swimming pool* and must—

- (a) be continuous for the full extent of the hazard; and
- (b) be of a strength and rigidity to withstand the foreseeable impact of people; and
- (c) restrict the access of young children to the pool and the immediate pool surrounds; and
- (d) have any gates and doors fitted with latching devices not readily operated by young children, and constructed to automatically close and latch.

(2) A *swimming pool* water recirculation system must incorporate safety measures to avoid entrapment of, or injury to, a person.

Applications

G1P2(2) only applies to a *swimming pool* with a depth of water more than 300 mm.

G1P3 Cool rooms

Any refrigerated or cooling chamber, or the like which is of sufficient size for a person to enter must—

- (a) have adequate means of communicating with or alerting other occupants in the building in the case of an emergency; and
- (b) have a door which is—
 - (i) of adequate dimensions to allow occupants to readily escape; and
 - (ii) openable from inside without a key at all times.

G1P4 Vaults

Any strong-room, vault or the like which is of sufficient size for a person to enter must—

- (a) have adequate means of communicating with or alerting other occupants in the building in the case of an emergency; and
- (b) have internal lighting controllable only from within the room; and
- (c) have an external indicator that the room is occupied.

G1P5 Outdoor play spaces in early childhood centres

Fencing or other barriers must be provided around any outdoor play space, in which the design and height of the fencing or other barriers, including the—

- (a) design of gates and fittings; and
- (b) proximity of the barriers to any permanent structure on the property,

must ensure that children cannot go through, over or under the fencing or other barriers.

Applications

G1P5 only applies to a Class 9b *early childhood centre*.

TAS G1P6

Deemed-to-Satisfy Provisions

G1D1 Deemed-to-Satisfy Provisions

TAS G1D1(2)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* G1P1 to G1P5 are satisfied by complying with G1D2 to G1D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

NSW G1D2

NT G1D2

QLD G1D2

SA G1D2

TAS G1D2

VIC G1D2

G1D2 Swimming pools

WA G1D2(1)

- (1) A *swimming pool* with a depth of water more than 300 mm and which is associated with a Class 2 or 3 building or Class 4 part of a building, must have suitable barriers to restrict access by young children to the immediate pool surrounds in accordance with—
 - (a) AS 1926.1, except 'This clause shall not apply to boundary barriers.' in clause 2.3.1 is replaced with 'This clause shall apply to boundary barriers.'; and
 - (b) AS 1926.2.
- (2) A water recirculation system in a *swimming pool* with a depth of water more than 300 mm must comply with AS 1926.3.

Explanatory Information: Cross-volume considerations

Part C2 of NCC Volume Three sets out the requirements for pumped discharge from *swimming pools*.

G1D3 Refrigerated chambers, strong-rooms and vaults

- (1) A refrigerated or cooling chamber, strongroom or vault that is of sufficient size for a person to enter must have—
 - (a) a door which is capable of being opened by hand from inside without a key; and
 - (b) internal lighting controlled only by a switch which is located adjacent to the entrance doorway inside the chamber, strongroom or vault; and
 - (c) an indicator lamp positioned outside the chamber, strongroom or vault which is illuminated when the interior lights *required* by (b) are switched on; and
 - (d) an alarm that is—
 - (i) located outside but controllable only from within the chamber, strongroom or vault; and
 - (ii) able to achieve a sound pressure level outside the chamber, strongroom or vault of 90 dB(A) when measured 3 m from the sounding device.
- (2) A door *required* by (1)(a) in a refrigerated or cooling chamber must have a doorway with a clear width of not less than 600 mm and a clear height not less than 1.5 m.

G1D4 Outdoor play spaces

- (1) Any outdoor play space in a Class 9b *early childhood centre* must be enclosed on all sides with a barrier which—
 - (a) where the edge of the trafficable surface of the outdoor play space is at the same level or less than 2 m above the surface beneath — complies with AS 1926.1, except 'This clause shall not apply to boundary barriers.' in clause 2.3.1 is replaced with 'This clause shall apply to boundary barriers.'; and
 - (b) where the edge of the trafficable surface of the outdoor play space is 2 m or more above the surface beneath—
 - (i) is not less than 1.8 m high, as measured from above the trafficable surface; and
 - (ii) is non-climbable and does not contain horizontal or other elements that could facilitate climbing; and

- (iii) does not have any openings or apertures through which a 100 mm or greater sphere could pass; and
 - (iv) is not within 1.8 m, as measured directly from the top of the barrier, of any elements within the outdoor play space that facilitate climbing; and
 - (v) is not within 900 mm of elements in a wall that facilitate climbing; and
- (c) has strength and rigidity complying with AS 1926.1.
- (2) For the purposes of (1)(a), AS 1926.1 is applied as if there is a *swimming pool* located outside the outdoor play space, so that the barrier restricts children from exiting the premises without the knowledge of staff in the centre.
- (3) The requirements of (1) do not apply to a wall, including doors and *windows*, which form part of the Class 9b *early childhood centre*, except where the wall is within a non-climbable zone for a barrier provided under (1)(a).

NSW G1D5

G1D5 Swimming pool drainage

A *swimming pool's* pumped discharge must be discharged to the sanitary drainage system in accordance with AS/NZS 3500.2.

Explanatory Information

Consideration should be given to the requirements of the relevant *Network Utility Operator*. Where a *Network Utility Operator* does not permit *swimming pool* discharge to the sanitary drainage system, a *Performance Solution* will be necessary to demonstrate the suitability of the alternative drainage method.

Part G2**Boilers, pressure vessels, heating appliances, fireplaces, chimneys and flues****Introduction to this Part**

This Part is intended to reduce the risk to building occupants from the operation, malfunction or failure of *boilers*, *pressure vessels* and combustion appliances including components such as fireplaces, chimneys, flues, chutes, hoppers and the like.

Explanatory Information

Part G2 does not contain requirements for gas heaters, gas appliances and associated flues.

Objectives**G201****Objective**

The Objective of this Part is to—

- (a) safeguard occupants from illness or injury caused by—
 - (i) fire from combustion appliances installed within a building; and
 - (ii) malfunction of a *boiler* or *pressure vessel* installed within a building; and
- (b) protect a building from damage caused by the malfunction of a *boiler* or *pressure vessel* installed within.

Functional Statements**G2F1****Combustion appliances**

Combustion appliances using controlled combustion located in a building are to be installed in a way which reduces the likelihood of fire spreading beyond the appliance.

G2F2**Boilers and pressure vessels**

Boilers and *pressure vessels* located in a building are to be installed in a manner which will provide adequate safety for occupants.

Performance Requirements**G2P1****Combustion heating appliances**

Where provided in a building, a combustion appliance and its associated components, including an open fire-place, chimney, flue, chute, hopper or the like, must be installed—

- (a) to withstand the temperatures likely to be generated by the appliance; and

- (b) so that it does not raise the temperature of any building element to a level that would adversely affect the element's physical or mechanical properties or function; and
- (c) so that hot products of combustion will not—
 - (i) escape through the walls of the associated components; and
 - (ii) discharge in a position that will cause fire to spread to nearby *combustible* materials or allow smoke to penetrate through nearby *windows*, ventilation inlets, or the like.

G2P2 Boilers and pressure vessels

When located in a building, *boilers* and *pressure vessels* must be installed to avoid, during reasonably foreseeable conditions, the likelihood of—

- (a) leakage from the vessel which could cause damage to the building; and
- (b) rupture or other mechanical damage of the vessel which could cause damage to the building or injury to occupants.

Verification Methods

G2V1 Combustion appliances

Compliance with G2P1(a) and G2P1(b) is verified when—

- (a) components used within an appliance and its installation are constructed from—
 - (i) heat-resistant materials for maximum operating temperatures not less than 600°C, where the material complies with (c); or
 - (ii) heat-tolerant materials for maximum operating temperatures more than 150°C and less than 600°C, where the material complies with (c); and
- (b) the building elements surrounding the appliance maintain their designed function and material properties inclusive of a full range of thermal movements when exposed to the heat effects of the appliance; and
- (c) a sample of the material is tested to the maximum operating temperature, specified in (a)(i) or (a)(ii) for a minimum of 96 hours; and
- (d) the tested sample, when allowed to cool, is free from—
 - (i) visible cracks and fractures; and
 - (ii) visible indication of de-lamination; and
 - (iii) linear distortion in excess of the equivalent of 10 mm per metre, and
 - (iv) deterioration of the appearance of any surface finish, when compared to an unheated sample.

Deemed-to-Satisfy Provisions

G2D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* G2P1 and G2P2 are satisfied by complying with G2D2 to G2D4.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

G2D2 Installation of appliances

The installation of a stove, heater or similar appliance in a building must comply with:

- (a) Domestic solid-fuel burning appliances — installation: AS/NZS 2918.
- (b) For *boilers* and *pressure vessels*: Specification 30.

G2D3 Open fireplaces

An open fireplace, or solid-fuel burning appliance in which the fuel-burning compartment is not enclosed, must have—

- (a) a hearth constructed of stone, concrete, masonry or similar *non-combustible* material so that—
 - (i) it extends not less than 300 mm beyond the front of the fireplace opening and not less than 150 mm beyond each side of that opening; and
 - (ii) it extends beyond the limits of the fireplace or appliance not less than 300 mm if the fireplace or appliance is free-standing from any wall of the room; and
 - (iii) its upper surface does not slope away from the grate or appliance; and
 - (iv) *combustible* material situated below or around the external edge of the hearth, but not below that part *required* to extend beyond the fireplace opening or the limits of the fireplace, is not less than 150 mm from the upper surface of the hearth; and
- (b) walls forming the sides and back of the fireplace up to not less than 300 mm above the underside of the arch or lintel which—
 - (i) are constructed in 2 separate leaves of solid masonry with a total combined thickness not less than 180 mm, excluding any cavity; and
 - (ii) do not consist of concrete block masonry in the construction of the inner leaf; and
- (c) walls of the chimney above the level referred to in (b)—
 - (i) constructed of masonry units with a net volume, excluding cored and similar holes, not less than 75% of their gross volume, measured on the overall rectangular shape of the units, and with an actual thickness of not less than 100 mm; and
 - (ii) lined internally to a thickness of not less than 12 mm with rendering consisting of 1 part cement, 3 parts lime, and 10 parts sand by volume, or other suitable material; and
- (d) suitable *damp-proof courses* or *flashings* to maintain weatherproofing.

G2D4 Incinerator rooms

- (1) If an incinerator is installed in a building, any hopper giving access to a charging chute must be—
 - (a) *non-combustible*; and
 - (b) gas-tight when closed; and
 - (c) designed to return to the closed position after use; and
 - (d) not attached to a chute that connects directly to a flue unless the hopper is located in the open air; and
 - (e) not located in a *required exit*.
- (2) A room containing an incinerator must be separated from other parts of the building by construction with an FRL of not less than 60/60/60.

Part G3 Atrium construction

Introduction to this Part

This Part provides additional *Deemed-to-Satisfy Provisions* for buildings that contain an *atrium*. The *Deemed-to-Satisfy Provisions* of this Part cover *atrium well* dimensions, construction, fire separation, *exits* and fire and smoke control systems.

Deemed-to-Satisfy Provisions

G3D1 Application of Part

This Part does not apply to an *atrium* which—

- (a) connects only 2 *storeys*; or
- (b) connects only 3 *storeys* if—
 - (i) each *storey* is provided with a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17* throughout; and
 - (ii) one of those *storeys* is situated at a level at which there is direct egress to a road or *open space*.

G3D2 Dimensions of atrium well

An *atrium well* must have a width throughout the well that is able to contain a cylinder having a horizontal diameter of not less than 6 m.

G3D3 Separation of atrium by bounding walls

An *atrium* must be separated from the remainder of the building at each *storey* by bounding walls set back not more than 3.5 m from the perimeter of the *atrium well* except in the case of the walls at not more than 3 consecutive *storeys* if—

- (a) one of those *storeys* is at a level at which direct egress to a road or *open space* is provided; and
- (b) the sum of the *floor areas* of those *storeys* that are contained within the *atrium* is not more than the maximum area that is permitted in *Table C3D3*.

G3D4 Construction of bounding walls

Bounding walls must—

- (a) have an FRL of not less than 60/60/60, and—
 - (i) extend from the floor of the *storey* to the underside of the floor next above or to the underside of the roof; and
 - (ii) have any door openings protected with *self-closing* or *automatic* –/60/30 fire doors; or
- (b) be constructed of fixed toughened safety glass, or wired safety glass in *non-combustible* frames, with—
 - (i) any door openings fitted with a *self-closing* smoke door complying with *Specification 12*; and
 - (ii) the walls and doors protected with wall-wetting systems in accordance with *Specification 31*; and
 - (iii) a fire barrier with an FRL of not less than –/60/30 installed in any ceiling spaces above the wall.

G3D5 Construction at balconies

If a bounding wall separating an *atrium* from the remainder of the building is set back from the perimeter of the *atrium well*, a barrier that is imperforate, *non-combustible*, and not less than 1 m high, must be provided.

G3D6 Separation at roof

In an *atrium*—

- (a) the roof must have the FRL prescribed in [Table S5C11g](#); or
- (b) the roof structure and membrane must be protected by a sprinkler system (other than a FPAA101D or FPAA101H system) complying with [Specification 17](#).

G3D7 Means of egress

All areas within an *atrium* must have access to at least 2 *exits*.

G3D8 Fire and smoke control systems

Sprinkler systems, smoke control systems, fire detection and alarm systems, and emergency warning and intercom systems must be installed in compliance with [Specification 31](#).

Part G4 Construction in alpine areas

Introduction to this Part

This Part contains additional requirements for buildings constructed in an *alpine area* to address the potential for snow and ice to obstruct or delay evacuation and fire fighting or cause a hazard by falling on people.

Objectives

G4O1 Objective

The Objective of this Part is to safeguard occupants in *alpine areas* from illness or injury from an emergency while evacuating a building.

Applications

G4O1 applies to a building constructed in an *alpine area*.

Functional Statements

G4F1 Construction in alpine areas

A building in an *alpine area* is to be provided with additional measures in view of the increased difficulties in fire-fighting and maintaining access and means of egress in snow conditions.

Applications

G4F1 only applies to a building constructed in an *alpine area*.

Performance Requirements

G4P1 External doorways

An external doorway from a building in an *alpine area* must be installed so that opening the door is not obstructed by snow or ice.

Applications

G4P1 applies to a building constructed in an *alpine area* and overrules other *Performance Requirements* of NCC Volume One.

G4P2 Structures forming pathways in snow conditions

A building in an *alpine area* containing external trafficable structures forming part of the means of egress must be

constructed so that those structures remain, as far as practicable, useable under snow conditions.

Applications

G4P2 applies to a building constructed in an *alpine area* and overrules other *Performance Requirements* of NCC Volume One.

G4P3 Control of falling ice and snow

A building in an *alpine area* must be constructed so that snow or ice is not shed from the building onto the allotment, any adjoining allotment, road or public space in a location or manner that will—

- (a) obstruct a means of egress from any building to a road or *open space*; or
- (b) otherwise endanger people.

Applications

G4P3 applies to a building constructed in an *alpine area* and overrules other *Performance Requirements* of NCC Volume One.

G4P4 Fire safety systems in alpine areas

A building in an *alpine area* must have a *fire safety system* installed to—

- (a) facilitate fire-fighting operations; and
- (b) alert occupants in the event of an emergency.

Applications

G4P4 applies to a building constructed in an *alpine area* and overrules other *Performance Requirements* of NCC Volume One.

Deemed-to-Satisfy Provisions

G4D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* G4P1 to G4P4 are satisfied by complying with—
 - (a) G4D2 to G4D8; and
 - (b) for a building containing an *occupiable outdoor area*, Part G6.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

G4D2 Application of Part

- (1) The *Deemed-to-Satisfy Provisions* of this Part apply to any building constructed in an *alpine area* in addition to other *Deemed-to-Satisfy Provisions* of NCC Volume One.
- (2) Where any *Deemed-to-Satisfy Provisions* are in conflict, the provisions of this Part take precedence.

G4D3 External doors

External doors which may be subject to the build-up of snow must—

- (a) open inwards or slide; and
- (b) if inward opening, be marked “OPEN INWARDS” on the inside face of the door in letters not less than 75 mm high in a colour contrasting with that of the background; and
- (c) be constructed so that the threshold is not less than 900 mm above the adjoining surface; and
- (d) if it serves a corridor or stairway, be positioned in an alcove or recess with—
 - (i) no horizontal dimensions of the alcove or recess less than twice the width of the door; and
 - (ii) the door positioned to open against a wall such that the distance from any part of its swing to the nearest point of entry of the stairway or corridor is not less than the width of the door.

G4D4 Emergency lighting

In a Class 2, 3, 5, 6, 7, 8 or 9 building or Class 4 part of a building, a system of emergency lighting must be installed in accordance with the *Deemed-to-Satisfy Provisions of Part E4*—

- (a) in every stairway (other than those within a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part of a building); and
- (b) in every *public corridor* or the like leading to an *exit*; and
- (c) externally above every doorway opening to a road or *open space*; and
- (d) in any *storey* of the building if illumination sufficient for safe egress will not be available under conditions of emergency.

G4D5 External trafficable structures

External stairways, ramps, access bridges or other trafficable structures serving the building must—

- (a) have a floor surface that consists of expanded mesh if it is used as a means of egress; and
- (b) have any *required* barrier designed so that its sides are not less than 75% open; and
- (c) for a stairway, have *goings* (G), *risers* (R) and slope relationship quantity (2R + G) in accordance with—
 - (i) *Table D3D14*; or
 - (ii) *Table G4D5*; and
- (d) for a ramp serving as an *exit* and not serving as an *accessible* ramp, have a gradient not steeper than 1:12; and
- (e) where a ramp is also serving as an *accessible* ramp under *Part D4*, be in accordance with AS 1428.1.

Table G4D5: Alternate stair riser and going dimensions

Riser (R)		Going (G)		Slope relationship (2R + G)	
Max	Min	Max	Min	Max	Min
150	115	375	355	675	605

Table Notes

Dimensions are in mm.

G4D6 Clear space around buildings

A building must be so constructed that—

- (a) if any part of an *external wall* is more than 3.6 m above the natural ground level — the distance of that part from a boundary other than a road alignment is not less than 2.5 m plus an additional 100 mm for each 300 mm or part thereof by which that part of the wall exceeds a height of 3.6 m; and
- (b) if an *exit* doorway discharges into a court between wings of a building and that area may be used for vehicle access to the building, the distance between wings must be not less than 4 m; and
- (c) where an *exit* doorway discharges opposite a feature that could entrap snow or an embankment that is more than 900 mm above the threshold of the doorway, a distance of not less than 4 m must be provided between the doorway and the feature.

G4D7 Fire-fighting services and equipment

(1) Every Class 2, 3, 5, 6, 7, 8 or 9 building must have—

- (a) a manually operated fire alarm system with call-points complying with AS 1670.1; and
- (b) fire hydrants installed in accordance with E1D2(2); and
- (c) fire hose reels installed in accordance with E1D3(2) to (7), except that in a Class 2 or 3 building—
 - (i) for the purpose of E1D3(2), a *sole-occupancy unit* is considered to be a *fire compartment*; and
 - (ii) for the purpose of E1D3(3)(b), a *sole-occupancy unit* may be served by a single fire hose reel located at the level of egress from that *sole-occupancy unit*; and
 - (iii) for the purpose of E1D3(6), a fire hose may pass through a doorway in bounding construction referred to in C4D12.

(2) The requirements of (1)(c) do not apply to a Class 8 *electricity network substation*.

G4D8 Fire orders

Every Class 2, 3 or 9 building must display a notice clearly marked “FIRE ORDERS” in suitable locations near the main entrance and on each *storey*, explaining—

- (a) the method of operation of the fire alarm system and the location of all call-points; and
- (b) the location and methods of operation of all fire-fighting equipment; and
- (c) the location of all *exits*; and
- (d) the procedure for evacuation of the building.

Part G5 Construction in bushfire prone areas

Introduction to this Part

This Part contains additional requirements for the construction of buildings located in *designated bushfire prone areas*, to address the additional risks posed by bushfire attack.

Objectives

VIC G501

G501 Objective

The Objective of this Part is to—

- (a) safeguard occupants from injury from the effects of a bushfire; and
- (b) protect buildings from the effects of a bushfire; and
- (c) facilitate temporary shelter for building occupants who may be unable to readily evacuate the building prior to a bushfire.

Applications

- (1) G501(a) and (b) apply in a *designated bushfire prone area* to—
 - (a) a Class 2 or 3 building; or
 - (b) a Class 10a building or deck associated with a Class 2 or 3 building.
- (2) G501(a), (b) and (c) apply in a *designated bushfire prone area* to—
 - (a) a Class 9a *health-care building*; and
 - (b) a Class 9b—
 - (i) *early childhood centre*; and
 - (ii) primary or secondary *school*; and
 - (c) a Class 9c *residential care building*; and
 - (d) a Class 10a building or deck immediately adjacent or connected to a building of a type listed in (a) to (c).

Functional Statements

VIC G5F1

G5F1 Construction in bushfire prone areas

A building constructed in a *designated bushfire prone area*—

- (a) is to provide a resistance to bushfires in order to reduce the danger to life and minimise the risk of the loss of the building; and
- (b) if occupied by people who may be unable to readily evacuate the building prior to a bushfire, is to be constructed so as to provide its occupants shelter from the direct and indirect actions of a bushfire.

Applications

- (1) G5F1(a) applies in a *designated bushfire prone area* to—
 - (a) a Class 2 or 3 building; or
 - (b) a Class 10a building or deck associated with a Class 2 or 3 building; or
 - (c) a Class 10a building or deck immediately adjacent or connected to a building of a type listed in (2)(a), (b) or (c)
- (2) G5F1(a) and (b) apply in a *designated bushfire prone area* to—
 - (a) a Class 9a *health-care building*; and
 - (b) a Class 9b—
 - (i) *early childhood centre*; and
 - (ii) primary or secondary *school*; and
 - (c) a Class 9c *residential care building*.

Performance Requirements

NSW G5P1

QLD G5P1

TAS G5P1

VIC G5P1

G5P1 Bushfire resistance

A building that is constructed in a *designated bushfire prone area* must be designed and constructed to—

- (a) reduce the risk of ignition from a *design bushfire* with an annual exceedance probability not more than 1:100 years, or 1:200 years for a Class 9 building; and
- (b) take account of the assessed duration and intensity of the *fire actions* of the *design bushfire*; and
- (c) be designed to prevent internal ignition of the building and its contents; and
- (d) maintain the structural integrity of the building for the duration of the *design bushfire*.

Applications

G5P1 applies in a *designated bushfire prone area* to—

- (a) a Class 2 or 3 building; and
- (b) a Class 9a *health-care building*; and
- (c) a Class 9b—
 - (i) *early childhood centre*; and
 - (ii) primary or secondary *school*; and
- (d) a Class 9c *residential care building*; and
- (e) a Class 10a building or deck immediately adjacent or connected to a building of a type listed in (a) to (d).

NSW G5P2

TAS G5P2

VIC G5P2

G5P2

Additional bushfire requirements for certain Class 9 buildings

A building that is constructed in a *designated bushfire prone area* and occupied by people who may be unable to readily evacuate the building prior to a bushfire must, to the degree necessary—

- (a) reduce the risk of an untenable indoor environment for occupants during a bushfire event, appropriate to the—
 - (i) location of the building relative to fire hazards, including—
 - (A) classified vegetation; and
 - (B) adjacent buildings, structures and movable objects; and
 - (C) carparking areas and allotment boundaries; and
 - (D) other *combustible* materials; and
 - (ii) number of occupants to be accommodated within the building; and
 - (iii) intensity of bushfire attack on the building; and
 - (iv) duration of occupancy; and
 - (v) intensity of potential consequential fires; and
 - (vi) occupant tenability within the building before, during and after the bushfire event; and
 - (vii) combined effects of structural, fire exposure and other effects to which the building may reasonably be subjected; and
 - (viii) provision of fire fighting equipment and water supply to facilitate protection of the building; and
- (b) be provided with vehicular access to the *site* to enable firefighting and emergency personnel to defend or evacuate the building; and
- (c) have access to a sufficient supply of water for firefighting purposes on the *site*; and
- (d) provide safe access within the *site* to the building (including carparking areas), as well as safe egress after the bushfire event.

Applications

G5P2 applies to the following buildings located in a *designated bushfire prone area*—

- (a) a Class 9a *health-care building*; and
- (b) a Class 9b—
 - (i) *early childhood centre*; and
 - (ii) primary or secondary *school*; and
- (c) a Class 9c *residential care building*.

Notes

G5P2 does not guarantee the safety of building occupants or the maintenance of tenable conditions within a building during a bushfire event.

Verification Methods

G5V1

Buildings in bushfire prone areas

- (1) Compliance with *Performance Requirement G5P1* is verified if the ignition probability for a building exposed to a *design bushfire* does not exceed 10%.
- (2) Bushfire design actions must be determined in consideration of the annual probability of a *design bushfire* derived from—

- (a) assigning the building or structure with an Importance Level in accordance with (3); and
 - (b) determining the corresponding annual probability of exceedance in accordance with Table G5V1.
- (3) A building or structure's Importance Level must be identified as one of the following:
- (a) Importance Level 1 — where the building or structure presents a low degree of hazard to life and *other property* in the case of failure.
 - (b) Importance Level 2 — where the building or structure is not of Importance Level 1, 3 or 4 or is a Class 2 building accommodating 12 people or less.
 - (c) Importance Level 3 — where the building is designed to contain a large number of people and is a—
 - (i) Class 2 building accommodating more than 12 people; or
 - (ii) Class 3 boarding house, guest house, hostel, lodging house or backpackers accommodation; or
 - (iii) Class 3 residential part of a hotel or motel; or
 - (iv) Class 3 residential part of a *school*.
 - (d) Importance Level 4 — where the building or structure is—
 - (i) essential to emergency management or post-disaster recovery; or
 - (ii) associated with hazardous facilities; or
 - (iii) subject to a necessary 'defend in place' strategy and is a—
 - (A) Class 3 accommodation building for the aged, children or people with disabilities; or
 - (B) Class 3 residential part of a health-care building which accommodates members of staff; or
 - (C) Class 3 residential part of a *detention centre*; or
 - (D) building that operates in the event of a bushfire emergency, such as a public bushfire shelter or a bushfire emergency control centre.
- (4) The ignition probability for a building must be assessed by application of the following:
- (a) An event tree analysis of relevant bushfire scenarios.
 - (b) *Design bushfire* conditions that include combinations of the following actions appropriate to the distance between the building and the bushfire hazard:
 - (i) Direct attack from airborne burning embers.
 - (ii) Burning debris and accumulated embers adjacent to a building element.
 - (iii) Radiant heat from a bushfire front.
 - (iv) Direct flame attack from a bushfire front.
- (5) Applied *fire actions* must allow for reasonable variations in—
- (a) fire weather; and
 - (b) vegetation, including fuel load, burning behaviour of vegetation (including the potential for crown fires); and
 - (c) the distance of the building from vegetation; and
 - (d) topography, including slopes and features that may shield; and
 - (e) ignition of adjacent buildings, building elements, plants, mulch and other materials; and
 - (f) effective size of fire front; and
 - (g) duration of exposure; and
 - (h) flame height; and
 - (i) flame tilt; and
 - (j) flame adhesion to sloping land; and
 - (k) the height of the building and its elements.
- (6) The assessment process must include consideration of—
- (a) the probability of non-complying construction of critical aspects of an approved design; and
 - (b) the probability of critical aspects of an approved design being fully functional during the life of the building; and

- (c) inclusion of safety factors; and
- (d) sensitivity analysis of critical aspects of a proposed design.

Limitations

G5V1 does not apply to a Class 9 building.

Notes

For a building that is subject to G5P2, and therefore outside the scope of G5V1, the building would need to comply with either—

- (a) *Performance Requirement G5P2* by means of a *Performance Solution*; or
- (b) the *Deemed-to-Satisfy Provisions* of G5D4 if the building is located in an area subject to a Bushfire Attack Level (BAL) not exceeding BAL – 12.5.

Table G5V1: Annual Probability of Exceedance (APE) for design bushfire actions

Importance Level	Complex analysis APE for bushfire exposure	Simple analysis APE for weather conditions (<i>design bushfire</i>)
1	No requirement	No requirement
2	1:500	1:50
3	1:1000	1:100
4	1:2000	1:200

Table Notes

Complex analysis must consider the probability of ignition, fire spread to the urban interface and penetration of the urban interface coincident with fire weather conditions.

Deemed-to-Satisfy Provisions

G5D1 Deemed-to-Satisfy Provisions

SA G5D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements G5P1* and subject to G5D2, G5P2, are satisfied by complying with G5D3 and G5D4.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

NSW G5D2

QLD G5D2

VIC G5D2

G5D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part apply in a *designated bushfire prone area* to—

- (a) a Class 2 or 3 building; or
- (b) a building located in an area subject to a Bushfire Attack Level (BAL) not exceeding BAL—12.5, determined in accordance with AS 3959 that is—
 - (i) a Class 9a *health-care building*; or
 - (ii) a Class 9b—

- (A) *early childhood centre*; or
- (B) primary or secondary *school*; or
- (iii) a Class 9c *residential care building*; or
- (c) a Class 10a building or deck immediately adjacent or connected to a—
 - (i) Class 2 or 3 building; or
 - (ii) a building of a type listed in (b).

Notes

- (1) If a building of a type listed in (b) or (c)(ii) is subject to a BAL exceeding BAL—12.5, the building would need to comply with *Performance Requirement G5P2* by means of a *Performance Solution*. There are no *Deemed-to-Satisfy Provisions* for these buildings.

NSW G5D3

G5D3 Protection — residential buildings

In a *designated bushfire prone area* the following must comply with AS 3959:

- (a) A Class 2 or 3 building.
- (b) A Class 10a building or deck immediately adjacent or connected to a Class 2 or 3 building.

NSW G5D4

VIC G5D4

G5D4 Protection — certain Class 9 buildings

- (1) In a *designated bushfire prone area* the following must comply with *Specification 43*:

- (a) A Class 9a *health-care building*.
- (b) A Class 9b—
 - (i) *early childhood centre*; or
 - (ii) primary or secondary *school*.
- (c) A Class 9c *residential care building*.

- (2) In a *designated bushfire prone area*, a Class 10a building or deck immediately adjacent or connected to a building of a type listed in (1) must comply with *S43C2* and *S43C13*.

SA G5D5

Part G6 Occupiable outdoor areas

Introduction to this Part

This Part provides additional *Deemed-to-Satisfy Provisions* for buildings that include an *occupiable outdoor area*.

Deemed-to-Satisfy Provisions

G6D1 Application of Part

- (1) The *Deemed-to-Satisfy Provisions* of this Part apply to buildings containing an *occupiable outdoor area* in addition to the other *Deemed-to-Satisfy Provisions* of NCC Volume One.
- (2) The *Deemed-to-Satisfy Provisions* of this Part take precedence where there is a difference to the *Deemed-to-Satisfy Provisions* of Sections C, D, E, F and G.
- (3) Except for G6D2, the *Deemed-to-Satisfy Provisions* of this Part do not apply to—
 - (a) an *occupiable outdoor area* of a *sole-occupancy unit* in a Class 2 or 3 building, Class 9c building or Class 4 part of a building; or
 - (b) an *occupiable outdoor area* with an area less than 10m².

Explanatory Information

Part G6 contains *Deemed-to-Satisfy Provisions* additional to those contained in Sections C, D, E, F and G for *occupiable outdoor areas*.

G6D2 Fire hazard properties

- (1) Subject to (2), a lining, material or assembly in an *occupiable outdoor area* must comply with C2D11 as for an internal element.
- (2) The following *fire hazard properties* of a lining, material or assembly in an *occupiable outdoor area* are not *required* to comply with C2D11:
 - (a) *Average specific extinction area*.
 - (b) *Smoke-Developed Index*.
 - (c) *Smoke development rate*.
 - (d) *Smoke growth rate index* (SMOGR_{RC}).

G6D3 Fire separation

For the purposes of the *Deemed-to-Satisfy Provisions* of C3D8, C3D9 and C3D10, a reference to a *storey* includes an *occupiable outdoor area*, however a *fire wall* cannot be used to separate an *occupiable outdoor area* into different *fire compartments*.

G6D4 Provision for escape

For the purposes of the *Deemed-to-Satisfy Provisions* of Part D2, a reference to a *storey* or room includes an *occupiable outdoor area*.

G6D5 Construction of exits

For the purposes of the *Deemed-to-Satisfy Provisions* of Part D3, a reference to a *storey* or room includes an *occupiable outdoor area*.

G6D6 Fire fighting equipment

Except for S17C7(2)(a), for the purposes of the *Deemed-to-Satisfy Provisions* of Part E1, a reference to a *storey* includes an *occupiable outdoor area*.

Notes

An *occupiable outdoor area* is not a *storey* for the purposes of Schedule 1 of the NCC and therefore is not included in the determination of *rise in storeys*.

G6D7 Lift installations

For the purposes of the *Deemed-to-Satisfy Provisions* of Part E3, a reference to a *storey* includes an *occupiable outdoor area*.

G6D8 Visibility in an emergency, exit signs and warning systems

For the purposes of the *Deemed-to-Satisfy Provisions* of Part E4, a reference to a *storey* includes an *occupiable outdoor area*.

G6D9 Light and ventilation

For the purposes of the *Deemed-to-Satisfy Provisions* of F6D5, F6D9 and F6D10, a reference to a room includes an *occupiable outdoor area*.

G6D10 Fire orders

For the purposes of the *Deemed-to-Satisfy Provisions* of G4D8, a reference to a *storey* includes an *occupiable outdoor area*.

Part G7 Livable housing design

NSW Part G7

Introduction to this Part

This Part sets requirements for dwellings to include features that are designed to improve their accessibility and usability for occupants and visitors, including those with a mobility-related disability.

Objectives

G7O1 Objective

The Objective of this Part is to ensure that housing is designed to meet the needs of the community, including older people and those with a mobility-related disability.

Applications

G7O1 only applies to a Class 2 *sole-occupancy unit*.

Functional Statements

G7F1 Livable housing design

A Class 2 *sole-occupancy unit* is to be designed such that it is—

- (a) easy to enter; and
- (b) easy to navigate in and around; and
- (c) capable of easy and cost effective adaptation; and
- (d) responsive to the changing needs of occupants.

Applications

G7F1 only applies to a Class 2 *sole-occupancy unit*.

Performance Requirements

G7P1 Livable housing design

Each *sole-occupancy unit* in a Class 2 building must be provided with—

- (a) at least one level and step-free entrance door into the *sole-occupancy unit* from an *accessible* part of the floor on which it is located; and
- (b) internal doors and corridors which facilitate unimpeded movement between spaces; and
- (c) a *sanitary compartment* that—

- (i) facilitates independent access and use; and
- (ii) is located on the entry level of the *sole-occupancy unit*; and
- (d) a shower that facilitates independent access and use; and
- (e) the walls of a *sanitary compartment* referred to in (c), the shower referred to in (d) and a bath (where installed, other than a freestanding bath) constructed so as to facilitate future installation of grabrails, or the like, in a way that minimises the removal of existing wall linings.

Applications

G7P1(a) only applies to a *sole-occupancy unit* that is located on an *accessible* floor.

Deemed-to-Satisfy Provisions

G7D1 Deemed-to-Satisfy Provisions

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirement G7P1* is satisfied by complying with *G7D2*.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with *A2G2(3)* and *A2G4(3)* as applicable.

G7D2 Livable housing design

Each *sole-occupancy unit* in a Class 2 building must comply with the ABCB Standard for Livable Housing Design, except for Part 1.

Explanatory Information

Part 1 of the ABCB Standard for Livable Housing Design requires a step-free access path from a parking space or property boundary, to the dwelling entry door. For Class 2 buildings, this requirement is already addressed by *Part D4* and the Disability (Access to Premises—Buildings) Standards 2010. Therefore, it is not necessary to apply Part 1 of the ABCB Standard for Livable Housing Design to a Class 2 building.

Specification 30

Installation of boilers and pressure vessels

S30C1 Scope

This Specification sets out the requirements for the installation of *boilers* and *pressure vessels* in buildings.

S30C2 Explosion relief

The distance between the vent of any explosion relief device for a *boiler* or *pressure vessel* and any adjacent wall, roof, ceiling or other solid construction shall be calculated in accordance with Table S30C2.

Table S30C2: Minimum clearances for explosion relief

Clearance from	Minimum clearance (metres)
Adjacent wall or ceiling/roof	$0.4(V/3)^{1/3}$ or 0.4 m, whichever is the greater
Two walls at right angles; or one wall and a ceiling/roof	$0.6(V/3)^{1/3}$ or 0.6 m, whichever is the greater

Table Notes

For the purposes of this table, v is the internal volume of the *boiler* or *pressure vessel* being vented up to the connection of the flue.

S30C3 Floors and drainage

- (1) Floor surfaces beneath *boilers* and *pressure vessels* shall be *water resistant* and formed to drain away from supports and structural building elements.
- (2) Where a safe tray is provided to trap liquids, it must be manufactured from a material resistant to corrosion from the contents of the *boiler* or *pressure vessel*.

S30C4 Protection from heat

Building elements surrounding a *boiler* must be protected from any surface heat by refractory material or effective air spaces so that—

- (a) steel elements do not exceed a temperature of more than 300°C; and
- (b) concrete elements do not exceed a temperature of more than 200°C; and
- (c) timber elements do not exceed a temperature of more than 150°C.

PREVIEW DRAFT

Specification 31

Fire and smoke control systems in buildings containing atriums

S31C1 Scope

This Specification sets out the requirements for the design and operation of systems of fire and smoke control in buildings containing an *atrium*.

Automatic fire sprinkler system

S31C2 General requirement — automatic fire sprinkler system

A sprinkler system (other than a FPAA101D or FPAA101H system) complying with [Specification 17](#) must be installed in every building containing an *atrium*, except where varied or superseded by this Specification.

S31C3 Roof protection

- (1) A roof of an *atrium* which does not have the FRL prescribed in [Specification 5](#) or the *Deemed-to-Satisfy Provisions* of [Part C3](#) must be protected by *automatic* sprinklers arranged to wet both the covering membrane and supporting structure if the roof is—
 - (a) less than 12 m above the floor of the *atrium* or the floor of the highest *storey* where the bounding construction is set back more than 3.5 m from the *atrium well* if a Class 2, 3, 5 or 9 part of a building is open to the *atrium*; or
 - (b) less than 20 m above the floor of the *atrium* or the floor of the highest *storey* where the bounding construction is set back more than 3.5 m from the *atrium well* if a Class 6, 7 or 8 part of a building is open to the *atrium*.
- (2) The temperature rating of sprinkler heads required by (1) must be within the range 79°C – 100°C

S31C4 Atrium floor protection

The floor of the *atrium* must be protected by sprinklers with—

- (a) the use of sidewall pattern sprinkler heads together with overhead sprinklers where dictated by the dimensions of the *atrium*; and
- (b) sprinkler heads of the quick response type.

S31C5 Sprinkler systems to glazed walls

- (1) Where an *atrium* is separated from the remainder of the building by walls or doors incorporating glazing, a wall wetting system must be provided to protect the glazing as follows:
 - (a) On the *atrium* side of the glazing — to all glazed walls which are set back more than 3.5 m from the *atrium well*.
 - (b) On the *atrium* side of the glazing — to all glazed walls which are not set back, or are set back 3.5 m or less, from the *atrium well*, for all levels which are less than—
 - (i) 12 m above the floor of an *atrium* or the floor of the highest *storey* where the bounding wall is set back

- more than 3.5 m from the *atrium well* if a Class 2, 3, 5 or 9 part of the building is open to the *atrium*; or
- (ii) 20 m above the floor of an *atrium* or the floor of the highest *storey* where the bounding wall is set back more than 3.5 m from the *atrium well* if a Class 6, 7 or 8 part of the building is open to the *atrium*.
- (c) On the side of the glazing away from the *atrium well* — to all glazing forming part of the bounding wall at each *storey*.
- (2) Sprinklers must be located in positions allowing full wetting of the glazing surfaces without wetting adjacent sprinkler heads.
- (3) Sprinkler heads must be of the quick response type and have a maximum temperature rating of 74°C.
- (4) The rate of water discharge to protect glazing must be not less than—
- (a) on the *atrium* side of the glazing—
 - (i) 0.25 L/s.m² where glazing is not set back from the *atrium well*; or
 - (ii) 0.167 L/s.m² where glazing is set back from the *atrium well*; and
 - (b) on the side away from the *atrium well* — 0.167 L/s.m².
- (5) In addition to that of the basic sprinkler protection for the building, the water supply to *required* wall wetting systems must be of adequate capacity to accommodate the following on the *atrium* side of the glazing:
- (a) Where the bounding walls are set back less than 3.5 m from the *atrium well* — wall wetting of a part not less than 6 m long for a height of not less than—
 - (i) 12 m above the floor of an *atrium* or the floor of the highest *storey* where the bounding wall is set back more than 3.5 m from the *atrium well* if a Class 2, 3, 5 or 9 part of the building is open to the *atrium*; or
 - (ii) 20 m above the floor of an *atrium* or the floor of the highest *storey* where the bounding wall is set back more than 3.5 m from the *atrium well* if a Class 6, 7 or 8 part of the building is open to the *atrium*.
 - (b) Where the walls are set back 3.5 m or more from the *atrium well* — wetting of a part not less than 12 m long on one *storey*.

S31C6 Stop valves

- (1) Basic sprinkler and wall wetting systems protecting a building containing an *atrium* must be provided with easily accessible and identified stop valves.
- (2) Sprinkler and wall wetting systems must be provided with independent stop valves.
- (3) Sprinkler heads protecting the roof of the *atrium* must be provided with a stop valve.
- (4) Stop valves to wall wetting and roof sprinklers may be of the gate type.
- (5) All sprinkler and wall wetting stop valves must be monitored to detect unauthorised closure.

Smoke control system

S31C7 General requirements — smoke control system

Except where varied or superseded by this Specification, mechanical air handling systems in a building containing an *atrium* must be installed as a hot layer smoke control system in accordance with AS 1668.1.

S31C8 Operation of atrium mechanical air-handling systems

Mechanical air-handling systems serving an *atrium* must be designed to operate so that during a fire—

- (a) a tenable atmosphere is maintained in all paths of travel along balconies to *required exits* during the period of

evacuation; and

- (b) smoke exhaust fans serving the *atrium* are only activated when smoke enters the *atrium*; and
- (c) central plant systems do not use the *atrium* as a return air path; and
- (d) central plant systems which use return air paths remote from the *atrium*—
 - (i) cycle to the full outside air mode; and
 - (ii) stop supply air to the fire affected *storey* or *fire compartment*; and
 - (iii) continue to fully exhaust the fire affected *storey* or *fire compartment* and reduce the exhaust from other *storeys* or *fire compartments* by at least 75%; and
 - (iv) continue to supply air to *fire compartments* or *storeys* other than the fire affected *storey* or *fire compartment*; and
- (e) fans performing relief or exhaust duty from the *atrium* stop normal operation; and
- (f) floor by floor, or unitary, air-handling plant serving a single *fire compartment* or *storey*—
 - (i) ceases normal operation in the fire affected *storey* or *fire compartment*; and
 - (ii) commences full relief or exhaust from that fire affected *storey* or *fire compartment*; and
 - (iii) continue to supply air to *fire compartments* or *storeys* other than the fire affected *storey* or *fire compartment*.

S31C9 Activation of smoke control system

- (1) The smoke control system must be activated by—
 - (a) operation of an *automatic* fire alarm; or
 - (b) operation of the sprinkler system; or
 - (c) a manual start switch.
- (2) All controls for the smoke control system must be located—
 - (a) in the fire control room; or
 - (b) in the emergency control centre (if any); or
 - (c) adjacent to the sprinkler control valves; or
 - (d) incorporated in the Fire Indicator Panel.


S31C10 Smoke exhaust system

A smoke exhaust system serving an *atrium* must be designed on the basis of—

- (a) the sprinkler system limiting the size of a fire to—
 - (i) a heat output of 1.5 MW and perimeter of 7.5 m if a Class 2, 3, 5 or 9 part of the building is open to the *atrium*; or
 - (ii) a heat output of 5 MW and perimeter of 12 m if a Class 6, 7 or 8 part of the building is open to the *atrium*; and
- (b) a smoke plume reaching a level 3 m above the highest *storey* having a path of travel to a *required exit* along a balcony bounding the *atrium well*, and not less than—
 - (i) 12 m above the floor of an *atrium* or the floor of the highest *storey* where the bounding wall is set back more than 3.5 m from the *atrium well* if a Class 2, 3, 5 or 9 part of the building is open to the *atrium*; or
 - (ii) 20 m above the floor of an *atrium* or the floor of the highest *storey* where the bounding construction is set back more than 3.5 m from the *atrium well* if a Class 6, 7 or 8 part of the building is open to the *atrium*; and
- (c) the smoke exhaust system discharging smoke at a rate of not less than that shown in Figure S31C10 for the appropriate height of smoke plume and fire size—
 - (i) from the top of the *atrium*; or

- (ii) horizontally, where calculations of wind velocity induced pressure profiles for the building verify that the exhaust system will operate effectively for all wind directions.

Figure S31C10: Smoke exhaust rate

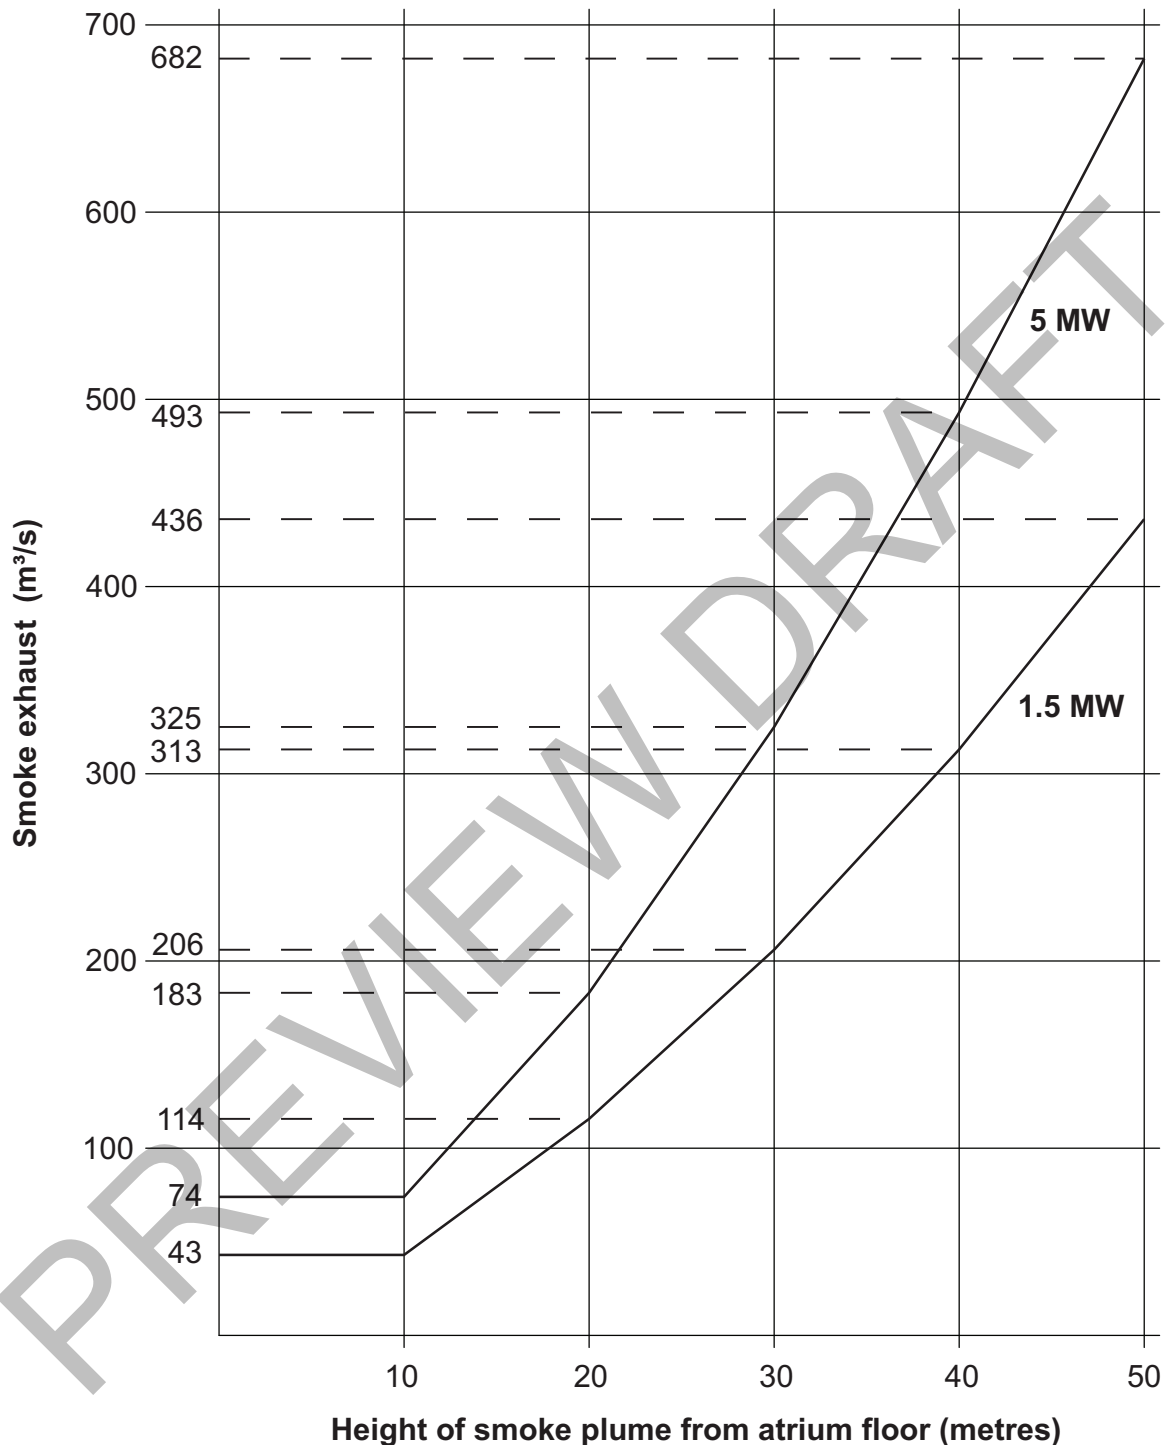

S31C11 Upward air velocity

Notwithstanding S31C10(c), the average upward air velocity in the *atrium*, due to the *required* smoke exhaust quantity must—

- be not less than 0.2 m/s at any level over an 18 m height above the floor of the *atrium*; and
- not exceed the following maximum velocities in *atriums* of constant cross sectional plan area:
 - For occupancy classification qualifying for 1.5 MW fire size — 3.5 m/s.

- (ii) For occupancy classifications qualifying for 5 MW fire size — 5 m/s.

S31C12 Exhaust fans

- (1) Smoke exhaust must be provided by fans capable of continuous and *required* operation for a period of not less than 1 hour when handling exhaust gases at 200°C.
- (2) Where a Class 2, 3 or 9 part of a building adjoins an *atrium*, the *atrium* must be provided with a minimum of 3 fans each capable of 50% of the total *required* smoke exhaust capacity.
- (3) *Atriums* other than those referred to in (2) must be provided with a minimum of 2 fans each capable of 50% of the total *required* smoke exhaust capacity.

S31C13 Smoke-and-heat vents

Notwithstanding S31C12, *automatic* vents complying with AS 2665 may be used, except where a Class 6 part of a building adjoins the *atrium*, in lieu of exhaust fans provided that—

- (a) the height from the *atrium* floor to the bottom of the highest vent is not more than 12 m; and
- (b) the vents are fitted with a remote manual operation switch located adjacent to the sprinkler control valves or incorporated in the Fire Indicator Panel.

S31C14 Make-up air supply

- (1) Uniformly distributed make-up air must be provided to the *atrium* exhaust system from—
 - (a) outside the *atrium* at or near the lowest *storey* level; and
 - (b) relief air from non-fire *storeys*.
- (2) A discharge volume sufficient to maintain a velocity of not less than 0.1 m/s towards the *atrium well* must be provided on all *storeys* where the bounding wall is set back from the *atrium well*.
- (3) The requirements of (1)(a) are satisfied if make-up air is provided to the *atrium* exhaust system in such a manner as to prevent, as far as possible, disturbance of the smoke layer due to turbulence created by the incoming air, through—
 - (a) openings directly from the outside air to the *atrium* and located as close as practicable to the lowest level of the *atrium*; or
 - (b) ducts from the outside air to the *atrium* which deliver air as close as practicable to the lowest level of the *atrium* and, where passing through any other *fire compartment* having an FRL of at least 60/60/60; or
 - (c) a combination of (a) or (b).

Fire detection and alarm system

S31C15 General requirements—fire detection and alarm system

Except where superseded by this Specification, *automatic* fire detection and alarm systems in a building containing an *atrium* must comply with AS 1670.1.

S31C16 Smoke detection system

Smoke detection within an *atrium*—

- (a) must be provided within all outside air intakes and at individual floor return air intakes of all air-handling systems to initiate *automatic* fire mode operation, and where applicable, comply with the restart facilities in AS 1668.1; and
- (b) must operate at an obscuration level not greater than 0.5% per metre with compensation for external airborne contamination as necessary; and
- (c) must sample air within the *atrium* and in *storeys* where the bounding wall is set back more than 3.5 m from the *atrium well*; and
- (d) must be calibrated to compensate for smoke dilution where sampling occurs within return air path common to more than one room; and
- (e) may incorporate beam type detectors to sense smoke in an *atrium* in a Class 5, 6, 7 or 8 building with an *effective height* of not more than 25 m if the beam detectors are—
 - (i) located at intervals of not more than 3 *storeys*; and
 - (ii) arranged to scan at 90 degrees orientation to adjacent beam units.

S31C17 Smoke detection in spaces separated from the atrium by bounding walls

Smoke detection systems must be located at all return and relief air openings associated with the building air-handling systems and be—

- (a) of the sampling type system as *required* in S31C16; or
- (b) of the point type photoelectric smoke detector.

S31C18 Alarm systems

- (1) A break-glass fire alarm point must be provided at each door to a *fire-isolated stairway*, *fire-isolated ramp* or *fire-isolated passageway*.
- (2) A staged alarm must be provided where an air sampling type smoke detection system is provided for the *atrium*, and must operate as follows:
 - (a) Alert building management when abnormal smoke levels of 0.03% obscuration per metre are detected.
 - (b) Initiate a second alarm to management and start all smoke control systems including pressurisation of escape routes when smoke levels of 0.07% obscuration per metre are detected.
 - (c) Automatically call the *fire brigade*, activate the emergency warning and intercom system, and de-activate all plant not necessary for fire safety within the building when smoke levels of 0.09% obscuration per metre are detected.
- (3) Beam and point type smoke detectors *required* must simultaneously operate all functions referred to above and activate at the level set out in AS 1670.1.

Additional requirements

S31C19 Emergency warning and intercom systems

A building containing an *atrium* must be provided with an emergency warning and intercom system which—

- (a) complies with AS 1670.4; and
- (b) incorporates visual warning devices that—
 - (i) operate upon the evacuation signal; and
 - (ii) display the word “EVACUATE” in red with letters conforming with the requirements of the *Deemed-to-Satisfy Provisions* of Part E4 for *exit* signs.

S31C20 Standby power system

- (1) If a *required* path of travel to an *exit* is within an *atrium*, a suitable alternative power supply must be provided to operate *required* safety systems, including sprinkler systems and fire hydrant pumps, air handling systems, alarms, warning and communication systems and emergency lighting circuits.
- (2) The alternative power supply must—
 - (a) be connected *automatically* if the normal power supply fails; and
 - (b) if located within the building, be separated from the remainder of the building by an enclosure with an FRL of at least 120/120/120; and
 - (c) be connected to the safety systems by means of cabling complying with C3D14(3).
- (3) The requirements of (1) are satisfied by—
 - (a) a single medium voltage supply taken from an electricity substation situated within, or adjacent to, the building concerned where the power supply to the substation consists of two or more high voltage cables each taking electricity from separate transformers; or
 - (b) two or more medium voltage supplies each taking electricity from separate electricity substations situated—
 - (i) outside the building concerned; and
 - (ii) at a suitable distance from each other; or
 - (c) a single medium voltage supply taken from an electricity substation together with an electricity generating plant capable of—
 - (i) generating a medium voltage supply; and
 - (ii) starting and taking the *required* electrical load within a period of not more than 30 seconds from the time of normal supply failure.

S31C21 System for excluding smoke from fire-isolated exits

Required fire-isolated *exits* in a building containing an *atrium* must be protected from the entry of smoke in accordance with E2D3.

Specification 43

Bushfire protection for certain Class 9 buildings

S43C1 Scope

- (1) This Specification sets out bushfire protection measures for buildings described in G5D4.
- (2) Compliance with this Specification does not guarantee the safety of building occupants or the maintenance of tenable conditions within a building during a bushfire event.

Explanatory Information

The measures set out in this Specification are intended to operate in conjunction with other bushfire safety measures that lie outside the scope of the NCC. Information about these measures can be found in the Guide to NCC Volume One for Part G5.

NSW S43C2

S43C2 Separation from classified vegetation

- (1) The building must be separated from classified vegetation—
 - (a) by not less than the minimum distances specified in Table S43C2; or
 - (b) such that radiant heat flux on exposed building elements will not exceed 10kW/m².
- (2) For the purposes of (1), the term 'classified vegetation' has the meaning that it has in AS 3959.

Table S43C2: Minimum distance of building to classified vegetation

Vegetation classification	Slope	Minimum distance (m) of the building to classified vegetation
High risk	Upslope and flat land	60
High risk	Downslope max 20 degrees	110
Medium risk	Upslope and flat land	40
Medium risk	Downslope max 20 degrees	80
Low risk	Upslope and flat land	30
Low risk	Downslope max 20 degrees	50

Table Notes

- (1) Table values are based on a Fire Danger Index of 100 in accordance with AS 3959.
- (2) High risk equates to vegetation classification of forest and woodland in accordance with AS 3959.
- (3) Medium risk equates to vegetation classification of scrub and rainforest in accordance with AS 3959.
- (4) Low risk equates to vegetation classification of shrubland, mallee/mulga and grassland in accordance with AS 3959.

S43C3 Separation between buildings

- (1) The building must be located not less than 12 m from any other building.
- (2) The separation distance *required* by (1) need not be complied with if the building is constructed—

- (a) with **external walls** that have an FRL of not less than 60/60/60 when tested from the outside, including any openings protected in accordance with AS 3959 for BAL—19 or greater; or
- (b) for **external walls** and roof, using a material or system that satisfies the test criteria of AS 1530.8.1 for a radiant heat flux of 10 kW/m² or greater.

S43C4 Separation from allotment boundaries and carparking areas

- (1) The building must be located not less than 10 m from any allotment boundary or open carparking area/spots.
- (2) The separation distance **required** by (1) need not be complied with if the building is constructed—
 - (a) with **external walls** that have an FRL of not less than 60/60/60 when tested from the outside, including any openings protected in accordance with AS 3959 for BAL—19 or greater; or
 - (b) for **external walls** and roof, using a material or system that satisfies the test criteria of AS 1530.8.1 for a radiant heat flux of 10 kW/m² or greater.

S43C5 Separation from hazards

The **external walls** and roof of the building must be protected from potential hazards on the **site** such as liquefied petroleum gas bottles, fuel storage, storage of **combustible** materials, waste bins, vehicles, machinery, and the like, by—

- (a) a separation distance of not less than 10 m; or
- (b) where within the 10 m separation distance described in (a), constructed with **external walls** that have an FRL of not less than 60/60/60 when tested from the outside, including any openings protected in accordance with AS 3959 for BAL—19 or greater; or
- (c) for **external walls** and roof, using a material or system that satisfies the test criteria of AS 1530.8.1 for a radiant heat flux of 10 kW/m² or greater.

S43C6 Non-combustible path around building

A **non-combustible** pathway directly adjacent to the building and not less than 1.5 m wide must be provided around the perimeter of the building.

S43C7 Access pathways

- (1) Access pathways that lead to a road or **open space** must—
 - (a) be readily identifiable; and
 - (b) have an even surface; and
 - (c) have a minimum clear width of not less than 1 m.
- (2) If the access pathway is an **accessway** that is **required** to comply with **Part D4**, the requirements of **Part D4** override (1) to the extent of any inconsistency.

S43C8 Exposed external areas

An external area designed to hold people unable to be safely accommodated within the building, that may be exposed to radiant heat flux from a fire front during a bushfire event, must not be exposed to an incident radiant heat flux from the fire front exceeding 1 kW/m² above background solar radiant heat flux.

S43C9 Internal tenability

To maintain internal tenability throughout the duration of occupancy during a bushfire event, the building must comply with the following:

- (a) An air handling system must be provided that is capable of—
 - (i) being adjusted for full recycling of internal air for a period of not less than 4 hours to avoid the introduction of smoke into the building; and
 - (ii) maintaining an internal air temperature of not more than 25°C.
- (b) The building envelope must be designed such that if an air handling system *required* by (a) fails, then—
 - (i) internal air temperatures can be maintained below 39°C; and
 - (ii) internal surface temperatures can be maintained below 60°C.
- (c) If the building is divided into separate compartments then, for the purposes of (a), each compartment must have a separate air handling system.
- (d) Each air handling system *required* by (a) must be designed to account for the activation of smoke detectors from low concentrations of smoke from external sources, so as to ensure that air-conditioning and other essential systems remain operational.

S43C10 Building envelope

The building envelope must be constructed in accordance with AS 3959 – BAL 19 or greater, except that where the use of *combustible* materials is permitted by AS 3959, they are not to be used unless permitted by C2D10(4), (5) or (6).

NSW S43C11

S43C11 Supply of water for fire-fighting purposes

Water for fire-fighting purposes must be available and consist of—

- (a) a fire hydrant system complying with E1D2, or
- (b) a static water supply consisting of tanks, *swimming pools*, dams or the like, or a combination of these, together with suitable pumps, hoses and fittings, capable of providing the required flow rate for a period of not less than 4 hours, determined in consultation with the relevant *fire brigade*.

S43C12 Emergency power supply

- (1) Emergency power must be provided to support, for not less than 4 hours before and 2 hours after the passing of the fire front during a bushfire event, the ongoing operation of—
 - (a) air handling systems to maintain internal tenability; and
 - (b) any pumps for fire-fighting; and
 - (c) any emergency lighting and *exit* signs; and
 - (d) any other emergency equipment listed in C3D14(6) and *required* to be provided.
- (2) Manual control for emergency back-up power supply must be provided to facilitate manual intervention where the power supply fails or runs out.

S43C13 Signage

Signage must be provided to warn building occupants against storing combustible materials under or adjacent to the building.

S43C14 Vehicular access

Vehicular access to the building must be provided in accordance [C3D5\(2\)](#), as if the building were a large isolated building for the purposes of [C3D4](#).

PREVIEW DRAFT

Section I Special use buildings

Part I1

Class 9b buildings

Deemed-to-Satisfy Provisions

I1D1	Application of Part
I1D2	Separation
I1D3	Proscenium wall construction
I1D4	Seating area
I1D5	Exits from stages
I1D6	Access to platforms and lofts
I1D7	Aisle lights

Part I2

Public transport buildings

Deemed-to-Satisfy Provisions

I2D1	Application of Part
I2D2	Accessways
I2D3	Ramps
I2D4	Handrails and grabrails
I2D5	Doorways and doors
I2D6	Lifts
I2D7	Stairways
I2D8	Unisex accessible toilet
I2D9	Location of accessible toilets
I2D10	Symbols and signs
I2D11	Tactile ground surface indicators
I2D12	Lighting
I2D13	Hearing augmentation
I2D14	Emergency warning systems
I2D15	Controls

Part I3

Farm buildings and farm sheds

Deemed-to-Satisfy Provisions

I3D1	Application of Part
I3D2	Fire resistance and separation
I3D3	Provision for escape
I3D4	Construction of exits
I3D5	Fixed platforms, walkways, stairways and ladders
I3D6	Thresholds
I3D7	Swinging doors
I3D8	Fire fighting equipment
I3D9	Fire hydrants and water supplies
I3D10	Fire hose reels
I3D11	Portable fire extinguishers
I3D12	Emergency lighting requirements
I3D13	Exit signs
I3D14	Direction signs

I3D15	Design and operation of exit signs
I3D16	Sanitary facilities
I3D17	Height of rooms and other spaces
I3D18	Artificial lighting

Specification 32 Construction of proscenium walls

S32C1	Scope
S32C2	Separation of stage areas, etc
S32C3	Proscenium wall construction
S32C4	Combustible materials not to cross proscenium wall
S32C5	Protection of openings in proscenium wall
S32C6	Proscenium curtains

PREVIEW DRAFT

Part I1 Class 9b buildings

Introduction to this Part

This Part provides additional *Deemed-to-Satisfy Provisions* for certain types of Class 9b buildings where large numbers of people assemble and which contain a *stage* and *backstage* area.

Deemed-to-Satisfy Provisions

NSW I1D1

I1D1 Application of Part

- (1) The *Deemed-to-Satisfy Provisions* of this Part apply to every enclosed Class 9b building or part of a building which—
 - (a) is a *school* assembly, church or community hall with a *stage* and any *backstage* area with a total *floor area* of more than 300 m²; or
 - (b) otherwise, has a *stage* and any *backstage* area with a total *floor area* of more than 200 m²; or
 - (c) has a *stage* with an associated rigging loft.
- (2) Notwithstanding (1)—
 - (a) I1D4 applies to every open or enclosed Class 9b building; and
 - (b) I1D7 applies to every enclosed Class 9b building.

Explanatory Information

Part I1 contains *Deemed-to-Satisfy Provisions* additional to those contained in Sections C, D and E for Class 9b buildings.

I1D2 Separation

A theatre, public hall or the like must—

- (a) have a sprinkler system (other than a FPAA101D or FPAA101H system) complying with *Specification 17*; or
- (b) have the *stage*, *backstage* area and accessible under *stage* area separated from the audience by a proscenium wall in accordance with I1D3.

I1D3 Proscenium wall construction

A proscenium wall must comply with *Specification 32*.

I1D4 Seating area

In a seating area—

- (a) the gradient of the floor surface must not be steeper than 1 in 8, or the floor must be stepped so that—
 - (i) a line joining the nosings of consecutive steps does not exceed an angle of 30° to the horizontal; and

- (ii) the height of each step in the stepped floor is not more than 600 mm; and
- (iii) the height of any opening in such a step is not more than 125 mm; and
- (b) if an aisle divides the stepped floor and the difference in level between any 2 consecutive steps—
 - (i) exceeds 230 mm but not 400 mm — an intermediate step must be provided in the aisle; and
 - (ii) exceeds 400 mm — 2 equally spaced intermediate steps must be provided in the aisle; and
 - (iii) the going of intermediate steps must be not less than 270 mm and such as to provide as nearly as practicable equal treads throughout the length of the aisle; and
- (c) the clearance between rows of fixed seats used for viewing performing arts, sport or recreational activities must be not less than—
 - (i) 300 mm if the distance to an aisle is not more than 3.5 m; or
 - (ii) 500 mm if the distance to an aisle is more than 3.5 m.

I1D5 Exits from stages

- (1) The path of travel to an **exit** from a **stage** or performing area must not pass through the proscenium wall if the **stage** area is separated from the audience area with a proscenium wall.
- (2) **Required exits** from **backstage** and under-**stage** areas must be independent of those provided for the audience area.

I1D6 Access to platforms and lofts

A stairway that provides access to a service platform, rigging loft, or the like, must comply with AS 1657.

I1D7 Aisle lights

In every enclosed Class 9b building, where in any part of the auditorium, the general lighting is dimmed or extinguished during public occupation and the floor is stepped or is inclined at a slope steeper than 1 in 12, aisle lights must be provided to illuminate the full length of the aisle and tread of each step.

Part I2 Public transport buildings

Introduction to this Part

This Part provides additional *Deemed-to-Satisfy Provisions* for Class 9b and Class 10 buildings that are used as public transport buildings. The provisions of this Part are based on the Disability Standards for Accessible Public Transport 2002 (Transport Standards).

Deemed-to-Satisfy Provisions

I2D1 Application of Part

- (1) The *Deemed-to-Satisfy Provisions* of this Part apply to the passenger use areas of a Class 9b or Class 10 building used for public transport.
- (2) The *Deemed-to-Satisfy Provisions* of this Part take precedence where there is a difference to the *Deemed-to-Satisfy Provisions* of Parts D4, E3 and F4.
- (3) For an airport that does not accept regular public transport services, as defined in the Disability Standards for Accessible Public Transport 2002, only I2D8, I2D9, I2D10, I2D11, I2D12 and I2D13 of this Part apply.
- (4) Exemption (1) to A6G1(1) does not apply to this Part.

Explanatory Information

Part I2 contains *Deemed-to-Satisfy Provisions* for Class 9b and Class 10 public transport buildings additional to those contained in Parts D4, E3 and F4 that apply to public transport buildings.

I2D2 Accessways

- (1) An *accessway* must comply with AS 1428.2.
- (2) If an *accessway* branches into 2 or more parallel tracks—
 - (a) the ends of each track must be on the main pedestrian traffic routes; and
 - (b) the parallel tracks must have equal convenience and be located as close as practicable to the main pedestrian branch.
- (3) The minimum unobstructed width of an *accessway* must be 1.2 m, except that—
 - (a) the minimum unobstructed width of a moving walkway forming part of an *accessway* may be not less than 850 mm; and
 - (b) the minimum unobstructed width of a doorway in an *accessway* may be not less than 850 mm.
- (4) Poles, columns, stanchions, bollards and fixtures must not project into an *accessway*.
- (5) Obstacles that abut an *accessway* must have a *luminance contrast* with a background of not less than 30%.
- (6) Manoeuvring areas that allow a 180 degree wheelchair turn must comply with clause 6.2 of AS 1428.2.
- (7) A passing area must be provided at least every 6 m along any two-way *accessway* that is less than 1800 mm wide.
- (8) Ground and floor surfaces must comply with clause 9 of AS 1428.2 and AS 1428.1 Supplement 1 provides criteria for the selection of floor surfaces.
- (9) The requirements of D4D4(c)(ii) do not apply to Class 9b or Class 10 public transport buildings.

I2D3 Ramps

- (1) A ramp forming part of an [accessway](#) must comply with clause 8 of AS 1428.2.
- (2) The requirements of [D4D12\(a\)](#) do not apply to Class 9b or Class 10 public transport buildings.

I2D4 Handrails and grabrails

- (1) A handrail must comply with clause 10.1 of AS 1428.2.
- (2) Handrails must be placed along an [accessway](#) wherever passengers are likely to require additional support or passive guidance.
- (3) A grabrail must comply with clause 10.2 of AS 1428.2.
- (4) A grabrail or handrail must be provided at fixed locations where passengers are required to pay fares.

I2D5 Doorways and doors

Doorways and doors must comply with clause 11 (except clause 11.5.2) of AS 1428.2.

I2D6 Lifts

Lift facilities must comply with AS 1735.12.

I2D7 Stairways

Stairs must comply with—

- (a) clause 9.1 of AS 1428.1, including the notes; and
- (b) clause 9.2 of AS 1428.1; and
- (c) clauses 13.2, 13.3 and Figures 8 and 9 of AS 1428.2.

I2D8 Unisex accessible toilet

If toilets are provided, there must be at least one unisex [accessible](#) toilet without an airlock that complies with AS 1428.1 clause 10, sanitary facilities.

I2D9 Location of accessible toilets

[Accessible](#) toilets must be in the same location as other toilets.

I2D10 Symbols and signs

- (1) The international symbols for accessibility and deafness in accordance with clauses 14.2 and 14.3 of AS 1428.1 must be used to identify an [accessway](#) and which facilities and boarding points are [accessible](#).

- (2) Signs must be placed in accordance with clause 17.4 of AS 1428.2.
- (3) The size of accessibility symbols must comply with Table 1 of AS 1428.2.
- (4) The symbol for accessibility must incorporate directional arrows and words or, if possible, pictograms, to show passengers the way to [accessible](#) facilities such as toilets.
- (5) Signs must comply with clause 17.1 and Figure 30 of AS 1428.2.
- (6) If a sign incorporates raised lettering or symbols, they must be at least 0.8 mm above the surface of the sign.
- (7) If an operator or provider supplements a notice with braille characters, they must be placed to the left of the raised characters.

I2D11 Tactile ground surface indicators

Tactile ground surface indicators must be installed in accordance with AS 1428.4 on an [accessway](#) and must indicate changes of direction in accordance with clause 18.1 of AS 1428.2.

I2D12 Lighting

Any lighting provided must comply with minimum levels of maintenance illumination for various situations shown in the notes to clause 19.1 of AS 1428.2.

I2D13 Hearing augmentation

If a public address system is installed, it must comply with clause 21.1 of AS 1428.2.

I2D14 Emergency warning systems

- (1) If an emergency warning system is installed, it must comply with clauses 18.2.1, 18.2.2 and 18.2.3 of AS 1428.2.
- (2) In the event of an emergency, provision must be made for people with vision impairment to locate the [exit](#) path.

I2D15 Controls

Controls must comply with clause 11 of AS 1428.1.

Part I3 Farm buildings and farm sheds

SA Part I3

Introduction to this Part

This Part provides additional *Deemed-to-Satisfy Provisions* for Class 7 and Class 8 buildings which are *farm buildings* or *farm sheds*.

Deemed-to-Satisfy Provisions

I3D1 Application of Part

- (1) The *Deemed-to-Satisfy Provisions* of this Part apply to *farm buildings* and *farm sheds*.
- (2) The *Deemed-to-Satisfy Provisions* of this Part take precedence where there is a difference to the *Deemed-to-Satisfy Provisions* of Sections C, D, E, and F.
- (3) I3D1 to I3D5, I3D8 and I3D11 to I3D18 apply to a *farm shed*.
- (4) I3D1, I3D3, I3D5 to I3D7, I3D9 to I3D12, I3D14, I3D15 and I3D18 apply to a *farm building*.

Explanatory Information

Part I3 contains *Deemed-to-Satisfy Provisions* additional to those contained in Sections C, D, E and F for *farm buildings* and *farm sheds*.

I3D2 Fire resistance and separation

A *farm shed* need not comply with the provisions of *Parts C2, C3 and C4*, except for *C2D12*, if it is separated from any other building or allotment boundary by a distance of not less than 6 m.

I3D3 Provision for escape

- (1) Except for *D2D3, D2D5 to D2D11, D2D14, D2D15(1), D2D18(c), D2D19 and D2D20*, the *Deemed-to-Satisfy Provisions* of Part D2 do not apply to a *farm shed*.
- (2) An *open space* adjacent to a *farm building* or a *farm shed* need not be directly connected with a public road.

I3D4 Construction of exits

Except for *D3D14, D3D15, D3D17 to D3D21, D3D22 and D3D29*, the *Deemed-to-Satisfy Provisions* of Part D3 do not apply to a *farm shed*.

I3D5 Fixed platforms, walkways, stairways and ladders

A fixed platform, stairway, ladder and any going and riser, landing, handrail or barrier may comply with AS 1657 in lieu of *D3D14, D3D15, D3D17 to D3D21 and D3D22* where it serves a *farm building* or a *farm shed*.

I3D6 Thresholds

The threshold of a doorway that serves an area not *required* to be *accessible* by D4D2 in a *farm building* need not comply with D3D16 where the door sill is not more than 700 mm above the finished surface of the ground, floor or the like, to which the doorway opens.

I3D7 Swinging doors

A swinging door in a *required exit* or forming part of a *required exit* need not swing in the direction of egress if it serves a *farm building*.

I3D8 Fire fighting equipment

The *Deemed-to-Satisfy Provisions* of Part E1 do not apply to a *farm shed*.

I3D9 Fire hydrants and water supplies

- (1) This provision applies to a *farm building*—
- (a) with a total *floor area* greater than 500 m²; and
 - (b) located where a *fire brigade station* is—
 - (i) not more than 50 km from the building as measured along roads; and
 - (ii) equipped with equipment capable of utilising a fire hydrant.
- (2) A *farm building* referred to in (1) must be—
- (a) provided with a fire hydrant system installed in accordance with AS 2419.1, except reference to '4 hours' water supply in clause 4.2 is replaced with '2 hours'; or
 - (b) located on the same allotment as an access point to a water supply which—
 - (i) has a minimum total capacity of 144,000 litres; and
 - (ii) is situated so as to enable emergency services vehicles access to within 4 m; and
 - (iii) is located within 60 m of the building and not more than 90 m from any part of the building.
- (3) For the purposes of (2)(b), water supply for a *farm building* must consist of one or any number of the following:
- (a) A water storage tank.
 - (b) A dam.
 - (c) A reservoir.
 - (d) A river.
 - (e) A lake.
 - (f) A bore.
 - (g) A sea.
- (4) If the whole or part of the water supply referred to in (2)(b) is contained in a water storage tank, it must be—
- (a) located not less than 10 m from the building; and
 - (b) fitted with at least one small bore suction connection and one large bore suction connection where—
 - (i) each suction connection is located in a position so as to enable emergency service vehicles access to within 4 m; and
 - (ii) the suction connections are located not less than 10 m from the building; and

- (iii) 'small bore suction connection' and 'large bore suction connection' have the meanings contained in AS 2419.1.

I3D10 Fire hose reels

A fire hose reel system need not be provided to serve a *farm building* where portable fire extinguishers are installed in accordance with I3D11.

I3D11 Portable fire extinguishers

- (1) A *farm building* not provided with a fire hose reel system in accordance with E1D3 must be provided with—
- (a) one portable fire extinguisher rated at not less than 5ABE in each room containing flammable materials or electrical equipment; and
 - (b) one portable fire extinguisher rated at not less than 4A60BE adjacent to every *required exit* door; and
 - (c) location signs complying with clauses 3.3 to 3.9 of AS 2444 above each *required* portable fire extinguisher.
- (2) A *farm shed* must be provided with not less than one portable fire extinguisher for every 500 m² of *floor area* or part thereof, distributed as evenly as practicable throughout the building.
- (3) A portable fire extinguisher *required* by (2) must be—
- (a) of ABE type; and
 - (b) not less than 4.5 kg in size; and
 - (c) installed in accordance with Section 3 of AS 2444.

I3D12 Emergency lighting requirements

- (1) An emergency lighting system need not be installed in a *farm building*—
- (a) with no artificial lighting as permitted by I3D18; or
 - (b) with artificial lighting where, if that lighting fails due to an emergency, automatic power supply to the building is provided by a fuel-driven generator.
- (2) An emergency lighting system need not be installed in a *farm shed*.

I3D13 Exit signs

An *exit* serving a *farm shed* need not be provided with an *exit* sign where the *exit* is a permanent opening not less than 2 m wide.

I3D14 Direction signs

In a *farm building* or a *farm shed*, if an *exit* is not readily apparent to persons occupying or visiting the building, *exit* signs complying with I3D15 must be installed in appropriate positions in corridors, hallways, lobbies and the like, indicating the direction to a *required exit*.

I3D15 Design and operation of exit signs

- (1) In a *farm building*, each *required exit* sign provided under E4D5 and I3D14 need not comply with E4D8 if—
- (a) the use of illuminated *exit* signs may adversely impact the behaviour or welfare of animals being kept in the building; and
 - (b) non-illuminated *exit* signs are installed in accordance with the requirements of Appendix D of AS/NZS 2293.1 as for an externally illuminated *exit* sign, and clauses 5.6 and 5.8 of AS/NZS 2293.1.
- (2) In a *farm shed*, each *required exit* sign provided under E4D5 and I3D14 need not comply with E4D8 if—
- (a) non-illuminated *exit* signs are installed in accordance with the requirements of Appendix D of AS/NZS 2293.1 as for an externally illuminated *exit* sign, and clauses 5.6 and 5.8 of AS/NZS 2293.1; and
 - (b) the maximum viewing distance in clause 5.6 of AS/NZS 2293.1 is not more than 24 m.

I3D16 Sanitary facilities

F4D4 does not apply to a *farm shed*.

I3D17 Height of rooms and other spaces

F5D2 does not apply to a *farm shed* which has ceiling heights not less than—

- (a) in a room, corridor, passageway or the like — 2.1 m; and
- (b) in a room or space with a sloping ceiling or projections — a height of not less than 2.1 m for at least two-thirds of the *floor area* of the room or space, and when calculating the *floor area* of the room or space, any part that has a ceiling height of less than 1.5 m is not included; and
- (c) in a stairway, ramp, landing or the like — 2.0 m measured vertically above the nosing line of stairway treads or the floor surface of the ramp, landing or the like.

I3D18 Artificial lighting

- (1) An artificial lighting system need not be provided in a *farm building* where—
- (a) occupants are provided with visibility sufficient for safe movement through suitable alternative means; and
 - (b) the use of artificial lighting could adversely affect the function of the building including, but not limited to—
 - (i) the behaviour or welfare of animals being kept in the building; or
 - (ii) the cultivating or propagating of plants or fungi.
- (2) An artificial lighting system need not be provided in a *farm shed*.

Specification 32

Construction of proscenium walls

S32C1 Scope

This Specification contains the requirements for the construction of proscenium walls for theatres, public halls, or the like.

S32C2 Separation of stage areas, etc

- (1) Dressing rooms, scene docks, property rooms, workshops, associated store rooms and other ancillary areas must be—
 - (a) located on the *stage* side of the proscenium wall; and
 - (b) separated from corridors and the like by construction having an FRL of not less than 60/60/60, and if of *lightweight construction*, complying with *Specification 6*.
- (2) The *stage* and *backstage* must be separated from other parts of the building other than the audience seating area by construction having an FRL of not less than 60/60/60, and if of *lightweight construction*, complying with *Specification 6*.
- (3) Any doorway in the construction referred to in (1) and (2) must be protected by a *self-closing* –/60/30 fire door.

S32C3 Proscenium wall construction

A proscenium wall must—

- (a) extend to the underside of the roof covering or the underside of the structural floor next above; and
- (b) have an FRL of not less than 60/60/60, and if of *lightweight construction*, comply with *Specification 6*.

S32C4 Combustible materials not to cross proscenium wall

Timber purlins or other *combustible* material must not pass through or cross any proscenium wall.

S32C5 Protection of openings in proscenium wall

Every opening in a proscenium wall must be protected—

- (a) at the principal opening, by a curtain in accordance with *S32C6* which is—
 - (i) capable of closing the proscenium opening within 35 seconds either by gravity slide or motor assisted mechanisms; and
 - (ii) operated by a system of *automatic* heat activated devices, manually operated devices or push button emergency devices; and
 - (iii) able to be operated from either the *stage* side or the audience side of the curtain; and
- (b) at any doorway in the wall, by a *self-closing* –/60/30 fire door.

S32C6 Proscenium curtains

A curtain *required* by S32C5 must be—

- (a) a fire safety curtain—
 - (i) made of *non-combustible* material; and
 - (ii) capable of withstanding a pressure differential of 0.5 kPa over its entire surface area; and
 - (iii) so fitted that when fully lowered it inhibits the penetration of smoke around the perimeter of the opening, from the *stage*; or
- (b) a curtain—
 - (i) having *fire hazard properties* complying with *Specification 7*; and
 - (ii) protected by a deluge system of open sprinklers installed along the full width of the curtain.

PREVIEW DRAFT

Section J Energy efficiency

Part J1 Energy efficiency performance requirements

Objectives

J1O1 Objective

Functional Statements

J1F1 Energy efficiency

Performance Requirements

J1P1 Operational energy use and greenhouse gas emissions

J1P2 Thermal performance of a Class 4 part of a building

J1P3 Energy usage of a Class 4 part of a building

J1P4 Renewable energy, energy storage and electric vehicle charging

Verification Methods

J1V1 NABERS Energy

J1V2 Green Star

J1V3 Verification using a reference building

J1V4 Verification of building envelope sealing

Part J2 Energy efficiency

Deemed-to-Satisfy Provisions

J2D1 Deemed-to-Satisfy Provisions

J2D2 Application of Section J

Part J3 Elemental provisions for a Class 4 part of a building

Deemed-to-Satisfy Provisions

J3D1 Deemed-to-Satisfy Provisions

J3D2 Application of Part

J3D3 Reducing heating and cooling loads of a Class 4 part of a building using house energy rating software

J3D4 Ceiling fans in a Class 4 part of a building

J3D5 Roof thermal breaks of a Class 4 part of a building

J3D6 * * * * *

J3D7 Roofs and ceilings of a Class 4 part of a building

J3D8 External walls of a Class 4 part of a building

J3D9 Wall-glazing construction of a Class 4 part of a building

J3D10 Floors of a Class 4 part of a building

J3D11 External winter glazing of a Class 4 part of a building

J3D12 External summer glazing of a Class 4 part of a building

J3D13 Shading of a Class 4 part of a building

J3D14 Net equivalent energy usage of a Class 4 part of a building

J3D15 Net equivalent energy usage for Class 4 part of building – home energy rating software

Part J4 Building fabric

Deemed-to-Satisfy Provisions

J4D1 Deemed-to-Satisfy Provisions

J4D2 Application of Part

J4D3	Thermal construction — general
J4D4	Roof and ceiling construction
J4D5	Roof lights
J4D6	Walls and glazing
J4D7	Floors

Part J5

Building sealing

Deemed-to-Satisfy Provisions

J5D1	Deemed-to-Satisfy Provisions
J5D2	Application of Part
J5D3	Chimneys and flues
J5D4	Roof lights
J5D5	Windows and doors
J5D6	Exhaust fans
J5D7	Construction of roofs, ceilings, walls and floors
J5D8	Evaporative coolers

Part J6

Air-conditioning and ventilation

Deemed-to-Satisfy Provisions

J6D1	Deemed-to-Satisfy Provisions
J6D2	Application of Part
J6D3	Air-conditioning system control
J6D4	Mechanical ventilation system control
J6D5	Fans and duct systems
J6D6	Ductwork insulation
J6D7	Ductwork sealing
J6D8	Pump systems
J6D9	Pipework insulation
J6D10	Space heating
J6D11	Refrigerant chillers
J6D12	Unitary air-conditioning equipment
J6D13	Heat rejection equipment

Part J7

Artificial lighting and power

Deemed-to-Satisfy Provisions

J7D1	Deemed-to-Satisfy Provisions
J7D2	Application of Part
J7D3	Artificial lighting
J7D4	Interior artificial lighting and power control
J7D5	Interior decorative and display lighting
J7D6	Exterior artificial lighting
J7D7	Boiling water and chilled water storage units
J7D8	Lifts
J7D9	Escalators and moving walkways

Part J8

Heated water supply and swimming pool and spa pool plant

Deemed-to-Satisfy Provisions

J8D1	Deemed-to-Satisfy Provisions
J8D2	Application of Part

J8D3	Heated water supply
J8D4	Swimming pool heating and pumping
J8D5	Spa pool heating and pumping

Part J9**Energy monitoring and on-site distributed energy resources****Deemed-to-Satisfy Provisions**

J9D1	Deemed-to-Satisfy Provisions
J9D2	Application of Part
J9D3	Facilities for energy monitoring
J9D4	Facilities for electric vehicle charging equipment
J9D5	Facilities for solar photovoltaic and battery systems

Specification 33 Additional requirements

S33C1	Scope
S33C2	Additional requirements — general
S33C3	Additional requirements — Green Star

Specification 34 Modelling parameters for J1V3

S34C1	Scope
S34C2	Reference building
S34C3	Proposed building and reference building
S34C4	Services — proposed and reference building

Specification 35 Modelling profiles for J1V3

S35C1	Scope
S35C2	Modelling profiles

Specification 36 Material properties

S36C1	Scope
S36C2	Construction Deemed-to-Satisfy

Specification 37 Calculation of U-Value and solar admittance

S37C1	Scope
S37C2	General
S37C3	U-Value — Method 1 (Single Aspect)
S37C4	U-Value — Method 2 (Multiple Aspects)
S37C5	Solar admittance — Method 1 (Single Aspect)
S37C6	Solar admittance — Method 2 (Multiple Aspects)
S37C7	Shading

Specification 38 Spandrel panel thermal performance

S38C1	Scope
S38C2	Spandrel panel R-Value: Calculation method 1
S38C3	Spandrel panel R-Value: Calculation method 2

Specification 39 Sub-floor and soil thermal performance

S39C1	Scope
S39C2	Sub-floor space and soil thermal performance

Specification 40 Lighting and power control devices

S40C1	Scope
S40C2	Manual switch
S40C3	Time switch

S40C4	Demand-operated control
S40C5	Daylight sensor and dynamic lighting control device

Specification 44 Calculation of heating load limit, cooling load limit and thermal energy load limit

S44C1	Scope
S44C2	Heating load limit
S44C3	Cooling load limit
S44C4	Thermal energy load limit

Specification 45 * * * * *

Specification 46 Determination of peak efficiency and fan power ratio

S46C1	Scope
S46C2	Determination of peak efficiency and fan power ratio

Specification 47 Calculation of climate specific part load value for chillers

S47C1	Scope
S47C2	Calculation of climate specific part load value for chillers

Specification 48 Comparison of zone loads in proposed building and reference building

S48C1	Scope
S48C2	Comparison of zone loads in proposed building and reference building

Part J1 Energy efficiency performance requirements

NSW Part J1

NT Part J1

Introduction to this Part

This Part sets the thermal performance properties of building *fabric*, the energy efficiency of key energy using equipment and the features a building must have to facilitate the future installation of distributed energy resources.

Notes

For Class 2 buildings, Section J is replaced with Section J of NCC 2022 Amendment 2.

Objectives

J101 Objective

The Objective of this Section is to—

- (a) reduce energy consumption and energy peak demand; and
- (b) reduce greenhouse gas emissions; and
- (c) improve occupant health and *amenity*.

Functional Statements

J1F1 Energy efficiency

A building must—

- (a) reduce the energy consumption and energy peak demand of key energy using equipment; and
- (b) reduce the greenhouse gas emissions that occur as a result of a building's energy consumption and energy source; and
- (c) for a Class 4 part of a building, improve occupant health and *amenity* by mitigating the impact of extreme hot and cold weather events and energy blackouts; and
- (d) for other than in a Class 4 part of a building, protect occupant health and *amenity* by ensuring the building *envelope* assists in the maintenance of acceptable internal conditions while the building is occupied; and
- (e) be able to accommodate the installation of distributed energy resources.

Performance Requirements

J1P1 Operational energy use and greenhouse gas emissions

A building, other than a Class 4 part of a building, including its *services*, must have features that—

- (a) facilitate the efficient use of energy and near zero operational greenhouse gas emissions appropriate to—

- (i) the function and use of the building; and
 - (ii) the level of human comfort required for the building use; and
- (b) Please refer to NCC 2025 Preview Draft Omissions for missing text

NSW J1P2

J1P2 Thermal performance of a Class 4 part of a building

- (1) The total *heating load* of the *habitable rooms* and *conditioned spaces* in a Class 4 part of a building must not exceed the *heating load* limit in Specification 44.
- (2) The total *cooling load* of the *habitable rooms* and *conditioned spaces* in a Class 4 part of a building must not exceed the *cooling load* limit in Specification 44.
- (3) The total *thermal energy load* of the *habitable rooms* and *conditioned spaces* in a Class 4 part of a building must not exceed the *thermal energy load* limit in Specification 44.

NSW J1P3

J1P3 Energy usage of a Class 4 part of a building

- (1) The *energy value* of the *domestic services* of a Class 4 part of a building must not exceed the *energy value* with—
 - (a) a 3-star ducted heat pump, rated under the 2019 GEMS determination, heating all spaces that are provided with heating; and
 - (b) a 3-star ducted heat pump, rated under the 2019 GEMS determination, cooling all spaces that are provided with cooling; and
 - (c) a 5-star instantaneous gas water heater, rated under the 2017 GEMS determination, providing all domestic hot water; and
 - (d) a lighting power density of 4 W/m² serving all internal spaces that are provided with artificial lighting.
- (2) *Domestic services*, including any associated distribution system and components must, to the degree necessary, have features that facilitate the efficient use of energy appropriate to—
 - (a) the *domestic service* and its usage; and
 - (b) the geographic location of the building; and
 - (c) the location of the *domestic service*; and
 - (d) the energy source.

J1P4 Renewable energy, energy storage and electric vehicle charging

A building must have features that facilitate the future installation of on-site renewable energy generation and energy storage equipment, except where this is already installed to the maximum practicable extent, and electric vehicle charging equipment.

Verification Methods

J1V1 NABERS Energy

- (1) For a Class 5 building, compliance with J1P1 is verified when—

- (a) a minimum 6-star *NABERS Energy* for Offices base building Commitment Agreement is obtained; and
 - (b) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (i) tenant supplementary heating and cooling systems; and
 - (ii) external lighting; and
 - (iii) *carpark services*; and
 - (b) the energy model *required* for (a) demonstrates either—
 - (i) a *thermal comfort level* of between a *Predicted Mean Vote* of -1 to +1 is achieved across not less than 95% of the *floor area* of all occupied zones for not less than 98% of the annual *hours of operation* of the building; or
 - (ii) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (d) the building complies with the additional requirements in *Specification 33*.
- (2) For a Class 3 building, compliance with *J1P1* is verified when—
- (a) a minimum 4-star *NABERS Energy* for Hotels Commitment Agreement is obtained; and
 - (b) the operating hours of the *services* are not less than 12 hours per day in bedrooms, dining rooms and conference facilities, 24 hours per day in corridors and foyers and 18 hours per day in back-of-house areas; and
 - (c) the energy model *required* for (a) demonstrates that—
 - (i) the *regulated energy* greenhouse gas emissions are equivalent to at least 5.3-stars; and
 - (ii) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (iii) the space temperature in any indoor *swimming pool* chamber is maintained at 2°C above the pool temperature during occupied hours of not less than 12 hours per day; and
 - (d) the building complies with the additional requirements in *Specification 33*.
- (3) For a Class 6 shopping centre, compliance with *J1P1* is verified when—
- (a) a minimum 6-stars *NABERS Energy* for Shopping Centres Commitment Agreement is obtained; and
 - (b) the building has:
 - (i) an *air-conditioned* common area of not less than 20% of the gross lettable area; and
 - (ii) a gross lettable area greater than 15 000 m²; and
 - (c) the energy model *required* for (a) demonstrates—
 - (i) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (A) excluding carpark services and carpark numbers from *NABERS Energy* calculation; and
 - (B) calculating solar photovoltaic export based on the reduced site energy use arising from (A); and
 - (d) a dry bulb room temperature is maintained across not less than 95% of the *floor area* of all occupied zones, other than any room containing an indoor *swimming pool*, for not less than 95% of the annual *hours of operation* between—
 - (A) 18°C and 25°C for *conditioned spaces* with transitory occupancy and food preparation areas; and
 - (B) 21°C and 24°C for all other *conditioned spaces*; and
 - (e) the building complies with the additional requirements in *Specification 33*.
- (4) The calculation method for (1), (2), and (3) must comply with ANSI/ASHRAE Standard 140.

J1V2 Green Star

- (1) For a Class 3, 5, 6, 7, 8 or 9 building, compliance with *J1P1* is verified when—
- (a) the building complies with the simulation requirements, and is registered, for a Green Star Buildings rating; and
 - (b) the *annual greenhouse gas emissions* of the proposed building are less than 90% of the *annual greenhouse gas emissions* of the *reference building*; and
 - (c) in the proposed building, a *thermal comfort level* of between a *Predicted Mean Vote* of -1 to +1 is achieved

across not less than 95% of the *floor area* of all occupied zones for not less than 98% of the annual *hours of operation* of the building; and

(d) the building complies with the additional requirements in [Specification 33](#).

(2) The calculation method used for (1) must comply with ANSI/ASHRAE Standard 140.

Explanatory Information

Buildings using J1V2 are required to calculate and demonstrate a reduction of upfront carbon in line with the NABERS Upfront Embodied Carbon methodology as part of Green Star Buildings rating.

J1V3 Verification using a reference building

(1) For a Class 3, 5, 6, 7, 8 or 9 building, compliance with J1P1 is verified when—

(a) it is determined that—

- (i) the *annual greenhouse gas emissions* of the proposed building are not more than 97% of the *annual greenhouse gas emissions* of a *reference building* when the proposed building is modelled with the proposed *services*; and
- (ii) the *annual greenhouse gas emissions* of the *services* of the proposed building are not more than the *annual greenhouse gas emissions* of the *services* of the *reference building* when the proposed building is modelled with the same *services* as the *reference building*; and

(b) in the proposed building—

- (i) if a Class 5 building, a thermal comfort level of between a *Predicted Mean Vote* of -1 to +1 is achieved across not less than 95% of the floor area of all occupied zones for not less than 98% of the annual hours of operation of the building; or
- (ii) Please refer to NCC 2025 Preview Draft Omissions for missing text
- (iii) in *climate zone* 1, the 98th percentile zone *cooling load* across the *hours of operation* does not exceed 110% of the 98th percentile load in the corresponding zone of the *reference building*, across 95% of the assessable *floor area*; or
- (iv) in *climate zone* 8, the 98th percentile zone *heating load* across the *hours of operation* does not exceed 110% of the 98th percentile load in the corresponding zone of the *reference building*, across 95% of the assessable *floor area*; or
- (v) in *climate zones* 2 to 7—
 - (A) the 98th percentile zone *cooling load* across the annual *hours of operation* does not exceed 120% of the 98th percentile load of the corresponding zone of the *reference building*, across 95% of the assessable *floor area*; and
 - (B) the 98th percentile zone *heating load* across the annual *hours of operation* does not exceed 120% of the 98th percentile load of the corresponding zone of the *reference building*, across 95% of the assessable *floor area*; and

(c) the building complies with the additional requirements in [Specification 33](#).

(2) The calculation method used for (1) must comply with—

- (a) ANSI/ASHRAE Standard 140; and
- (b) [Specification 34](#); and
- (c) [Specification 48](#).

J1V4 Verification of building envelope sealing

(1) Compliance with J1P1(a) and J1P2 is verified for building *envelope* sealing when the *envelope* is sealed at an air permeability rate, tested in accordance with Method 1 of AS/NZS ISO 9972, of not more than—

- (a) for a Class 4 part of a building, 10 m³/hr.m² at 50 Pa reference pressure; or
 - (b) for a Class 5, 6, 8, 9a or 9b building, other than a *ward area*, in *climate zones* 1, 7 and 8, 5 m³/hr.m² at 50 Pa reference pressure; or
 - (c) for a Class 3 or 9c building, or a Class 9a *ward area* in *climate zones* 1, 3, 4, 6, 7 and 8, 5 m³/hr.m² at 50 Pa reference pressure.
- (2) In a Class 4 part of a building, where an air permeability rate of not more than 5 m³/hr.m² at 50 Pa reference pressure is achieved—
- (a) a mechanical ventilation system must be provided that—
 - (i) can be manually overridden; and
 - (ii) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (iii) provides a flow rate not less than that achieved with the following formula: $Q = (0.05 \times A + 3.5 \times (N + 1)) / p$, where—
 - (A) Q = the required air flow rate (L/s); and
 - (B) A = the total area of the Class 4 part of a building (m²); and
 - (C) N = the number of bedrooms in the Class 4 part of a building; and
 - (D) p = the fraction of time within each 4 hour segment that the system is operational; and
 - (b) any space with a solid-fuel burning combustion appliance must be ventilated with permanent openings directly to outside with a free area of not less than half of the cross-sectional area of the appliance's flue; and
 - (c) any space with a gas-fueled combustion appliance must be ventilated in accordance with—
 - (i) clause 6.4 of AS/NZS 5601.1; and
 - (ii) clause 6.4.5 of AS/NZS 5601.1.
- (3) For the purposes of (2)(c), the volume of the space is considered to be 1 m³ for determining ventilation requirements.

PREVIEW DRAFT

Part J2 Energy efficiency

NT Part J2

Introduction to this Part

This Part sets out the application of the *Deemed-to-Satisfy Provisions* in Parts J3 to J9.

Deemed-to-Satisfy Provisions

J2D1 Deemed-to-Satisfy Provisions

NSW J2D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements J1P1 to J1P4* are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

NSW J2D2

J2D2 Application of Section J

- (1) For a Class 3 to 9 building, other than a Class 4 part of a building, *Performance Requirement J1P1* is satisfied by complying with—
 - (a) Part J4, for the building *fabric*; and
 - (b) Part J5, for building sealing; and
 - (c) Part J6, for *air-conditioning* and ventilation; and
 - (d) Part J7, for artificial lighting and power; and
 - (e) Part J8, for heated water supply and *swimming pool* and spa pool plant; and
 - (f) J9D3, for facilities for energy monitoring; and
 - (g) J9D5(2) to (4), for onsite *renewable energy* systems.
- (2) For a Class 4 part of a building, *Performance Requirement J1P2* is satisfied by complying with—
 - (a) J3D3, using *house energy rating software*; or
 - (b) the following—
 - (i) J3D4, for ceiling fans; and
 - (ii) J3D5, J4D3(1) to (4), and Part J5, for general thermal construction; and

- (iii) J3D7, for roofs; and
 - (iv) J3D8 and J3D11 to J3D13, or J3D9, for walls and *glazing*; and
 - (v) J3D10, for floors.
- (3) For a Class 4 part of a building, *Performance Requirement J1P3* is satisfied by complying with—
- (a) for the net equivalent energy usage—
 - (i) J3D14, for a Class 4 part of a building with a total floor area not greater than 500 m²; or
 - (ii) J3D15, using *house energy rating software*; and
 - (b) Part J6, for *air-conditioning* and ventilation; and
 - (c) Part J7, for artificial lighting and power.
- (4) For a Class 3 to 9 building, *Performance Requirement J1P4* is satisfied by complying with J9D4(1), J9D4(2) and J9D5(1).

PREVIEW DRAFT

Part J3 Elemental provisions for a Class 4 part of a building

NT Part J3

TAS Part J3

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* (elemental) for compliance with Part J1. It sets out provisions for the insulation of building *fabric* and the energy efficiency of *domestic services* of a Class 4 part of a building.

Deemed-to-Satisfy Provisions

J3D1 Deemed-to-Satisfy Provisions

NSW J3D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* J1P1 to J1P4 are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

NSW J3D2

J3D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part apply to building elements forming the external building *fabric* and *domestic services* of a Class 4 part of a building.

NSW J3D3

J3D3 Reducing heating and cooling loads of a Class 4 part of a building using house energy rating software

- (1) The Class 4 part of a building must—
 - (a) for reducing the heating or cooling loads—
 - (i) collectively achieve an average energy rating of not less than 7 stars, including the separate heating and cooling load limits; and
 - (ii) individually achieve an energy rating of not less than 6 stars, including the separate heating and cooling

- load limits; and
- (b) for thermal breaks, comply with J3D5; and
 - (c) for compensating for a loss of ceiling insulation, other than where the *house energy rating software* has compensated for a loss of ceiling insulation, comply with Table J3D7w; and
 - (d) for general thermal construction, comply with J4D3(1) to J4D3(4); and
 - (e) for floor edge insulation, comply with J3D10(3), J3D10(5) and J3D10(6); and
 - (f) for building sealing, comply with Part J5.
- (2) Energy ratings referred to in (1)(a)(i) and (ii) must be achieved using—
- (a) *house energy rating software*; and
 - (b) the load limits specified in the ABCB Standard for NatHERS Heating and Cooling Load Limits.

NSW J3D4

J3D4 Ceiling fans in a Class 4 part of a building

- (1) Ceiling fans must be installed in accordance with Table J3D4 in—
- (a) *climate zones* 1, 2 and 3; and
 - (b) *climate zone* 5 in New South Wales and Queensland.
- (2) Ceiling fans *required* by (1) must—
- (a) be permanently installed; and
 - (b) have a speed controller.

Table J3D4: Minimum ceiling fan requirements in climate zones 1, 2, 3 and 5

Size of room (m ²)	Minimum number and diameter (mm) of ceiling fans <i>required</i> for a bedroom in <i>climate zones</i> 1, 2 and 3	Minimum number and diameter (mm) of ceiling fans <i>required</i> in a <i>habitable room</i> other than a bedroom in <i>climate zones</i> 1, 2, 3 and 5 (NSW and Qld)
< 15	1 x 900	1 x 900
≥ 15 to < 20	1 x 1200	1 x 1200
≥ 20 to < 25	1 x 1200	1 x 1400
≥ 25 to < 30	1 x 1400	2 x 1200
≥ 30 to < 45	1 x 1400	2 x 1400
≥ 45 to < 50	2 x 1400	3 x 1200
≥ 50	2 x 1400	3 x 1400

J3D5 Roof thermal breaks of a Class 4 part of a building

- (1) A metal-framed flat, skillion or cathedral roof that—
- (a) has metal sheet roofing directly fixed to metal purlins, metal rafters, metal battens or the like; and
 - (b) does not have a ceiling lining or has a ceiling lining fixed directly to the metal purlins, metal rafters, metal battens or the like; and
 - (c) has not achieved the *required Total R-Value* specified in Table J3D7t, calculated using a method that accounts for the effects of thermal bridging,
- must have a thermal break, consisting of a material with an *R-Value* of greater than or equal to R0.2, installed within the structure.

- (2) The requirements of (1) do not apply to roofs constructed using insulated sandwich panels.

J3D6

* * * * *

This clause has deliberately been left blank.

NSW J3D7

J3D7

Roofs and ceilings of a Class 4 part of a building

- (1) Roof and ceiling insulation must achieve the minimum *R-Value*—
- (a) in *climate zone* 1, in accordance with Tables J3D7a, J3D7b and J3D7c as applicable; and
 - (b) in *climate zone* 2, in accordance with Tables J3D7d, J3D7e and J3D7f as applicable; and
 - (c) in *climate zone* 3, in accordance with Tables J3D7g, J3D7h and J3D7i as applicable; and
 - (d) in *climate zone* 4, in accordance with Tables J3D7j, J3D7k and J3D7l as applicable; and
 - (e) in *climate zone* 5, in accordance with Tables J3D7m, J3D7n and J3D7o as applicable; and
 - (f) in *climate zone* 6—
 - (i) R3.5; or
 - (ii) if the roof contains *reflective insulation*, R3.0; and
 - (g) in *climate zones* 7 and 8, in accordance with Tables J3D7p, J3D7q and J3D7r as applicable.
- (2) *Reflective insulation* installed to comply with (1) must—
- (a) have a surface emittance of not more than 0.05; and
 - (b) be adjacent to a roof space of not less than 20 mm; and
 - (c) in *climate zones* 3 to 8, be downward facing.
- (3) The thermal bridging in a metal-framed roof must be addressed as follows—
- (a) for a pitched roof with a horizontal ceiling—
 - (i) achieving the *Total R-Value* in Table J3D7s, calculated using a method that accounts for the effects of thermal bridging; or
 - (ii) increasing the *R-Value* of the insulation between the ceiling frames by R0.5 more than the *R-Value* derived from (1); or
 - (iii) adding a continuous ceiling insulation layer with a minimum *R-Value* of R0.13 above or below the ceiling joists or the bottom chords of the trusses; or
 - (iv) achieving the *required* ceiling *R-Value* derived from (1) by stacking two layers of insulation immediately on top of each other, such that the top layer is orientated to cover the ceiling joists or bottom chord of the trusses and has an *R-Value* of at least R0.5; or
 - (b) for a flat, skillion or cathedral roof—
 - (i) achieving the *Total R-Value* in Table J3D7t, calculated using a method that accounts for the effects of thermal bridging; or
 - (ii) complying with Table J3D7u.
- (4) Where F8D5(1) applies, continuous insulation placed above the *primary insulation layer* to mitigate thermal bridging must have a *vapour permeance* of not less than that of the *primary insulation layer*.
- (5) Where, for operational or safety reasons, the area of ceiling insulation *required* is reduced, the loss of insulation must be compensated for in accordance with Table J3D7w.
- (6) Where the ceiling insulation *required* by (1) to (5) has an *R-Value*—
- (a) greater than R3.0 and less than or equal to R4.5, it may be reduced to R3.0 within 450 mm of an *external wall*; or

- (b) greater than R4.5, it may be reduced to R3.0 within 450 mm of an *external wall*, provided all other *required* ceiling insulation is increased by R0.5.
- (7) The requirements of (1) to (6) do not apply to roofs constructed using insulated sandwich panels.
- (8) Roofs constructed using insulated sandwich panels must achieve the minimum *Total R-Value* in Table J3D7x.
- (9) In *climate zones* 1 to 5, the solar absorptance of the upper surface of a roof must not be more than 0.64.

Table J3D7a: Flat concrete roof — minimum R-Value for ceiling insulation: climate zone 1

Reflective insulation under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Yes	1.0	1.5	2.0	2.5	3.0
No	1.5	2.0	2.5	3.0	4.0

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (3) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7b: Timber-framed pitched roof with horizontal ceiling — minimum R-Value for ceiling insulation: climate zone 1

Roof ventilation	Reflective insulation under-roof	Under-roof insulation R-Value	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Vented	Yes	< 1.0	1.5	1.5	1.5	1.5	2.0
		≥ 1.0 to < 1.5	1.5	1.5	1.5	1.5	1.5
		≥ 1.5 to < 2.0	1.5	1.5	1.5	1.5	1.5
		≥ 2.0	1.5	1.5	1.5	2.0	2.0
	No	< 1.0	2.0	2.5	4.0	5.0	X
		≥ 1.0 to < 1.5	1.5	1.5	1.5	1.5	2.5
		≥ 1.5 to < 2.0	1.5	1.5	1.5	2.0	2.0
		≥ 2.0	1.5	1.5	1.5	1.5	1.5
Standard	Yes	< 1.0	1.5	1.5	2.0	3.0	4.0
		≥ 1.0 to < 1.5	1.5	1.5	1.5	1.5	2.5
		≥ 1.5 to < 2.0	1.5	1.5	1.5	1.5	2.0
		≥ 2.0	1.5	1.5	1.5	1.5	1.5
	No	< 1.0	2.5	4.0	6.0	X	X
		≥ 1.0 to < 1.5	1.5	1.5	1.5	1.5	4.0
		≥ 1.5 to < 2.0	1.5	1.5	2.0	2.0	2.5
		≥ 2.0	1.5	1.5	1.5	2.0	2.5

Table Notes

- (1) SA = solar absorptance.
- (2) A roof space is to be considered 'vented' if it—
- (a) has one wind-driven roof ventilator per 50 m² of ceiling area with gable, eave or ridge vents; or
 - (b) has one powered roof ventilator per 200 m² of ceiling area with gable, eave or ridge vents; or
 - (c) is a tiled roof without *sarking-type material* at roof level.
- (3) If a roof is not 'vented', it is a 'standard' roof.

- (4) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (5) *R-Values* listed are for the labelled, declared *R-Value* of insulation.
- (6) X = not permitted.

Table J3D7c: Timber-framed flat, skillion or cathedral roof — minimum R-Value for ceiling insulation: climate zone 1

<i>Reflective insulation</i> under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Yes	1.5	1.5	2.0	3.0	4.0
No	1.5	3.5	5.0	X	X

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* can be achieved by installing insulation under the roof or on top of the ceiling or a combination of both.
- (3) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (4) *R-Values* listed are for the labelled, declared *R-Value* of insulation.
- (5) X = not permitted.

Table J3D7d: Flat concrete roof — minimum R-Value for ceiling insulation: climate zone 2

<i>Reflective insulation</i> under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Yes	2.0	2.5	2.5	3.0	3.5
No	3.0	3.0	3.5	4.0	4.5

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (3) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7e: Timber-framed pitched roof with horizontal ceiling — minimum R-Value for ceiling insulation: climate zone 2

Roof ventilation	<i>Reflective insulation</i> under-roof	Under-roof insulation <i>R-Value</i>	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Vented	Yes	Any	2.5				
	No	0 to < 0.5	2.5	3.0	3.0	3.5	3.5
		≥ 0.5	2.5				
Standard	Yes	Any	2.5				
	No	0 to < 0.5	3.0	3.0	3.5	4.0	4.0
		≥ 0.5 to < 1.0	2.5	2.5	2.5	3.0	3.0
		≥ 1.0	2.5				

Table Notes

- (1) SA = solar absorptance.
- (2) A roof is considered 'vented' if it—

- (a) has one wind-driven roof ventilator per 50 m² of ceiling area with gable, eave or ridge vents; or
- (b) has one powered roof ventilator per 200 m² of ceiling area with gable, eave or ridge vents; or
- (c) is a tiled roof without *sarking-type material* at roof level.

(3) If a roof is not 'vented', it is a 'standard' roof.

(4) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.

(5) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7f: Timber-framed flat, skillion or cathedral roof — minimum R-Value for ceiling insulation: climate zone 2

Reflective insulation under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Yes	2.5	2.5	2.5	2.5	2.5
No	3.0	3.0	3.5	4.0	4.0

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* can be achieved by installing insulation under the roof or on top of the ceiling or a combination of both.
- (3) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (4) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7g: Flat concrete roof — minimum R-Value for ceiling insulation: climate zone 3

Reflective insulation under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Yes	2.0	2.0	2.5	2.5	3.0
No	3.0	3.5	4.0	4.5	5.0

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (3) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7h: Timber-framed pitched roof with horizontal ceiling — minimum R-Values for ceiling insulation: climate zone 3

Roof ventilation	Reflective insulation under-roof	Under-roof insulation R-Value	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Vented	Yes	< 0.5	2.5	2.5	2.5	2.5	2.5
		≥ 0.5 to < 1.0	2.0	2.0	2.0	2.0	2.0
		≥ 1.0 to < 1.5	2.5	2.0	2.0	2.0	2.0
		≥ 1.5 to < 2.0	2.0	2.0	2.5	2.5	2.5
		≥ 2.0	2.5	2.5	3.0	3.0	3.0
	No	< 0.5	3.5	4.0	4.5	5.0	X
		≥ 0.5 to < 1.0	3.0	3.5	3.5	4.0	4.5
		≥ 1.0 to < 1.5	2.5	3.0	3.0	3.0	3.5

Roof ventilation	Reflective insulation under-roof	Under-roof insulation R-Value	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Standard		≥ 1.5 to < 2.0	2.5	3.0	3.0	3.0	3.0
		≥ 2.0	2.5	2.5	3.0	3.0	3.0
	Yes	< 0.5	2.0	2.0	2.5	2.5	2.5
		≥ 0.5 to < 1.0	2.0	2.0	2.5	2.5	2.5
		≥ 1.0 to < 1.5	2.0	2.0	2.0	2.0	2.5
		≥ 1.5 to < 2.0	2.0	2.5	2.5	2.5	3.0
		≥ 2.0	2.0	2.0	2.5	2.5	2.5
	No	< 0.5	3.5	4.0	5.0	X	X
		≥ 0.5 to < 1.0	3.0	3.0	3.5	4.0	5.0
		≥ 1.0 to < 1.5	2.5	2.5	3.0	3.0	3.5
		≥ 1.5 to < 2.0	2.0	2.0	2.5	2.5	2.5
		≥ 2.0	2.0	2.0	2.5	2.5	2.5

Table Notes

- (1) SA = solar absorptance.
- (2) A roof is considered 'vented' if it—
 - (a) has one wind-drive roof ventilator per 50 m² of ceiling area with gable, eave or ridge vents; or
 - (b) has one powered roof ventilator per 200 m² of ceiling area with gable, eave or ridge vents; or
 - (c) is a tiled roof without *sarking-type material* at roof level.
- (3) If a roof is not 'vented', it is a 'standard' roof.
- (4) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (5) *R-Values* listed are for the labelled, declared *R-Value* of insulation.
- (6) X = not permitted.

Table J3D7i: Timber-framed flat, skillion or cathedral roof — minimum R-Value for ceiling insulation: climate zone 3

Reflective insulation under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64
Yes	2.0	2.0	2.5	2.5	2.5
No	3.5	4.0	5.0	X	X

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* can be achieved by installing insulation under the roof or on top of the ceiling or a combination of both.
- (3) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (4) *R-Values* listed are for the labelled, declared *R-Value* of insulation.
- (5) X = not permitted.

Table J3D7j: Flat concrete roof — minimum R-Value for ceiling insulation: climate zone 4

Reflective insulation under-roof	≤ 0.64
Yes	2.0

Reflective insulation under-roof	≤ 0.64
No	2.5

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (3) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7k: Timber-framed pitched roof with horizontal ceiling — minimum R-Value for ceiling insulation: climate zone 4

Roof ventilation	Reflective insulation under- roof	Under-roof insulation <i>R-Value</i>	SA ≤ 0.23	SA > 0.23 to ≤ 0.64
Vented	Yes	< 0.5	3.0	3.5
		≥ 0.5	3.0	3.0
	No	Any	3.5	
Standard	Yes	Any	3.0	
	No	< 0.5	3.5	
		≥ 0.5	3.0	

Table Notes

- (1) SA = solar absorptance.
- (2) A roof is considered 'vented' if it—
- (a) has one wind-driven roof ventilator per 50 m² of ceiling area with gable, eave or ridge vents; or
 - (b) has one powered roof ventilator per 200 m² of ceiling area with gable, eave or ridge vents; or
 - (c) is a tiled roof without *sarking-type material* at roof level.
- (3) If a roof is not 'vented', it is a 'standard' roof.
- (4) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (5) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7l: Timber-framed flat, skillion or cathedral timber roof — minimum R-Value for ceiling insulation: climate zone 4

Reflective insulation under-roof	SA ≤ 0.64
Yes	3.0
No	3.5

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* can be achieved by installing insulation under the roof or on top of the ceiling or a combination of both.
- (3) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (4) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7m: Flat concrete roof — minimum R-Value for ceiling insulation: climate zone 5

Reflective insulation under-roof	SA ≤ 0.42	SA > 0.42 to ≤ 0.64
Yes	3.0	3.5
No	4.0	4.0

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (3) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7n: Timber-framed pitched roof with horizontal ceiling — minimum R-Value for ceiling insulation: climate zone 5

Roof ventilation	Reflective insulation under- roof	Under-roof insulation R-Value	SA ≤ 0.42	SA > 0.42 to ≤ 0.64
Vented	Yes	< 0.5	3.0	2.5
		≥ 0.5	2.5	
	No	0 to < 2.0	3.0	
		≥ 2.0	2.5	
Standard	Yes	Any	2.5	
	No	0 to < 1.0	3.0	
		≥ 1.0 to < 2.0	2.5	
		≥ 2.0	3.0	

Table Notes

- (1) SA = solar absorptance.
- (2) A roof is considered 'vented' if it—
- (a) has one wind-driven roof ventilator per 50 m² of ceiling area with gable, eave or ridge vents; or
 - (b) has one powered roof ventilator per 200 m² of ceiling area with gable, eave or ridge vents; or
 - (c) is a tiled roof without *sarking-type material* at roof level.
- (3) If a roof is not 'vented', it is a 'standard' roof.
- (4) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (5) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7o: Timber-framed flat, skillion or cathedral roof — minimum R-Value for ceiling insulation: climate zone 5

Reflective insulation under- roof	R-Value
Yes	2.5
No	3.0

Table Notes

- (1) The *R-Value* can be achieved by installing insulation under the roof or on top of the ceiling or a combination of both.
- (2) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (3) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7p: Flat concrete roof — minimum R-Value for ceiling insulation: climate zones 7 and 8

Reflective insulation under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64	SA > 0.64 to ≤ 0.73	SA > 0.73
Yes	3.5	3.5	3.5	3.0	3.0	3.0	2.5
No	4.0	3.0	3.0	2.5	2.5	2.5	2.0

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (3) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7q: Timber-framed pitched roof with flat ceiling — minimum R-Value for ceiling insulation: climate zones 7 and 8

Roof ventilation	Reflective insulation under-roof	Under-roof insulation R-Value	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64	SA > 0.64 to ≤ 0.73	SA > 0.73 to ≤ 0.85	SA > 0.85
Standard	Yes	0 to < 1.0	4.5	4.5	4.5	4.0	4.0	4.0	4.0	4.0
		≥ 1.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
	No	0 to < 1.0	5.0	4.5	4.5	4.0	4.0	3.5	3.5	3.5
		≥ 1.0 to < 1.5	4.5	4.5	4.0	4.0	4.0	4.0	3.5	3.5
		≥ 1.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
	Vented	Yes	0 to < 1.0	4.5	4.5	4.5	4.5	4.0	4.0	4.0
			≥ 1.0	4.5	4.5	4.5	4.5	4.0	4.0	4.0
		No	0 to < 1.0	5.0	4.5	4.5	4.5	4.0	4.0	3.5
			≥ 1.0 to < 1.5	4.5	4.5	4.5	4.5	4.0	4.0	4.0
		≥ 1.5	4.5	4.5	4.5	4.5	4.5	4.0	4.0	4.0

Table Notes

- (1) SA = solar absorptance.
- (2) A roof is considered 'vented' if it—
- (a) has one wind-driven roof ventilator per 50 m² of ceiling area with gable, eave or ridge vents; or
 - (b) has one powered roof ventilator per 200 m² of ceiling area with gable, eave or ridge vents; or
 - (c) is ventilated to *outdoor air* through evenly distributed openings in accordance with [Table F8D5](#); or
 - (d) is a tiled roof without *sarking-type material* at roof level.
- (3) If a roof is not 'vented', it is a 'standard' roof.
- (4) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.
- (5) *R-Values* listed are for the labelled, declared *R-Value* of insulation.

Table J3D7r: Timber-framed flat, skillion or cathedral roof — minimum R-Value for ceiling insulation: climate zones 7 and 8

Reflective insulation under-roof	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64	SA > 0.64 to ≤ 0.73	SA > 0.73 to ≤ 0.85	SA > 0.85
Yes	4.5	4.5	4.5	4.0	4.0	4.0	4.0	4.0
No	5.0	4.5	4.5	4.0	4.0	3.5	3.5	3.5

Table Notes

- (1) SA = solar absorptance.
- (2) The *R-Value* can be achieved by installing insulation under the roof or on top of the ceiling or a combination of both.
- (3) The *R-Value* of *reflective insulation* is not to be included in the *R-Value* of any under-roof or ceiling insulation.

(4) *R-Values* listed are for the labelled, declared *R-Value* for insulation.

Table J3D7s: Metal-framed pitched roof with horizontal ceiling — minimum Total R-Value of ceiling to account for thermal bridging

Ceiling insulation <i>R-Value</i> from Tables J3D7a to J3D7r and J3D7(1)(f) as applicable	Minimum <i>Total R-Value</i> to account for thermal bridging
1.5	1.38
2.0	1.74
2.5	2.09
3.0	2.43
3.5	2.63
4.0	2.95
4.5	3.27
5.0	3.59
5.5	3.91
6.0	4.23

Table Notes

- (1) The *Total R-Value* calculation only includes the ceiling frame, insulation and ceiling lining. It is not to include the internal air films, roof space or roof lining.
- (2) Minimum ceiling *Total R-Values* are in-situ values. They account for compression of insulation.

Table J3D7t: Metal-framed flat, skillion or cathedral roof — minimum Total R-Value to account for thermal bridging

Ceiling insulation <i>R-Value</i> from Tables J3D7a to J3D7r, and J3D7(1)(f) as applicable	Minimum <i>Total R-Value</i> to account for thermal bridging: heat flow down	Minimum <i>Total R-Value</i> to account for thermal bridging: heat flow up
1.0	1.40	1.32
1.5	1.86	1.78
2.0	2.29	2.21
2.5	2.71	2.63
3.0	3.11	3.02
3.5	3.31	3.22
4.0	3.66	3.57
4.5	3.98	3.90
5.0	4.32	4.22
5.5	4.63	4.53
6.0	4.93	4.82

Table Notes

- (1) Minimum *Total R-Values* are in-situ values. They account for compression of insulation.
- (2) Direction of heat flow must be determined in accordance with [Table J3D7v](#).

Table J3D7u: Metal-framed flat, skillion or cathedral roof – thermal bridging mitigation

Minimum ceiling <i>R-Value</i> from Tables J3D7a to J3D7r, and J3D7(1)(f) as applicable	Option 1– increase insulation between roof frame members to specified minimum <i>R-Value</i>	Option 2 – add a layer of continuous insulation with specified minimum <i>R-Value</i> above or below the roof frame members
1.0	1.5	0.13
1.5	2.5	0.30
2.0	3.5	0.30
2.5	5.0	0.40
3.0	6.0	0.60
3.5	X	0.60
4.0	X	0.60
4.5	X	0.60
5.0	X	0.60
5.5	X	0.60
6.0	X	0.60

Table Notes

- (1) Minimum *R-Values* are in-situ values. They account for compression of insulation.
- (2) X= not permitted.

Table J3D7v: Direction of heat flow

Climate zone	Direction of heat flow
1	Down
2 – altitude less than 300 m	Down
2 – altitude 300 m or more	Down and up
3	Down and up
4	Up
5	Up
6	Up
7	Up
8	Up

Table J3D7w: Adjusted minimum R-Value of ceiling insulation required to compensate for loss of ceiling insulation area

Percentage of ceiling area uninsulated	Minimum <i>R-Value</i> of ceiling insulation <i>required</i> to satisfy J3D7(1) and J3D7(3)									
	1.0	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
0.5% to less than 1.0%	1.0	1.6	2.2	2.8	3.4	4.0	4.7	5.4	6.2	6.9
1.0% to less than 1.5%	1.1	1.7	2.3	2.9	3.6	4.4	5.2	6.1	7.0	X
1.5% to less than 2.0%	1.1	1.7	2.4	3.1	3.9	4.8	5.8	6.8	X	X
2.0% to less than 2.5%	1.1	1.8	2.5	3.3	4.2	5.3	6.5	X	X	X
2.5% to less than 3.0%	1.2	1.9	2.6	3.6	4.6	5.9	X	X	X	X
3.0% to less than 4.0%	1.2	2.0	3.0	4.2	5.7	X	X	X	X	X
4.0% to less than 5.0%	1.3	2.2	3.4	5.0	X	X	X	X	X	X

Table Notes

- (1) Interpolation is allowed for values between those shown.
- (2) X = not permitted.

Table J3D7x: Total R-Values for roofs constructed with insulated sandwich panels

<i>Climate zone</i>	SA ≤ 0.23	SA > 0.23 to ≤ 0.32	SA > 0.32 to ≤ 0.42	SA > 0.42 to ≤ 0.53	SA > 0.53 to ≤ 0.64	SA > 0.64 to ≤ 0.73	SA > 0.73 to ≤ 0.85	SA > 0.85
1	1.86	3.31	4.32	X	X	X	X	X
2 – heat flow down	3.11	3.11	3.31	3.66	3.66	X	X	X
2 – heat flow up	3.02	3.02	3.22	3.57	3.57	X	X	X
3 – heat flow down	3.31	3.66	4.32	X	X	X	X	X
3 – heat flow up	3.22	3.57	4.22	X	X	X	X	X
4	3.22	3.22	3.22	3.22	3.22	X	X	X
5	3.02	3.02	3.02	3.02	3.02	X	X	X
6	3.57	3.57	3.57	3.57	3.57	3.57	3.57	3.57
7	4.22	3.90	3.90	3.57	3.57	3.22	3.22	3.22
8	3.90	3.57	3.57	3.22	3.22	3.02	3.02	3.02

Table Notes

- (1) SA = solar absorptance.
- (2) Direction of heat flow must be determined in accordance with [Table J3D7v](#).
- (3) X = not permitted.

NSW J3D8

J3D8 External walls of a Class 4 part of a building

- (1) The *Total R-Value* of an *external wall*—
 - (a) in *climate zones* 1, 2, 3, 5 and 6—
 - (i) where the ratio of the area of opaque *external walls* to the *floor area* of the *sole-occupancy unit* is less than 20%, must be at least R1.15; and
 - (ii) where the ratio of the area of opaque *external walls* to the *floor area* of the *sole-occupancy unit* is greater than or equal to 20% but less than 35%, must be at least R2.04; and
 - (iii) where the ratio of the area of opaque *external walls* to the *floor area* of the *sole-occupancy unit* is greater than or equal to 35%, must be at least R2.24; and
 - (b) in *climate zones* 4, 7 and 8, must be at least R2.24.
- (2) The *Total R-Value* of an *external wall* must be determined in accordance with—
 - (a) for a spandrel panel in a curtain wall system, in accordance with [Specification 38](#); and
 - (b) for all other walls, in accordance with AS/NZS 4859.2.
- (3) The solar absorptance of an *external wall* must—
 - (a) in *climate zones* 1 to 6, be in accordance with [Table J3D8a](#); and
 - (b) in *climate zones* 7 and 8, be in accordance with [Table J3D8b](#).

Table J3D8a: Solar absorptance – climate zones 1 to 6

Climate zone	Opaque external wall to net floor area ratio	Permitted solar absorptance
1 and 3	< 45%	≤ 0.8
	≥ 45%	≤ 0.35
2	< 35%	Any
	≥ 35%	Any, or ≤ 0.35, if shading device overhang is < 300 mm
4 and 5	< 45%	Any
	≥ 45%	≤ 0.35, if shading device overhang is < 1500 mm
6	Any	Any

Table J3D8b: Solar absorptance – climate zones 7 and 8

Opaque external wall to net floor area ratio	Shading device overhang (mm)			
	≥ 0 to < 600	≥ 600 to < 900	≥ 900 to < 1200	≥ 1200
< 20%	Any	Any	≥ 0.4	X
≥ 20% to < 35%	Any	Any	X	X
≥ 35% to < 45%	Any	≥ 0.4	X	X
≥ 45%	Any	≥ 0.6	X	X

Table Notes

X = not permitted

NSW J3D9

J3D9 Wall-glazing construction of a Class 4 part of a building

- (1) The *Total System U-Value* of *wall-glazing construction* that forms part of the external building *fabric* must not be greater than—
 - (a) in *climate zones* 1 to 5, U2.2; or
 - (b) in *climate zone* 6, U2.0; or
 - (c) in *climate zones* 7 and 8, U1.4.
- (2) The *Total System U-Value* of *wall-glazing construction* that forms part of the external building *fabric* must be calculated in accordance with *Specification 37*.
- (3) Wall components of *wall-glazing construction* must achieve a minimum *Total R-Value* of—
 - (a) where the wall is less than 80% of the area of the *wall-glazing construction*, R1.0; or
 - (b) where the wall is 80% or more of the area of the *wall-glazing construction*, the value specified in *Table J4D6b* for a Class 3 building.
- (4) In *climate zones* 1 to 6, the *solar admittance* of externally facing *wall-glazing construction* must be not greater than that shown in *Table J3D9*.
- (5) In *climate zones* 7 and 8, *glazing* in a *wall-glazing construction* must have a *Total System SHGC* of at least 0.4.
- (6) The *solar admittance* of a *wall-glazing construction* must be calculated in accordance with *Specification 37* as for a Class 3 building as *required*.
- (7) The solar absorptance of an *external wall* must be in accordance with J3D8(3).

Table J3D9: Maximum wall-glazing construction solar admittance

<i>Climate zone</i>	<i>Eastern aspect solar admittance</i>	<i>Northern aspect solar admittance</i>	<i>Southern aspect solar admittance</i>	<i>Western aspect solar admittance</i>
1	0.10	0.10	0.14	0.10
2	0.10	0.10	0.10	0.10
3	0.11	0.11	0.11	0.11
4	0.11	0.11	0.11	0.11
5	0.13	0.13	0.13	0.13
6	0.14	0.14	0.14	0.14
7	N/A	N/A	N/A	N/A
8	N/A	N/A	N/A	N/A

J3D10 Floors of a Class 4 part of a building

NSW J3D10(1)

- (1) Where a Class 4 part of a building has a concrete floor above an unenclosed *carpark*, undercroft or the like, underfloor insulation must be installed with an *R-Value* at least—
- (a) in *climate zone* 2 and *climate zones* 5 to 8, R2.0; and
 - (b) in *climate zones* 3 and 4, R1.5.

NSW J3D10(2)

- (2) Where a Class 4 part of a building has a concrete floor above an enclosed *carpark*, undercroft or the like, underfloor insulation must be installed with an *R-Value* at least—
- (a) in *climate zone* 2, R0.5; and
 - (b) in *climate zones* 4 and 5, R1.0; and
 - (c) in *climate zone* 6, R1.5; and
 - (d) in *climate zones* 7 and 8, R2.0.
- (3) A concrete slab-on-ground, including a waffle-pod slab, with an in-slab or in-screed heating or cooling system must have insulation with an *R-Value* at least 1.0 installed around the vertical edge of its perimeter.

NSW J3D10(4)

- (4) A concrete slab-on-ground, other than a waffle-pod slab, must be insulated in accordance with the following:
- (a) In *climate zones* 6 and 7—
 - (i) insulation with an *R-Value* of at least 0.64 must be installed around the vertical edge of its perimeter; and
 - (ii) insulation with an *R-Value* of at least 0.64 must be installed underneath the slab.
 - (b) In *climate zone* 8—
 - (i) insulation with an *R-Value* of at least 1.0 must be installed around the vertical edge of its perimeter; and
 - (ii) insulation with an *R-Value* of at least 2.0 must be installed underneath the slab.
- (5) Insulation *required* by (3), (4)(a)(i) and (4)(b)(i) must—
- (a) be *water resistant*; and
 - (b) be continuous from the adjacent finished ground level—
 - (i) to a depth of not less than 300 mm; or
 - (ii) for at least the full depth of the vertical edge of the concrete slab-on-ground.
- (6) The requirements of (3) do not apply to an in-screed heating or cooling system used solely in a bathroom, amenity area or the like.

J3D11

External winter glazing of a Class 4 part of a building

(1) In *climate zones* 2 to 8, the ratio of the conductance (C_U) and solar heat gain (C_{SHGC}) of the *glazing* of each *storey*, including any *mezzanine*, of a Class 4 part of a building must—

- (a) not exceed the allowance obtained from Table J3D11a; and
- (b) be calculated in accordance with the following formula:

$$\frac{[(A_1 \times U_1 \times BC_1 \times OC_1 \times R_{W1}) + (A_2 \times U_2 \times BC_2 \times OC_2 \times R_{W2}) + \dots]}{[(A_1 \times SHGC_1 \times E_{W1} \times BS_{W1} \times F_{W1} \times H_{W1} \times R_{W1}) + (A_2 \times SHGC_2 \times E_{W2} \times BS_{W2} \times F_{W2} \times H_{W2} \times R_{W2}) + \dots]}$$

(2) In the formula at (1)(b)—

- (a) $A_{1,2,etc}$ = the area of each *glazing* element; and
- (b) $U_{1,2,etc}$ = the *Total System U-Value* of each *glazing* element; and
- (c) $SHGC_{1,2,etc}$ = the *Total System SHGC* for each *glazing* element, not exceeding 0.7; and
- (d) $E_{W1,2,etc}$ = the winter exposure factor for each *glazing* element obtained from Table J3D11b, J3D11c, J3D11d, J3D11e, J3D11f or J3D11g; and
- (e) $BC_{1,2,etc}$ = the bedroom conductance factor obtained from Table J3D11h, J3D11i, J3D11j, J3D11k, J3D11l or J3D11m; and
- (f) $OC_{1,2,etc}$ = the orientation sector conductance factor obtained from Table J3D11n; and
- (g) $R_{W1,2,etc}$ = the room type factor obtained from Table J3D11h, J3D11i, J3D11j, J3D11k, J3D11l or J3D11m; and
- (h) $BS_{W1,2,etc}$ = the bedroom solar heat gain factor obtained from Table J3D11h, J3D11i, J3D11j, J3D11k, J3D11l or J3D11m; and
- (i) $F_{W1,2,etc}$ = the frame factor obtained from Table J3D11o, J3D11p, J3D11q, J3D11r, J3D11s or J3D11t for each *glazing* element; and
- (j) $H_{W1,2,etc}$ = the floor factor obtained from Table J3D11h, J3D11i, J3D11j, J3D11k, J3D11l or J3D11m for each *glazing* element.

(3) For the purpose of J3D11—

- (a) orientation sectors must be determined in accordance with Figure 13.3.2a of the ABCB Housing Provisions; and
- (b) P/H must be determined in accordance with Figure S37C7a; and
- (c) For P/H between those in Tables J3D11b, J3D11c, J3D11d, J3D11e, J3D11f and J3D11g, either use the next highest P/H or interpolate.

Table J3D11a: Maximum conductance to solar heat gain ratio (C_U/C_{SHGC})

Climate zone	Maximum conductance to solar heat gain ratio (C_U/C_{SHGC})
2	16.95
3	19.88
4	13.34
5	11.83
6	6.27
7	12.90
8	12.90

Table J3D11b: Orientation sector winter exposure factor (E_w): climate zone 2

P/H	North	North east	East	South east	South	South west	West	North west
0.00	1.49	1.61	1.23	0.96	0.68	1.03	1.37	1.71
0.05	1.44	1.53	1.14	0.81	0.57	0.90	1.27	1.64
0.10	1.38	1.48	1.09	0.76	0.53	0.85	1.22	1.55
0.20	1.21	1.32	0.97	0.69	0.50	0.75	1.10	1.39
0.40	1.00	1.06	0.77	0.57	0.42	0.63	0.92	1.14
0.60	0.83	0.87	0.69	0.50	0.37	0.55	0.77	0.96
0.80	0.62	0.69	0.56	0.43	0.35	0.50	0.66	0.79
1.00	0.43	0.59	0.46	0.41	0.33	0.43	0.56	0.65
1.20	0.26	0.47	0.40	0.36	0.31	0.40	0.53	0.53
1.40	0.22	0.40	0.33	0.33	0.29	0.38	0.47	0.44
1.60	0.18	0.32	0.31	0.33	0.28	0.35	0.39	0.39
1.80	0.15	0.28	0.27	0.31	0.26	0.33	0.35	0.32
2.00	0.12	0.21	0.24	0.29	0.26	0.33	0.33	0.31

Table J3D11c: Orientation sector winter exposure factor (E_w): climate zone 3

P/H	North	North east	East	South east	South	South west	West	North west
0.00	0.90	1.10	0.88	0.69	0.50	0.58	0.67	0.91
0.05	0.89	1.06	0.82	0.60	0.44	0.51	0.64	0.89
0.10	0.83	1.01	0.78	0.58	0.42	0.49	0.61	0.84
0.20	0.74	0.90	0.70	0.52	0.40	0.44	0.55	0.76
0.40	0.59	0.74	0.60	0.43	0.36	0.37	0.47	0.63
0.60	0.44	0.57	0.48	0.39	0.34	0.32	0.38	0.51
0.80	0.30	0.45	0.43	0.34	0.30	0.30	0.32	0.41
1.00	0.20	0.38	0.35	0.30	0.28	0.28	0.29	0.33
1.20	0.14	0.29	0.31	0.28	0.28	0.25	0.24	0.28
1.40	0.11	0.26	0.25	0.26	0.26	0.23	0.21	0.24
1.60	0.08	0.23	0.24	0.24	0.24	0.21	0.20	0.20
1.80	0.07	0.16	0.19	0.24	0.24	0.19	0.17	0.18
2.00	0.06	0.16	0.18	0.21	0.24	0.19	0.15	0.16

Table J3D11d: Orientation sector winter exposure factor (E_w): climate zone 4

P/H	North	North east	East	South east	South	South west	West	North west
0.00	1.58	1.66	1.16	0.93	0.70	0.78	0.85	1.38
0.05	1.54	1.60	1.06	0.79	0.58	0.66	0.79	1.32
0.10	1.53	1.54	1.04	0.74	0.56	0.62	0.75	1.28
0.20	1.30	1.41	0.94	0.67	0.50	0.56	0.68	1.15
0.40	1.18	1.20	0.78	0.57	0.44	0.48	0.58	0.99
0.60	0.98	0.99	0.69	0.50	0.38	0.42	0.49	0.81
0.80	0.85	0.81	0.60	0.45	0.36	0.38	0.44	0.68
1.00	0.68	0.73	0.52	0.41	0.32	0.34	0.37	0.58
1.20	0.49	0.56	0.46	0.36	0.32	0.32	0.34	0.50
1.40	0.38	0.52	0.42	0.33	0.30	0.30	0.30	0.42

P/H	North	North east	East	South east	South	South west	West	North west
1.60	0.27	0.45	0.39	0.33	0.28	0.28	0.26	0.37
1.80	0.21	0.39	0.35	0.31	0.28	0.26	0.24	0.32
2.00	0.19	0.35	0.31	0.29	0.26	0.24	0.22	0.26

Table J3D11e: Orientation sector winter exposure factor (E_w): climate zone 5

P/H	North	North east	East	South east	South	South west	West	North west
0.00	1.61	1.34	1.08	0.87	0.67	0.76	0.85	1.23
0.05	1.56	1.29	0.98	0.74	0.56	0.64	0.78	1.17
0.10	1.56	1.23	0.92	0.69	0.54	0.62	0.75	1.14
0.20	1.30	1.10	0.83	0.63	0.49	0.54	0.67	1.03
0.40	1.19	0.91	0.69	0.54	0.41	0.47	0.55	0.86
0.60	0.97	0.75	0.56	0.47	0.38	0.41	0.47	0.70
0.80	0.78	0.62	0.49	0.42	0.34	0.37	0.42	0.57
1.00	0.64	0.47	0.39	0.38	0.32	0.33	0.36	0.49
1.20	0.43	0.42	0.35	0.36	0.31	0.31	0.29	0.39
1.40	0.32	0.31	0.29	0.34	0.29	0.29	0.28	0.33
1.60	0.22	0.27	0.27	0.31	0.25	0.25	0.23	0.28
1.80	0.18	0.23	0.22	0.29	0.25	0.25	0.20	0.25
2.00	0.14	0.17	0.21	0.27	0.25	0.23	0.19	0.19

Table J3D11f: Orientation sector winter exposure factor (E_w): climate zone 6

P/H	North	North east	East	South east	South	South west	West	North west
0.00	3.04	2.50	1.52	1.51	1.51	1.63	1.76	2.75
0.05	2.94	2.36	1.39	1.28	1.26	1.38	1.62	2.61
0.10	2.91	2.28	1.33	1.21	1.19	1.30	1.52	2.55
0.20	2.50	2.05	1.18	1.08	1.05	1.16	1.40	2.34
0.40	2.29	1.77	1.01	0.91	0.91	0.98	1.20	1.98
0.60	1.95	1.51	0.86	0.77	0.81	0.83	1.04	1.71
0.80	1.73	1.28	0.72	0.71	0.74	0.80	0.92	1.42
1.00	1.38	1.02	0.65	0.64	0.67	0.69	0.78	1.24
1.20	1.12	0.95	0.55	0.61	0.60	0.65	0.72	1.04
1.40	0.85	0.72	0.49	0.54	0.60	0.62	0.64	0.93
1.60	0.70	0.65	0.42	0.50	0.56	0.54	0.56	0.79
1.80	0.51	0.53	0.40	0.47	0.53	0.51	0.54	0.72
2.00	0.40	0.47	0.38	0.44	0.49	0.51	0.48	0.58

Table J3D11g: Orientation sector winter exposure factor (E_w): climate zones 7 and 8

P/H	North	North east	East	South east	South	South west	West	North west
0.00	1.66	1.53	0.90	0.82	0.74	0.78	0.83	1.43
0.05	1.61	1.47	0.83	0.69	0.61	0.66	0.76	1.37
0.10	1.61	1.44	0.79	0.64	0.59	0.62	0.73	1.34
0.20	1.51	1.34	0.73	0.58	0.53	0.55	0.66	1.22
0.40	1.30	1.17	0.63	0.49	0.44	0.47	0.55	1.07

P/H	North	North east	East	South east	South	South west	West	North west
0.60	1.19	1.02	0.54	0.43	0.40	0.41	0.48	0.91
0.80	1.02	0.88	0.48	0.39	0.36	0.37	0.43	0.79
1.00	0.93	0.78	0.44	0.34	0.34	0.33	0.37	0.67
1.20	0.73	0.66	0.37	0.32	0.32	0.31	0.33	0.60
1.40	0.66	0.64	0.36	0.30	0.29	0.29	0.30	0.46
1.60	0.51	0.46	0.32	0.28	0.27	0.25	0.28	0.43
1.80	0.42	0.44	0.26	0.26	0.27	0.25	0.25	0.37
2.00	0.31	0.37	0.26	0.24	0.25	0.25	0.22	0.31

Table J3D11h: Conductance and radiation factors: climate zone 2

Type of factor	Factor
Bedroom conduction weighting factor (BC)	0.43
Room type multiplier (for bedroom and unconditioned areas) (R_w)	1.00
Bedroom solar heat gain weighting factor (BS_w)	0.40
Floor factor for tiled or vinyl covered floors (H_w)	1.02
Floor factor for other than tiled or vinyl covered floors (H_w)	0.96

Table J3D11i: Conductance and radiation factors: climate zone 3

Type of factor	Factor
Bedroom conduction weighting factor (BC)	0.42
Room type multiplier (for bedroom and unconditioned areas) (R_w)	1.00
Bedroom solar heat gain weighting factor (BS_w)	1.28
Floor factor for tiled or vinyl covered floors (H_w)	1.02
Floor factor for other than tiled or vinyl covered floors (H_w)	0.97

Table J3D11j: Conductance and radiation factors: climate zone 4

Type of factor	Factor
Bedroom conduction weighting factor (BC)	0.70
Room type multiplier (for bedroom and unconditioned areas) (R_w)	1.00
Bedroom solar heat gain weighting factor (BS_w)	0.60
Floor factor for tiled or vinyl covered floors (H_w)	1.04
Floor factor for other than tiled or vinyl covered floors (H_w)	0.92

Table J3D11k: Conductance and radiation factors: climate zone 5

Type of factor	Factor
Bedroom conduction weighting factor (BC)	0.63
Room type multiplier (for bedroom and unconditioned areas) (R_w)	1.10

Type of factor	Factor
Bedroom solar heat gain weighting factor (BS_W)	0.81
Floor factor for tiled or vinyl covered floors (H_W)	1.03
Floor factor for other than tiled or vinyl covered floors (H_W)	0.93

Table J3D11l: Conductance and radiation factors: climate zone 6

Type of factor	Factor
Bedroom conduction weighting factor (BC)	0.81
Room type multiplier (for bedroom and unconditioned areas) (R_W)	1.00
Bedroom solar heat gain weighting factor (BS_W)	0.65
Floor factor for tiled or vinyl covered floors (H_W)	1.02
Floor factor for other than tiled or vinyl covered floors (H_W)	0.98

Table J3D11m: Conductance and radiation factors: climate zones 7 and 8

Type of factor	Factor
Bedroom conduction weighting factor (BC)	0.60
Room type multiplier (for bedroom and unconditioned areas) (R_W)	1.00
Bedroom solar heat gain weighting factor (BS_W)	0.51
Floor factor for tiled or vinyl covered floors (H_W)	1.03
Floor factor for other than tiled or vinyl covered floors (H_W)	0.93

Table J3D11n: Orientation sector conductance factor (OC)

Climate zone	North	North east	East	South east	South	South west	West	North west
2	1.70	1.34	0.98	0.84	0.70	0.90	1.10	1.40
3	1.30	1.10	0.90	0.95	1.00	0.95	0.90	1.10
4	1.30	1.25	1.20	1.03	0.85	0.92	0.99	1.15
5	1.20	1.15	1.10	1.05	1.00	1.05	1.10	1.15
6	1.23	1.13	1.00	1.00	1.02	1.00	1.00	1.16
7 and 8	1.40	1.25	1.10	1.00	0.90	0.95	1.00	1.20

Table J3D11o: Frame factor (F_W) — climate zone 2

Frame solar absorptance	Factor
≤ 0.40	0.97
> 0.40 to < 0.68	1.00
≥ 0.68	1.08

Table Notes

Interpolation is allowed for values between those shown.

Table J3D11p: Frame factor (F_w) — climate zone 3

Frame solar absorptance	Factor
≤ 0.40	0.98
> 0.40 to < 0.68	1.00
≥ 0.68	1.05

Table Notes

Interpolation is allowed for values between those shown.

Table J3D11q: Frame factor (F_w) — climate zone 4

Frame solar absorptance	Factor
≤ 0.40	0.99
> 0.40 to < 0.68	1.00
≥ 0.68	1.01

Table Notes

Interpolation is allowed for values between those shown.

Table J3D11r: Frame factor (F_w) — climate zone 5

Frame solar absorptance	Factor
≤ 0.40	1.00
> 0.40 to < 0.68	1.00
≥ 0.68	1.01

Table Notes

Interpolation is allowed for values between those shown.

Table J3D11s: Frame factor (F_w) — climate zone 6

Frame solar absorptance	Factor
≤ 0.40	0.92
> 0.40 to < 0.68	1.00
≥ 0.68	1.13

Table Notes

Interpolation is allowed for values between those shown.

Table J3D11t: Frame factor (F_w) — climate zones 7 and 8

Frame solar absorptance	Factor
≤ 0.40	0.97
> 0.40 to < 0.68	1.00
≥ 0.68	1.01

Table Notes

Interpolation is allowed for values between those shown.

J3D12

External summer glazing of a Class 4 part of a building

(1) In *climate zones* 1 to 7, the aggregate solar heat gain of the *glazing* in each *storey*, including any *mezzanine*, of a Class 4 part of a building must—

- (a) not exceed the allowance resulting from multiplying the *floor area* of the *storey*, including any *mezzanine*, measured within the enclosing walls, by the constant C_{SHGC} obtained from Table J3D12a; and
- (b) be calculated in accordance with the following formula:

$$(A_1 \times SHGC_1 \times E_{S1} \times R_{S1} \times F_{S1} \times H_{S1}) + (A_2 \times SHGC_2 \times E_{S2} \times R_{S2} \times F_{S2} \times H_{S2}) + \dots$$

(2) In the formula at (1)(b)—

- (a) $A_{1,2,etc}$ = the area of each *glazing* element; and
- (b) $SHGC_{1,2,etc}$ = the *Total System SHGC* for each *glazing* element, not exceeding 0.7; and
- (c) $E_{S1,2,etc}$ = the summer exposure factor for each *glazing* element obtained from Table J3D12b, J3D12c, J3D12d, J3D12e, J3D12f, J3D12g or J3D12h.
- (d) $R_{S1,2,etc}$ = the factor obtained from Table J3D12i or Table J3D12j for each *glazing* element located in a bedroom or room which is not a *conditioned space*; and
- (e) $F_{S1,2,etc}$ = the frame factor obtained from Table J3D12i or Table J3D12j for *glazing* element; and
- (f) $H_{S1,2,etc}$ = the floor factor obtained from Table J3D12i or Table J3D12j for each *glazing* element.

(3) For the purpose of J3D12—

- (a) orientation sectors must be determined in accordance with Figure 13.3.2a of the ABCB Housing Provisions; and
- (b) P/H must be determined in accordance with Figure S37C7a; and
- (c) for P/H between those shown in Tables J3D12b, J3D12c, J3D12d, J3D12e, J3D12f, J3D12g, J3D12h, J3D12i and J3D12j, either use the next highest P/H or interpolate.

Table J3D12a: Constant for Solar Heat Gain (C_{SHGC}) — climate zones 1 to 7

% Ventilation opening area per m ²	Climate zone 1	Climate zone 2	Climate zone 3	Climate zone 4	Climate zone 5	Climate zone 6	Climate zone 7
5% to <10%	0.0191	0.0245	0.0547	0.0506	0.0674	0.1472	0.0930
10% to <15%	0.0237	0.0532	0.0745	0.0946	0.1111	0.2969	0.2405
15% to <20%	0.0294	0.0700	0.0861	0.1203	0.1367	0.3845	0.3267
20% to 90%	0.0364	0.0819	0.0943	0.1385	0.1548	0.4466	0.3879

Table Notes

- (1) The *ventilation opening* area is the total area of each *ventilation opening* divided by the *floor area* of the *storey*, including any *mezzanine*.
- (2) No window can have a design *ventilation opening* greater than 90% because the window frame will always obstruct some area of the opening.
- (3) Interpolation is allowed for values between those shown.

Table J3D12b: Orientation sector summer exposure factor (E_s) — climate zone 1

P/H	North	North east	East	South east	South	South west	West	North west
0.00	0.62	0.76	0.79	0.75	0.52	0.89	1.06	0.85
0.05	0.52	0.67	0.73	0.68	0.45	0.82	0.98	0.75
0.10	0.49	0.61	0.68	0.65	0.41	0.76	0.92	0.69
0.20	0.44	0.53	0.62	0.57	0.33	0.66	0.80	0.60
0.40	0.36	0.41	0.48	0.42	0.25	0.53	0.66	0.47
0.60	0.30	0.33	0.40	0.36	0.20	0.42	0.53	0.38
0.80	0.26	0.28	0.32	0.28	0.18	0.36	0.46	0.32
1.00	0.23	0.23	0.27	0.25	0.15	0.30	0.38	0.28
1.20	0.21	0.21	0.23	0.20	0.13	0.27	0.34	0.26
1.40	0.20	0.19	0.20	0.18	0.13	0.22	0.30	0.22
1.60	0.18	0.16	0.17	0.16	0.11	0.20	0.27	0.21
1.80	0.15	0.16	0.16	0.13	0.10	0.20	0.24	0.18
2.00	0.14	0.15	0.14	0.13	0.10	0.17	0.22	0.17

Table J3D12c: Orientation sector summer exposure factor (E_s) — climate zone 2

P/H	North	North east	East	South east	South	South west	West	North west
0.00	0.65	1.16	1.59	1.20	0.73	1.30	1.77	1.23
0.05	0.54	1.01	1.43	1.06	0.61	1.18	1.62	1.10
0.10	0.50	0.94	1.35	0.99	0.58	1.10	1.50	1.00
0.20	0.42	0.81	1.20	0.88	0.51	0.98	1.32	0.87
0.40	0.35	0.62	0.95	0.70	0.40	0.78	1.10	0.67
0.60	0.30	0.48	0.78	0.57	0.33	0.64	0.88	0.50
0.80	0.26	0.41	0.65	0.47	0.29	0.54	0.77	0.43
1.00	0.23	0.33	0.56	0.40	0.24	0.47	0.62	0.36
1.20	0.21	0.30	0.46	0.35	0.22	0.40	0.54	0.31
1.40	0.19	0.26	0.42	0.32	0.21	0.35	0.48	0.27
1.60	0.17	0.25	0.36	0.29	0.19	0.31	0.41	0.24
1.80	0.15	0.22	0.31	0.25	0.17	0.30	0.37	0.22
2.00	0.15	0.21	0.29	0.24	0.16	0.26	0.36	0.21

Table J3D12d: Orientation sector summer exposure factor (E_s) — climate zone 3

P/H	North	North east	East	South east	South	South west	West	North west
0.00	0.80	1.26	1.41	1.38	0.89	1.33	1.29	1.20
0.05	0.67	1.14	1.31	1.26	0.77	1.21	1.20	1.07
0.10	0.63	1.03	1.24	1.19	0.73	1.14	1.13	0.99
0.20	0.54	0.88	1.09	1.05	0.62	1.00	1.01	0.87
0.40	0.46	0.68	0.87	0.83	0.51	0.83	0.80	0.67
0.60	0.40	0.52	0.73	0.68	0.42	0.66	0.67	0.52
0.80	0.34	0.42	0.58	0.55	0.36	0.58	0.57	0.42
1.00	0.29	0.35	0.50	0.47	0.32	0.49	0.50	0.35
1.20	0.27	0.31	0.42	0.40	0.28	0.43	0.41	0.31
1.40	0.24	0.27	0.35	0.36	0.27	0.37	0.39	0.27

P/H	North	North east	East	South east	South	South west	West	North west
1.60	0.24	0.24	0.33	0.32	0.22	0.36	0.33	0.25
1.80	0.21	0.23	0.30	0.28	0.22	0.32	0.31	0.23
2.00	0.21	0.22	0.25	0.28	0.20	0.28	0.26	0.20

Table J3D12e: Orientation sector summer exposure factor (E_s) — climate zone 4

P/H	North	North east	East	South east	South	South west	West	North west
0.00	0.79	1.13	1.12	1.05	0.68	1.14	1.44	1.23
0.05	0.67	1.05	1.05	0.97	0.59	1.05	1.34	1.12
0.10	0.62	0.95	0.99	0.91	0.55	0.98	1.29	1.03
0.20	0.47	0.83	0.90	0.82	0.49	0.87	1.16	0.89
0.40	0.33	0.63	0.74	0.67	0.41	0.71	0.94	0.68
0.60	0.30	0.48	0.59	0.56	0.35	0.61	0.79	0.50
0.80	0.26	0.36	0.50	0.49	0.30	0.52	0.65	0.40
1.00	0.22	0.29	0.44	0.42	0.26	0.45	0.56	0.33
1.20	0.21	0.25	0.37	0.37	0.24	0.40	0.50	0.28
1.40	0.18	0.22	0.31	0.34	0.20	0.38	0.42	0.23
1.60	0.18	0.19	0.30	0.30	0.19	0.33	0.36	0.22
1.80	0.15	0.17	0.26	0.27	0.17	0.29	0.35	0.19
2.00	0.14	0.16	0.22	0.23	0.17	0.28	0.29	0.18

Table J3D12f: Orientation sector summer exposure factor (E_s) — climate zone 5

P/H	North	North east	East	South east	South	South west	West	North west
0.00	0.82	1.20	1.31	1.06	0.82	1.04	1.30	1.16
0.05	0.69	1.06	1.18	0.94	0.68	0.92	1.19	1.04
0.10	0.63	0.97	1.11	0.87	0.65	0.86	1.11	0.94
0.20	0.51	0.84	0.98	0.77	0.58	0.76	0.99	0.83
0.40	0.39	0.64	0.78	0.63	0.46	0.62	0.81	0.62
0.60	0.35	0.51	0.64	0.52	0.40	0.51	0.65	0.48
0.80	0.30	0.41	0.55	0.44	0.34	0.43	0.52	0.40
1.00	0.26	0.34	0.46	0.37	0.30	0.37	0.46	0.31
1.20	0.24	0.29	0.40	0.33	0.26	0.33	0.40	0.27
1.40	0.21	0.25	0.35	0.30	0.24	0.29	0.34	0.24
1.60	0.20	0.24	0.32	0.25	0.22	0.27	0.30	0.21
1.80	0.18	0.22	0.28	0.23	0.20	0.23	0.27	0.20
2.00	0.17	0.19	0.26	0.23	0.19	0.21	0.25	0.19

Table J3D12g: Orientation sector summer exposure factor (E_s) — climate zone 6

P/H	North	North east	East	South east	South	South west	West	North west
0.00	2.18	2.75	2.88	2.22	1.59	2.46	2.91	2.90
0.05	1.85	2.47	2.63	1.99	1.35	2.25	2.70	2.64
0.10	1.69	2.30	2.48	1.89	1.27	2.13	2.60	2.43
0.20	1.35	1.96	2.20	1.66	1.14	1.92	2.33	2.13
0.40	0.94	1.48	1.78	1.38	0.94	1.57	1.87	1.61

P/H	North	North east	East	South east	South	South west	West	North west
0.60	0.78	1.10	1.53	1.15	0.81	1.36	1.58	1.19
0.80	0.68	0.89	1.25	0.97	0.68	1.17	1.37	0.94
1.00	0.57	0.74	1.05	0.82	0.60	0.98	1.16	0.84
1.20	0.52	0.61	0.93	0.74	0.60	0.91	1.00	0.68
1.40	0.47	0.56	0.80	0.66	0.49	0.80	0.87	0.61
1.60	0.42	0.48	0.70	0.61	0.47	0.73	0.79	0.49
1.80	0.39	0.46	0.65	0.56	0.44	0.66	0.71	0.47
2.00	0.36	0.43	0.60	0.54	0.44	0.61	0.64	0.40

Table J3D12h: Orientation sector summer exposure factor (E_s) — climate zone 7

P/H	North	North east	East	South east	South	South west	West	North west
0.00	0.89	1.06	1.06	0.93	0.70	0.91	1.06	1.07
0.05	0.77	0.95	0.97	0.82	0.59	0.81	0.97	0.97
0.10	0.71	0.88	0.92	0.79	0.56	0.76	0.92	0.89
0.20	0.58	0.77	0.82	0.69	0.50	0.68	0.81	0.78
0.40	0.37	0.59	0.67	0.57	0.42	0.55	0.66	0.58
0.60	0.30	0.46	0.57	0.50	0.36	0.47	0.56	0.46
0.80	0.26	0.36	0.48	0.44	0.31	0.41	0.47	0.36
1.00	0.23	0.30	0.42	0.37	0.28	0.35	0.39	0.29
1.20	0.20	0.25	0.36	0.34	0.25	0.31	0.34	0.25
1.40	0.18	0.21	0.32	0.30	0.23	0.28	0.29	0.22
1.60	0.17	0.19	0.29	0.27	0.22	0.26	0.28	0.19
1.80	0.16	0.18	0.25	0.24	0.20	0.24	0.24	0.17
2.00	0.15	0.17	0.24	0.23	0.20	0.21	0.22	0.16

Table J3D12i: Conductance factors — climate zone 1

Factor	Value
Room type multiplier (for bedroom and unconditioned areas) (R_s)	0.32
Frame solar absorptance multiplier Frame SA = 0.3 up to 0.4 (F_s)	0.83
Frame solar absorptance multiplier Frame SA = 0.4 up to 0.5 (F_s)	1.00
Frame solar absorptance multiplier Frame SA = 0.5 or more (F_s)	1.20
Floor factor for tiled or vinyl covered floors (H_s)	1.00
Floor factor for other than tiled or vinyl covered floors (H_s)	1.00

Table J3D12j: Conductance factors — climate zones 2 to 7

Type of factor	Climate zone 2	Climate zone 3	Climate zone 4	Climate zone 5	Climate zone 6	Climate zone 7
Room type multiplier (for bedroom and unconditioned areas) (R_s)	0.40	0.56	0.71	0.91	0.87	1.11
Frame solar absorptance multiplier (for metal frame windows) (F_s) $SA \leq 0.40$	1.00	0.89	0.87	0.85	0.74	0.86
Frame solar absorptance multiplier (for metal frame windows) (F_s) $SA > 0.40$ to < 0.68	1.06	1.00	1.00	1.00	1.00	1.00
Frame solar absorptance multiplier (for metal frame windows) (F_s) $SA \geq 0.68$	1.22	1.18	1.22	1.24	1.22	1.32
Floor factor for tiled or vinyl covered floors (H_s)	1.06	1.06	1.13	1.13	1.04	1.21
Floor factor for other than tiled or vinyl covered floors (H_s)	0.97	0.97	0.94	0.94	0.94	0.90

Table Notes

Interpolation is allowed for values between those shown.

NSW J3D13

J3D13 Shading of a Class 4 part of a building

Where shading is *required* to comply with J3D11 or J3D12, it must—

- (a) be provided by an external permanent projection, such as a verandah, balcony, fixed canopy, eaves, shading hood or carport, which—
 - (i) extends horizontally on both sides of the *glazing* for a distance greater than or equal to the projection distance P in Figure S37C7a; or
 - (ii) provide the equivalent shading to (i) with a reveal or the like; or
- (b) be provided by an external shading device, such as a shutter, blind, vertical or horizontal building screen with blades, battens or slats, which—
 - (i) is capable of restricting at least 80% of the summer solar radiation; and
 - (ii) if adjustable, is readily operated either manually, mechanically or electronically by the building occupants.

J3D14 Net equivalent energy usage of a Class 4 part of a building

- (1) The net equivalent energy usage of a Class 4 part of a building must not exceed the allowance determined in accordance with the following formula:
- (a) $A \times E_F$, where—
- A = the floor area factor obtained from multiplying the total floor area by the adjustment factor in [Table J3D14a](#); and
 - E_F = the energy factor obtained from [Table J3D14b](#).
- (2) For the purposes of (1), the net equivalent energy usage must be calculated—
- where the Class 4 part of a building is served by a dedicated heated water system, in accordance with (3); and
 - where the Class 4 part of a building is served by a centralised heated water system, in accordance with (4).
- (3) The net equivalent energy usage of a Class 4 part of a building served by a dedicated heated water system must be determined in accordance with the following formula: $(A \times E_E) + E_P + E_S - E_R$, where—
- A = the floor area factor obtained from multiplying the total floor area by the adjustment factor in [Table J3D14a](#); and
 - E_E = the [main space conditioning](#) and [main water heater](#) efficiency factor obtained from the ABCB Standard for Whole-of-Home Efficiency Factors; and
 - E_P = the [swimming pool](#) pump energy usage in (5); and
 - E_S = the spa pump energy in (6); and
 - E_R = the installed capacity of a on-site photovoltaics apportioned to the Class 4 part of a building (kW); and
- (4) The net equivalent energy usage of a Class 4 part of a building served by a centralised heated water system must be determined in accordance with the following formula: $(A \times E_E) + E_P + E_S + E_C - E_R - E_{RC}$, where—
- A = the floor area factor obtained from multiplying the total floor area by the adjustment factor in [Table J3D14a](#); and
 - E_E = subject to (7), the [main space conditioning](#) and [main water heater](#) efficiency factor obtained from the ABCB Standard for Whole-of-Home Efficiency Factors; and
 - E_P = the [swimming pool](#) pump energy usage in (5); and
 - E_S = the spa pump energy usage in (6); and
 - E_C = the centralised heated water system circulating pump energy usage in (8); and
 - E_R = the installed capacity, in kW, of on-site photovoltaics apportioned to the Class 4 part of a building; and
 - E_{RC} = the installed capacity, in kW, of on-site photovoltaics that directly offsets the energy consumption of circulating pumps for a centralised heated water system serving a Class 4 part of a building, where—
 - this value does not exceed circulating pump energy usage (E_C); and
 - the on-site solar photovoltaics are directly connected to the same electrical supply as common area equipment in the building, including the circulating pumps.
- (5) The [swimming pool](#) pump energy usage (E_P) for a [swimming pool](#) dedicated solely to the Class 4 part of a building must be determined in accordance with the following formula: $E_P = V \times FP / 1000$, where—
- E_P = the [swimming pool](#) pump energy usage; and

- (b) v = the volume of the *swimming pool* to the nearest 1000 litres; and
- (c) FP = the *swimming pool* pump factor in Table 13.6.2c of the ABCB Housing Provisions.
- (6) The spa pump energy usage (E_S) must be determined in accordance with the following formula: $E_S = V \times FSB / 100$, where—
- (a) ES = the spa pump energy usage; and
- (b) v = the volume of the spa to the nearest 100 litres; and
- (c) FSB = the spa pump factor in Table 13.6.2d of the ABCB Housing Provisions.
- (7) The *main space conditioning* and *main water heater* efficiency factor for a Class 4 part of a building served by a centralised heated water system must be determined in accordance with the following—
- (a) for other than a solar boosted centralised heated water system, the equivalent water heater used to determine the efficiency factor in the ABCB Standard for Whole-of-Home Efficiency Factors must be determined in accordance with Table J3D14e; and
- (b) for a solar boosted centralised heated water system, the efficiency factors must be determined in accordance with the following formula: $E_E = F_1 \times P_1 + F_2 \times P_2$, where—
- (i) E_E = the *main space conditioning* and *main water heater* efficiency factor; and
- (ii) F_1 = the efficiency factor obtained from the ABCB Standard for Whole-of-Home Efficiency Factors using the equivalent water heater in Table J3D14e; and
- (iii) F_2 = the efficiency factor obtained from the ABCB Standard for Whole-of-Home Efficiency Factors for—
- (A) where the solar boosted centralised heated water system uses heat pump type heating as the auxiliary heating source, a heat pump (standard) water heater; and
- (B) where the solar boosted centralised heated water system uses gas type heating as the auxiliary heating source, a gas storage water heater; and
- (C) for all other types of solar boosted centralised heated water systems, an electric storage (standard) water heater; and
- (iv) P_1 = the solar percentage factor determined in accordance with the following formula: $P_1 = (A_C / A_S) / 0.02$, where—
- (A) P_1 = the solar percentage factor; and
- (B) A_C = the total area in m² of all solar thermal collectors connected to the heated water system; and
- (C) A_S = the total floor area in m² of all *sole-occupancy units* served by the heated water system.
- (v) P_2 = the non-solar percentage factor determined in accordance with the following formula: $P_2 = 1 - P_1$, where—
- (A) P_2 = the non-solar percentage factor; and
- (B) P_1 = the solar percentage factor in (iv); and
- (vi) where the *main space conditioning* and *main water heater* efficiency factor for the heat pump F_2 is less than that of the solar boosted system F_1 then P_1 must be set to 0 and P_2 to 1; and
- (vii) P_1 cannot be greater than 1.0.
- (8) The circulating pump energy usage E_C must be determined in accordance with the following formula: $E_C = L_F \times (C_P + C_S \times N_F)$, where—
- (a) E_C = the circulating pump energy usage; and
- (b) L_F = heated water load factor obtained from Table J3D14c; and

- (c) C_P = the primary circulating pump energy factor obtained from Table J3D14d; and
- (d) C_S = the secondary circulating pump energy factor obtained from Table J3D14d; and
- (e) N_F = the factor for the number of *sole-occupancy units* served determined in accordance with the following formula: $N_F = 0.6 + (\text{number of sole-occupancy units served} - 100) \times 0.00133$; and
- (f) N_F = cannot be greater than 1.0.

Table J3D14a: Floor area adjustment factor for a Class 4 part of a building

Total floor area m ²	Floor area factor	Total floor area m ²	Floor area factor	Total floor area m ²	Floor area factor	Total floor area m ²	Floor area factor
< 50	0.0123	160–169	0.0097	280–289	0.0087	400–409	0.0080
50–59	0.0119	170–179	0.0096	290–299	0.0086	410–419	0.0079
60–69	0.0116	180–189	0.0095	300–309	0.0085	420–429	0.0079
70–79	0.0113	190–199	0.0094	310–319	0.0085	430–439	0.0078
80–89	0.0111	200–209	0.0093	320–329	0.0084	440–449	0.0078
90–99	0.0108	210–219	0.0092	330–339	0.0083	450–459	0.0077
100–109	0.0106	220–229	0.0091	340–349	0.0083	460–469	0.0077
110–119	0.0105	230–239	0.0090	350–359	0.0082	470–479	0.0077
120–129	0.0103	240–249	0.0090	360–369	0.0082	480–489	0.0076
130–139	0.0101	250–259	0.0089	370–379	0.0081	490–499	0.0076
140–149	0.0100	260–269	0.0088	380–389	0.0081	500	0.0075
150–159	0.0099	270–279	0.0087	390–399	0.0080	—	—

Table Notes

- (1) The total floor area is measured within the inside face of the *external walls* of the *sole-occupancy unit* and includes any conditioned attached Class 10a building.
- (2) Where values fall between ranges given, the floor area must be rounded up to the nearest whole square metres of floor area.

Table J3D14b: Energy factor for a Class 4 part of a building

Climate zone	ACT	NSW	NT	QLD	SA	TAS	Vic	WA
1	—	—	2.73	3.95	—	—	—	4.64
2	—	1.88	—	2.54	—	—	—	—
3	—	—	1.76	3.52	—	—	—	4.10
4	—	2.57	—	—	2.65	—	1.79	3.34
5	—	2.50	—	3.26	2.56	—	—	3.36
6	—	3.43	—	—	3.58	—	2.32	4.58
7	3.66	3.32	—	—	—	4.41	2.32	—
8	—	5.70	—	—	—	5.60	4.02	—

Table J3D14c: Heated water load factor for a Class 4 part of a building

Total floor area m ²	Load factor	Total floor area m ²	Load factor	Total floor area m ²	Load factor	Total floor area m ²	Load factor
< 50	0.20	160 - 169	0.48	280 - 289	0.59	400 - 409	0.66
50 - 59	0.22	170 - 179	0.49	290 - 299	0.60	410 - 419	0.67

Total floor area m ²	Load factor	Total floor area m ²	Load factor	Total floor area m ²	Load factor	Total floor area m ²	Load factor
60 - 69	0.25	180 - 189	0.51	300 - 309	0.60	420 - 429	0.67
70 - 79	0.28	190 - 199	0.52	310 - 319	0.61	430 - 439	0.68
80 - 89	0.31	200 - 209	0.53	320 - 329	0.61	440 - 449	0.69
90 - 99	0.34	210 - 219	0.54	330 - 339	0.62	450 - 459	0.69
100 - 109	0.37	220 - 229	0.55	340 - 349	0.62	460 - 469	0.70
110 - 119	0.39	230 - 239	0.56	350 - 359	0.63	470 - 479	0.71
120 - 129	0.41	240 - 249	0.56	360 - 369	0.63	480 - 489	0.72
130 - 139	0.43	250 - 259	0.57	370 - 379	0.64	490 - 499	0.72
140 - 149	0.45	260 - 269	0.58	380 - 389	0.65	500	0.73
150 - 159	0.47	270 - 279	0.58	390 - 399	0.65	—	—

Table Notes

- (1) The total **floor area** is measured within the inside face of the **external walls** of the **sole-occupancy unit** and includes any conditioned attached Class 10a building.
- (2) Where values fall between ranges given, the **floor area** must be rounded up to the nearest whole square metres of **floor area**.

Table J3D14d: Energy factor (C_p or C_s) for a circulating pump serving a Class 4 part of a building

Climate zone	ACT	NSW	NT	QLD	SA	TAS	VIC	WA
1	—	—	0.064	0.115	—	—	—	0.148
2	—	0.131	—	0.113	—	—	—	—
3	—	—	0.06	0.104	—	—	—	0.139
4	—	0.134	—	—	0.138	—	0.112	0.153
5	—	0.15	—	0.129	0.147	—	—	0.153
6	—	0.161	—	—	0.167	—	0.135	0.184
7	0.131	0.173	—	—	—	0.146	0.145	—
8	—	0.155	—	—	—	0.131	0.13	—

Table Notes

- (1) If no primary circulating pump is present, then $C_p = 0$.
- (2) If no secondary circulating pump is present, then $C_s = 0$.

Table J3D14e: Water heater type to be applied when using the ABCB Standard for Whole-of-Home Efficiency Factors for a Class 4 part of a building

System Number	Type of centralised heated water system	Equivalent heated water system
1	Single electric storage (boiler)	Electric storage (standard or off-peak)
2	Manifolded electric storage	Electric storage (standard or off-peak)
3	Manifolded electric instantaneous - no storage	Electric storage (standard or off-peak)
4	Manifolded electric instantaneous - with storage	Electric storage (standard or off-peak)
5	Air-sourced heat pump - with storage	Heat pump (standard or off-peak)
6	Manifolded air source heat pumps - with storage	Heat pump (standard or off-peak)
7	Electric boosted solar - with storage	Solar electric (standard)
8	Manifolded electric boosted solar - with storage	Solar electric (standard)

System Number	Type of centralised heated water system	Equivalent heated water system
9	Heat pump boosted solar - with storage	Solar electric (standard) or heat pump (standard or off-peak)
10	Manifolded heat pump boosted solar - with storage	Solar electric (standard) or heat pump (standard or off-peak)
11	Gas storage (boiler)	Gas storage
12	Manifolded gas storage	Gas storage
13	Manifolded gas instantaneous - no storage	Gas instantaneous
14	Manifolded gas instantaneous - with storage	Gas storage
15	Gas boosted solar with storage	Solar gas
16	Manifolded gas boosted solar with storage	Solar gas
17	Instantaneous gas boosted solar - with storage	Solar gas
18	Manifold instantaneous gas boosted solar - with storage	Solar gas
19	Gas boosted air sourced heat pump	Heat pump (standard)
20	All other electrically heated types of central domestic hot water systems	Electric storage (standard or off-peak)
21	All other gas heated types of central domestic hot water systems	Gas storage

Table Notes

If the electricity tariff of the centralised heated water system is unknown, select "standard" from the ABCB Standard for Whole-of-Home Efficiency Factors.

NSW J3D15

J3D15 Net equivalent energy usage for Class 4 part of building – home energy rating software

A Class 4 part of a building must achieve a whole-of-home rating of not less than 50 using *house energy rating software*.

Part J4 Building fabric

NT Part J4

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for compliance with Part J1. It sets out provisions for the building *envelope* including roofs, ceilings, roof lights, walls, *glazing* and floors.

Deemed-to-Satisfy Provisions

J4D1 Deemed-to-Satisfy Provisions

NSW J4D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* J1P1 to J1P4 are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

NSW J4D2

J4D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part apply to building elements forming the *envelope* of a Class 3 to 9 building other than J4D3(5), J4D4, J4D5, J4D6 and J4D7 which do not apply to a Class 4 part of a building.

NSW J4D3

J4D3 Thermal construction — general

- (1) Where *required*, insulation must comply with AS/NZS 4859.1 and be installed so that it—
 - (a) forms a continuous barrier with ceilings, walls, bulkheads, floors, slab-edges or the like that inherently contribute to the thermal barrier; and
 - (b) is continuous below and around box gutters, parapets and the like; and
 - (c) abuts or overlaps adjoining insulation other than at supporting members such as posts, beams, truss chords, rafters, studs, noggings, joists, furring channels, slab edges and the like where the insulation must be against the member; and

- (d) does not affect the safe or effective operation of a *service* or fitting.
- (2) Where *required*, *reflective insulation* must be installed with—
 - (a) the necessary airspace to achieve the *required R-Value* between a reflective side of the *reflective insulation* and a building lining or cladding; and
 - (b) the *reflective insulation* closely fitted against any penetration, door or *window* opening; and
 - (c) the *reflective insulation* adequately supported by framing members; and
 - (d) each adjoining sheet of roll membrane being—
 - (i) overlapped not less than 50 mm; or
 - (ii) taped together.
- (3) Where *required*, bulk insulation must be installed so that—
 - (a) it maintains its position and thickness, other than where it is compressed between cladding and supporting members, water pipes, electrical cabling or the like; and
 - (b) in a ceiling, where there is no bulk insulation or *reflective insulation* in the wall beneath, it overlaps the wall by not less than 50 mm.
- (4) Roof, ceiling, wall and floor materials, and associated surfaces are deemed to have the thermal properties listed in *Specification 36*.
- (5) The *required Total R-Value* and *Total System U-Value*, including allowance for thermal bridging, must be—
 - (a) calculated in accordance with AS/NZS 4859.2 for a roof or floor; or
 - (b) determined in accordance with *Specification 37* for *wall-glazing construction*; or
 - (c) determined in accordance with *Specification 39* or Section 3.5 of CIBSE Guide A for soil or sub-floor spaces.

J4D4 Roof and ceiling construction

- (1) A roof or ceiling must achieve a *Total R-Value* greater than or equal to—
 - (a) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (i) in *climate zones* 1, 2, 3, 4 and 5 — R3.7 for a downward direction of heat flow; and
 - (ii) in *climate zone* 6 — R3.2 for a downward direction of heat flow; and
 - (iii) in *climate zone* 7 — R3.7 for an upward direction of heat flow; and
 - (iv) in *climate zone* 8 — R4.8 for an upward direction of heat flow.
 - (b) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (i) in *climate zones* 1, 3, 4 and 6 — R4.8 for a downward direction of heat flow; and
 - (ii) in *climate zone* 2 — R4.4 for a downward direction of heat flow; and
 - (iii) in *climate zone* 5 — R3.7 for a downward direction of heat flow; and
 - (iv) in *climate zones* 7 and 8 — R5.3 in an upward direction of heat flow.
- (2) In *climate zones* 1, 2, 3, 4, 5, 6 and 7 the upper surface of a roof must have—
 - (a) a *Total Solar Reflectance* greater than 0.55 and a thermal emittance greater than 0.85; or
 - (b) a *Solar Reflectance Index* greater than 61; or
 - (c) a solar absorptance of not more than 0.45 and a thermal emittance of greater than 0.85.
- (3) In *climate zones* 1, 2, 3, 5 and 6 the upper surface of a metal roof, which has outside air intakes, unitary air-conditioning units or air-cooled chillers mounted on it or less than 2 m above it, must have—
 - (a) a *Total Solar Reflectance* greater than 0.65 and a thermal emittance greater than 0.85; or
 - (b) a *Solar Reflectance Index* greater than 80; or
 - (c) a solar absorptance of not more than 0.35 and a thermal emittance of greater than 0.85.
- (4) The requirements of (2) and (3) do not apply to the portion of the upper surface of a roof that is beneath a solar

photovoltaic panel or a rooftop garden.

J4D5 Roof lights

Roof lights must have—

- (a) a total area of not more than 5% of the *floor area* of the room or space served; and
- (b) transparent and translucent elements, including any imperforate ceiling diffuser, with a combined performance of—
 - (i) for *Total system SHGC*, in accordance with Table J4D5; and
 - (ii) for *Total system U-Value*, not more than U3.9.

Table J4D5: Roof lights – Total system SHGC

<i>Roof light</i> shaft index ^{Note 1}	Total area of <i>roof lights</i> up to 3.5% of the <i>floor area</i> of the room or space	Total area of <i>roof lights</i> more than 3.5% and up to 5% of the <i>floor area</i> of the room or space
<1.0	≤ 0.45	≤ 0.29
≥ 1.0 to < 2.5	≤ 0.51	≤ 0.33
≥ 2.5	≤ 0.76	≤ 0.49

Table Notes

- (1) The *roof light* shaft index is determined by measuring the distance from the centre of the shaft at the roof to the centre of the shaft at the ceiling level and dividing it by the average internal dimension of the shaft opening at the ceiling level (or the diameter for a circular shaft) in the same units of measurement.
- (2) The area of a *roof light* is the area of the roof opening that allows light to enter the building.
- (3) The total area of *roof lights* is the combined area for all *roof lights* serving the room or space.

NSW J4D6

J4D6 Walls and glazing

- (1) The *Total System U-Value* of *wall-glazing construction*, including *wall-glazing construction* which wholly or partly forms the *envelope* internally, must not be greater than the values specified in Table J4D6a.
- (2) The *Total System U-Value* of *glazing*, including *display glazing*, must not be greater than U5.8.
- (3) The *Total System U-Value* of *wall-glazing construction* must be calculated in accordance with Specification 37.
- (4) Wall components of a *wall-glazing construction* must achieve a minimum *Total R-Value* of—
 - (a) where the wall is less than 80% of the area of the *wall-glazing construction*, R1.0; or
 - (b) where the wall is 80% or more of the area of the *wall-glazing construction*, the value specified in Table J4D6b.
- (5) The *solar admittance* of externally facing *wall-glazing construction*, excluding *wall-glazing construction* which is wholly internal, must not be greater than—
 - (a) for a Class 5, 6, 7, 8 or 9b building or a Class 9a building other than a *ward area*, the values specified in Table J4D6c; and
 - (b) for a Class 3 or 9c building or a Class 9a *ward area*, the values specified in Table J4D6d.
- (6) The *solar admittance* of a *wall-glazing construction* must be calculated in accordance with Specification 37.
- (7) The *Total system SHGC* of *display glazing* must not exceed the lesser of the following:
 - (a) 0.81 divided by the applicable shading factor specified in S37C7.
 - (b) 1.

Table J4D6a: Maximum Total System U-Value of wall-glazing construction

Climate zone	Class 5, 6, 7, 8, 9b building or a Class 9a building other than a ward area	Class 3 or 9c building or a Class 9a ward area
1	1.6	1.1
2	1.9	1.6
3	1.7	1.2
4	1.7	1.3
5	1.9	1.6
6	1.8	1.6
7	1.7	1.2
8	2.0	1.1

Table J4D6b: Minimum wall Total R-Value - Wall area 80% or more of wall-glazing construction area

Climate zone	Class 5, 6, 7, 8 or 9b building or a Class 9a building other than a ward area	Class 3 or 9c building or Class 9a ward area
1	3.0	4.0
2	1.0	1.0
3	2.2	2.4
4	2.0	1.9
5	1.0	1.0
6	1.2	1.0
7	2.2	2.2
8	3.6	3.6

Table J4D6c: Maximum wall-glazing construction solar admittance - Class 5, 6, 7, 8 or 9b building or Class 9a building other than a ward area

Climate zone	Eastern aspect solar admittance	Northern aspect solar admittance	Southern aspect solar admittance	Western aspect solar admittance
1 to 7	0.10	0.09	0.11	0.09
8	0.10	0.10	0.20	0.10

Table J4D6d: Maximum wall glazing construction solar admittance - Class 3 or 9c building or Class 9a ward area

Climate zone	Eastern aspect solar admittance	Northern aspect solar admittance	Southern aspect solar admittance	Western aspect solar admittance
All	0.06	0.06	0.06	0.06

J4D7 Floors

- (1) A floor must achieve the *Total R-Value* specified in Table J4D7.
- (2) For the purposes of (1), a slab-on-ground that does not have an in-slab heating or cooling system is considered to achieve a *Total R-Value* of R2.0, except—
 - (a) in *climate zone* 8; or

- (b) a Class 3, Class 9a *ward area* or Class 9c building in *climate zone 7* that has a *floor area* to floor perimeter ratio of less than or equal to 2.
- (3) A floor must be insulated around the vertical edge of its perimeter with insulation having an *R-Value* greater than or equal to 1.0 when the floor—
 - (a) is a concrete slab-on-ground in *climate zone 8*; or
 - (b) has an in-slab or in-screed heating or cooling system, except where used solely in a bathroom, amenity area or the like.
- (4) Insulation *required* by (3) for a concrete slab-on-ground must—
 - (a) be *water resistant*; and
 - (b) be continuous from the adjacent finished ground level—
 - (i) to a depth not less than 300 mm; or
 - (ii) for the full depth of the vertical edge of the concrete slab-on-ground.

Table J4D7: Floors – Minimum Total R-Value

Location	<i>Climate zone 1—</i> upwards heat flow	<i>Climate zones 2 and 3 —</i> upwards and downwards heat flow	<i>Climate zones 4, 5, 6 and 7 —</i> downwards heat flow	<i>Climate zone 8 —</i> downwards heat flow
A floor without an in-slab heating or cooling system	2.0	2.0	2.0	3.5
A floor with an in-slab heating or cooling system	3.25	3.25	3.25	4.75

Table Notes

For the purpose of calculating the *Total R-Value* of a floor, the sub-floor and soil *R-Value* must be calculated in accordance with *Specification 39* or Section 3.5 of CIBSE Guide A.

Part J5 Building sealing

NT Part J5

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for compliance with Part J1. It sets out provisions for sealing a building to prevent air leakage. The provisions are intended to improve occupant thermal comfort by increasing *envelope* efficacy and reduce the energy consumption of any installed *air-conditioning* systems.

Deemed-to-Satisfy Provisions

J5D1 Deemed-to-Satisfy Provisions

NSW J5D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* J1P1 to J1P4 are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable. Type text here

NSW J5D2

J5D2 Application of Part

- (1) The *Deemed-to-Satisfy Provisions* of this Part apply to—
 - (a) elements forming the *envelope* of a Class 3, 5, 6, 7, 8 or 9 building; and
 - (b) the external building *fabric* of a Class 4 part of a building.
- (2) Notwithstanding (1), the *Deemed-to-Satisfy Provisions* of this Part do not apply to—
 - (a) a building in *climate zones* 1, 2, 3 or 5 where the only means of *air-conditioning* is by using an evaporative cooler; or
 - (b) a permanent building opening, in a space where a gas appliance is located, that is necessary for the safe operation of a gas appliance; or
 - (c) a building or space where the mechanical ventilation *required* by Part F6 provides sufficient pressurisation to prevent infiltration.

J5D3 Chimneys and flues

The chimney or flue of an open solid-fuel burning appliance must be provided with a damper or flap that can be closed to seal the chimney or flue.

J5D4 Roof lights

A *roof light* must be sealed, or capable of being sealed, with—

- (a) an imperforate ceiling diffuser or the like installed at the ceiling or internal lining level; or
- (b) a weatherproof seal; or
- (c) a shutter system readily operated either manually, mechanically or electronically by the occupant.

NSW J5D5

J5D5 Windows and doors

- (1) A door, openable *window* or the like must be sealed.
- (2) The requirements of (1) do not apply to—
 - (a) a *window* complying with AS 2047; or
 - (b) a fire door or smoke door; or
 - (c) a roller shutter door, roller shutter grille or other security door or device installed only for out-of-hours security.
- (3) A seal to restrict air infiltration—
 - (a) for the bottom edge of a door, must be a draft protection device; and
 - (b) for the other edges of a door or the edges of an openable *window* or other such opening, may be a foam or rubber compression strip, fibrous seal or the like.
- (4) An entrance to a building, must have an airlock, *self-closing* door, *rapid roller door*, revolving door or the like, other than—
 - (a) where the room containing the entrance has a *floor area* of not more than 50 m²; or
 - (b) where a café, restaurant, open front shop or the like has—
 - (i) an un-conditioned zone at least 3 m deep between the main entrance, including an open front, and a *conditioned space*; and
 - (ii) at other entrances to the café, restaurant, open front shop or the like, *self-closing* doors; or
 - (c) where the entrance is a moveable external wall with the capability to open for the purpose of creating a temporary unconditioned space; or
 - (d) where, for the safety of the building occupants or for the intended use of the facility, it is *required* to be left open to a temporary unconditioned space at an *early childhood centre*, preschool, *school*, or the like; or
 - (e) where the entrance serves a Class 3 *sole-occupancy unit* or a Class 4 part of a building.
- (5) A loading dock entrance, if leading to a *conditioned space*, must be fitted with a *rapid roller door* or the like.

J5D6 Exhaust fans

An exhaust fan must be fitted with a sealing device such as a self-closing damper or the like unless it is necessary for the fan to operate continuously.

J5D7

Construction of roofs, ceilings, walls and floors

- (1) Ceilings, walls, floors and any opening such as a *window* frame, door frame, *roof light* frame, ventilation opening frame or the like must be constructed to minimise air leakage.
- (2) Construction *required* by (1) must be—
 - (a) enclosed by internal lining systems that are close fitting at ceiling, wall and floor junctions; or
 - (b) sealed at junctions and penetrations with—
 - (i) close fitting architrave, skirting or cornice; or
 - (ii) expanding foam, rubber compressible strip, caulking or the like.
- (3) The requirements of (1) do not apply to openings, grilles, louvres or the like *required* for smoke hazard management.

J5D8

Evaporative coolers

An evaporative cooler must be fitted with a self-closing damper or the like in *climate zones* 4, 5, 6, 7 and 8.

Part J6 Air-conditioning and ventilation

NT Part J6

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for compliance with Part J1. It sets out the provisions for the efficiency and control of *air-conditioning*, space heating and ventilation equipment, the efficiency, sealing and insulation requirements for ductwork systems containing fans, and for the efficiency and insulation of pipework and pump systems.

Deemed-to-Satisfy Provisions

J6D1 Deemed-to-Satisfy Provisions

NSW J6D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* J1P1 to J1P4 are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

NSW J6D2

J6D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part do not apply to a Class 8 *electricity network substation*.

J6D3 Air-conditioning system control

- (1) An *air-conditioning* system—
 - (a) must be capable of being deactivated when the building or part of a building served by that system is not occupied; and
 - (b) must not use a single heating coil or a single cooling coil in an air-handling unit to serve more than one *air-conditioning* zone where one zone will require heating at the same time another requires cooling; and
 - (c) when serving more than one *air-conditioning* zone or area with different heating or cooling needs, must—
 - (i) thermostatically control the temperature of each zone or area; and
 - (ii) not control the temperature by mixing actively heated air and actively cooled air; and

- (iii) serve diverse loads through modulating airflow to the maximum extent practicable; and
- (iv) limit zone-level reheating of air cooled by equipment upstream of the zone to not more than 7.5°C at any intended airflow rate; and
- (v) limit zone-level re-cooling of air heated by equipment upstream of the zone to not more than 7.5°C at any intended airflow rate; and
- (d) which provides the *required* mechanical ventilation, other than in *climate zone* 1 or where dehumidification control is needed, must have an *outdoor air economy cycle* if the total air flow rate of any airside component of an *air-conditioning* system is greater than or equal to the flow rates in *Table J6D3*; and
- (e) which contains more than one water heater, chiller or coil, must be capable of stopping the flow of water to those not operating; and
- (f) when serving a *sole-occupancy unit* in a Class 3 building, must not operate when any external door of the *sole-occupancy unit* is open for more than one minute; and
- (g) must have the ability to use direct signals from the control components responsible for the delivery of comfort conditions in the building to regulate the operation of central plant; and
- (h) must have a control dead band of not less than 2°C, except where a smaller range is *required* for specialised applications; and
- (i) must be provided with balancing dampers and balancing valves, as *required* to meet the needs of the system at its maximum operating condition, that ensure the maximum design air or fluid flow is achieved but not exceeded by more than 15% above design at each—
 - (i) component; or
 - (ii) group of components operating under a common control in a system containing multiple components; and
- (j) must ensure that each independently operating space of more than 1000 m² and every separate floor of the building has provision to terminate airflow independently of the remainder of the system sufficient to allow for different operating times; and
- (k) where the design maximum heated water temperature is greater than 45°C, must be capable of automatic variable temperature operation of heated water circuits; and
- (l) when deactivated, must close any motorised outdoor air or return air damper that is not otherwise being actively controlled; and
- (m) must be capable of automatic variable temperature operation of chilled water circuits; and
- (n) where fitted with a cooling tower, must automatically vary the condenser water set point temperature across the full range of condenser water inlet temperatures permitted by the equipment being served.
- (2) When two or more *air-conditioning* systems serve the same space they must use control sequences that prevent the systems from operating in opposing heating and cooling modes.
- (3) A time switch must be provided to control—
 - (a) an *air-conditioning* system of more than 2 kW_r; and
 - (b) a heater of more than 1 kW_{heating} used for *air-conditioning*.
- (4) A time switch under (3) must—
 - (a) be capable of switching electric power on and off at variable pre-programmed times and on variable pre-programmed days; and
 - (b) have the ability to program public holidays at least 1 year ahead; and
 - (c) be capable of being overridden by—
 - (i) a demand-operated control; or
 - (ii) a manual switch; and
 - (d) allow the resumption of normal operation no longer than 2 hours after any override is activated.
- (5) The requirements of (3) and (4) do not apply to—
 - (a) an *air-conditioning* system that serves—
 - (i) only one *sole-occupancy unit* in a Class 3 or 9c building; or
 - (ii) only a Class 4 part of a building; or

- (b) a *conditioned space* where *air-conditioning* is needed for 24 hour continuous use.

Table J6D3: Requirement for an outdoor air economy cycle

Climate zone	Total air flow rate <i>requiring</i> an economy cycle (L/s)
2	9000
3	7500
4	3500
5	3000
6	1200
7	2500
8	2000

Explanatory Information

In J6D3(1)(c)(iii) airflow should not be modulated—

- (1) below the level needed for *required* ventilation; or
- (2) beyond a level of pressurisation appropriate to the use of the space, in accordance with AS 1668.2; or
- (3) so that it interferes with the operation of the *air-conditioning* unit.

J6D4 Mechanical ventilation system control

- (1) A mechanical ventilation system, including one that is part of an *air-conditioning* system, except where the mechanical system serves only a Class 4 part of a building, must be capable of being deactivated when the building or part of the building served by that system is not occupied.
- (2) When serving a *conditioned space*, except in periods when evaporative cooling is being used, a mechanical ventilation system must—
 - (a) where specified in Table J6D4, have—
 - (i) an energy reclaiming system that—
 - (A) preconditions *outdoor air* at a minimum sensible heat transfer effectiveness of 60%; and
 - (B) is capable of allowing *outdoor air* to bypass the heat reclaiming system when the conditions do not provide a heat reclaim benefit; or
 - (ii) indirect evaporative cooling that—
 - (A) incorporates an energy reclaiming system meeting the requirements of (i); and
 - (B) has a minimum humidification efficiency of 85%; or
 - (iii) demand control ventilation in accordance with AS 1668.2 if appropriate to the application; and
 - (b) not exceed the minimum *outdoor air* quantity *required* by Part F6 by more than 20%, except—
 - (i) when additional unconditioned *outdoor air* is supplied for free cooling; or
 - (ii) where additional mechanical ventilation is needed to balance the *required* exhaust or process exhaust; or
 - (iii) where an energy reclaiming system meeting the requirements of (2)(a)(i) preconditions all the *outdoor air*.
- (3) An exhaust system with an air flow rate of more than 1000 L/s must be capable of stopping the motor when the system is not needed, except for an exhaust system in a *sole-occupancy unit* in a Class 3 or 9c building.
- (4) A time switch must be provided to a mechanical ventilation system with an air flow rate of more than 1000 L/s.
- (5) The time switch provided under (4) must—
 - (a) be capable of switching electric power on and off at variable pre-programmed times and on variable pre-programmed days; and

- (b) have the ability to program public holidays at least 1 year ahead; and
 - (c) be capable of being overridden by—
 - (i) a demand-operated control; or
 - (ii) a manual switch; and
 - (d) allow the resumption of normal operation no longer than 2 hours after any override is activated.
- (6) The requirements of (2), (4) and (5) do not apply to a mechanical ventilation system that serves—
- (a) only one *sole-occupancy unit* in a Class 3 or 9c building; or
 - (b) only a Class 4 part of a building.
- (7) The requirements of (4) and (5) do not apply to—
- (a) a building where mechanical ventilation is needed for 24 hour occupancy; or
 - (b) a *carpark* exhaust system; or
 - (c) a mechanical ventilation system that is required to operate 24/7 to manage air contaminants, maintain pressurisation or the like.

Table J6D4: Required outdoor air treatment

Climate zone	Outdoor air flow (L/s)	Required measure - where demand control ventilation is appropriate	Required measure - where demand control ventilation is not appropriate
1	≤120	No <i>required</i> measure	No <i>required</i> measure
1	>120 to ≤2000	Modulating control	No <i>required</i> measure
1	>2000	Modulating control	Indirect evaporative cooling system
2	≤400	No <i>required</i> measure	No <i>required</i> measure
2	>400	Modulating control	No <i>required</i> measure
3	≤400	No <i>required</i> measure	No <i>required</i> measure
3	>400 to ≤2000	Modulating control	No <i>required</i> measure
3	>2000	Modulating control	Indirect evaporative cooling system
4	≤400	No <i>required</i> measure	No <i>required</i> measure
4	>400 to ≤500	Modulating control	No <i>required</i> measure
4	>500	Modulating control	Energy reclaiming system
5	≤400	No <i>required</i> measure	No <i>required</i> measure
5	>400 to ≤1000	Modulating control	No <i>required</i> measure
5	>1000	Modulating control	Energy reclaiming system
6	≤500	No <i>required</i> measure	No <i>required</i> measure
6	>500	Modulating control	Energy reclaiming system
7	≤250	No <i>required</i> measure	No <i>required</i> measure
7	>250	Modulating control	Energy reclaiming system
8	≤100	No <i>required</i> measure	No <i>required</i> measure
8	>100 to ≤250	Modulating control	No <i>required</i> measure
8	>250	Modulating control	Energy reclaiming system

J6D5 Fans and duct systems

- (1) Fans, ductwork and duct components that form part of an *air-conditioning* system or mechanical ventilation system

must—

- (a) separately comply with (2) to (12); or
 - (b) achieve a fan motor input power per unit of flowrate lower than the fan motor input power per unit of flowrate achieved when applying (2) to (12) together.
- (2) Subject to (6), fans, other than roof mounted ventilation fans with cowlings, must have a peak efficiency determined, in accordance with [Specification 46](#), of not less than, $\eta_{\min} = a \times \ln(P) - b + N$ where—
- (a) $\eta_{\min}$ = the minimum required peak system static efficiency for installation type A or C or the minimum peak system total efficiency for installation type B or D; and
 - (b) P = the electrical input power of the fan (kW) at peak efficiency point, including any integrated motor control equipment; and
 - (c) N = the minimum performance grade obtained from Table J6D5a; and
 - (d) a = regression coefficient a, obtained from Table J6D5b; and
 - (e) b = regression coefficient b, obtained from Table J6D5c; and
 - (f) $\ln$ = natural logarithm.
- (3) Subject to (6), roof mounted ventilation fans with cowlings must—
- (a) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (b) where the electrical input power of the fan at peak efficiency point, including any integrated motor control equipment, is greater than 30 kW—
 - (i) have a peak system static efficiency of not less than 56% for installation type A or C; or
 - (ii) a peak system total efficiency of not less than 56% for installation type B or D.
- (4) Subject to (6), fans must either—
- (a) individually, have a fan power ratio, determined in accordance with [Specification 46](#), of less than 0.96; or
 - (b) collectively, have an average fan power ratio, determined in accordance with [Specification 46](#), of less than 0.96.
- (5) Where a fan's electrical power input, including any integrated motor control equipment, at the peak efficiency point and full speed, is greater than 750 W—
- (a) the fan must be capable of variable speed operation; and
 - (b) where serving a single room or space, the fan must be capable of operating at reduced flow when conditions in the room or space served are within the temperature control deadband if applicable; and
 - (c) where serving more than one room or space, the fan and the system it serves must—
 - (i) be capable of variable volume operation; and
 - (ii) operate to a variable pressure to the extent practicable.
- (6) The requirements of (2) to (5) do not apply to fans—
- (a) with electrical input power less than or equal to 125 W; or
 - (b) that need to be explosion proof; or
 - (c) that are supply fans inside unitary [air-conditioning](#) equipment.
- (7) The pressure drop in the index run across all straight sections of rigid ductwork and all sections of flexible ductwork must not exceed 1 Pa/m when averaged over the entire length of straight rigid duct and flexible duct. The pressure drop of flexible ductwork sections may be calculated as if the flexible ductwork is laid straight.
- (8) Flexible ductwork must not account for more than 6 m total length in any duct run.
- (9) The upstream connection to ductwork fittings in the index run must have an equivalent diameter to the connected duct.
- (10) Turning vanes must be included in all rigid ductwork elbows of an angle of 90°, or more acute than 90°, in the index run except where—
- (a) the inclusion of turning vanes presents a fouling risk; or
 - (b) a long radius bend in accordance with AS 4254.2 is used.

(11) For ductwork components in the index run—

- (a) the pressure drop across a coil must not exceed the value specified in [Table J6D5d](#); and
- (b) a high efficiency particulate arrestance (HEPA) air filter must not exceed the higher of—
 - (i) a pressure drop of 200 Pa when clean; or
 - (ii) the filter design pressure drop when clean at an air velocity of 1.5 m/s; and
- (c) any other air filter must not exceed—
 - (i) the pressure drop specified in [Table J6D5e](#) when clean; or
 - (ii) the filter design pressure drop when clean at an air velocity of 2.5 m/s; and
- (d) the pressure drop across intake louvres, relief louvres and exhaust louvres must not exceed—
 - (i) for single stage louvres, 30 Pa; and
 - (ii) for two stage louvres, 60 Pa; and
 - (iii) for acoustic louvres, 50 Pa; and
 - (iv) for other non-weatherproof louvres, 30 Pa; and
- (e) the pressure drop across a variable air volume box, with the damper in the fully open position, must not exceed—
 - (i) for units with electric reheat, 100 Pa; and
 - (ii) for other units, 25 Pa not including coil pressure losses; and
- (f) rooftop cowls must not exceed a pressure drop of 30 Pa; and
- (g) attenuators must not exceed a pressure drop of 40 Pa; and
- (h) fire dampers must not exceed a pressure drop of 15 Pa when open; and
- (i) balancing and control dampers in the index run must not exceed a pressure drop of 25 Pa when in the fully open position; and
- (j) supply air diffusers and grilles must not exceed a pressure drop of 40 Pa; and
- (k) exhaust grilles must not exceed a pressure drop of 30 Pa; and
- (l) transfer ducts must not exceed a pressure drop of 12 Pa; and
- (m) door grilles and door undercuts must not exceed a pressure drop of 12 Pa; and
- (n) active chilled beams must not exceed a pressure drop of 150 Pa.

(12) The requirements of (1) to (11) do not apply to—

- (a) fans in unducted [air-conditioning](#) systems with a supply air capacity of less than 1000 L/s; and
- (b) fans which are dedicated solely to fire and smoke control; and
- (c) the power for process-related components; and
- (d) kitchen exhaust systems.

Explanatory Information

For the purposes of (1)(b), fan motor input power per unit of flowrate may be calculated for [air-conditioning](#) systems and mechanical ventilation systems together.

Table J6D5a: Minimum fan performance grade

Fan type	Installation type A or C	Installation type B or D
All fans as a component of an air-handling unit or fan coil unit	61	64
Axial	40	58
Mixed flow	50	62
Centrifugal forward-curved	44	49
Centrifugal radial bladed	44	49

Fan type	Installation type A or C	Installation type B or D
Centrifugal backward-curved	61	64

Table Notes

- (1) Installation type A means an arrangement where the fan is installed with free inlet and outlet conditions.
- (2) Installation type B means an arrangement where the fan is installed with a free inlet and a duct at its outlet.
- (3) Installation type C means an arrangement where the fan is installed with a duct fitted to its inlet and with free outlet conditions.
- (4) Installation type D means an arrangement where the fan is installed with a duct fitted to its inlet and outlet.

Table J6D5b: Fan regression coefficient a

Fan type	Fan motor input power < 10 kW	Fan motor input power ≥ 10 kW
Axial	2.74	0.78
Mixed flow	4.56	1.1
Centrifugal forward-curved	2.74	0.78
Centrifugal radial bladed	2.74	0.78
Centrifugal backward-curved	4.56	1.1

Table J6D5c: Fan regression coefficient b

Fan type	Fan motor input power < 10 kW	Fan motor input power ≥ 10 kW
Axial	6.33	1.88
Mixed flow	10.5	2.6
Centrifugal forward-curved	6.33	1.88
Centrifugal radial bladed	6.33	1.88
Centrifugal backward-curved	10.5	2.6

Table J6D5d: Maximum coil pressure drop

Number of rows	Maximum pressure drop (Pa)
1	30
2	50
4	90
6	130
8	175
10	220

Table J6D5e: Maximum clean filter pressure drop

Filter minimum efficiency reporting value	Maximum pressure drop (Pa)
9	55
11	65
13	95
14	110

J6D6

Ductwork insulation

- (1) Ductwork and fittings in an *air-conditioning* system must be provided with insulation—
 - (a) complying with AS/NZS 4859.1; and
 - (b) having an insulation *R-Value* greater than or equal to—
 - (i) for flexible ductwork, 1.0; or
 - (ii) for cushion boxes, that of the connecting ductwork; or
 - (iii) that specified in Table J6D6.
- (2) Insulation must—
 - (a) be protected against the effects of weather and sunlight; and
 - (b) be installed so that it—
 - (i) abuts adjoining insulation to form a continuous barrier; and
 - (ii) maintains its position and thickness, other than at flanges and supports; and
 - (c) when conveying cooled air—
 - (i) be protected by a vapour barrier on the outside of the insulation; and
 - (ii) where the vapour barrier is a membrane, be installed so that adjoining sheets of the membrane—
 - (A) overlap by at least 50 mm; and
 - (B) are bonded or taped together.
- (3) The requirements of (1) do not apply to—
 - (a) ductwork and fittings located within the only or last room served by the system; or
 - (b) fittings that form part of the interface with the *conditioned space*; or
 - (c) return air ductwork in, or passing through, a *conditioned space*; or
 - (d) ductwork for *outdoor air* and exhaust air associated with an *air-conditioning* system; or
 - (e) the floor of an in-situ air-handling unit; or
 - (f) flexible fan connections.
- (4) For the purposes of (1), (2) and (3), ductwork and fittings—
 - (a) include non-active components of a ductwork system such as cushion boxes; and
 - (b) exclude active components such as air-handling unit components, fan coil units of *air-conditioning* or the like.

Table J6D6: Ductwork and fittings – Minimum insulation R-Value

Location of ductwork and fittings	Climate zone 1, 2, 3, 4, 5, 6 or 7	Climate zone 8
Within a conditioned space	1.2	2.0
Where exposed to direct sunlight	3.0	3.0
All other locations	2.0	3.0

J6D7

Ductwork sealing

Ductwork in an *air-conditioning* system with a capacity of 3000 L/s or greater, not located within the only or last room served by the system, must be sealed against air loss in accordance with the duct sealing requirements of AS 4254.1 and AS 4254.2 for the static pressure in the system.

J6D8

Pump systems

- (1) General — Pumps and pipework that form part of an *air-conditioning* system must either—
 - (a) separately comply with (2), (3), (4), (5) and (6); or
 - (b) achieve a pump motor power per unit of flowrate lower than the pump motor power per unit of flowrate achieved when applying (2), (3), (4), (5) and (6) together.
- (2) Where the pump motor power input at the duty point is greater than 750 W, a pump must be capable of—
 - (a) variable speed operation; and
 - (b) where serving a distributive system—
 - (i) variable volume operation; and
 - (ii) variable pressure operation to the extent permitted by—
 - (A) static head requirements; and
 - (B) the requirements of downstream equipment.
- (3) A distributive system must not have—
 - (a) uncontrolled bypasses; or
 - (b) three port valves.
- (4) The requirements of (3)(b) do not apply to a distributive system with a single chiller, including a chiller used for space heating, that serves—
 - (a) *air-conditioning* systems with a total co-incident design load of less than 200 kW; or
 - (b) only one heating coil or one cooling coil.
- (5) Circulator pumps — A glandless impeller pump, with a rated hydraulic power output of less than 2.5 kW and that is used in closed loop systems must have an energy efficiency index (EEI) not more than 0.27 calculated in accordance with European Union Commission Regulation No. 622/2012.
- (6) Other pumps — Pumps that are in accordance with Articles 1 and 2 of European Union Commission Regulation No. 547/2012 must have a minimum efficiency index (MEI) of 0.4 or more when calculated in accordance with European Union Commission Regulation No. 547/2012.
- (7) Pipework — Straight segments of pipework along the index run, forming part of an *air-conditioning* system—
 - (a) in pipework systems that do not have branches and have the same flow rate throughout the entire pipe network, must achieve an average pressure drop of not more than—
 - (i) for constant flow systems, the values nominated in Table J6D8a; or
 - (ii) for variable flow systems, the values nominated in Table J6D8b; or
 - (b) in any other pipework system, must achieve an average pressure drop of not more than—
 - (i) for constant flow systems, the values nominated in Table J6D8c; or
 - (ii) for variable flow systems, the values nominated in Table J6D8d.
- (8) The requirements of (7) do not apply—
 - (a) to valves and fittings; or
 - (b) where the smallest pipe size compliant with (7) results in a velocity of 0.7 m/s or less at design flow.

Table J6D8a: Maximum pipework pressure drop – Non-distributive constant flow systems

Nominal pipe diameter (mm)	Maximum pressure drop in systems operating 5000 hours/annum or less (Pa/m)	Maximum pressure drop in systems operating more than 5000 hours/annum (Pa/m)
Not more than 20	400	400
25	400	400
32	400	400

Nominal pipe diameter (mm)	Maximum pressure drop in systems operating 5000 hours/annum or less (Pa/m)	Maximum pressure drop in systems operating more than 5000 hours/annum (Pa/m)
40	400	400
50	400	350
65	400	350
80	400	350
100	400	200
125	400	200
150 or more	400	200

Table J6D8b: Maximum pipework pressure drop – Non-distributive variable flow systems

Nominal pipe diameter (mm)	Maximum pressure drop in systems operating 5000 hours/annum or less (Pa/m)	Maximum pressure drop in systems operating more than 5000 hours/annum (Pa/m)
Not more than 20	400	400
25	400	400
32	400	400
40	400	400
50	400	400
65	400	400
80	400	400
100	400	300
125	400	300
150 or more	400	300

Table J6D8c: Maximum pipework pressure drop – Distributive constant flow systems

Nominal pipe diameter (mm)	Maximum pressure drop in systems operating 2000 hours/annum or less (Pa/m)	Maximum pressure drop in systems operating between 2000 hours/annum and 5000 hrs/yr (Pa/m)	Maximum pressure drop in systems operating more than 5000 hours/annum (Pa/m)
Not more than 20	400	300	150
25	400	220	100
32	400	220	100
40	400	220	100
50	400	220	100
65	400	400	170
80	400	400	170
100	400	400	170
125	400	400	170
150 or more	400	400	170

Table J6D8d: Maximum pipework pressure drop – Distributive variable flow systems

Nominal pipe diameter (mm)	Maximum pressure drop in systems operating 5000 hours/annum or less (Pa/m)	Maximum pressure drop in systems operating more than 5000 hours/annum (Pa/m)
Not more than 20	400	250
25	400	180
32	400	180
40	400	180
50	400	180
65	400	300
80	400	300
100	400	300
125	400	300
150 or more	400	300

J6D9 Pipework insulation

- (1) *Piping*, vessels, heat exchangers and tanks containing heating or cooling fluid, where the fluid is held at a heated or cooled temperature, that are part of an *air-conditioning* system, other than within appliances covered by *MEPS*, must be provided with insulation—
 - (a) complying with AS/NZS 4859.1; and
 - (b) for *piping* of heating and cooling fluids, having an insulation *R-Value* in accordance with Table J6D9a; and
 - (c) for vessels, heat exchangers or tanks, having an insulation *R-Value* in accordance with Table J6D9b; and
 - (d) for refill or pressure relief *piping*, having an insulation *R-Value* equal to the *required* insulation *R-Value* of the connected pipe, vessel or tank within 500 mm of the connection.
- (2) Insulation must—
 - (a) be protected against the effects of weather and sunlight; and
 - (b) be able to withstand the temperatures within the *piping*, vessel, heat exchanger or tank.
- (3) Insulation provided to *piping*, vessels, heat exchangers or tanks containing cooling fluid must be protected by a vapour barrier on the outside of the insulation.
- (4) The requirements of (1) and (2) do not apply to *piping*, vessels or heat exchangers—
 - (a) located within the only or last room served by the system and downstream of the control device for the regulation of heating or cooling service to that room; or
 - (b) encased within a concrete slab or panel which is part of a heating or cooling system; or
 - (c) supplied as an integral part of a chiller, *boiler* or unitary air-conditioner complying with the requirements of J6D10, J6D11 and J6D12; or
 - (d) inside an air-handling unit, fan-coil unit, or the like.
- (5) For the purposes of (1), (2), (3) and (4)—
 - (a) heating fluids include heated water, steam and condensate; and
 - (b) cooling fluids include refrigerant, chilled water, brines and glycol mixtures, but do not include condenser cooling water.

Table J6D9a: Piping — Minimum insulation R-Value

Fluid temperature	Minimum insulation <i>R-Value</i> nominal pipe diameter ≤ 40 mm	Minimum insulation <i>R-Value</i> — nominal pipe diameter > 40 mm and ≤ 80 mm	Minimum insulation <i>R-Value</i> — nominal pipe diameter between > 80 mm and ≤ 150 mm	Minimum insulation <i>R-Value</i> — nominal pipe diameter > 150 mm
Low temperature chilled — ≤ 2°C	1.3	1.7	2.0	2.7
Chilled — > 2°C but ≤ 20°C	1.0	1.5	2.0	2.0
Heated — > 30°C but ≤ 85°C	1.7	1.7	1.7	1.7
High temperature heated — > 85°C	2.7	2.7	2.7	2.7

Table Notes

The minimum *required R-Value* may be halved for *piping* penetrating a structural member.

Table J6D9b: Vessels, heat exchangers and tanks — Minimum insulation R-Value

Fluid temperature range	Minimum insulation <i>R-Value</i>
Low temperature chilled — ≤ 2°C	2.7
Chilled — > 2°C but ≤ 20°C	1.8
Heated — > 30°C but ≤ 85°C	3.0
High temperature heated — > 85°C	3.0

J6D10 Space heating

- (1) A heater used for *air-conditioning* or as part of an *air-conditioning* system must be—
- a solar heater; or
 - a gas heater; or
 - a heat pump heater or 4-pipe chiller; or
 - a heater using reclaimed heat from another process such as reject heat from a refrigeration plant; or
 - an electric resistance heater if—
 - the heating capacity is not more than—
 - 40 W/m² of the *floor area* of the *conditioned space* in *climate zones* 1 or 2; or
 - the value specified in Table J6D10 in *climate zones* 3 to 8; or
 - the annual energy consumption for heating is not more than 15 kWh/m² of the *floor area* of the *conditioned space* in *climate zones* 1, 2, 3, 4 and 5; or
 - the in-duct heater complies with J6D3(1)(c)(iv); or
 - any combination of (a) to (e).

NSW J6D10(2)

- (2) An electric resistance heater may be used for heating a bathroom if—
- the heating capacity is not more than 1.2 kW; and
 - the heater has a time switch configured to deactivate the heater after a run-on period not more than 15 minutes from when there are no occupants in the space served.
- (3) A fixed heating or cooling appliance that moderates the temperature of an outdoor space must—
- be a radiant heater or evaporative cooler; and

- (b) be configured to automatically shut down when—
 - (i) there are no occupants in the space served; or
 - (ii) a period of one hour has elapsed since the last activation; or
 - (iii) the space served has reached the design temperature for heating; or
 - (iv) the space served has reached the design temperature for 30 minutes for cooling.
- (4) A gas water heater, that is used as part of an *air-conditioning* system, must achieve a minimum gross thermal efficiency of 90%.
- (5) A building with gas space heating must be provided with—
 - (a) reserved electrical capacity sufficient to support future installation of—
 - (i) an electric resistance space heating system with a heating capacity of not more than the value specified in J6D9(1)(e)(i) or (ii); or
 - (ii) air-source heat pump water heating equipment assuming a nominal coefficient of performance of 3.25; or
 - (iii) a combination of (i) and (ii); and
 - (b) reserved space within the main electrical distribution board, labelled accordingly, sized to facilitate future installation of switchgear and electrical supply for electric space heating equipment sized in accordance with (a); and
 - (c) reserved space in the electrical riser or supply pathway for future electric space heating equipment sized in accordance with (a).
- (6) Where reserved capacity for air-source heat pump water heating equipment is *required* by (5), the building must be provided with—
 - (a) reserved space for an open-roofed plant room or rooftop plant area with—
 - (i) an area of at least 36 m² plus 0.04 m²/kW of heating capacity to facilitate future installation of air-source heat pump water heating equipment; and
 - (ii) sufficient ventilation openings to achieve airflow of at least 100 L/s per kW of heating capacity to facilitate future air-source heat pump equipment, with no recirculation of air; and
 - (iii) connection to the space heating hot water system; and
 - (b) a hot water circulation system that can deliver the design *heating load* at a peak temperature of less than 50°C.
- (7) Capacity and space *required* by (5) and (6) must be sufficient to serve all of the *conditioned space* with the same design load used to specify the gas space heater equipment.
- (8) A connected group of one or more air-source heat pump water heaters, including 4-pipe chillers used as part of an *air-conditioning* system, must—
 - (a) when operating in heating mode have a capacity-weighted average coefficient of performance of not less than 3.14 at intermediate temperature and standard rating conditions as specified in Table 13 of EN 14511-2; and
 - (b) when operating in cooling mode—
 - (i) have a capacity-weighted average energy efficiency ratio at full load of not less than—
 - (A) 2.9 when determined in accordance with AHRI 551/591; or
 - (B) 2.9 when determined at the standard rating conditions specified in Table 16 of EN 14511-2; and
 - (ii) have a capacity-weighted average part load performance assessed based on—
 - (A) integrated part load value of not less than 4.69 when determined in accordance with AHRI 551/591; or
 - (B) Seasonal Energy Efficiency Ratio of 3.91 when determined in accordance with methods of Part 5 of EN 14825, at the standard part load conditions defined in Part 4 of EN 14825.
- (9) The capacity-weighted average of each efficiency metric in (8) must be calculated in accordance with the following formula:

$$\text{Capacityweightedaverage} = \frac{\sum_{i=1}^{i=n} C_i \text{Efficiency}_i}{\sum_{i=1}^{i=n} C_i}$$

where—

- (a) n = the number of heat pump water heaters in the group; and
- (b) C_i = the capacity of each heater, i , in either heating or cooling mode as applicable; and
- (c) $Efficiency_i$ = the rated coefficient of performance, energy efficiency ratio, or integrated part load value of each heater, i as applicable.

Table J6D10: Maximum electric resistance heating capacity

Floor area of the conditioned space	W/m ² of floor area in climate zone 3	W/m ² of floor area in climate zone 4	W/m ² of floor area in climate zone 5	W/m ² of floor area in climate zone 6	W/m ² of floor area in climate zone 7
≤ 500 m ²	50	60	55	65	70
> 500 m ²	40	50	45	55	60

J6D11 Refrigerant chillers

- (1) Refrigerant chillers must—
 - (a) individually, comply with (2); or
 - (b) collectively, comply with (3).
- (2) When assessed in accordance with AHRI 551/591, a chiller must—
 - (a) where air-cooled—
 - (i) in *climate zones* 1 or 3, achieve a full load operation energy efficiency ratio of not less than 3.1; and
 - (ii) in *climate zones* 2, 4, 5, 6 or 7 achieve a full load operation energy efficiency ratio and an integrated part load value such that the sum of the two is not less than—
 - (A) 8.1, where the rated cooling capacity of the chiller is not greater than 550 kW; and
 - (B) 8.5, where the rated cooling capacity of the chiller is greater than 550 kW; and
 - (iii) in *climate zone* 8, achieve an integrated part load value of not less than—
 - (A) 5.1, where the rated cooling capacity of the chiller is not greater than 550 kW; or
 - (B) 5.4, where the rated cooling capacity of the chiller is greater than 550 kW; and
 - (b) where water-cooled—
 - (i) in *climate zones* 1 or 2, achieve full load operation energy efficiency ratio of not less than the value specified in *Table J6D11a*; and
 - (ii) in *climate zones* 3 to 8, achieve a full load operation energy efficiency ratio and an integrated part load value such that the sum of the two is not less than the sum of the full load and integrated part load values specified in *Table J6D11a*, as applicable.
- (3) A connected group of one or more refrigerant chillers, used as part of an *air-conditioning* system, must achieve a *climate specific part load value*, determined in accordance with *Specification 47*, greater than—
 - (a) the applicable value specified in *Table J6D11b*, where all chillers in the group are water-cooled; or
 - (b) the applicable value specified in *Table J6D11c*, where all chillers in the group are air-cooled; or
 - (c) the average of the applicable values specified in *Table J6D11b* and *Table J6D11c* weighted according to the total full-load capacity of the chillers, where the group has both water-cooled and air-cooled chillers.
- (4) The requirements of (1), (2) and (3) do not apply to—
 - (a) 4-pipe chillers; or
 - (b) air-source heat pump water heaters.

Table J6D11a: Minimum energy efficiency ratio or integrated part load value for water-cooled refrigerant chillers other than 4-pipe chillers

Climate zone	Chiller rated cooling capacity kW	Full load energy efficiency ratio	Integrated part load value
1, 2	0 to 250	5.0	—
1, 2	> 250 to ≤ 500	5.6	—
1, 2	> 500 to ≤ 1,500	6.1	—
1, 2	> 1,500	6.5	—
3	0 to 250	5.0	6.2
3	> 250 to ≤ 500	5.8	8.3
3	> 500 to ≤ 1,500	6.0	10.4
3	> 1,500	6.3	11.4
4, 5, 6, 7 or 8	0 to 250	5.0	6.2
4, 5, 6, 7 or 8	> 250 to ≤ 500	5.5	8.3
4, 5, 6, 7 or 8	> 500 to ≤ 1,500	6.0	10.4
4, 5, 6, 7 or 8	> 1,500	6.3	11.4

Table J6D11b: Minimum climate specific part load value for a connected group of water-cooled chiller plant

Climate zone	Design load not greater than 450 kW	Design load greater than 450 kW to 900 kW	Design load greater than 900 kW to 2,400 kW	Design load greater than 2,400 kW
1	5.2	6.2	6.4	6.8
2	5.7	7.0	7.8	8.4
3	6.1	8.2	9.5	10.5
4	6.2	8.1	9.4	10.7
5	5.9	7.2	8.1	9.2
6	6.3	8.3	9.5	10.7
7	6.2	8.2	9.4	10.9
8	6.4	9.0	10.6	12.8

Table J6D11c: Minimum climate specific part load value for a connected group of air-cooled chiller plant

Climate zone	Design load not greater than 900 kW	Design load greater than 900 kW
1	4.1	3.9
2	4.8	4.5
3	4.3	4.1
4	4.9	4.5
5	5.1	4.8
6	5.4	5.0
7	5.2	4.9
8	5.6	5.5

J6D12

Unitary air-conditioning equipment

(1) Water-to-air unitary air-conditioners with a rated capacity greater than or equal to 65 kW, including packaged air-conditioners, split systems, and variable refrigerant flow units, must have a minimum energy efficiency ratio of 4.0 $W_r/W_{\text{input power}}$ for cooling when tested in accordance with AS/NZS ISO 13256.1 at test condition C3, where input power includes both compressor and fan input power.

(2) Assessed individually or collectively, a building's air-cooled unitary [air-conditioning](#) equipment, including packaged air-conditioners, split systems, and variable refrigerant flow units, must have a weighted efficiency index greater than 1—

(a) calculated using the following formula, based on the energy efficiency ratio,

$$WEI_{EER} = \frac{\sum_{\text{All applicable unitary conditioners } i} EER_i D_i}{\sum_{\text{All applicable unitary air conditioners } i} EER_i^{\min} D_i}, \text{ where—}$$

(i) WEI_{EER} = the weighted efficiency index of the unitary air-conditioners serving a building, assessed based on their rated Energy Efficiency Ratios; and

(ii) for each air-conditioner, i —

(A) EER_i = the tested energy efficiency ratio, determined in accordance with [MEPS](#); and

(B) D_i = the rated cooling capacity determined in accordance with [MEPS](#); and

(C) $EER_i^{\min}$ = the applicable nominal minimum energy efficiency ratio in [Table J6D12a](#); or

(b) calculated using the following formula, based on the Total Cooling Seasonal Performance Factor,

$$WEI_{TCSPF} = \frac{\sum_{\text{All applicable unitary air conditioners } j} TCSPF_j D_j}{\sum_{\text{All applicable unitary air conditioners } j} TCSPF_j^{\min} D_j}, \text{ where—}$$

(i) WEI_{TCSPF} = the weighted efficiency index of the unitary air-conditioners serving a building, assessed based on their rated Total Cooling Seasonal Performance Factors; and

(ii) for each air-conditioner, j —

(A) $TCSPF_j$ = the mixed zone Total Cooling Seasonal Performance Factor, determined in accordance with [MEPS](#) for the commercial based use of the product; and

(B) D_j = the rated cooling capacity determined in accordance with [MEPS](#); and

(C) $TCSPF_j^{\min}$ = the applicable nominal minimum energy efficiency ratio in [Table J6D12b](#).

(3) Where the weighted efficiency index contribution of an air-conditioner is assessed using the formula at (2)(a), air-cooled unitary air-conditioners, including packaged air-conditioners, split systems and variable refrigerant flow units, must have—

(a) variable speed outdoor fans; and

(b) at least one—

(i) digital scroll compressor; or

(ii) inverter driven compressor.

(4) The compressor [required](#) by 3(b) must be sized sufficiently to allow the unit to modulate across 50% to 100% of its rated cooling capacity.

(5) The requirements of (2) to (4) do not apply to—

(a) unitary air-conditioners with a rated cooling capacity of less than 10 kW; or

(b) unitary air-conditioners that serve only a Class 4 part of a building.

Table J6D12a: Nominal minimum energy efficiency ratio figures for air-cooled unitary air-conditioning systems

Rated cooling capacity	Unitary systems other than variable refrigerant flow units	Variable refrigerant flow units
≤ 39 kW	3.3	3.8
> 39 kW	3.1	3.4

Table J6D12b: Nominal minimum TCSPF figures for air-cooled unitary air-conditioning systems

Rated cooling capacity	Unitary systems other than variable refrigerant flow units
≤ 30 kW	3.6
> 30 kW	3.5

Explanatory Information

Variable refrigerant flow and multi-split units are tested as representative combination.

J6D13 Heat rejection equipment

- (1) The motor rated power of a fan in a cooling tower, closed circuit cooler or evaporative condenser must not exceed the allowances in [Table J6D13](#).
- (2) The fan in an air-cooled condenser must have a motor rated power of not more than 42 W for each kW of heat rejected from the refrigerant when determined in accordance with AHRI 460.
- (3) A fan with a three-phase motor in heat rejection equipment must be capable of variable speed operation.
- (4) The requirements of (2) and (3) do not apply to—
 - (a) a fan in a refrigerant chiller of an [air-conditioning](#) system that complies with [J6D11](#); and
 - (b) fans in unitary [air-conditioning](#) equipment, such as a packaged air-conditioners, a split system or a variable refrigerant flow unit that complies with [J6D12](#); and
 - (c) a fan in a 4-pipe chiller or air source heat pump water heater that complies with [J6D10\(8\)](#).

Table J6D13: Maximum fan motor power – Cooling towers, closed circuit coolers and evaporative condensers

Type	Cooling tower maximum fan motor input power (W/kW)	Closed circuit cooler maximum fan motor input power (W/kW)	Evaporative condenser maximum fan motor input power (W/kW)
Induced draft	10.4	16.9	11.0
Forced draft	19.5	Note	11.0

Table Notes

A closed circuit, forced draft cooling tower must not be used.

Part J7 Artificial lighting and power

NT Part J7

Introduction to this Part

This Part contains Deemed-to-Satisfy Provisions for compliance with Part J1. It sets out provisions for the design and configuration of artificial lighting and power, boiling and chilled water units, lifts and escalators and moving walkways.

Deemed-to-Satisfy Provisions

J7D1 Deemed-to-Satisfy Provisions

NSW J7D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements J1P1 to J1P4* are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

NSW J7D2

J7D2 Application of Part

J7D3, J7D4 and J7D6(1)(b) do not apply to a Class 8 *electricity network substation*.

J7D3 Artificial lighting

NSW J7D3(1)

- (1) In a Class 4 part of a building—
 - (a) the *lamp power density* or *illumination power density* of artificial lighting must not exceed the allowance of—
 - (i) 5 W/m² within a *sole-occupancy unit*; and
 - (ii) 4 W/m² on a verandah, balcony or the like attached to a *sole-occupancy unit*; and
 - (b) the *illumination power density* allowance in (a) may be increased by dividing it by the *illumination power density* adjustment factor for a control device in Table J7D3b as applicable; and
 - (c) when designing the *lamp power density* or *illumination power density*, the power of the proposed installation must be used rather than nominal allowances for exposed batten holders or luminaires; and

- (d) halogen lamps must be separately switched from fluorescent lamps.

NSW J7D3(2)

- (2) In a building other than a Class 4 part of a building—

- for artificial lighting, the aggregate design illumination power load must not exceed the sum of the allowances obtained by multiplying the area of each space by the maximum *illumination power density* in Table J7D3a; and
- the aggregate design illumination power load in (a) is the sum of the design illumination power loads in each of the spaces served; and
- where there are multiple lighting systems serving the same space, the design illumination power load for (b) is—
 - the total illumination power load of all systems; or
 - where a control system permits only one system to operate at a time based on the highest illumination power load; or determined by the formula—

$$[H \times T/2 + P \times (100 - T/2)]/100$$

- (d) In the formula at (c)(ii)—

- H = the highest illumination power load; and
- T = the time for which the maximum illumination power load will occur, expressed as a percentage; and
- P = the predominant illumination power load.

- (3) The requirements of (1) and (2) do not apply to the following:

- Emergency lighting provided in accordance with Part E4, including dedicated light sources for photoluminescent *exit* signs *required* by S25C3(a).
- Signage, display lighting within cabinets and display cases that are fixed in place.
- Lighting for accommodation within the residential part of a *detention centre*.
- A heater where the heater also emits light, such as in bathrooms.
- Lighting of a specialist process nature such as in a surgical operating theatre, fume cupboard or clean workstation.
- Lighting of performances such as theatrical or sporting.
- Lighting for the permanent display and preservation of works of art or objects in a museum or gallery other than for retail sale, purchase or auction.
- Lighting installed solely to provide photosynthetically active radiation for indoor plant growth on green walls and the like.

- (4) For the purposes of Table J7D3b, the following control devices must comply with Specification 40:

- Demand-operated controls.
- Daylight sensors and dynamic lighting control devices.

Table J7D3a: Maximum illumination power density

Space	Maximum <i>illumination power density</i> (W/m ²)
Auditorium, church and public hall	8
Board room and conference room	5
<i>Carpark</i> - general	2
<i>Carpark</i> - entry zone (first 15 m of travel) during the daytime	11.5
<i>Carpark</i> - entry zone (next 4 m of travel) during the day	2.5
<i>Carpark</i> - entry zone (first 20 m of travel) during night time	2.5
Common rooms, spaces and corridors in a Class 2 building	4.5

Space	Maximum <i>illumination power density</i> (W/m ²)
Control room, switch room and the like - intermittent monitoring	3
Control room, switch room and the like - constant monitoring	4.5
Corridors	5
Courtroom	4.5
Dormitory of a Class 3 building used for sleeping only	3
Dormitory of a Class 3 building used for sleeping and study	4
Entry lobby from outside the building	9
Health-care - infants' and children's wards and emergency department	4
Health-care - examination room	4.5
Health-care - examination room in intensive care and high dependency ward	6
Health-care - all other <i>patient care areas</i> including wards and corridors	2.5
Kitchen and food preparation area	4
Laboratory - artificially lit to an ambient level of 400 lx or more	6
Library - stack and shelving area	2.5
Library - reading room and general areas	4.5
Lounge area for communal use in a Class 3 or 9c building	4.5
Museum and gallery - circulation, cleaning and service lighting	2.5
Office - artificially lit to an ambient level of 200 lx or more	4.5
Office - artificially lit to an ambient level of less than 200 lx	2.5
Plant room where an average of 160 lx vertical illuminance is required on a vertical panel such as in switch rooms	4
Plant rooms with a horizontal illuminance target of 80 lx	2
Restaurant, café, bar, hotel lounge and a space for the serving and consumption of food or drinks	14
Retail space including a museum and gallery whose purpose is the sale of objects	14
<i>School</i> - general purpose learning areas and tutorial rooms	4.5
<i>Sole-occupancy unit</i> of a Class 3 or 9c building	5
Storage	1.5
Service area, cleaner's room and the like	1.5
Toilet, locker room, staff room, rest room and the like	3
Wholesale storage area with a vertical illuminance target of 160 lx	4
Stairways, including <i>fire-isolated stairways</i>	2
Lift cars	5.5

Table Notes

(1) In areas not listed above, the maximum *illumination power density* is—

- (i) for an illuminance not more than 80 lx, 2 W/m²; and
 - (ii) for an illuminance more than 80 lx and not more than 160 lx, 2.5 W/m²; and
 - (iii) for an illuminance more than 160 lx and not more than 240 lx, 3 W/m²; and
 - (iv) for an illuminance more than 240 lx and not more than 320 lx, 4.5 W/m²; and
 - (v) for an illuminance more than 320 lx and not more than 400 lx, 6 W/m²; and
 - (vi) for an illuminance more than 400 lx and not more than 600 lx, 10 W/m²; and
 - (vii) for an illuminance more than 600 lx and not more than 800 lx, 11.5 W/m².
- (2) For enclosed spaces with a Room Aspect Ratio of less than 1.5, the maximum *illumination power density* may be increased by dividing it by an adjustment factor for room aspect which is $0.5 + (\text{Room Aspect Ratio}/3)$.
- (3) The Room Aspect Ratio of the enclosed space is determined by the formula: $A/(H \times C)$, where—
- (i) A is the area of the enclosed space; and
 - (ii) H is the height of the space measured from the floor to the highest part of the ceiling; and
 - (iii) C is the perimeter of the enclosed space at floor level.
- (4) In addition to 2, the maximum *illumination power density* may be increased by dividing it by the *illumination power density* adjustment factor in Table J7D3b and Table J7D3c.
- (5) Circulation spaces are included in the allowances listed in this table.

Table J7D3b: Illumination power density adjustment factor for a control device

Item Notes 1 and 2	Description	<i>illumination power density</i> adjustment factor
Demand-operated controls	In a toilet or change room, other than a public toilet, in a Class 6 building	0.4
Demand-operated controls	Where a group of light fittings serving less than 100 m ² is controlled by one or more detectors	0.6
Demand-operated controls	Where a group of light fittings serving 100 m ² or more is controlled by one or more detectors	0.7
Programmable dimming system Note 3	Where not less than 75% of the area of a space is controlled by programmable dimmers	0.85
Fixed dimming Notes 3 and 4	All fittings with fixed dimming	Whichever is greater of (a) 0.5; or (b) $0.2 + 0.8L$ where L = the illuminance turndown for the fixed dimming.
Lumen depreciation dimming Note 3	All fittings with lumen depreciation dimming	0.85
Two stage sensor - equipped lights with minimum power of 30 % of peak power or less	Fire stairs and other spaces not used for regular transit	0.4
Two stage sensor - equipped lights with minimum power of 30% of peak power or less	Transitory spaces in regular use or in a <i>carpark</i>	0.7
Daylight sensor and dynamic lighting control device - dimmed or stepped switching of lights adjacent <i>windows</i> Notes 3 and 5	In a Class 5, 6, 7, 8 or 9b building or a Class 9a building, other than a <i>ward area</i> , where the lights are adjacent <i>windows</i> , other than <i>roof lights</i> , for a distance from the <i>window</i> equal to the depth of the floor to <i>window</i> head height	0.5 Note 3

Item Notes 1 and 2	Description	<i>illumination power density</i> adjustment factor
Daylight sensor and dynamic lighting control device - dimmed or stepped switching of lights adjacent <i>windows</i> Notes 3 and 5	Serving a Class 3 or 9c building, or a Class 9a <i>ward area</i> , where the lights are adjacent <i>windows</i> , other than <i>roof lights</i> , for a distance from the <i>window</i> equal to the depth of the floor to <i>window</i> head height	0.75 Note 3
Daylight sensor and dynamic lighting control device - dimmed or stepped switching of lights adjacent <i>windows</i> Notes 3 and 5	In a Class 5, 6, 7, 8 or 9b building or a Class 9a building, other than a <i>ward area</i> , where the lights are adjacent <i>roof lights</i>	0.6 Note 3
Daylight sensor and dynamic lighting control device - dimmed or stepped switching of lights adjacent <i>windows</i> Notes 3 and 5	In a Class 3 or 9c building, or a Class 9a <i>ward area</i> , where the lights are adjacent <i>roof lights</i>	0.8 Note 3

Table Notes

- (1) A maximum of two *illumination power density* adjustment factors for a control device can be applied to an area.
- (2) Please refer to NCC 2025 Preview Draft Omissions for missing text
- (3) The adjustment factor does not apply to tungsten, halogen or other incandescent sources.
- (4) Includes luminaires with a pre-programmed function which provides dimming from ON to OFF (one-stage dimming).
- (5) For lighting controlled by daylight sensors, the *illumination power density* adjustment factor is only applied between 8:00 am and 7:00 pm.

Table J7D3c: Illumination power density adjustment factor for light colour

Light source	Description	<i>illumination power density</i> adjustment factor
CRI ≥ 90	Where lighting with good colour rendering is used	0.9
CCT ≤ 3500 K Note	Where lighting with a warm appearance is used	0.8
CCT ≥ 4500 K	Where lighting with a cool appearance is used	1.1

Table Notes

Includes luminaires that can adjust their CCT to 3500 K or below.

J7D4 Interior artificial lighting and power control

- (1) In a Class 4 part of a building, all artificial lighting of a room or space must be individually operated in accordance with [Specification 40](#) by—
 - (a) a manual switch; or
 - (b) other control device; or
 - (c) a combination of (a) and (b).
- (2) Subject to (3) to (13), other than in a Class 4 part of a building, all artificial lighting must be controlled by demand-operated control devices in accordance with [Specification 40](#).
- (3) A room or space with regular occupancy may have a time switch installed that—
 - (a) overrides demand-operated controls during the period of regular occupancy; and
 - (b) complies with [Specification 40](#).

- (4) A room or space with less than 20 W of artificial lighting that is situated within a larger room or space, may be controlled by manual switch when the artificial lighting within the larger room or space is activated.
- (5) A space within a carpark with regular occupancy for greater than 5000 hours per annum need not have demand-operated control.
- (6) For the purposes of (3), (4) and (5) “regular occupancy” is when a room or space is—
 - (a) occupied by more than 1 person per 40 m²; or
 - (b) used more than once every 15 minutes.
- (7) Demand-operated control must be provided in the *sole-occupancy unit* of a Class 3 building, other than where providing accommodation for people with a disability or the aged, to disable the artificial lighting, air-conditioning, local fans and bathroom heating when the *sole-occupancy unit* is unoccupied.
- (8) A demand-operated control required by (2) must, for other than a single functional space such as an auditorium, theatre, swimming pool, sporting stadium or warehouse, not operate more than 250 m² of lighting.
- (9) In a Class 5, 6 or 8 building of more than 250 m², artificial lighting in a natural lighting zone adjacent to *windows* must be separately controlled from artificial lighting not in a natural lighting zone in the same *storey* except where—
 - (a) the room containing the natural lighting zone is less than 20 m²; or
 - (b) the room’s natural lighting zone contains less than 4 luminaires; or
 - (c) 70% or more of the luminaires in the room are in the natural lighting zone.
- (10) Artificial lighting in a *fire-isolated stairway*, *fire-isolated passageway* or *fire-isolated ramp* must be controlled by a demand-operated control in accordance with *Specification 40*.
- (11) Artificial lighting in a foyer, corridor and other circulation spaces—
 - (a) of more than 250 W within a single zone; and
 - (b) adjacent to *windows*,must be controlled by a daylight sensor and dynamic lighting control device in accordance with *Specification 40*.
- (12) Artificial lighting for daytime travel in the first 19 m of travel in a *carpark* entry zone must be controlled by a daylight sensor in accordance with *Specification 40*.
- (13) The requirements of (1) to (12) do not apply to the following:
 - (a) Emergency lighting in accordance with *Part E4*, including dedicated light sources for photoluminescent *exit* signs *required by S25C3(a)*.
 - (b) Where artificial lighting is needed for 24 hour occupancy such as for a manufacturing process, parts of a hospital, an airport control tower or within a *detention centre*.

J7D5 Interior decorative and display lighting

- (1) Interior decorative and display lighting, such as for a foyer mural or art display, must be controlled—
 - (a) separately from other artificial lighting; and
 - (b) by a manual switch for each area other than when the operating times of the displays are the same in a number of areas such as in a museum, art gallery or the like, in which case they may be combined; and
 - (c) by a time switch in accordance with *Specification 40* where the display lighting exceeds 1 kW.
- (2) Window display lighting must be controlled separately from other display lighting.

J7D6 Exterior artificial lighting

- (1) Exterior artificial lighting attached to or directed at the facade of a building, must—
 - (a) be controlled by—
 - (i) a daylight sensor; or

- (ii) a time switch that is capable of switching on and off electric power to the system at variable pre-programmed times and on variable pre-programmed days; and
- (b) when the total lighting load exceeds 100 W—
 - (i) use LED luminaires for 90% of the total lighting load; or
 - (ii) be controlled by a demand-operated control in accordance with [Specification 40](#); or
 - (iii) when used for decorative purposes, such as façade lighting or signage lighting, have a separate time switch in accordance with [Specification 40](#).
- (2) The requirements of (1)(b) do not apply to the following:
 - (a) Emergency lighting in accordance with [Part E4](#).
 - (b) Lighting around a *detention centre*.

J7D7 Boiling water and chilled water storage units

Power supply to a boiling water or chilled water storage unit must be controlled by a time switch in accordance with [Specification 40](#).

J7D8 Lifts

Lifts must—

- (a) be configured to ensure artificial lighting and ventilation in the car are turned off when it is unused for 15 minutes; and
- (b) achieve the idle and standby energy performance level in [Table J7D8a](#); and
- (c) achieve—
 - (i) the energy efficiency class in [Table J7D8b](#); or
 - (ii) if a dedicated goods lift, energy efficiency class D in accordance with ISO 25745-2.

Table J7D8a: Lift idle and standby energy performance level

Rated load	Idle and standby energy performance level in accordance with ISO 25745-2 ^{Note}
≤ 800 kg	2
> 800 kg to ≤ 2000 kg	3
> 2000 kg to ≤ 4000 kg	4
> 4000 kg	5

Table Notes

Applies to the standby power used after 30 minutes.

Table J7D8b: Lift energy efficiency class

Usage category in accordance with ISO 25745-2	Energy efficiency class in accordance with ISO 25745-2
1-4	C
≥ 5	D

J7D9

Escalators and moving walkways

Escalators and moving walkways must have the ability to slow to between 0.2 m/s and 0.05 m/s when unused for more than 15 minutes.

PREVIEW DRAFT

Part J8 Heated water supply and swimming pool and spa pool plant

NT Part J8

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for compliance with Part J1. It sets out provisions for ensuring water heaters, *swimming pool* and spa heaters and pump systems use energy efficiently.

Deemed-to-Satisfy Provisions

J8D1 Deemed-to-Satisfy Provisions

NSW J8D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements J1P1 to J1P4* are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

J8D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part do not apply to a Class 4 part of a building.

J8D3 Heated water supply

- (1) Pipework circulating heated water for food preparation and sanitary purposes must be insulated in accordance with J6D9, including 500 mm along each branch line.
- (2) Trace-heated pipework carrying heated water for food preparation and sanitary purposes must be insulated in accordance with J6D9.
- (3) A building with gas heated water for food preparation and sanitary purposes must be provided with—
 - (a) reserved electrical capacity sufficient to support future installation of air-source heat pump water heating equipment for food preparation and sanitary purposes assuming a nominal coefficient of performance of 3.25; and
 - (b) reserved space within the main electrical distribution board comprising at least one empty three-phase circuit breaker slot and 4 DIN rail spaces per 35 kW of water heating capacity labelled to indicate reservation for future installation of heated water supply; and

- (c) reserved space in the electrical riser or supply pathway for future water heating equipment, sized in accordance (a); and
- (d) reserved plant area with—
 - (i) space to accommodate heating plant of 7 m² plus 0.04 m²/kW of heating capacity; and
 - (ii) sufficient ventilation to achieve airflow of 115 L/s per kW of heating, with no recirculation of air.
- (4) The capacity and space *required* by (3) must be sufficient to serve the same design load used to specify any gas-powered water heating equipment for food preparation and sanitary purposes.

NSW J8D3

J8D4 Swimming pool heating and pumping

- (1) Heating for a *swimming pool* must be by—
 - (a) a solar heater; or
 - (b) a heater using reclaimed heat from another process such as reject heat from a refrigeration plant; or
 - (c) a geothermal heater; or
 - (d) a gas heater that achieves a minimum gross thermal efficiency of 90%; or
 - (e) a heat pump; or
 - (f) a combination of (a) to (e).
- (2) Where some or all of the heating *required* by (1) is by a gas heater or a heat pump, the *swimming pool* must have—
 - (a) a cover with a minimum *R-Value* of 0.05; and
 - (b) a time switch to control the operation of the heater.
- (3) A time switch must be provided to control the operation of a circulation pump for a *swimming pool*.
- (4) Where *required*, a time switch must be capable of switching electric power on and off at variable pre-programmed times and on variable pre-programmed days.
- (5) Pipework carrying heated or chilled water for a *swimming pool* must comply with the insulation requirements of J6D9.
- (6) A building with gas heated water for a *swimming pool* must be provided with—
 - (a) reserved electrical capacity sufficient to support future installation of air-source heat pump water heating equipment for the *swimming pool* assuming a nominal coefficient of performance of 3.25; and
 - (b) reserved space within the main electrical distribution board comprising at least one empty three-phase circuit breaker slot and 4 DIN rail spaces per 35 kW of water heating capacity, labelled to indicate reservation for future installation of water heating equipment for the *swimming pool*; and
 - (c) reserved space in the electrical riser or supply pathway for future *swimming pool* heating equipment sized in accordance with (a); and
 - (d) reserved plant area with—
 - (i) space to accommodate heating plant of 7 m² plus 0.04 m²/kW of heating capacity; and
 - (ii) sufficient ventilation openings to achieve airflow of 115 L/s per kW of heating capacity with no recirculation of air; and
 - (e) a hot water circulation system that operates at a peak temperature of less than 50°C.
- (7) The capacity and space *required* by (6) must be sufficient to serve the same design load used to specify any gas-powered *swimming pool* water heating equipment.
- (8) For the purpose of J8D3, a *swimming pool* does not include a spa pool.

J8D5

Spa pool heating and pumping

- (1) Heating for a spa pool that shares a water recirculation system with a *swimming pool* must be by—
- (a) a solar heater; or
 - (b) a heater using reclaimed heat from another process such as reject heat from a refrigeration plant; or
 - (c) a geothermal heater; or
 - (d) a gas heater that achieves a minimum gross thermal efficiency of 90%; or
 - (e) a heat pump; or
 - (f) a combination of (a) to (e).
- (2) Where some or all of the heating *required* by (1) is by a gas heater or a heat pump, the spa pool must have—
- (a) a cover with a minimum *R-Value* of 0.05; and
 - (b) a push button and a time switch to control the operation of the heater.
- (3) A time switch must be provided to control the operation of a circulation pump for a spa pool having a capacity of 680 L or more.
- (4) Where *required*, a time switch must be capable of switching electric power on and off at variable pre-programmed times and on variable pre-programmed days.
- (5) Pipework carrying heated or chilled water for a spa pool must comply with the insulation requirements of J6D9.
- (6) A building with gas heated water for spa pool heating must be provided with—
- (a) reserved electrical capacity sufficient to support future installation of air-source heat pump water heating equipment for the spa pool assuming a nominal coefficient of performance of 3.25; and
 - (b) reserved space within the main electrical distribution board comprising at least one empty three-phase circuit breaker slot and 4 DIN rail spaces per 35 kW of water heating capacity, labelled to indicate reservation for future installation of water heating equipment for the spa pool; and
 - (c) reserved space in the electrical riser or supply pathway for future the spa pool heating equipment sized in accordance with (a); and
 - (d) reserved plant area with—
 - (i) space to accommodate heating plant of 7 m² plus 0.04 m²/kW of heating capacity; and
 - (ii) sufficient ventilation openings to achieve airflow of 115 L/s per kW of heating capacity, with no recirculation of air; and
 - (e) a hot water circulation system and associated coils and heat exchangers serving the spa pool, designed to operate a peak temperature of less than 50°C.
- (7) The capacity and space *required* by (6) must be sufficient to serve the same design load used to specify any gas-powered spa pool water heating equipment.

Part J9 Energy monitoring and on-site distributed energy resources

NT Part J9

Introduction to this Part

This Part contains *Deemed-to-Satisfy Provisions* for compliance with Part J1. It sets out provisions that enable the monitoring of energy use (other than for billing purposes) and facilitate easy retrofit of renewable energy and electric vehicle charging equipment.

Deemed-to-Satisfy Provisions

J9D1 Deemed-to-Satisfy Provisions

NSW J9D1(1)

- (1) Where a *Deemed-to-Satisfy Solution* is proposed, *Performance Requirements* J1P1 to J1P4 are satisfied by complying with—
 - (a) J2D2; and
 - (b) J3D2 to J3D15; and
 - (c) J4D2 to J4D7; and
 - (d) J5D2 to J5D8; and
 - (e) J6D2 to J6D13; and
 - (f) J7D2 to J7D9; and
 - (g) J8D2 to J8D5; and
 - (h) J9D2 to J9D5.
- (2) Where a *Performance Solution* is proposed, the relevant *Performance Requirements* must be determined in accordance with A2G2(3) and A2G4(3) as applicable.

J9D2 Application of Part

The *Deemed-to-Satisfy Provisions* of this Part do not apply—

- (a) within a Class 4 part of a building; or
- (b) to a Class 8 *electricity network substation*.

J9D3 Facilities for energy monitoring

- (1) A building or *sole-occupancy unit* with a *floor area* of more than 500 m² must have energy meters configured to record the time-of-use consumption of gas and electricity.
- (2) A building with a *floor area* of more than 2 500 m² must have energy meters configured to enable individual time-of-use energy data recording, in accordance with (3), of—
 - (a) *air-conditioning* plant including, where appropriate, heating plant, cooling plant and air handling fans; and
 - (b) artificial lighting; and
 - (c) appliance power; and

- (d) central hot water supply; and
 - (e) internal transport devices including lifts, escalators and moving walkways where there is more than one serving the building; and
 - (f) on-site *renewable energy* equipment; and
 - (g) on-site electric vehicle charging equipment; and
 - (h) on-site *battery systems*; and
 - (i) other ancillary plant.
- (3) Energy meters *required* by (2) must be interlinked by a communication system that collates the time-of-use energy data to a single interface monitoring system where it can be stored, analysed and reviewed.
- (4) The provisions of (2) do not apply to energy meters serving individual *sole-occupancy units* with a *floor area* of less than 2 500 m².
- (5) Where a building has an Environmental Management Information System facility it must record, in addition to J9D3(2)(a) to (i), on a 5 minute time interval basis—
- (a) the energy use of any piece of equipment predicted to consume more than 5% of total building annual energy use; and
 - (b) entering and leaving temperatures and energy use for each chiller, heat pump, electric heater or hot water heater used in *air-conditioning*; and
 - (c) the temperature of all internal *air-conditioning* zones; and
 - (d) the water flow and return temperature of chilled and heated water loops; and
 - (e) the external temperature and humidity local to the building; and
 - (f) measurement of internal carbon dioxide and car park pollutant levels, where these are used for controlling fan speed or outside air quantities; and
 - (g) total instantaneous building electricity demand, recorded as an average over every 5 minutes of building operation; and
 - (h) the start/stop command value and speed of *air-conditioning* and mechanical ventilation fans and pumps and associated system pressure measurement and set point; and
 - (i) the damper command for economy cycle and ventilation dampers; and
 - (j) the damper or valve command for energy reclaim equipment.
- (6) The Environmental Management Information System in (5) must—
- (a) allow demand management control of the building's—
 - (i) *renewable energy* system, including any battery energy storage system installed; and
 - (ii) lighting system; and
 - (iii) *air-conditioning* and ventilation system; and
 - (iv) electric vehicle charging equipment; and
 - (b) include an operational interface that enables remote users to visualise system data and operational status; and
 - (c) allow for the visualisation of data in a graphical format, including the ability to compare individual data streams integrated over time periods and in time series; and
 - (d) be able to provide bulk downloads of at least 2 years of historic time series data to users; and
 - (e) allow scheduling, supervisory level setpoint override and modulation set-back of the *air-conditioning* and ventilation system; and
 - (f) incorporate monitoring and verification functionality with the capability to—
 - (i) provide monitoring and verification of a change in energy use in accordance with the International Performance Measurement and Verification Protocol Options B and C; and
 - (ii) automatically determine an energy performance baseline from historical building data and weather data; and
 - (iii) compare building performance against the baseline, both numerically and graphically; and
 - (iv) provide forecasts of the building's *renewable energy* production.

- (7) The requirements of (5) and (6) do not apply to services that consume less than 5% of the building's total annual energy consumption.

Notes

An Environmental Management Information System that complies with J9D3(5) and (6) and records data as *required* by J9D3(2)(a) to (i) satisfies the requirement for 'energy meters' in J9D3(2).

J9D4 Facilities for electric vehicle charging equipment

- (1) Subject to (2), a *carpark* associated with a Class 3, 5, 6, 7b, 8 or 9 building must be provided with electrical distribution boards dedicated to electric vehicle charging—
- (a) in accordance with Table J9D4 in each *storey* of the carpark; and
 - (b) labelled to indicate use for electric vehicle charging equipment.
- (2) Electrical distribution boards dedicated to serving electric vehicle charging in a *carpark* must—
- (a) be fitted with a charging control system with the ability to manage and schedule charging of electric vehicles in response to total building demand; and
 - (b) when associated with a Class 5 to 9 building, have capacity for each circuit to support an electric vehicle charger able to deliver a minimum of 12 kWh from 9:00 am to 5:00 pm daily; and
 - (c) when associated with a Class 3 building, have capacity for each circuit to support an electric vehicle charger able to deliver a minimum of 48 kWh from 11:00 pm to 7:00 am daily; and
 - (d) be sized to support the future installation of a 7 kW (32 A) type 2 electric vehicle charger in—
 - (i) 10% of car parking spaces associated with a Class 5 or 6 building; or
 - (ii) 20% of car parking spaces associated with a Class 3, 7b, 8 or 9 building; and
 - (e) contain space of at least 36 mm width of DIN rail per outgoing circuit for individual sub-circuit for individual sub-circuit electricity metering to record electricity use of electric vehicle charging equipment; and
 - (f) be labelled to indicate the use of the space *required* by (f) is for the future installation of metering equipment.

Limitations

J9D4 does not apply to a stand alone Class 7a building.

Table J9D4: Electric vehicle distribution board requirement for each storey of a carpark

<i>Carpark</i> spaces per <i>storey</i> for electric vehicles	Electrical distribution boards <i>required</i> for electric vehicle charging per <i>storey</i>
0 - 9	0
10 - 24	1
25 - 48	2
49 - 72	3
73 - 96	4
97 - 120	5
121 - 144	6
145 - 168	7

Table Notes

- (1) Where there are more than 168 *carpark* spaces per *storey*, one additional distribution board must be provided for each additional 24 spaces or part thereof.
- (2) The number of distribution boards *required* is determined by application of J9D4(2)(d).

J9D5

Facilities for solar photovoltaic and battery systems

- (1) The main electrical switchboard of a building must contain at least 2 empty three-phase circuit breaker slots and 4 DIN rail spaces labelled to indicate the use of each space for a *battery system*.
- (2) A building must be provided with an on-site solar photovoltaic system—
 - (a) that covers 100% of the roof area, excluding areas—
 - (i) shaded for more than 25% of annual daylight hours; or
 - (ii) where the roof pitch exceeds 45° relative to horizontal; or
 - (iii) that are awnings; or
 - (iv) that are car parks; or
 - (v) that are roof gardens; or
 - (vi) that are terraces or other rooftop areas designated for occupation; or
 - (vii) used for roof lights or translucent roofing for natural lighting or the like; or
 - (viii) designated as a trafficable area, access for height safety systems or plant maintenance access or a *required* path of travel to an *exit*; or
 - (ix) used for plant equipment, services installations or the like; or
 - (x) above exhaust air flows from heat rejection equipment or the like; or
 - (xi) where provision of solar photovoltaic panel is impractical on account of panel size or mounting system limitations; or
 - (b) with a peak system output rating per m² of building *conditioned space* not less than those specified in Table J9D5a.
- (3) In addition to (2), a building where gas is used for building services must be provided with further on-site photovoltaic system peak output capacity not less than the value specified in Table J9D5b.
- (4) If the on-site solar photovoltaic system in (3) is placed on a building roof, the panels must—
 - (a) not be shaded for more than 25% of daylight hours; and
 - (b) not have a pitch of more than 45°.

Limitations

- (1) The requirements of J9D5(2) do not apply to a building—
 - (a) where 100% of the effective roof area is shaded for more than 70% of annual daylight hours; or
 - (b) provided with an on-site renewable energy generation system with a generation capacity at least equivalent to a solar photovoltaic system described under J9D5(2).
- (2) The requirements of J9D5(1) do not apply to a building with *battery systems* installed.

Table J9D5a: Minimum solar photovoltaic system installed peak output (W) per m² of conditioned space for buildings without gas

Building Class	Climate zone 1	Climate zones 2 to 7	Climate zone 8
Class 5, 6, and 7	95	65	55
Class 3 and 9	70	40	35

Table J9D5b: Minimum solar photovoltaic system installed peak output (W) per m² of conditioned space for buildings with gas, in addition to the requirements of J9D5(2)

Building Class	Climate zones 1 and 3	Climate zones 2 and 5	Climate zones 4 and 6	Climate zone 7	Climate zone 8
Class 5, 6 and 7	0	0	1	1.7	4.7

Energy efficiency

Building Class	Climate zones 1 and 3	Climate zones 2 and 5	Climate zones 4 and 6	Climate zone 7	Climate zone 8
Class 3 and 9	2.6	0.9	2.6	0.9	0

Explanatory Information

Where compliance with J9D5 leads to the installation of an on-site solar photovoltaic system, existing network connection rules, governed by the Distribution Network Service Provider (DNSP), will apply. Depending on the size of the system and the amount of PV already installed in the local area, the DNSP may require a building to have certain features that help maintain local electricity grid stability. These could include options for a dynamic grid connection, demand response capability as per [J9D3\(6\)](#) for key energy using equipment, or on-site energy storage.

PREVIEW DRAFT

Specification 33

Additional requirements

S33C1 Scope

This Specification contains requirements that must be complied with in addition to the modelling requirements of J1V1, J1V2 and J1V3.

S33C2 Additional requirements — general

- (1) In addition to the modelling requirements for J1V1, J1V2, and J1V3, a building must comply with—
- (a) for general thermal construction, J4D3; and
 - (b) for floor edge insulation, J4D7(3) and J4D7(4); and
 - (c) for building sealing, J1V4 or J5; and
 - (d) for deactivation, control and insulation of *air-conditioning* and mechanical ventilation systems—
 - (i) J6D3(1)(a); and
 - (ii) J6D3(1)(b); and
 - (iii) J6D3(1)(c)(i)
 - (iv) J6D3(1)(e); and
 - (v) J6D3(2); and
 - (vi) J6D3(3); and
 - (vii) J6D3(4)
 - (viii) J6D3(5)
 - (ix) J6D4(3); and
 - (x) J6D4(4); and
 - (xi) J6D4(5)
 - (xii) J6D4(6)
 - (xiii) J6D4(7)
 - (xiv) J6D5; and
 - (xv) J6D6; and
 - (xvi) J6D9; and
 - (e) for testing water-to-air package *air-conditioning* equipment not less than 65 kW, AS/NZS ISO 13256.1 at test condition C3; and
 - (f) for testing a refrigeration chiller, AHRI 551/591; and
 - (g) for interior artificial lighting and power control, J7D4; and
 - (h) for interior decorative and display lighting, J7D5; and
 - (i) for artificial lighting around the exterior of a building, J7D6; and
 - (j) for boiling water and chilled water storage units, J7D7; and
 - (k) for deactivation of *swimming pool* heating and pumping, J8D4(2)(b) and J8D4(3); and
 - (l) for deactivation of spa pool heating and pumping, J8D5(2)(b) and J8D5(3); and
 - (m) for facilities for energy monitoring, Part J9; and
 - (n) for deactivation of fixed outdoor space heating appliances, clause J6D10(3).

- (o) for facilitating the future replacement of gas-powered appliances with electrically-powered appliances—
 - (i) J6D10(5), (6) and (7); and
 - (ii) J8D3(3) and (4); and
 - (iii) J8D4(6) and (7); and
 - (iv) J8D5(6) and (7).
- (2) In addition to the requirements of (1), a building using J1V1 must comply with J9D5(2) to (4) for facilities for solar photovoltaic panels.

S33C3 Additional requirements — Green Star

Where not included in the building energy simulation to satisfy J1V2(1), compliance must be achieved with—

- (a) for heating, cooling and ventilation equipment outside the scope of the *Green Star* model, Part J6; and
- (b) for artificial lighting outside the scope of the *Green Star* model, Part J7.

Specification 34

Modelling parameters for J1V3

S34C1 Scope

This Specification contains the *required* modelling parameters for J1V3.

S34C2 Reference building

The *annual greenhouse gas emissions* must be calculated for the *reference building* in accordance with the following:

- (a) The *reference building* must—
 - (i) subject to (b), (c) and (d), comply with *Deemed-to-Satisfy Provisions* in Parts J4 to J8; and
 - (ii) have the minimum amount of mechanical ventilation *required* by Part F6; and
 - (iii) be provided with a solar photovoltaic system that complies with—
 - (A) J9D5(2)(a), J9D5(3) and J9D5(4) with PV panels modelled as parallel to the roof and assuming an average solar photovoltaic panel power rating of 225 W/m²; or
 - (B) J9D5(2)(b), J9D5(3) and J9D5(4).
- (b) The *external walls* must have a solar absorptance of 0.6.
- (c) The U-Value of the wall-glazing construction must be calculated according to S37C3.
- (d) The solar admittance of the wall-glazing construction must be calculated according to S37C5.
- (e) Where J1V3(1)(b)(i) or J1V3(1)(b)(ii) applies, the *air-conditioning* must—
 - (i) for 95% of the annual *hours of operation*, achieve dry bulb temperatures between—
 - (A) 18°C to 25°C for *conditioned spaces* with transitory occupancy; and
 - (B) subject to (ii), 21°C to 24°C in all other *conditioned spaces*; and
 - (ii) if the proposed building has no mechanically provided cooling or has mixed mode cooling, have the same method of control and control set points for non-mechanical cooling as the proposed building.
- (f) The infiltration rate in each zone must be—
 - (i) 0.7 air changes per hour throughout all zones when there is no mechanically supplied *outdoor air*; and
 - (ii) 0.35 air changes per hour throughout all zones at all other times.
- (g) The artificial lighting must achieve the *required* maximum *illumination power density* in Part J7 without applying the control device adjustment factors.
- (h) *Minimum Energy Performance Standards* must be applied to *services* not covered by Parts J6 to J8.

S34C3 Proposed building and reference building

- (1) The *annual greenhouse gas emissions* must be calculated for the proposed building and the *reference building* using the same—
 - (a) *annual greenhouse gas emissions* calculation method; and
 - (b) greenhouse gas emissions factors in accordance with (2); and
 - (c) location in accordance with (3); and
 - (d) climatic data, using a projection at year 2050 made under a Representative Concentration Pathway with an 8.5 W/m² increase in radiative forcing; and
 - (e) adjacent structures and features; and

- (f) orientation; and
 - (g) building form in accordance with (4); and
 - (h) testing standards including for insulation, *glazing*, water heater and unitary *air-conditioning* equipment; and
 - (i) *fabric* and *glazing* in accordance with (5); and
 - (j) *services* in accordance with (6) and S34C4; and
 - (k) target for thermal comfort minimums as per J1V3(1)(b).
- (2) For the purposes of (1)(b), greenhouse gas emissions factors must be based on the factors in Table S34C3.
- (3) For the purposes of (1)(c), location must be either—
- (a) the location where the building is to be constructed if appropriate climatic data is available; or
 - (b) the nearest location with similar climatic conditions, for which climatic data is available.
- (4) For the purposes of (1)(g), building form must include the same—
- (a) roof geometry; and
 - (b) floor plan; and
 - (c) number of *storeys*; and
 - (d) location, extent and configuration of ground floors and basements; and
 - (e) size and location of *glazing*; and
 - (f) external doors.
- (5) For the purposes of (1)(i), *fabric* and *glazing* must include the same—
- (a) thermal resistance of air films including any adjustment factors, moisture content of materials and the like; and
 - (b) dimensions of external, internal and separating walls; and
 - (c) internal shading devices, including their colour and their criteria for operation; and
 - (d) location and extent of thermal mass.
- (6) For the purposes of (1)(j), *services* must include the same—
- (a) range and type of *services* and energy sources including the same proportions and functions of air-cooled and water-cooled *air-conditioning* equipment; and
 - (b) *air-conditioning* zones including—
 - (i) separate zones for each *storey*; and
 - (ii) separate zones for each *sole-occupancy unit*; and
 - (iii) in spaces larger than 20 m², separate perimeter zones, no deeper than 4 m adjacent to *external walls* with windows facing—
 - (A) within 45° of true north; and
 - (B) within 45° of true south; and
 - (C) within 45° of true east; and
 - (D) within 45° of true west; and
 - (iv) separate centre zones comprising the remainder of each *sole-occupancy unit* within each *storey*; and
 - (v) the same method of calculating the temperature difference across *air-conditioning* zone boundaries; and
 - (vi) the same method of combining zones with similar heating and cooling requirements, where necessary to simplify the simulation; and
 - (c) floor coverings and furniture and fittings density; and
 - (d) internal artificial lighting illumination levels; and
 - (e) internal heat gains including people, lighting, appliances, meals and other electric power loads; and
 - (f) *air-conditioning*, including chiller, fan and *boiler* equipment, system configuration; and
 - (g) profiles for occupancy, *air-conditioning*, lighting and internal heat gains from people, hot meals, appliances, equipment and heated water supply systems based on—

- (i) [Specification 35](#); or
 - (ii) [NABERS Energy](#) simulation requirements; or
 - (iii) [Green Star](#) simulation requirements; or
 - (iv) the actual building if—
 - (A) the operating hours per year are not less than 2,500; or
 - (B) the daily operating profiles are not listed in [Specification 35](#); and
 - (h) supply heated water temperature and rate of use; and
 - (i) infiltration values, subject to (7); and
 - (j) sequencing for water heaters, refrigeration chillers and heat rejection equipment such as cooling towers; and
 - (k) where [J1V3\(1\)\(b\)\(i\)](#) applies, representation of clothing and metabolic rate of the occupants, and air speed from mechanical services; and
 - (l) control of [air-conditioning](#), in accordance with the requirements of [Part J6](#), except if the controls for the proposed building are not adequately specified or cannot be simulated, the sample control specifications in Appendix B of AIRAH-DA28 must be used; and
 - (m) environmental conditions such as ground reflectivity, form factors for topography and built environment, temperature of external bounding surfaces, air velocities across external surfaces, vegetation and the like; and
 - (n) number, sizes, floors and traffic served by lifts and escalators; and
 - (o) loss factors for solar PV installation.
- (7) For the purposes of (6)(i), the intended building leakage at 50 Pa may be converted into a whole building infiltration value for the proposed building infiltration using Tables 4.16 to 4.24 of CIBSE Guide A if all of the following have been specified:
- (a) Additional sealing provisions to those [required](#) by [Part J5](#).
 - (b) An intended building leakage of less than 10 m³/hr.m² at 50 Pa.
 - (c) Pressure testing to verify achievement of the intended building leakage.
- (8) Where [J1V3\(1\)\(b\)\(iii\)](#), (iv) or (v) applies, the [air-conditioning](#) must—
- (a) subject to (b), for 95% of the annual hours of operation, achieve dry bulb temperatures between—
 - (i) 18°C to 25°C for [conditioned spaces](#) with transitory occupancy; and
 - (ii) 21°C to 24°C in all other [conditioned spaces](#); and
 - (b) if the proposed building has no mechanically provided cooling or has mixed mode cooling, the proposed building and reference building must have the same method of control and control set points for non-mechanical cooling.

Table S34C3: Greenhouse gas emissions factors (kgCO₂-e/GJ)

Energy Source	ACT	NSW	NT	QLD	SA	TAS	VIC	WA
Electricity	-	51	110	120	22.5	9	135	83
Gas	-	51.53	51.53	51.53	51.53	51.53	51.53	51.53

Table Notes

- (1) National emissions factors are not applicable to calculations for buildings in the ACT as they do not take into account investments in renewable electricity generation in the national electricity market made by the ACT.
- (2) Values for the ACT can be found in the ACT Appendix.

S34C4 Services — proposed and reference building

For the modelling of [services](#) for the purposes of calculating [annual greenhouse gas emissions](#)—

- (a) system demand and response for all items of plant must be calculated on a not less frequent than hourly basis;

and

- (b) energy usage of all items of plant must be calculated with allowances for—
 - (i) part load performance; and
 - (ii) staging to meet system demand; and
- (c) energy usage of cooling plant must be calculated with allowances for—
 - (i) the impact of chilled water temperature on chiller efficiency; and
 - (ii) the impact of condenser water temperature on water-cooled plant efficiency; and
 - (iii) the impact of ambient temperature on air-cooled plant efficiency; and
 - (iv) the energy use of primary pumps serving individual chillers; and
 - (v) the energy use of auxiliary equipment, including controls and oil heating for chillers; and
 - (vi) thermal losses in the chilled water system; and
 - (vii) the impact of chilled water temperature on thermal losses in the chilled water system; and
- (d) energy usage of water heating systems for space heating must be calculated with allowances for—
 - (i) the impact of water temperature on water heater efficiency; and
 - (ii) the energy use of primary or feedwater pumps serving individual water heaters; and
 - (iii) thermal losses in water heating systems; and
 - (iv) the thermal mass of water heating systems, accounting for thermal losses during periods when the system is not operating; and
- (e) energy usage of fan and pump systems must be calculated with allowances for—
 - (i) the method of capacity regulation; and
 - (ii) the use of either fixed or variable pressure control; and
- (f) energy usage of pump systems must be calculated with allowances for the system fixed static pressure head; and
- (g) energy usage of auxiliary equipment associated with co-generation and tri-generation systems, including pumps, cooling towers and jacket heaters, must be calculated; and
- (h) if energy usage for each is the same in the proposed building and the reference building, omission from the calculation for both the proposed building and reference building may be made for—
 - (i) heated water supply for food preparation and sanitary purposes; and
 - (ii) lifts; and
 - (iii) escalators; and
 - (iv) electric vehicle charging; and
- (i) energy use of a lift in a building with more than one classification may be apportioned according to the number of *storeys* of the part for which the *annual greenhouse gas emissions* are being calculated.

Specification 35

Modelling profiles for J1V3

S35C1 Scope

This Specification contains modelling profiles as referenced in S34C3(6)(g).

S35C2 Modelling profiles

- (1) The *air-conditioning*, must be modelled on the basis of—
 - (a) the daily occupancy and operation profiles in Tables S35C2b, S35C2c, S35C2d, S35C2e, S35C2f, S35C2g, S35C2h, S35C2i, S35C2j and S35C2k; and
 - (b) the internal heat gains in a building—
 - (i) from occupants and hot meals, in accordance with one of the options in Table S35C2n; and
 - (ii) from appliances and equipment, in accordance with Table S35C2l; and
 - (iii) from artificial lighting, determined in accordance with (2).
- (2) The artificial lighting, must be modelled on the basis of the proposed level of artificial lighting in the building with the daily profile in Tables S35C2b, S35C2c, S35C2d, S35C2e, S35C2f, S35C2g, S35C2h, S35C2i, S35C2j and S35C2k.
- (3) The heated water supply, must be modelled on the basis of the consumption rates of Table S35C2m.

Table * * * * * : This table reference has been deliberately left blank

Table S35C2b: Occupancy and operation profiles of a Class 3 hotel

Time period (local standard time)	Occupancy (Daily)	Artificial lighting (Daily)	Appliances and equipment (Daily)	Air-conditioning (Daily)
12:00am to 1:00am	90%	5%	20%	On
1:00am to 2:00am	90%	5%	20%	On
2:00am to 3:00am	90%	5%	15%	On
3:00am to 4:00am	90%	5%	15%	On
4:00am to 5:00am	90%	5%	15%	On
5:00am to 6:00am	80%	25%	15%	On
6:00am to 7:00am	70%	80%	40%	On
7:00am to 8:00am	60%	80%	80%	On
8:00am to 9:00am	60%	50%	50%	On
9:00am to 10:00am	30%	20%	30%	On
10:00am to 11:00am	10%	20%	20%	Off
11:00am to 12:00pm	10%	20%	20%	Off
12:00pm to 1:00pm	10%	20%	20%	Off
1:00pm to 2:00pm	10%	20%	20%	Off
2:00pm to 3:00pm	10%	20%	20%	Off
3:00pm to 4:00pm	10%	20%	20%	Off
4:00pm to 5:00pm	20%	20%	20%	On
5:00pm to 6:00pm	30%	50%	40%	On

Energy efficiency

Time period (local standard time)	Occupancy (Daily)	Artificial lighting (Daily)	Appliances and equipment (Daily)	Air-conditioning (Daily)
6:00pm to 7:00pm	40%	50%	40%	On
7:00pm to 8:00pm	50%	50%	50%	On
8:00pm to 9:00pm	60%	50%	60%	On
9:00pm to 10:00pm	70%	50%	60%	On
10:00pm to 11:00pm	70%	50%	40%	On
11:00pm to 12:00am	90%	50%	20%	On

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the Class 3 building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The *air-conditioning* profile is expressed as the plant status.

Table S35C2c: Weekday occupancy and operation profiles of a Class 5 building, a Class 7 warehouse, a Class 8 Laboratory or a Class 9a clinic, day surgery or procedure unit

Time period (local standard time)	Occupancy (Monday to Friday)	Artificial lighting (Monday to Friday)	Appliances and equipment (Monday to Friday)	Air-conditioning (Monday to Friday)
12:00am to 1:00am	0%	0%	25%	Off
1:00am to 2:00am	0%	0%	25%	Off
2:00am to 3:00am	0%	0%	25%	Off
3:00am to 4:00am	0%	0%	25%	Off
4:00am to 5:00am	0%	0%	25%	Off
5:00am to 6:00am	0%	0%	25%	Off
6:00am to 7:00am	0%	0%	25%	Off
7:00am to 8:00am	10%	40%	65%	On
8:00am to 9:00am	20%	90%	80%	On
9:00am to 10:00am	70%	100%	100%	On
10:00am to 11:00am	70%	100%	100%	On
11:00am to 12:00pm	70%	100%	100%	On
12:00pm to 1:00pm	70%	100%	100%	On
1:00pm to 2:00pm	70%	100%	100%	On
2:00pm to 3:00pm	70%	100%	100%	On
3:00pm to 4:00pm	70%	100%	100%	On
4:00pm to 5:00pm	70%	100%	100%	On
5:00pm to 6:00pm	35%	80%	80%	On
6:00pm to 7:00pm	10%	60%	65%	Off
7:00pm to 8:00pm	5%	60%	55%	Off
8:00pm to 9:00pm	5%	50%	25%	Off
9:00pm to 10:00pm	0%	0%	25%	Off
10:00pm to 11:00pm	0%	0%	25%	Off
11:00pm to 12:00am	0%	0%	25%	Off

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The appliances and equipment profile is expressed as a percentage of the maximum internal heat gain in [Table S35C2I](#).
- (4) The *air-conditioning* profile is expressed as the plant status.

Table S35C2d: Weekend occupancy and operation profiles of a Class 5 building, a Class 7 warehouse, a Class 8 Laboratory or a Class 9a clinic, day surgery or procedure unit

Time period (local standard time)	Occupancy (Saturday, Sunday and holidays)	Artificial lighting (Saturday, Sunday and holidays)	Appliances and equipment (Saturday, Sunday and holidays)	Air-conditioning (Saturday, Sunday and holidays)
12:00am to 1:00am	0%	0%	25%	Off
1:00am to 2:00am	0%	0%	25%	Off
2:00am to 3:00am	0%	0%	25%	Off
3:00am to 4:00am	0%	0%	25%	Off
4:00am to 5:00am	0%	0%	25%	Off
5:00am to 6:00am	0%	0%	25%	Off
6:00am to 7:00am	0%	0%	25%	Off
7:00am to 8:00am	0%	0%	25%	Off
8:00am to 9:00am	5%	15%	25%	Off
9:00am to 10:00am	5%	15%	25%	Off
10:00am to 11:00am	5%	15%	25%	Off
11:00am to 12:00pm	5%	15%	25%	Off
12:00pm to 1:00pm	5%	15%	25%	Off
1:00pm to 2:00pm	5%	15%	25%	Off
2:00pm to 3:00pm	5%	15%	25%	Off
3:00pm to 4:00pm	5%	15%	25%	Off
4:00pm to 5:00pm	5%	15%	25%	Off
5:00pm to 6:00pm	0%	0%	25%	Off
6:00pm to 7:00pm	0%	0%	25%	Off
7:00pm to 8:00pm	0%	0%	25%	Off
8:00pm to 9:00pm	0%	0%	25%	Off
9:00pm to 10:00pm	0%	0%	25%	Off
10:00pm to 11:00pm	0%	0%	25%	Off
11:00pm to 12:00am	0%	0%	25%	Off

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The appliances and equipment profile is expressed as a percentage of the maximum internal heat gain in [Table S35C2I](#).
- (4) The *air-conditioning* profile is expressed as the plant status.

Table S35C2e: Occupancy and operation profiles of a Class 6 shop or shopping centre

Time period (local standard time)	Occupancy (Daily)	Artificial lighting (Daily)	Appliances and equipment (Daily)	Air-conditioning (Daily)
12:00am to 1:00am	0%	0%	25%	Off
1:00am to 2:00am	0%	0%	25%	Off
2:00am to 3:00am	0%	0%	25%	Off
3:00am to 4:00am	0%	0%	25%	Off
4:00am to 5:00am	0%	0%	25%	Off
5:00am to 6:00am	0%	0%	25%	Off
6:00am to 7:00am	0%	0%	25%	Off
7:00am to 8:00am	10%	100%	70%	On
8:00am to 9:00am	20%	100%	70%	On
9:00am to 10:00am	20%	100%	70%	On
10:00am to 11:00am	15%	100%	70%	On
11:00am to 12:00pm	25%	100%	70%	On
12:00pm to 1:00pm	25%	100%	70%	On
1:00pm to 2:00pm	20%	100%	70%	On
2:00pm to 3:00pm	20%	100%	70%	On
3:00pm to 4:00pm	20%	100%	70%	On
4:00pm to 5:00pm	20%	100%	70%	On
5:00pm to 6:00pm	5%	100%	70%	On
6:00pm to 7:00pm	5%	100%	70%	Off
7:00pm to 8:00pm	0%	0%	10%	Off
8:00pm to 9:00pm	0%	0%	10%	Off
9:00pm to 10:00pm	0%	0%	10%	Off
10:00pm to 11:00pm	0%	0%	10%	Off
11:00pm to 12:00am	0%	0%	10%	Off

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The appliances and equipment profile is expressed as a percentage of the maximum internal heat gain in [S35C2I](#).
- (4) The *air-conditioning* profile is expressed as the plant status.

Table S35C2f: Occupancy and operation profiles of a Class 6 restaurant or cafe

Time period (local standard time)	Occupancy (Monday to Saturday)	Artificial lighting (Monday to Saturday)	Appliances and equipment (Monday to Saturday)	Air-conditioning (Monday to Saturday)
12:00am to 1:00am	0%	5%	15%	Off
1:00am to 2:00am	0%	5%	15%	Off
2:00am to 3:00am	0%	5%	15%	Off
3:00am to 4:00am	0%	5%	15%	Off
4:00am to 5:00am	0%	5%	15%	Off
5:00am to 6:00am	0%	5%	15%	Off

Energy efficiency

Time period (local standard time)	Occupancy (Monday to Saturday)	Artificial lighting (Monday to Saturday)	Appliances and equipment (Monday to Saturday)	Air-conditioning (Monday to Saturday)
6:00am to 7:00am	5%	40%	40%	Off
7:00am to 8:00am	5%	40%	40%	On
8:00am to 9:00am	5%	60%	60%	On
9:00am to 10:00am	5%	60%	60%	On
10:00am to 11:00am	20%	90%	90%	On
11:00am to 12:00pm	50%	90%	90%	On
12:00pm to 1:00pm	80%	90%	90%	On
1:00pm to 2:00pm	70%	90%	90%	On
2:00pm to 3:00pm	40%	90%	90%	On
3:00pm to 4:00pm	20%	90%	90%	On
4:00pm to 5:00pm	25%	90%	90%	On
5:00pm to 6:00pm	50%	90%	90%	On
6:00pm to 7:00pm	80%	90%	90%	On
7:00pm to 8:00pm	80%	90%	90%	On
8:00pm to 9:00pm	80%	90%	90%	On
9:00pm to 10:00pm	50%	90%	90%	On
10:00pm to 11:00pm	35%	50%	50%	On
11:00pm to 12:00am	20%	30%	30%	On

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The appliances and equipment profile is expressed as a percentage of the maximum internal heat gain in [S35C2I](#).
- (4) The *air-conditioning* profile is expressed as the plant status.
- (5) Sunday profile is 5% continuous artificial lighting and 5% continuous appliances and equipment where there is no occupancy and the *air-conditioning* is "off".

Table S35C2g: Occupancy and operation profiles of a Class 9a ward area

Time period (local standard time)	Occupancy (Daily)	Artificial lighting (Daily)	Air-conditioning (Daily)
12:00am to 1:00am	70%	5%	On
1:00am to 2:00am	70%	5%	On
2:00am to 3:00am	70%	5%	On
3:00am to 4:00am	70%	5%	On
4:00am to 5:00am	70%	5%	On
5:00am to 6:00am	70%	25%	On
6:00am to 7:00am	70%	80%	On
7:00am to 8:00am	70%	80%	On
8:00am to 9:00am	70%	50%	On
9:00am to 10:00am	70%	20%	On
10:00am to 11:00am	70%	20%	On
11:00am to 12:00pm	70%	20%	On

Time period (local standard time)	Occupancy (Daily)	Artificial lighting (Daily)	Air-conditioning (Daily)
12:00pm to 1:00pm	70%	20%	On
1:00pm to 2:00pm	70%	20%	On
2:00pm to 3:00pm	70%	20%	On
3:00pm to 4:00pm	70%	20%	On
4:00pm to 5:00pm	70%	20%	On
5:00pm to 6:00pm	70%	50%	On
6:00pm to 7:00pm	70%	50%	On
7:00pm to 8:00pm	70%	50%	On
8:00pm to 9:00pm	70%	50%	On
9:00pm to 10:00pm	70%	50%	On
10:00pm to 11:00pm	70%	50%	On
11:00pm to 12:00am	70%	5%	On

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The *air-conditioning* profile is expressed as the plant status.

Table S35C2h: Occupancy and operation profiles of a Class 9b theatre or cinema

Time period (local standard time)	Occupancy (Monday to Friday)	Occupancy (Saturday and Sunday)	Artificial lighting (Monday to Friday)	Artificial lighting (Saturday and Sunday)	Air-conditioning (Monday to Friday)	Air-conditioning (Saturday and Sunday)
12:00am to 1:00am	0%	0%	5%	5%	Off	Off
1:00am to 2:00am	0%	0%	5%	5%	Off	Off
2:00am to 3:00am	0%	0%	5%	5%	Off	Off
3:00am to 4:00am	0%	0%	5%	5%	Off	Off
4:00am to 5:00am	0%	0%	5%	5%	Off	Off
5:00am to 6:00am	0%	0%	5%	5%	Off	Off
6:00am to 7:00am	0%	0%	5%	5%	Off	Off
7:00am to 8:00am	0%	0%	5%	5%	Off	On
8:00am to 9:00am	0%	20%	100%	100%	Off	On
9:00am to 10:00am	0%	70%	10%	10%	Off	On
10:00am to 11:00am	0%	70%	10%	10%	Off	On

Time period (local standard time)	Occupancy (Monday to Friday)	Occupancy (Saturday and Sunday)	Artificial lighting (Monday to Friday)	Artificial lighting (Saturday and Sunday)	Air-conditioning (Monday to Friday)	Air-conditioning (Saturday and Sunday)
11:00am to 12:00pm	0%	70%	10%	10%	On	On
12:00pm to 1:00pm	20%	20%	100%	100%	On	On
1:00pm to 2:00pm	70%	70%	5%	5%	On	On
2:00pm to 3:00pm	70%	70%	5%	5%	On	On
3:00pm to 4:00pm	70%	70%	5%	5%	On	On
4:00pm to 5:00pm	70%	70%	5%	5%	On	On
5:00pm to 6:00pm	20%	20%	100%	100%	On	On
6:00pm to 7:00pm	20%	20%	100%	100%	On	On
7:00pm to 8:00pm	70%	70%	100%	100%	On	On
8:00pm to 9:00pm	70%	70%	5%	5%	On	On
9:00pm to 10:00pm	70%	70%	5%	5%	On	On
10:00pm to 11:00pm	70%	70%	5%	5%	On	On
11:00pm to 12:00am	10%	10%	100%	100%	On	On

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The *air-conditioning* profile is expressed as the plant status.

Table S35C2i: Occupancy and operation profiles of a Class 9b conference facility

Hour	Occupancy (Daily)	Artificial lighting and equipment (Daily)	Air-conditioning (Daily)
12:00am to 1:00am	0%	15%	Off
1:00am to 2:00am	0%	15%	Off
2:00am to 3:00am	0%	15%	Off
3:00am to 4:00am	0%	15%	Off
4:00am to 5:00am	0%	15%	Off
5:00am to 6:00am	0%	15%	Off
6:00am to 7:00am	5%	25%	On
7:00am to 8:00am	10%	45%	On
8:00am to 9:00am	20%	45%	On

Hour	Occupancy (Daily)	Artificial lighting and equipment (Daily)	Air-conditioning (Daily)
9:00am to 10:00am	20%	45%	On
10:00am to 11:00am	25%	60%	On
11:00am to 12:00pm	30%	60%	On
12:00pm to 1:00pm	30%	60%	On
1:00pm to 2:00pm	35%	60%	On
2:00pm to 3:00pm	30%	45%	On
3:00pm to 4:00pm	30%	60%	On
4:00pm to 5:00pm	35%	60%	On
5:00pm to 6:00pm	25%	60%	On
6:00pm to 7:00pm	20%	60%	On
7:00pm to 8:00pm	15%	25%	On
8:00pm to 9:00pm	10%	25%	On
9:00pm to 10:00pm	10%	25%	On
10:00pm to 11:00pm	10%	25%	On
11:00pm to 12:00am	5%	25%	Off

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The appliances and equipment profile is expressed as a percentage of the maximum internal heat gain in [S35C2I](#).
- (4) The *air-conditioning* profile is expressed as the plant status.

Table S35C2j: Occupancy and operation profiles of a Class 9b school

Time period (local standard time)	Occupancy (Monday to Friday)	Artificial lighting (Monday to Friday)	Appliances and equipment (Monday to Friday)	Air-conditioning (Monday to Friday)
12:00am to 1:00am	0%	0%	5%	Off
1:00am to 2:00am	0%	0%	5%	Off
2:00am to 3:00am	0%	0%	5%	Off
3:00am to 4:00am	0%	0%	5%	Off
4:00am to 5:00am	0%	0%	5%	Off
5:00am to 6:00am	0%	0%	5%	Off
6:00am to 7:00am	0%	0%	5%	Off
7:00am to 8:00am	5%	20%	30%	On
8:00am to 9:00am	75%	85%	85%	On
9:00am to 10:00am	90%	95%	95%	On
10:00am to 11:00am	90%	95%	95%	On
11:00am to 12:00pm	90%	95%	95%	On
12:00pm to 1:00pm	50%	60%	70%	On
1:00pm to 2:00pm	50%	60%	70%	On
2:00pm to 3:00pm	90%	95%	95%	On
3:00pm to 4:00pm	70%	90%	80%	On

Time period (local standard time)	Occupancy (Monday to Friday)	Artificial lighting (Monday to Friday)	Appliances and equipment (Monday to Friday)	Air-conditioning (Monday to Friday)
4:00pm to 5:00pm	50%	70%	60%	On
5:00pm to 6:00pm	20%	20%	20%	Off
6:00pm to 7:00pm	20%	20%	20%	Off
7:00pm to 8:00pm	20%	20%	20%	Off
8:00pm to 9:00pm	10%	5%	10%	Off
9:00pm to 10:00pm	5%	0%	5%	Off
10:00pm to 11:00pm	5%	0%	5%	Off
11:00pm to 12:00am	5%	0%	5%	Off

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The appliances and equipment profile is expressed as a percentage of the maximum internal heat gain in [S35C2l](#).
- (4) The *air-conditioning* profile is expressed as the plant status.
- (5) Saturday and Sunday profiles are 5% continuous artificial lighting and 5% continuous appliances and equipment, where there is no occupancy and the *air-conditioning* is "off".

Table S35C2k: Occupancy and operation profiles of a Class 9c aged care facility

Time period (local standard time)	Occupancy (Monday to Friday)	Occupancy (Saturday, Sunday and holidays)	Artificial lighting (Daily)	Air-conditioning (Monday to Friday)	Air-conditioning (Saturday, Sunday and holidays)
12:00am to 1:00am	85%	85%	5%	On	On
1:00am to 2:00am	85%	85%	5%	On	On
2:00am to 3:00am	85%	85%	5%	On	On
3:00am to 4:00am	85%	85%	5%	On	On
4:00am to 5:00am	85%	85%	5%	On	On
5:00am to 6:00am	85%	85%	25%	On	On
6:00am to 7:00am	85%	85%	80%	On	On
7:00am to 8:00am	80%	85%	80%	On	On
8:00am to 9:00am	50%	50%	50%	On	On
9:00am to 10:00am	50%	50%	20%	Off	On
10:00am to 11:00am	50%	50%	20%	Off	On
11:00am to 12:00pm	50%	50%	20%	Off	On
12:00pm to 1:00pm	50%5	50%	20%	Off	On
1:00pm to 2:00pm	50%	50%	20%	Off	On
2:00pm to 3:00pm	50%	50%	20%	Off	On
3:00pm to 4:00pm	50%	50%	20%	Off	On

Time period (local standard time)	Occupancy (Monday to Friday)	Occupancy (Saturday, Sunday and holidays)	Artificial lighting (Daily)	Air-conditioning (Monday to Friday)	Air-conditioning (Saturday, Sunday and holidays)
4:00pm to 5:00pm	50%	50%	20%	On	On
5:00pm to 6:00pm	50%	50%	50%	On	On
6:00pm to 7:00pm	70%	50%	50%	On	On
7:00pm to 8:00pm	70%	70%	50%	On	On
8:00pm to 9:00pm	80%	80%	50%	On	On
9:00pm to 10:00pm	85%	80%	50%	On	On
10:00pm to 11:00pm	85%	85%	50%	On	On
11:00pm to 12:00am	85%	85%	5%	On	On

Table Notes

- (1) The occupancy profile is expressed as a percentage of the maximum number of people that can be accommodated in the Class 9c building.
- (2) The artificial lighting profile is expressed as a percentage of the maximum *illumination power density* permitted under [Part J7](#).
- (3) The *air-conditioning* profile is expressed as the plant status.

Table S35C2l: Internal heat gains for appliances and equipment

Application	Internal sensible heat gain rate
Class 9a building <i>ward area</i>	5 W/m ² averaged for 24 hours per day, 7 days per week, continuous operation
Class 8 laboratory and a Class 9a clinic, day surgery and a procedure unit	15 W/m ²
Class 6 shop and shopping centre, Class 6 cafe and restaurant and Class 9b <i>school</i>	5 W/m ²
Other applications	No load
Class 3 (<i>sole-occupancy unit</i>)	160 W per room
Class 3 dormitories	No load
Class 5 building	11 W/m ²
Class 9c building	160 W per room
Class 9b (conference facilities only)	150 W per room plus 10 W per person

Table S35C2m: Heated water supply consumption rates

Application	Daily consumption rate at 60°C
Residential part of a hotel or motel	100 L/ <i>sole-occupancy unit</i>
Dormitory, boarding house, guest house, hostel, lodging house and backpackers accommodation	50 L/person
Residential part of a <i>school</i> , accommodation for the aged, children or people with a disability and a <i>detention centre</i> or a <i>health-care building</i> which accommodates members of staff	
Class 9c building	
Office, laboratory, shop and <i>assembly building</i>	4 L/person

Application	Daily consumption rate at 60°C
Dining room, restaurant and cafe	9 L/meal
<i>Health-care building, ward area</i>	70 L/patient
<i>School</i>	7 L/person
Other applications	4 L/person

Table S35C2n: Internal heat gains for occupants and hot meals

Application	Internal heat gains per person
Dining room, restaurant or cafe	80 W <i>sensible heat gain</i> and 80 W <i>latent heat gain</i>
	The average adjusted metabolic rate for sedentary work from Table 45 of AIRAH-DA09
	The heat emission rate for sedentary work from Table 6.3 of CIBSE Guide A
Other applications	75 W <i>sensible heat gain</i> and 55 W <i>latent heat gain</i>
	An average adjusted metabolic rate from Table 45 of AIRAH-DA09
	A heat emission rate from Table 6.3 of CIBSE Guide A

Table Notes

- (1) The number of people must be calculated in accordance with [D2D18](#).
- (2) For a dining room, restaurant or cafe, the internal heat gains per person account for heat gains from both occupants and hot meals.
- (3) For other applications, the internal heat gains per person only account for heat gains from occupants.

Specification 36

Material properties

S36C1 Scope

This Specification lists the thermal properties of some common construction materials.

S36C2 Construction Deemed-to-Satisfy

- (1) Tables S36C2a, S36C2b, S36C2c, S36C2d and S36C2e list the thermal conductivity considered to be achieved by some common construction materials.
- (2) For the purposes of Tables S36C2a, S36C2b, S36C2c, S36C2d and S36C2e:
 - (a) For materials which incorporate cores or hollows in regular patterns (such as cored brickwork, hollow blockwork and cored floor or wall panels), the tabulated material densities and thermal conductivities are based on the gross density (mass divided by external dimensions).
 - (b) The *R-Value* of a material is determined by dividing the thickness of the material in metres by the thermal conductivity in $\text{Wm}^{-1}\text{K}^{-1}$.
- (3) Tables S36C2f, S36C2g, S36C2h, S36C2i, S36C2j, S36C2k, S36C2l and S36C2m list the *R-Value* considered to be achieved by air films and airspaces.
- (4) For an *envelope* that contains a ventilated airspace, the *Total R-Value* of the building *fabric* must be reduced based on the area of ventilation openings in accordance with clause 6.3 of AS/NZS 4859.2.
- (5) The requirements of (4) do not apply to a roof with an airspace greater than 300 mm or a pitched roof greater than 5° with a horizontal ceiling.

Table S36C2a: Thermal conductivity of typical framing materials

Description	Density (kg/m^3)	Thermal conductivity ($\text{Wm}^{-1}\text{K}^{-1}$)
Steel	7850	47.5
Timber – kiln dried hardwood (across the grain)	677	0.16
Timber – Radiata pine (across the grain)	506	0.12

Table S36C2b: Thermal conductivity of typical roof cladding materials

Description	Density (kg/m^3)	Thermal conductivity ($\text{Wm}^{-1}\text{K}^{-1}$)
Aluminium sheeting	2680	210
Concrete or terra cotta tiles	1922	0.81
Steel sheeting	7850	47.5

Table S36C2c: Thermal conductivity of typical wall cladding materials

Description	Density (kg/m^3)	Thermal conductivity ($\text{Wm}^{-1}\text{K}^{-1}$)
Aluminium sheeting	2680	210
Autoclaved aerated concrete	350	0.10
	510	0.15
	900	0.27

Description	Density (kg/m ³)	Thermal conductivity (Wm ⁻¹ K ⁻¹)
Cement render (1 part cement to 4 parts sand)	1570	0.53
Clay brick: 2.75 kg	1430	0.55
Clay brick: 3.25 kg	1690	0.65
Clay brick: 3.75 kg	1950	0.78
Concrete block: 190 mm dense or 90 mm dense solid	1100/2200	1.1
Concrete block: 140 mm dense or 190 mm lightweight	1250/910	0.85
Concrete block: 90 mm dense hollow or 90 mm lightweight solid	1650 / 1800	0.75
Concrete block: 140 mm lightweight	1050	0.67
Concrete block: 90 mm lightweight	1360	0.55
Fibre-cement	1360	0.25
Gypsum plasterboard	880	0.17
Pine weatherboards	506	0.10
Plywood	530	0.14
Solid concrete	2400	1.44
Steel sheeting	7850	47.5
Prestressed hollow core concrete panel	1680	0.80

Table S36C2d: Thermal conductivity of typical flooring materials

Description	Density (kg/m ³)	Thermal conductivity (Wm ⁻¹ K ⁻¹)
Carpet underlay	-	0.04
Carpet	-	0.05
Prestressed hollow core concrete planks	1680	0.80
Particleboard	640	0.12
Plywood	530	0.14
Timber – kiln dried hardwood (across the grain)	677	0.16
Timber – Radiata pine (across the grain)	506	0.10
Solid concrete	2400	1.44
Vinyl floor tiles	2050	0.79

Table S36C2e: Thermal conductivity of other materials not listed in Tables S36C2a to S36C2d

Description	Density (kg/m ³)	Thermal conductivity (Wm ⁻¹ K ⁻¹)
Clay soil (10% moisture content)	1300	0.6
PMMA (polymethylmethacrylate)	1180	1.0
Polycarbonates	1200	0.2
Sand (6% moisture content)	1800	1.64
Soda lime glass	2500	1.0

Table S36C2f: Typical R-Values for air films: surfaces other than outdoor surfaces

Position of air film	Direction of heat flow	R-Value
On a surface with a pitch of not more than 5°	Up	0.11
	Down	0.16
On a surface with a pitch of more than 5° but not more than 30°	Up	0.11
	Down	0.15
On a surface with a pitch of more than 30° but not more than 45°	Up	0.11
	Down	0.13
On a wall	Horizontal	0.12

Table S36C2g: Typical R-Values for air films: outdoor surfaces

Position of air film	Direction of heat flow	R-Value
Any	Any	0.03

Table S36C2h: Typical R-Values for airspaces: non-reflective non-ventilated

Position of airspace	Direction of heat flow	R-Value
In a roof with a pitch not more than 5° or cathedral ceiling with a 20 mm to 50 mm thick roof airspace	Up	0.15
	Down	0.15
In a roof with a pitch not more than 5° or cathedral ceiling with a more than 50 mm to 300 mm thick roof airspace	Up	0.15
	Down	0.17
In a roof airspace greater than 300 mm thick or with a horizontal ceiling and a roof pitch more than 5°	Up	0.18
	Down	0.28
In a wall	Horizontal	0.16

Table Notes

- (1) Linear interpolation may be used to calculate the *R-Value* of the airspace in a roof with an intermediate pitch.
- (2) A non-ventilated airspace in a roof is one with continuous cover, such as metal or sarked tiles, and no specific provision for ventilation.
- (3) *R-Values* are calculated using AS/NZS 4859.2 based on the following:
 - (a) summer temperatures of 24°C internally and 36°C externally for heat transfer down; and
 - (b) winter temperatures of 18°C internally and 12°C externally for heat transfer up; and
 - (c) average of summer and winter results for horizontal heat transfer (e.g. in walls).
- (4) A non-ventilated airspace in a wall is one where there is no express provision for airflow through it and openings to the external environment do not exceed more than 500 mm² per metre of length in the horizontal direction.
- (5) A non-ventilated airspace in a wall for the purposes of Note (4) includes a wall with drainage openings or weepholes that are open vertical joints in the outer leaf of a *cavity* masonry wall, which are not regarded as ventilation openings.

Table S36C2i: Typical R-Values for airspaces: reflective non-ventilated

Position of airspace	Direction of heat flow	R-Value
In a wall with an inner reflective surface of 0.05 emittance and a 20 mm to 100 mm airspace to the wall lining	Horizontal	0.61

Position of airspace	Direction of heat flow	R-Value
In a wall with a central reflective membrane with an inner surface emittance of 0.05 and a 20 mm to 100 mm airspace from the membrane to the wall lining, and an outer anti-glare emittance of 0.08 and a 20 mm to 100 mm airspace to the wall cladding	Horizontal	1.1
In a wall with an outer anti-glare reflective surface of 0.08 emittance and a 20 mm to 100 mm airspace to the wall cladding	Horizontal	0.53

Table Notes

- (1) A non-ventilated airspace in a wall is one where there is no express provision for airflow through it and openings to the external environment do not exceed 500 mm² per metre of length in the horizontal direction.
- (2) A non-ventilated airspace in a wall for the purposes of Note (1) includes a wall with drainage openings or weepholes that are open vertical joints in the outer leaf of a *cavity* masonry wall, which are not regarded as ventilation openings.
- (3) *R-Values* are calculated using AS/NZS 4859.2 based on the following:
- (a) summer temperatures of 24°C internally and 36°C externally for heat transfer down; and
 - (b) winter temperatures of 18°C internally and 12°C externally for heat transfer up; and
 - (c) average of summer and winter results for horizontal heat transfer (e.g. in walls); and
 - (d) emittances are normal emittances of bounding surfaces in accordance with AS 4200.1.

Table S36C2j: Typical R-Values for airspaces: non-reflective ventilated

Position of airspace	Direction of heat flow	R-Value
In a roof airspace greater than 300 mm thick or with a horizontal ceiling and a pitch more than 5°	Up	Nil
	Down	0.46

Table S36C2k: Typical R-Values for roof spaces with a reflective surface: Roof space > 300 mm thick or pitched roof with a horizontal ceiling

Direction of heat flow	R-Value of reflective airspace	
	Ventilated roof space	Non-ventilated roof space
Up	0.34	0.56
Down	1.36	1.09

Table Notes

- (1) A non-ventilated airspace in a roof is one with continuous cover, such as metal or sarked tiles, and no specific provision for ventilation.
- (2) A reflective surface is a surface with normal emittance of 0.05 or less, in accordance with AS 4200.1.

Table S36C2l: Typical R-Values for non-ventilated roof spaces with a reflective surface: Flat, skillion or pitched roof (≤5°) with horizontal ceiling, roof space not more than 300 mm thick

Emittance of airspace bounding surfaces	Thickness of roof space	Direction of heat flow	R-Value of reflective airspace
Surface 1 emittance 0.9, Surface 2 emittance 0.05	≤ 300 mm	Up	0.43
Surface 1 emittance 0.9, Surface 2 emittance 0.05	20 mm	Down	0.60

Emittance of airspace bounding surfaces	Thickness of roof space	Direction of heat flow	R-Value of reflective airspace
Surface 1 emittance 0.9, Surface 2 emittance 0.05	60 mm	Down	1.16
Surface 1 emittance 0.9, Surface 2 emittance 0.05	100 mm to $\leq$ 300 mm	Down	1.30

Table Notes

- (1) A non-ventilated airspace in a roof is one with continuous cover, such as metal, and no specific provision for ventilation.
- (2) Linear interpolation may be used to calculate the *R-Value* of an airspace of intermediate thickness.
- (3) *R-Values* are calculated using AS/NZS 4859.2 based on the following:
 - (a) summer temperatures of 24°C internally and 36°C externally for heat transfer down; and
 - (b) winter temperatures of 18°C internally and 12°C externally for heat transfer up; and
 - (c) emittances are normal emittances of bounding surfaces in accordance with AS 4200.1.

Table S36C2m: Typical R-Values for non-ventilated roof spaces with a reflective surface: Pitched roof with cathedral ceiling, roof space not more than 300 mm thick

Emittance of airspace bounding surfaces	Thickness of roof space	Direction of heat flow	R-Value of reflective airspace		
			15° to not more than 25° pitch	more than 25° to not more than 35° pitch	more than 35° to not more than 45° pitch
Surface 1 emittance 0.9, Surface 2 emittance 0.05	$\leq$ 300 mm	Up	0.43	0.43	0.43
Surface 1 emittance 0.9, Surface 2 emittance 0.05	20 mm	Down	0.59	0.59	0.59
Surface 1 emittance 0.9, Surface 2 emittance 0.05	60 mm	Down	0.91	0.82	0.75
Surface 1 emittance 0.9, Surface 2 emittance 0.05	100 mm to $\leq$ 300 mm	Down	0.96	0.85	0.76

Table Notes

- (1) A non-ventilated airspace in a roof is one with continuous cover, such as metal or sarked tiles, and no specific provision for ventilation.
- (2) Linear interpolation may be used to calculate the *R-Value* of the airspace in a roof with an intermediate pitch and thickness.
- (3) *R-Values* are calculated using AS/NZS 4859.2 based on the following:
 - (a) summer temperatures of 24°C internally and 36°C externally for heat transfer down; and
 - (b) winter temperatures of 18°C internally and 12°C externally for heat transfer up; and
 - (c) emittances are normal emittances of bounding surfaces in accordance with AS 4200.1.

Explanatory Information

Section F of NCC Volume One may require ventilation of roof space in *climate zones* 6, 7 and 8 to manage risks associated with *condensation*.

Specification 37

Calculation of U-Value and solar admittance

S37C1 Scope

This specification describes the methods of calculating the U-Value and *solar admittance* of a *wall-glazing construction*.

S37C2 General

For determining the aspect of a *wall-glazing construction*—

- (a) the northern aspect is within 45° of true north; and
- (b) the southern aspect is within 45° of true south; and
- (c) the eastern aspect is within 45° of true east; and
- (d) the western aspect is within 45° of true west.

S37C3 U-Value — Method 1 (Single Aspect)

- (1) For the purposes of this method, a *wall-glazing construction* only includes the walls and *glazing* facing a single aspect.
- (2) The *Total System U-Value* of the wall component of a *wall-glazing construction* must be calculated as the inverse of the *Total R-Value*, including allowance for thermal bridging, in accordance with—
 - (a) AS/NZS 4859.2; or
 - (b) Specification 38 for *spandrel panels*.
- (3) The *Total System U-Value* of a *wall-glazing construction* must be calculated as the area-weighted average of the *Total System U-Value* of each of the components of the *wall-glazing construction*.

S37C4 U-Value — Method 2 (Multiple Aspects)

- (1) For the purposes of this method, a *wall-glazing construction* only includes the walls and *glazing* facing multiple aspects.
- (2) The *Total System U-Value* of the wall component of a *wall-glazing construction* must be calculated as the inverse of the *Total R-Value*, including allowance for thermal bridging, in accordance with—
 - (a) AS/NZS 4859.2; or
 - (b) Specification 38 for *spandrel panels*.
- (3) The *Total System U-Value* of a *wall-glazing construction* must be calculated as the area-weighted average of the *Total System U-Value* of each of the components of the *wall-glazing construction*.

S37C5 Solar admittance — Method 1 (Single Aspect)

- (1) The *solar admittance* of a *wall-glazing construction* must be calculated in accordance with the following formula:

$$SA = \frac{A_{W1} \times S_{W1} \times SHGC_{W1}}{A_{WALL}} + \frac{A_{W2} \times S_{W2} \times SHGC_{W2}}{A_{WALL}} + \dots$$

(2) In the formula at (1)—

- (a) SA = the *wall-glazing construction solar admittance*; and
- (b) $A_{W1}, A_{W2}, \dots$ = the area of each *glazing* element; and
- (c) $S_{W1}, S_{W2}, \dots$ = the shading multiplier for each *glazing* element in accordance with S37C7; and
- (d) $SHGC_{W1, W2, \dots}$ = the *total system SHGC* of each *glazing* element; and
- (e) A_{WALL} = the total *wall-glazing construction* area.

S37C6 Solar admittance — Method 2 (Multiple Aspects)

(1) The *solar admittance* of *wall-glazing construction* must achieve a representative *air-conditioning* energy value less than that achieved by the reference *solar admittance*, when using the following formula:

$$E_R = A_N \alpha_N SA_N + A_E \alpha_E SA_E + A_S \alpha_S SA_S + A_W \alpha_W SA_W$$

(2) In the formula at (1)—

- (a) E_R = the representative *air-conditioning* energy value; and
- (b) $A_{N,E,S,W}$ = the area of the *wall-glazing construction* facing each aspect; and
- (c) $\alpha_{N,E,S,W}$ = the *solar admittance* weighting coefficient of each aspect equal to—
 - (i) where the *glazing* area on an aspect is less than 20% of the *wall-glazing construction* area, 0; and
 - (ii) the values in Table S37C6a and Table S37C6b; and
- (d) $SA_{N,E,S,W}$ = the *wall-glazing construction solar admittance* of each aspect—
 - (i) equal to the applicable value in J4D6(5) in the reference case; and
 - (ii) calculated in accordance with S37C5(1) in the proposed case.

Table S37C6a: Solar admittance weighting coefficient — Class 5, 6, 7, 8 or 9b building or Class 9a building other than a ward area

Aspect	Climate zone 1	Climate zone 2	Climate zone 3	Climate zone 4	Climate zone 5	Climate zone 6	Climate zone 7	Climate zone 8
Northern	1.47	1.95	1.95	2.05	2.28	2.12	2.40	1.88
Southern	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Eastern	1.39	1.58	1.63	1.72	1.72	1.62	1.84	1.92
Western	1.41	1.68	1.65	1.69	1.75	1.67	1.92	1.25

Table S37C6b: Solar admittance weighting coefficient — Class 3 or 9c building or Class 9a ward area

Aspect	Climate zone 1	Climate zone 2	Climate zone 3	Climate zone 4	Climate zone 5	Climate zone 6	Climate zone 7	Climate zone 8
Northern	1.42	1.77	1.72	1.55	1.88	1.52	1.60	1.24
Southern	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Eastern	1.30	1.49	1.48	1.37	1.48	1.28	1.35	1.26
Western	1.37	1.54	1.50	1.36	1.52	1.33	1.40	1.05

S37C7

Shading

For the purpose of calculating *solar admittance*, the shading multiplier for each *glazing* element is the lesser of—

- (a) Please refer to NCC 2025 Preview Draft Omissions for missing text
 - (i) the value in Table S37C7a for shading on the northern, eastern or western aspects; or
 - (ii) the value in Table S37C7b for shading on the southern aspect; or
- (b) Please refer to NCC 2025 Preview Draft Omissions for missing text
- (c) 0.35 for shading that is provided by an external shading device such as a shutter, blind, vertical or horizontal building screen with blades, battens or slats, which—
 - (i) is capable of restricting at least 80% of summer solar radiation; and
 - (ii) if adjustable, will operate automatically in response to the level of solar radiation.

Table S37C7a: Horizontal shading multipliers — Northern, eastern and western aspects

G/H	P/H = 0	P/H = 0.1	P/H = 0.2	P/H = 0.3	P/H = 0.4	P/H = 0.5	P/H = 0.6	P/H = 0.7	P/H = 0.8	P/H = 0.9	P/H = 1
0	1.00	0.90	0.80	0.72	0.64	0.57	0.51	0.46	0.41	0.38	0.35
0.1	1.00	0.95	0.89	0.81	0.74	0.66	0.59	0.52	0.47	0.42	0.40
0.2	1.00	0.98	0.94	0.89	0.82	0.75	0.68	0.62	0.56	0.51	0.47
0.3	1.00	1.00	0.97	0.94	0.89	0.84	0.78	0.72	0.66	0.61	0.57
0.4	1.00	1.00	0.99	0.97	0.94	0.90	0.86	0.82	0.77	0.73	0.68
0.5	1.00	1.00	1.00	0.99	0.97	0.95	0.92	0.90	0.86	0.83	0.79

Table S37C7b: Horizontal shading multipliers — Southern aspect

G/H	P/H = 0	P/H = 0.1	P/H = 0.2	P/H = 0.3	P/H = 0.4	P/H = 0.5	P/H = 0.6	P/H = 0.7	P/H = 0.8	P/H = 0.9	P/H = 1
0	1.00	0.93	0.87	0.82	0.77	0.73	0.69	0.65	0.62	0.60	0.58
0.1	1.00	0.97	0.93	0.88	0.84	0.79	0.75	0.71	0.67	0.64	0.62
0.2	1.00	0.98	0.96	0.93	0.89	0.85	0.81	0.77	0.73	0.70	0.68
0.3	1.00	0.99	0.98	0.96	0.93	0.90	0.87	0.83	0.80	0.77	0.74
0.4	1.00	1.00	0.99	0.98	0.96	0.94	0.91	0.89	0.86	0.84	0.81
0.5	1.00	1.00	0.99	0.99	0.98	0.96	0.95	0.93	0.91	0.90	0.88

Table S37C7c: Vertical shading multipliers — Northern aspect

Climate zone	D	W = 1.7 H	W = H	W = 0.7 H	W = 0.5 H
1, 2, 3, 5, 6	0.1 W	0.91	0.90	0.90	0.90
1, 2, 3, 5, 6	0.3 W	0.85	0.83	0.82	0.81
1, 2, 3, 5, 6	0.5 W	0.82	0.78	0.76	0.74
1, 2, 3, 5, 6	0.7 W	0.81	0.76	0.73	0.70
4	0.1 W	0.91	0.91	0.90	0.90
4	0.3 W	0.87	0.84	0.83	0.82
4	0.5 W	0.84	0.80	0.78	0.76
4	0.7 W	0.83	0.78	0.75	0.73
7	0.1 W	0.92	0.91	0.91	0.90
7	0.3 W	0.87	0.85	0.83	0.82

Climate zone	D	W = 1.7 H	W = H	W = 0.7 H	W = 0.5 H
7	0.5 W	0.86	0.82	0.79	0.78
7	0.7 W	0.85	0.80	0.78	0.75
8	0.1 W	0.92	0.92	0.91	0.91
8	0.3 W	0.90	0.88	0.86	0.85
8	0.5 W	0.91	0.87	0.85	0.83
8	0.7 W	0.91	0.88	0.86	0.84

Table S37C7d: Vertical shading multipliers — Western aspect

Climate zone	D	W = 1.7 H	W = H	W = 0.7 H	W = 0.5 H
1, 2, 3, 5, 6	0.1 W	0.93	0.91	0.90	0.90
1, 2, 3, 5, 6	0.3 W	0.87	0.85	0.84	0.84
1, 2, 3, 5, 6	0.5 W	0.85	0.82	0.80	0.79
1, 2, 3, 5, 6	0.7 W	0.83	0.79	0.77	0.75
4	0.1 W	0.93	0.90	0.90	0.89
4	0.3 W	0.88	0.86	0.85	0.84
4	0.5 W	0.87	0.84	0.82	0.81
4	0.7 W	0.86	0.83	0.81	0.79
7	0.1 W	0.96	0.95	0.95	0.95
7	0.3 W	0.94	0.94	0.94	0.93
7	0.5 W	0.94	0.93	0.93	0.93
7	0.7 W	0.94	0.93	0.93	0.92
8	0.1 W	0.93	0.90	0.89	0.89
8	0.3 W	0.90	0.88	0.87	0.87
8	0.5 W	0.90	0.88	0.87	0.86
8	0.7 W	0.90	0.89	0.87	0.86

Table S37C7e: Vertical shading multipliers — Eastern aspect

Climate zone	D	W = 1.7 H	W = H	W = 0.7 H	W = 0.5 H
1, 2, 3, 5, 6	0.1 W	0.94	0.94	0.93	0.93
1, 2, 3, 5, 6	0.3 W	0.90	0.89	0.88	0.87
1, 2, 3, 5, 6	0.5 W	0.88	0.85	0.84	0.83
1, 2, 3, 5, 6	0.7 W	0.87	0.83	0.81	0.79
4	0.1 W	0.94	0.93	0.92	0.92
4	0.3 W	0.91	0.89	0.89	0.88
4	0.5 W	0.90	0.88	0.86	0.85
4	0.7 W	0.89	0.87	0.85	0.83
7	0.1 W	0.95	0.94	0.94	0.93
7	0.3 W	0.91	0.92	0.91	0.91
7	0.5 W	0.93	0.91	0.90	0.89
7	0.7 W	0.93	0.91	0.90	0.88
8	0.1 W	0.94	0.93	0.93	0.92
8	0.3 W	0.94	0.93	0.93	0.92
8	0.5 W	0.95	0.94	0.93	0.92

Climate zone	D	$W = 1.7 H$	$W = H$	$W = 0.7 H$	$W = 0.5 H$
8	0.7 W	0.95	0.95	0.94	0.93

Figure S37C7a: Permanent external horizontal shading – measurement of P, G and H


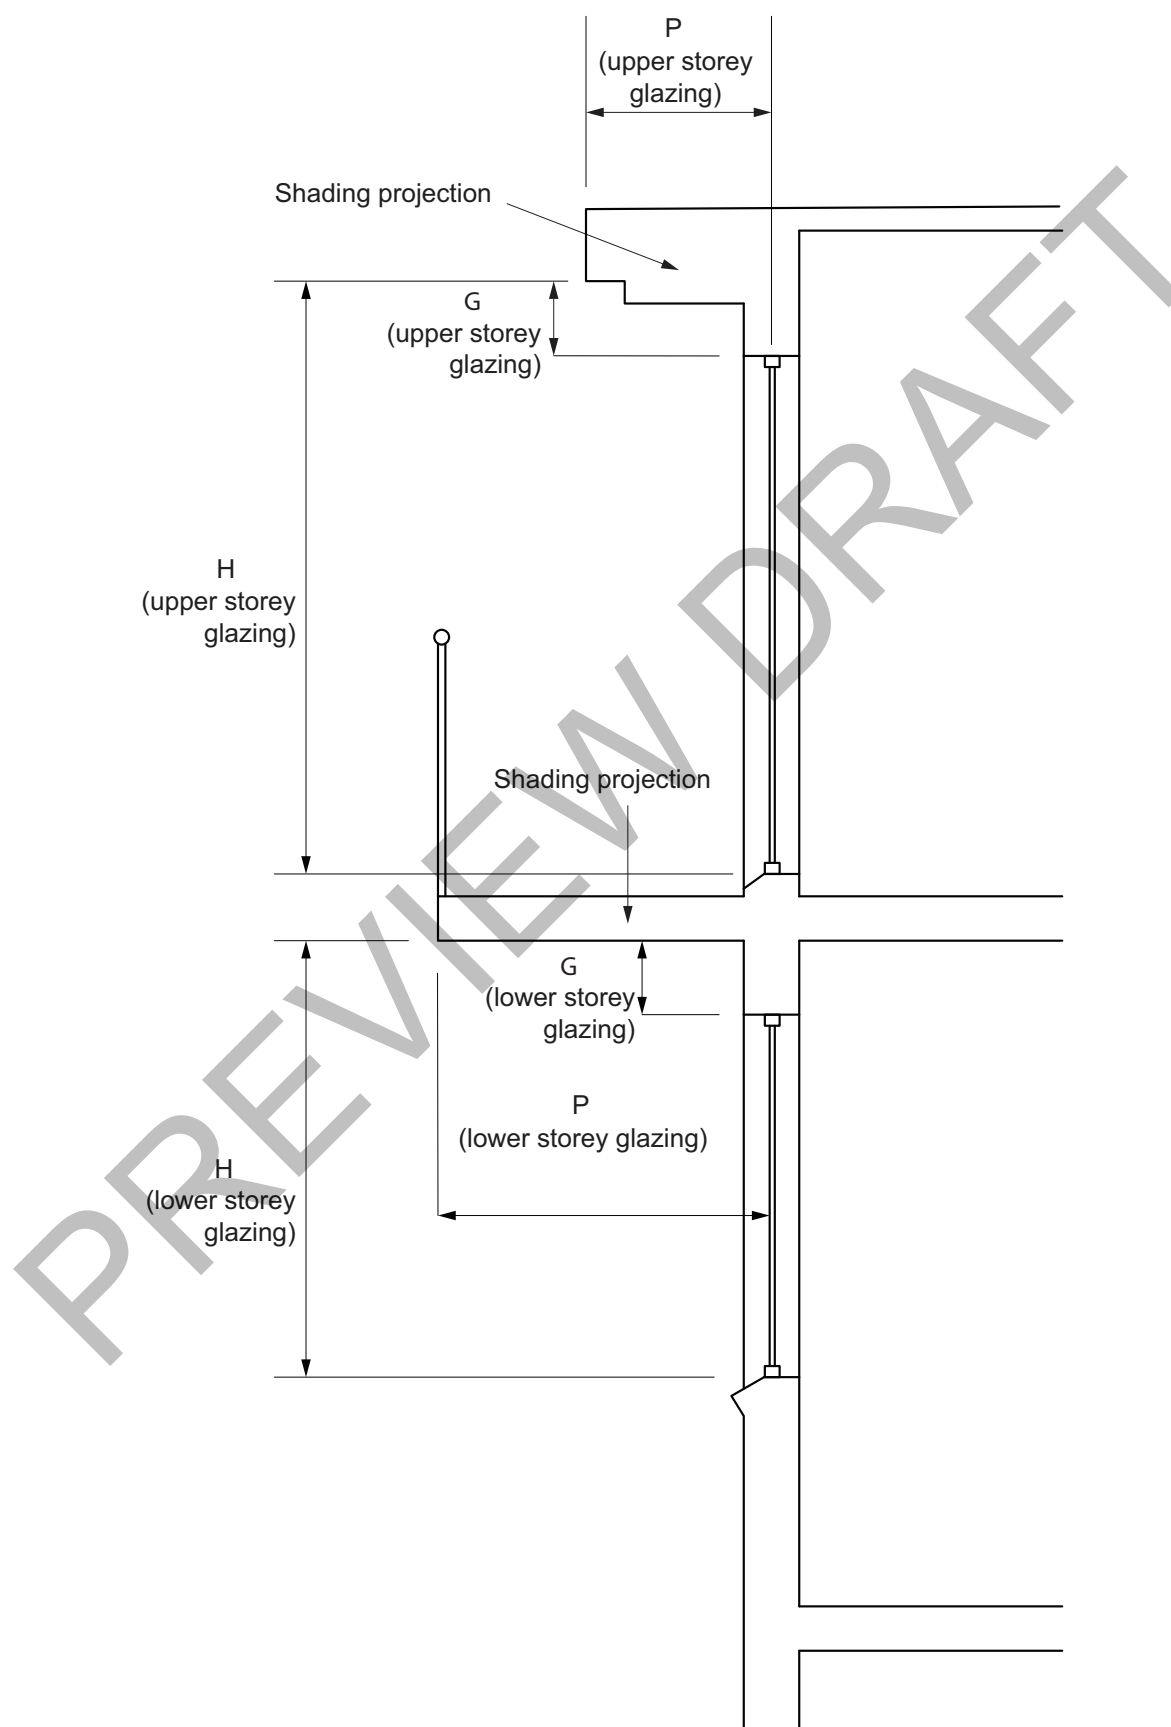


Figure S37C7b: Permanent external vertical shading – measurement of D, W and H

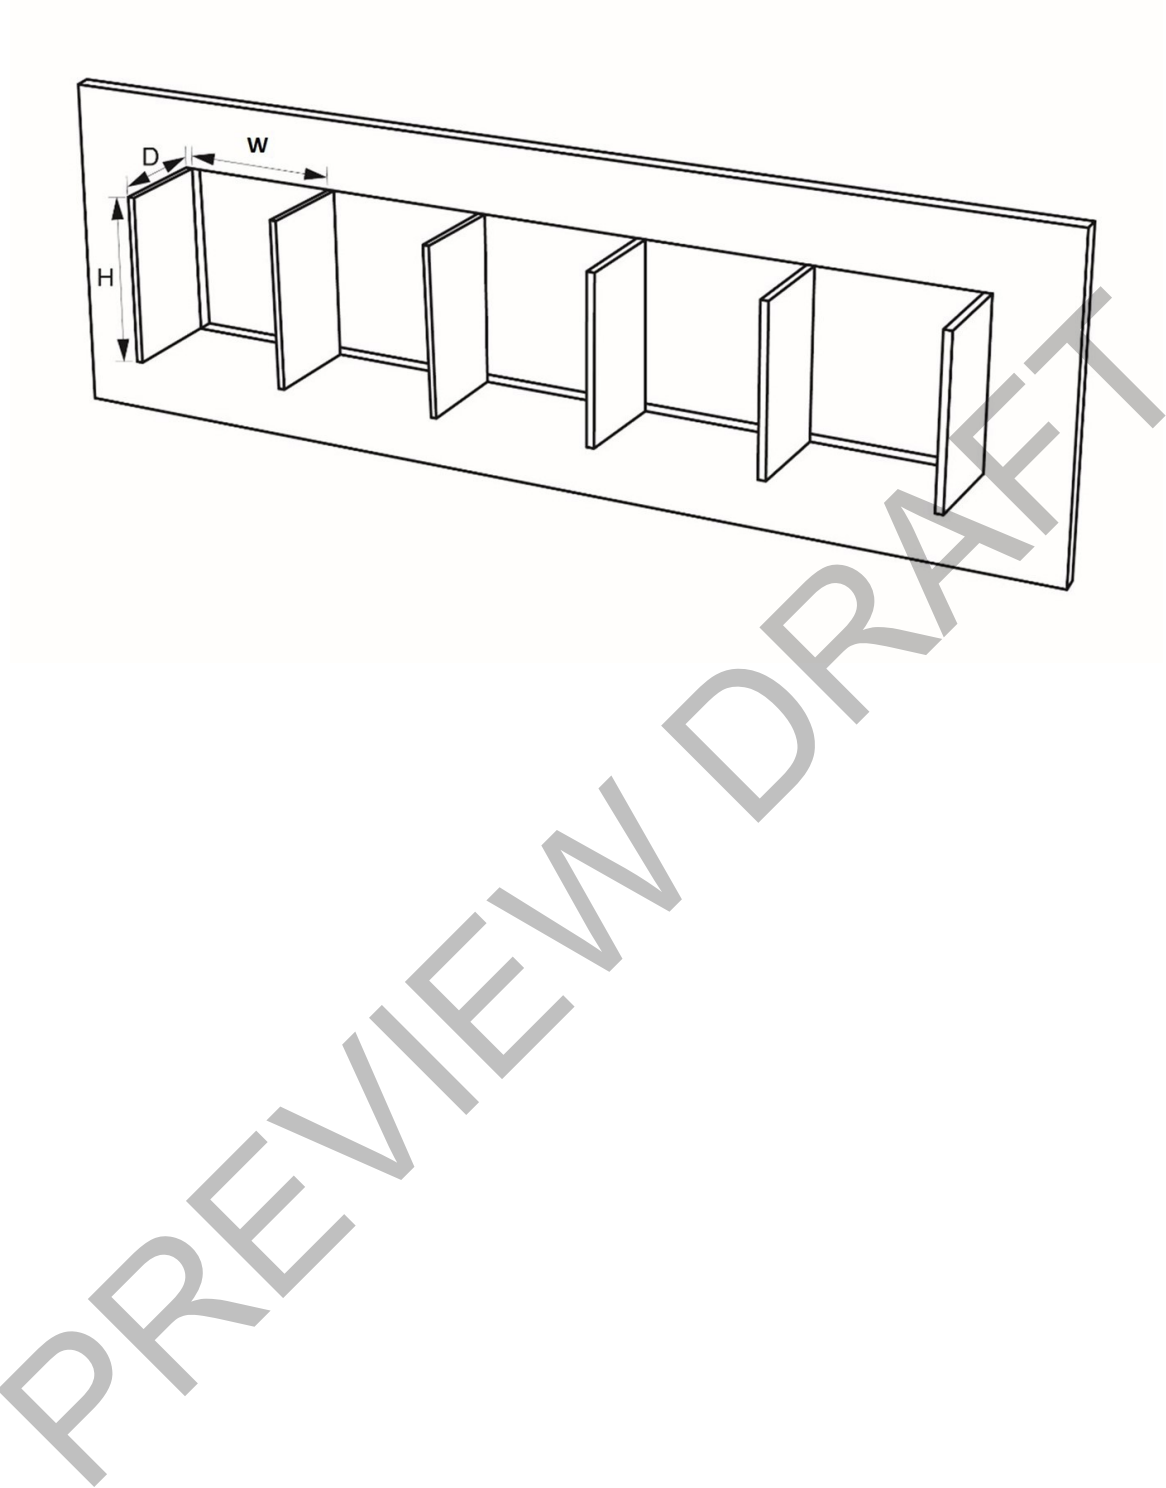

Specification 38

Spandrel panel thermal performance

S38C1 Scope

This Specification describes methods of determining the thermal performance of *spandrel panels*.

S38C2 Spandrel panel R-Value: Calculation method 1

Spandrel panels are deemed to have the thermal properties nominated in Table S38C2, where—

- (a) Configuration 1 consists of—
 - (i) a thermally unbroken (bridged) frame; and
 - (ii) a centre of *spandrel panel* consisting of—
 - (A) a single-glazed opaque or clear face; and
 - (B) a 100 mm air gap; and
 - (C) a 3 mm aluminium, 0.8 mm galvanised steel or zinc back pan; and
- (b) Configuration 2 consists of—
 - (i) a thermally unbroken (bridged) frame; and
 - (ii) a centre of *spandrel panel* consisting of—
 - (A) a double-glazed opaque face; and
 - (B) a 50 mm air gap; and
 - (C) a 3 mm aluminium, 0.8 mm galvanised steel or zinc back pan; and
- (c) Configuration 3 consists of—
 - (i) a thermally broken (unbridged) frame; and
 - (ii) a centre of *spandrel panel* consisting of—
 - (A) a double-glazed clear face; and
 - (B) a 50 mm air gap; and
 - (C) a 3 mm aluminium, 0.8 mm galvanised steel or zinc back pan; and
- (d) Configuration 4 consists of—
 - (i) a thermally broken (unbridged) frame; and
 - (ii) a centre of *spandrel panel* consisting of—
 - (A) a double-glazed low-e clear face; and
 - (B) a 50 mm air gap; and
 - (C) a 3 mm aluminium, 0.8 mm galvanised steel or zinc back pan.

Table S38C2: Achieved Total R-Value of spandrel panels

Type	No insulation	R0.5 insulation	R1.0 insulation	R1.5 insulation	R2.0 insulation
Configuration 1	0.3	0.39	0.42	0.44	0.45
Configuration 2	0.35	0.41	0.43	0.44	0.45
Configuration 3	0.84	0.96	1.03	1.07	1.09
Configuration 4	0.91	1.00	1.05	1.09	1.11

S38C3

Spandrel panel R-Value: Calculation method 2

(1) The Total R-Value of a *spandrel panel* is determined in accordance with the following formula:

$$R_{sp} = \frac{A_{cs} + \sum A_{es} + \sum A_{fs}}{U_{cs}A_{cs} + \sum U_{es}A_{es} + \sum U_{fs}A_{fs}}$$

(2) In the formula at (1)—

- (a) A_{cs} = the area of the centre region of the *spandrel panel*; and
- (b) A_{es} = the area of the edge region of the *spandrel panel*, where the edge has a defined width of 127 mm; and
- (c) A_{fs} = the area of the frame region of the *spandrel panel*; and
- (d) U_{cs} = the U-value of the centre region of the *spandrel panel*; and
- (e) U_{es} = the U-value of the edge region of the *spandrel panel*, where the edge has a defined width of 127 mm; and
- (f) U_{fs} = the U-value of the frame region of the *spandrel panel*; and
- (g) R_{sp} = the Total R-Value of the *spandrel panel*.

Specification 39

Sub-floor and soil thermal performance

S39C1 Scope

This Specification describes the thermal performance of sub-floor spaces and soil in direct contact with a floor for the purposes of calculating the *Total R-Value* of a floor.

S39C2 Sub-floor space and soil thermal performance

- (1) Table S39C2a details the *R-Values* considered to be achieved by enclosed sub-floor spaces that are—
- (a) mechanically ventilated by not more than 1.5 air changes per hour; or
 - (b) provided with not more than 150% of the aggregate sub-floor ventilation area *required* by Part F1 and are not mechanically ventilated.
- (2) Table S39C2b details the *R-Values* considered to be achieved by the soil for floors that are in direct contact with the ground.

Table S39C2a: R-Value of sub-floor spaces

Ratio of <i>floor area</i> (m ²) to floor perimeter (m)	Sub-floor space <i>R-Value</i>
1.0	0.10
1.5	0.15
2.0	0.20
2.5	0.25
3.0	0.30
3.5	0.35
4.0	0.40
4.5	0.45
5.0	0.50
5.5	0.55
6.0	0.60
6.5	0.65
7.0	0.70

Table Notes

Where the ratio of *floor area* to floor perimeter is between the values stated, interpolation may be used to determine the sub-floor space *R-Values*.

Table S39C2b: R-Value of soil in contact with a floor

Ratio of <i>floor area</i> (m ²) to floor perimeter (m)	Wall thickness of 50 mm	Wall thickness of 100 mm	Wall thickness of 150 mm	Wall thickness of 200 mm	Wall thickness of 250 mm	Wall thickness of 300 mm
1.0	0.4	0.5	0.5	0.6	0.7	0.8
1.5	0.6	0.7	0.7	0.8	0.9	1.0
2.0	0.7	0.8	0.9	1.0	1.1	1.3

Energy efficiency

Ratio of <i>floor area</i> (m ²) to floor perimeter (m)	Wall thickness of 50 mm	Wall thickness of 100 mm	Wall thickness of 150 mm	Wall thickness of 200 mm	Wall thickness of 250 mm	Wall thickness of 300 mm
2.5	0.9	1.0	1.1	1.2	1.3	1.5
3.0	1.0	1.2	1.3	1.4	1.5	1.7
3.5	1.2	1.3	1.5	1.6	1.7	1.9
4.0	1.3	1.5	1.6	1.7	1.9	2.2
4.5	1.5	1.7	1.8	1.9	2.1	2.4
5.0	1.6	1.8	2.0	2.1	2.3	2.6
5.5	1.8	2.0	2.1	2.2	2.4	2.8
6.0	1.9	2.1	2.3	2.4	2.6	2.9
6.5	2.0	2.3	2.4	2.6	2.8	3.1
7.0	2.2	2.4	2.6	2.7	3.0	3.3

Table Notes

- (1) Where a wall thickness or ratio of *floor area* to floor perimeter is between the values stated, interpolation may be used to determine the soil *R-Value*.
- (2) Wall thickness means the thickness of the *envelope* wall that sits on or around the slab.

Specification 40

Lighting and power control devices

S40C1 Scope

This Specification contains the requirements for lighting and power control devices including manual switches, time switches, demand-operated controls and daylight control devices.

S40C2 Manual switch

An artificial lighting manual switch must be located in a visible and easily accessed position—

- (a) in the room or space being switched; or
- (b) in an adjacent room or space from where at least 90% of the lighting being controlled is visible.

S40C3 Time switch

- (1) A time switch must—
 - (a) be capable of switching on and off electric power at variable pre-programmed times and on variable pre-programmed days; and
 - (b) have the ability to program public holidays at least 1 year ahead.
- (2) A time switch for internal lighting must be capable of being overridden by—
 - (a) a demand-operated control; or
 - (b) a manual switch.
- (3) A time switch for external lighting must be capable of being configured to limit the period the system is switched on to between 30 minutes before sunset and 30 minutes after sunrise.
- (4) A time switch for boiling water or chilled water storage units must be capable of being overridden for a maximum period of 2 hours outside normal operating hours.

S40C4 Demand-operated control

- (1) A demand-operated control must—
 - (a) activate artificial lighting upon detecting the presence or movement of an occupant; and
 - (b) deactivate artificial lighting immediately or after a run-on period not more than 15 minutes after the space is vacated.
- (2) A demand-operated control in a *fire-isolated stairway*, *fire-isolated passageway* or *fire-isolated ramp* must be configured so that a minimum of 30% of the full design illumination is provided when deactivation required by (1)(b) has occurred.

Notes

For the purposes of S40C4, demand-operated controls may detect the presence or movement of an occupant via a motion detector, key card, security system or the like.

S40C5

Daylight sensor and dynamic lighting control device

A daylight sensor and dynamic control device for artificial lighting must, in response to the measured level of available daylight in the range 50–1000 lux—

- (a) for high pressure discharge lights, switch lights on and off with a programmable delay and switching differential; and
- (b) for all other lights, dim continuously or step lighting output down in not less than 4 steps so that the lowest power setting is less than 50% of full power.

PREVIEW DRAFT

Specification 44

Calculation of heating load limit, cooling load limit and thermal energy load limit

S44C1 Scope

This Specification contains the method of calculating the *heating load* limit, *cooling load* limit and *thermal energy load* limit for compliance with J1P2 and H6P1.

S44C2 Heating load limit

The *heating load* limit of a space, measured in MJ/m².annum, is equal to the greater of—

- (a) 4; and
- (b) $((0.0044 \times HDH) - 5.9) \times F_H$, where—
 - (i) HDH = the total annual *heating degree hours* of the building location; and
 - (ii) F_H = the area adjustment factor for the *heating load* limit, determined in accordance with Table S44C2.

Table S44C2: Area adjustment factors for the heating load limit

Total area of <i>habitable rooms</i> (A_H)	Area adjustment factor (F_H)
$\leq 50 \text{ m}^2$	1.37
$> 50 \text{ m}^2$ to $\leq 350 \text{ m}^2$	$(5.11 \times 10^{-6})A_H^2 - (3.82 \times 10^{-3})A_H + 1.55$
$> 350 \text{ m}^2$	0.84

Explanatory Information

Annual total *heating degree hours* for various locations may be found in Table S45C3a.

S44C3 Cooling load limit

- (1) The *cooling load* limit of a space, measured in MJ/m².annum, is calculated in accordance with the following formula:

$$CLL = (5.4 + 0.00617 \times (CDH + 1.85DGH)) \times F_C$$

- (2) In the formula at (1)—

- (a) CLL = the *cooling load* limit (MJ/m².annum); and
- (b) CDH = the total annual *cooling degree hours* of the building location; and
- (c) DGH = the total annual *dehumidification gram hours* of the building location; and
- (d) F_C = the area adjustment factor for the *cooling load* limit, determined in accordance with Table S44C3.

Table S44C3: Area adjustment factors for the cooling load limit

Total area of the <i>habitable rooms</i> (A_H)	Area adjustment factor (F_C)
$\leq 50 \text{ m}^2$	1.34
$> 50 \text{ m}^2$ and $\leq 200 \text{ m}^2$	$(1.29 \times 10^{-5})A_H^2 - (5.55 \times 10^{-3})A_H + 1.58$
$> 200 \text{ m}^2$ and $\leq 1000 \text{ m}^2$	$(3.76 \times 10^{-7})A_H^2 - (7.82 \times 10^{-4})A_H + 1.12$
$> 1000 \text{ m}^2$	0.71

Explanatory Information

Annual total *cooling degree hours* and *dehumidification gram hours* for various locations may be found in Table S45C3a.

S44C4 Thermal energy load limit

- (1) The *thermal energy load* limit of a space, measured in $\text{MJ/m}^2.\text{annum}$, is calculated in accordance with the following

$$\text{formula: } TLL = \frac{19.3HLL + 22.6CLL - 8.4}{T_r + 10.74} - 15$$

- (2) In the formula at (1)—

- (a) TLL = the *thermal energy load* limit; and
- (b) HLL = the *heating load* limit; and
- (c) CLL = the *cooling load* limit; and
- (d) T_r = the annual average *daily outdoor temperature range*.

PREVIEW DRAFT

Specification 45

* * * * *

The content of Specification 45, which existed in NCC 2022, has been removed. The Specification number has been retained so as not to change the numbering of the current NCC from that of NCC 2022.

PREVIEW DRAFT

Specification 46

Determination of peak efficiency and fan power ratio

S46C1 Scope

This Specification contains the method of calculating fan power ratio for the purpose of assessing compliance with J6D5.

S46C2 Determination of peak efficiency and fan power ratio

- (1) The efficiency of a selected fan is the product of its impeller efficiency (including any casing), motor efficiency and the integrated motor control equipment multiplier in (2).
- (2) The value of the integrated motor control equipment multiplier—
 - (a) where the fan motor is not capable of variable speed operation or has an external variable speed control device, is 1; or
 - (b) where the fan motor has integrated variable speed control capability and the motor input power at peak efficiency point is less than 5 kW, is $0.03 \times \ln(P) + 1.088$, where—
 - (i) P = the motor input power of the fan (kW) at peak efficiency point; and
 - (ii) $\ln$ = natural logarithm; or
 - (c) where the fan motor has integrated variable speed control capability and the motor input power at peak efficiency point is greater than or equal to 5 KW, is 1.04.
- (3) The fan power ratio of an individual fan must be calculated in accordance with the following formula:

$$FPR_{individualfan} = \frac{\eta_{rf}}{\eta_{dp}}$$

where—

- (a) $FPR_{individualfan}$ = the fan power ratio of the fan; and
 - (b) η_{rf} = the efficiency calculated using the equation at J6D5(2) or J6D5(3) as applicable, with electrical input power P_{dp} , as determined at (5); and
 - (c) η_{dp} = the static efficiency of the selected fan at the duty point for installation type A or C, or the total efficiency at the duty point for installation type B or D.
- (4) The average fan power ratio of multiple fans must be calculated in accordance with the following formula:

$$FPR_{average} = \frac{\sum_{applicablefans} P_{dp}}{\sum_{applicablefans} P_{rf}}$$

where—

- (a) $FPR_{average}$ = the average fan power ratio of multiple fans; and
 - (b) P_{dp} = the electrical input power of each selected fan at duty point, calculated in accordance with (5); and
 - (c) P_{rf} = the electrical input power of each reference fan at duty point, calculated in accordance with (6).
- (5) P_{dp} must be calculated in accordance with the following:

$$P_{dp} = \frac{p_{dp} Q_{dp}}{\eta_{dp}}$$

where—

- (a) p_{dp} = the static pressure (Pa) at the duty point for installation type A or C or the total pressure (Pa) at the duty point for installation type B or D; and
 - (b) Q_{dp} = the flow (m³/s) at the duty point; and
 - (c) η_{dp} = the static efficiency at the duty point for installation type A or C or the total efficiency at the duty point for installation type B or D.
- (6) P_{rf} must be calculated in accordance with the following formula:

$$P_{rf} = \frac{p_{dp} Q_{dp}}{\eta_{rf}}$$

where—

- (a) p_{dp} = the static pressure (Pa) at the duty point for installation type A or C or total pressure (Pa) at the duty point for installation type B or D; and
- (b) Q_{dp} = the flow (m³/s) at the duty point; and
- (c) η_{rf} = the efficiency calculated using the equation at J6D5(2) or (3) as applicable with electrical input power P_{dp} .

Explanatory Information

Duty point refers to the operating point of the fan when providing the maximum system design flow at the system design pressure. Where the fan is a fixed speed fan, the full speed efficiency and the pressure where the fan curve intersects the system curve may be used.

Specification 47

Calculation of climate specific part load value for chillers

S47C1 Scope

This Specification contains the method to calculate the *climate specific part load value* for a connected group of chillers that serves a common load, for the purposes of assessing compliance with J6D11.

S47C2 Calculation of climate specific part load value for chillers

- (1) The *climate specific part load value* for a group of one or more chillers must be calculated in accordance with the following formula:

$$CSPLV = \alpha_{100}EER_{100} + \alpha_{75}EER_{75} + \alpha_{50}EER_{50} + \alpha_{25}EER_{25}$$

where—

- (a) $CSPLV$ = *climate specific part load value*; and
 - (a) EER_n = the weighted average energy efficiency ratio of the chillers that operate to provide n% of the design *cooling load* under the staging strategy to be deployed, determined in accordance with (2) and (3); and
 - (b) α_n = load weighting factors specified in—
 - (i) Table S47C2a for chillers serving a Class 5, 6, 7, 8 or 9b building or a Class 9a building other than a *ward area*; or
 - (ii) Table S47C2b for chillers serving a Class 3 or 9c building or a Class 9a *ward area*.
- (2) EER_n is determined as the weighted average energy efficiency ratio of the chillers operating to meet n% of the design *cooling load* under the staging strategy to be deployed, allowing for the part load efficiencies at—
- (a) a chilled water leaving temperature of 7°C; and
 - (b) a chilled water flow rate that corresponds to a 6°C difference between entering and leaving temperatures at the rated cooling capacity, when determined in accordance with AHRI 551/591; and
 - (c) for water-cooled chillers—
 - (i) a condenser water entering temperature that is determined by adding the design approach temperature to the outside wet bulb temperature listed in—
 - (A) Table S47C2c for chillers serving a Class 5, 6, 7, 8 or 9b building or a Class 9a building other than a *ward area*; or
 - (B) Table S47C2d for chillers serving a Class 3 or 9c building or a Class 9a *ward area*; and
 - (ii) a condenser water flow rate that corresponds to a 6°C difference between entering and leaving temperature at the rated cooling capacity, when determined in accordance with AHRI 551/591; and
 - (d) for air-cooled chillers, the outside dry bulb temperature listed in—
 - (i) Table S47C2e for chillers serving a Class 5, 6, 7, 8 or 9b building or a Class 9a building other than a *ward area*; or
 - (ii) Table S47C2f for a Class 3 or 9c building or a Class 9a *ward area*.
- (3) The EER_n values in (2) must be determined using test measurements and calculations performed in accordance with the procedures of AHRI 551/591.

Table S47C2a: Load weighting factors - Class 5, 6, 7, 8 or 9b building or Class 9a building other than a ward area

Load	CZ 1	CZ 2	CZ 3	CZ 4	CZ 5	CZ 6	CZ 7	CZ 8
25%	7%	25%	23%	25%	24%	42%	28%	20%
50%	48%	43%	48%	35%	46%	31%	36%	27%
75%	43%	31%	28%	37%	30%	26%	34%	42%
100%	2%	1%	1%	3%	0%	1%	2%	11%

Table Notes

- (1) Load is the proportion of the total design load served by a connected group of chillers.
 (2) CZ = *climate zone*.

Table S47C2b: Load weighting factors - Class 3 or 9c building or Class 9a ward area

Load	CZ 1	CZ 2	CZ 3	CZ 4	CZ 5	CZ 6	CZ 7	CZ 8
25%	7%	31%	23%	43%	41%	60%	40%	16%
50%	31%	39%	44%	39%	35%	24%	31%	32%
75%	61%	28%	32%	18%	23%	15%	26%	49%
100%	1%	2%	1%	0%	1%	1%	3%	3%

Table Notes

- (1) Load is the proportion of the total design load served by a connected group of chillers.
 (2) CZ = *climate zone*.

Table S47C2c: Part load evaluation points - outdoor wet bulb temperature (°C), Class 5, 6, 7, 8 or 9b building or Class 9a building other than a ward area

Load	CZ 1	CZ 2	CZ 3	CZ 4	CZ 5	CZ 6	CZ 7	CZ 8
25%	17	16	12	12	14	12	12	10
50%	24	22	17	17	20	18	17	13
75%	27	25	21	20	23	20	19	15
100%	28	27	23	22	25	24	21	14

Table Notes

- (1) Load is the proportion of the total design load served by a connected group of chillers.
 (2) CZ = *climate zone*.

Table S47C2d: Part load evaluation points - outdoor wet bulb temperature (°C), Class 3 or 9c building or Class 9a ward area

Load	CZ 1	CZ 2	CZ 3	CZ 4	CZ 5	CZ 6	CZ 7	CZ 8
25%	19	18	12	14	17	14	14	10
50%	24	22	17	18	21	19	17	13
75%	27	25	20	20	23	21	19	14
100%	29	27	24	23	26	23	20	17

Table Notes

- (1) Load is proportion of the total design load served by a connected group of chillers.
 (2) CZ = *climate zone*.

Table S47C2e: Part load evaluation points - outdoor dry bulb temperature (°C), Class 5, 6, 7, 8 or 9b building or Class 9a building other than a ward area

Load	CZ 1	CZ 2	CZ 3	CZ 4	CZ 5	CZ 6	CZ 7	CZ 8
25%	27	21	21	18	19	17	17	14
50%	31	27	32	27	25	26	25	20
75%	32	29	34	31	28	31	29	23
100%	29	29	28	32	27	36	32	25

Table Notes

- (1) Load is the proportion of the total design load served by a connected group of chillers.
 (2) CZ = *climate zone*.

Table S47C2f: Part load evaluation points - outdoor dry bulb temperature (°C), Class 3 or 9c building or Class 9a ward area

Load	CZ 1	CZ 2	CZ 3	CZ 4	CZ 5	CZ 6	CZ 7	CZ 8
25%	24	22	21	20	21	19	18	14
50%	29	27	31	29	26	27	26	17
75%	31	29	36	34	29	33	31	22
100%	34	32	39	41	32	41	36	27

Table Notes

- (1) Load is the proportion of the total design load served by a connected group of chillers.
 (2) CZ = *climate zone*.

Specification 48**Comparison of zone loads in proposed building and reference building****S48C1****Scope**

This Specification contains the requirements for comparing sensible heating and cooling loads for each assessable zone in the proposed building with the corresponding zones in the reference building.

S48C2**Comparison of zone loads in proposed building and reference building**

- (1) The zone load is the sensible heating or cooling effect required to maintain the temperature in each zone within the range specified in [S34C3\(8\)](#).
- (2) The loads for each zone in the proposed building and the reference building must be calculated in accordance with the modelling parameters of [Specification 34](#).
- (3) A zone of the proposed building is assessable under [J1V3\(1\)\(b\)\(iii\)](#) to [\(v\)](#) if it has—
 - (a) a 98th percentile *heating load* of at least 10 W/m²; or
 - (b) a 98th percentile *cooling load* of at least 40 W/m².

Schedule 1

Definitions

Abbreviations

Symbols

Glossary

PREVIEW DRAFT

Abbreviations

Abbreviation	Definitions
ABCB	Australian Building Codes Board
AC	Alternating Current
ACC	Acrylic conformal coating
ACL	Acrylic latex
ACP	Aluminium Composite Panel
AIRAH	Australian Institute of Refrigeration, Air conditioning and Heating
ANSI	American National Standards Institute
AS	Australian Standard
ASET	Available Safe Egress Time
ASHRAE	American Society of Heating, Refrigerating and Air Conditioning Engineers
ASTM	American Society for Testing and Materials
BAL	Bushfire Attack Level
BCA	Building Code of Australia
BE	Fire blocks evacuation route
CAN	National Standard of Canada
CCT	Correlated Colour Temperature
CF	Challenging fire
CHF	Critical Heat Flux
CIBSE	Chartered Institution of Building Services Engineers
CRF	Critical Radiant Flux
CRI	Colour Rendering Index
CS	Fire starts in a concealed space
C_{SHGC}	Constant for solar heat gain
CSIRO	Commonwealth Scientific and Industrial Research Organisation
C_U	Constant for conductance
DC	Direct Current
DN	Diameter Nominal
FED	Fractional Effective Dose
FI	Fire brigade intervention
FRL	Fire Resistance Level
FZ	Flame Zone
GEMS	Greenhouse and Energy Minimum Standards
GRP	Glass fibre reinforced polyester
HDG	Hot dip galvanising
HRR	Heat Release Rate
HS	Horizontal fire spread
IS	Rapid fire spread involving internal surface linings
ISO	International Organisation for Standardisation
IZS	Inorganic zinc silicate
LED	Light-Emitting Diode

Definitions

Abbreviation	Definitions
MEPS	Minimum Energy Performance Standards
NABERS	National Australian Built Environment Rating System
NASH	National Association of Steel-Framed Housing
NATA	National Association of Testing Authorities Australia
NatHERS	Nationwide House Energy Rating Scheme
NCC	National Construction Code
NSF	National Sanitation Foundation
PBDB	Performance-based design brief
PCA	Plumbing Code of Australia
PMV	Predicted Mean Vote
ppm	parts per million
PUR	Polyurethane
PVC	Polyvinyl chloride
RC	Robustness check
RSET	Required Safe Egress Time
R_w	Weighted sound reduction index
SF	Smouldering fire
SHGC	Solar Heat Gain Coefficient
SL	Square mesh
SS	Structural stability and other property
STC	Sound Transmission Class
TM	Trench mesh
UF	Unexpected catastrophic failure
UPVC	Unplasticized polyvinyl chloride
UT	Fire in normally unoccupied room threatening occupants of other rooms
U-Value	Thermal transmittance
VS	Vertical fire spread involving external cladding or external openings
WC	Water closet

Symbols

Symbols	Definitions
°	degree(s)
°C	degree(s) Celsius
°CDB	degree(s) Celsius Dry Bulb
°CWB	degree(s) Celsius Wet Bulb
-e/MJ	equivalent per Megajoule(s)
µm	micrometre
µg/N.s	Micrograms per newton-second
CO ₂ -e/m ² .hr	Carbon dioxide equivalent per square metre hour
dB(A)	decibels "A" scale weighting network
f' _c	Characteristic compressive strength of concrete at 28 days
f' _y	Yield stress used in design
G	Permanent load
J	Joule(s)
J/kg.K	Joules per kilogram degree Kelvin
J/s.m ²	Joules per second square metre
K	Kelvin(s)
kg	kilogram(s)
kg/m	kilogram(s) per metre
kg/m ²	kilogram(s) per square metre
kg/m ³	kilogram(s) per cubic metre
kJ/m ² .hr	kilojoules per square metre hour
km	kilometre(s)
kPa	kilopascal(s)
kW/m ²	kilowatt(s) per square metre
kW _{heating}	kilowatt(s) of heating
kW _r	kilowatt(s) of refrigeration
L	litre(s)
L/min	litre(s) per minute
L/s	litre(s) per second
L/s.m ²	litre(s) per second square metre
Lumens/W	Lumens per Watt
lx	lux
m	metre(s)
m/s	metre(s) per second
m ²	square metre(s)
m ² .K/W	square metre Kelvin(s) per Watt
m ³	cubic metre(s)
m ³ /hour	cubic metre(s) per hour
m ³ /s	cubic metre(s) per second
mcd/m ²	millicandelas per square metre

Definitions

Symbols	Definitions
min	minute(s)
MJ/hour	Megajoules per hour
MJ/m ² .annum	Megajoules per square metre annum
mm	millimetre(s)
mm ²	square millimetre(s)
MW	megawatt(s)
N	newton(s)
N/m	Newton(s) per metre
Pa	pascal(s)
Pa/m	pascal(s) per metre
Q	Imposed load
s	second(s)
ULS	Ultimate limit state
V	Volt(s)
W	Watt(s)
Wp/m ²	Watt peak per metre squared output of a solar photovoltaic panel
W _{input power}	Watts of input power
Wr/W _{input power}	Watts of thermal refrigeration per watt of input power
W/kW _{rej}	Watts per kilowatt of heat rejected
Wm ⁻¹ K ⁻¹	Watts per metre degree Kelvin
W/m ²	Watts per square metre
°south	degree south
%	percent
>	greater than
<	less than
≤	less than or equal to
≥	equal to or more than

Glossary

Above ground rainwater tank: A rainwater tank that is not in any way set into the ground.

Accessible: Having features to enable use by people with a disability.

Accessway: A continuous *accessible* path of travel (as defined in AS 1428.1) to, into or within a building.

Accredited Testing Laboratory: One of the following:

- (a) An organisation accredited by the National Association of Testing Authorities Australia (NATA) to undertake the relevant tests.
- (b) An organisation outside Australia accredited to undertake the relevant tests by an authority recognised by NATA through a mutual recognition agreement.
- (c) An organisation recognised as being an Accredited Testing Laboratory under legislation at the time the test was undertaken.

Activity support level: The degree to which occupants can undertake activities with respect to the likely *activity traits* and *occupant traits*.

Explanatory Information

This term is used to articulate whether the height of a room or space is sufficient and by what degree. This is achieved by having regard to the room or space's intended use by occupants, through consideration of the defined terms '*activity traits*' and '*occupant traits*'.

Activity traits: For the purposes of—

- (a) Volume One, the features of the activities that will be undertaken in a *habitable room* or space; or
- (b) Volume Two, the features of the activities that will be undertaken in a room or space.

Explanatory Information

This term is used to describe the characteristics of the activities that will be undertaken in a room or space.

For example, the activities likely to be undertaken in a bedroom, and the associated features are—

- sleeping — a person lying horizontally; and
- resting — a person lying horizontally or sitting upright on the bed; and
- leisure activities, such as reading a book — a person sitting upright on the bed, with enough space to stretch their arms vertically; and
- dressing/changing clothes — a person standing with enough space to stretch their arms vertically.

Administering body: The body responsible for administering the *WaterMark Certification Scheme*.

Aged care building: A Class 9c building for residential accommodation of aged persons who, due to varying degrees of incapacity associated with the ageing process, are provided with *personal care services* and 24 hour staff assistance to evacuate the building during an emergency.

NSW Aisle

SA Agriculture

Air-conditioning: For the purposes of Section J of Volume One, a *service* that actively cools or heats the air within a space, but does not include a *service* that directly—

- (a) cools or heats cold or hot rooms; or
- (b) maintains specialised conditions for equipment or processes, where this is the main purpose of the *service*.

Alarm zone: For the purposes of *Specification 23*, an area of a building protected by one or more smoke alarms connected to one alarm circuit.

Allotment: An area of land shown on an approved plan of subdivision for which a separate title is held or issued.

Alpine area: An area given in *Figure 1* and in *Table 1* for specific locations, and is—

Definitions

- (a) likely to be subject to significant snowfalls; and
- (b) in New South Wales, the ACT or Victoria more than 1200 m above the Australian Height Datum; and
- (c) in Tasmania more than 900 m above the Australian Height Datum.

Table 1: Alpine areas where snow loads are significant

Location	Map identifier
Kiandra (NSW)	1
Mount Kosciuszko (NSW)	2
Perisher Valley (NSW)	3
Thredbo (NSW)	4
Cabramurra (NSW)	5
Charlotte Pass Village (NSW)	6
Diggers Creek (NSW)	7
Guthega Village (NSW)	8
Mount Blue Cow (NSW)	9
Mount Selwyn (NSW)	10
Perisher Range (NSW)	11
Rules Point (NSW)	12
Sawpit Creek (NSW)	13
Smiggin Holes (NSW)	14
Smiggin Range (NSW)	15
Three Mile Dam (NSW)	16
Wilsons Valley (NSW)	17
Falls Creek (Vic.), including Summit Area, Sun Valley and Village Bowl	18
Mount Baw Baw (Vic.)	19
Mount Buffalo (Vic.), including Chalet, Dingo Dell and Tatra	20
Mount Buller (Vic.), including Baldy and Village	21
Mount Hotham (Vic.), including Davenport and Village Centre	22
Dinner Plain (Vic.)	23
Lake Mountain (Vic.)	24
Mount Stirling (Vic.)	25
Ben Lomond Ski Field (Tas.)	26
Cradle Valley (Tas.)	27
Great Lake Area (Tas.)	28
Mount Field Ski Field (Tas.)	29

Figure 1: Alpine areas

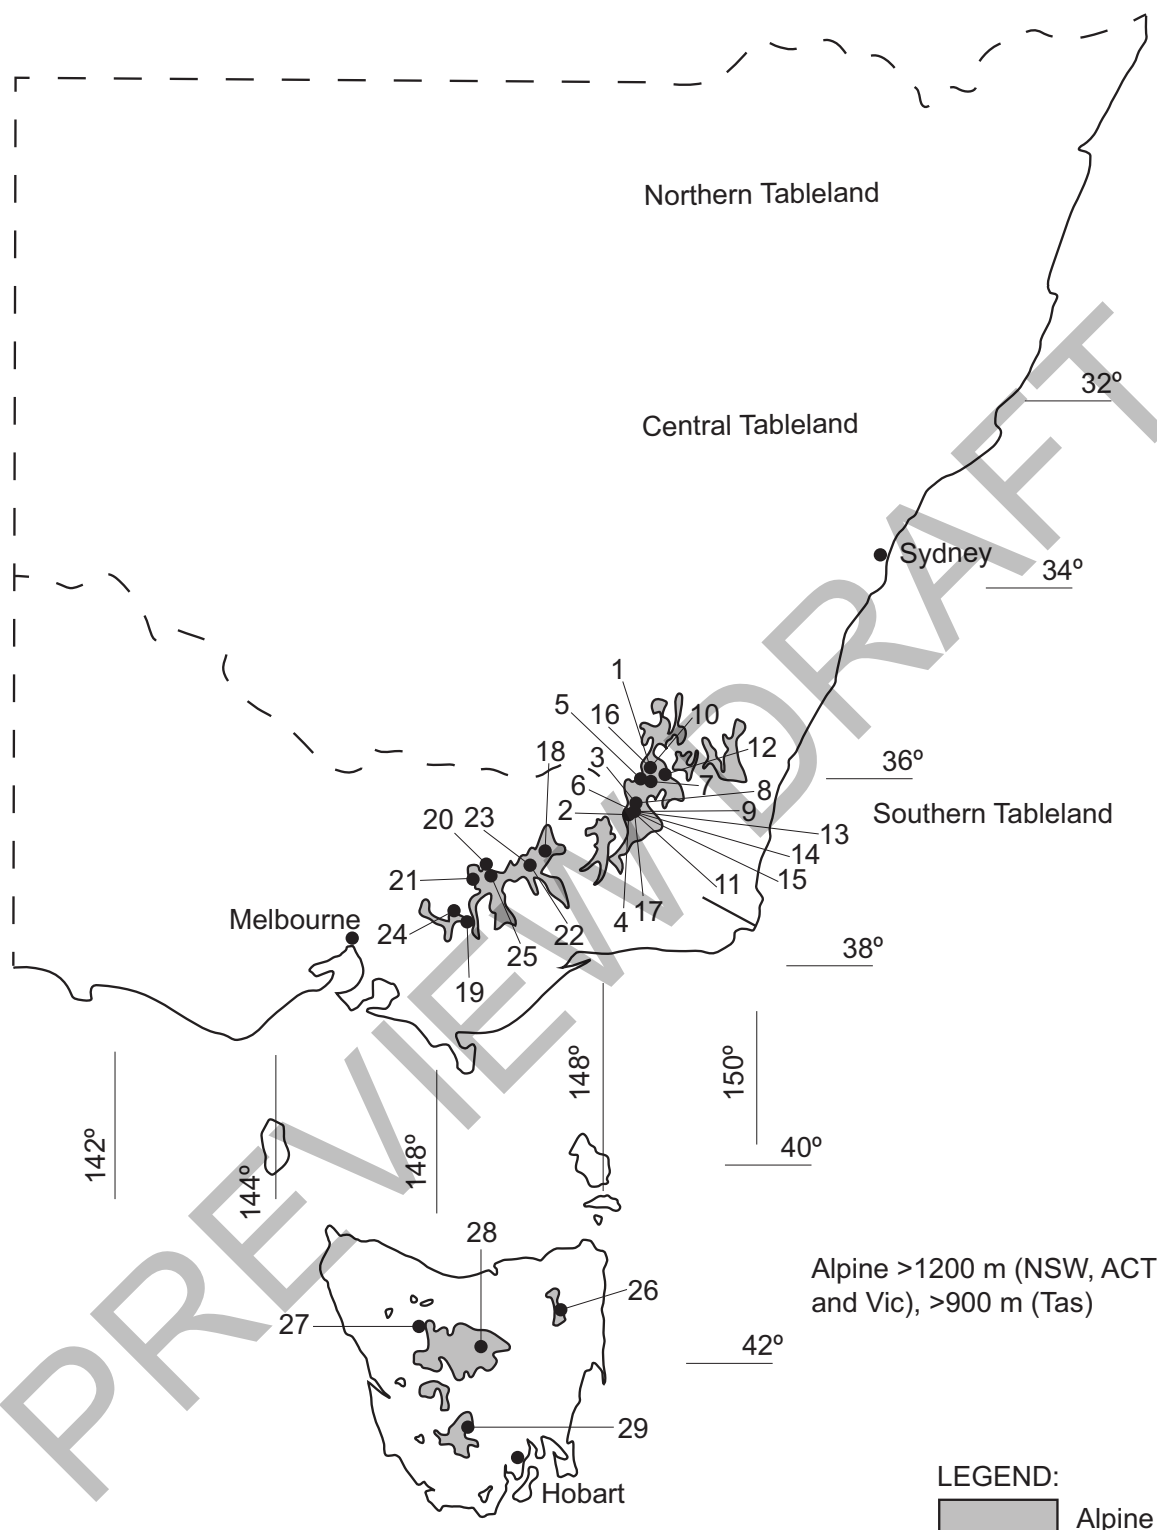


Figure Notes

This map is approximate only and altitude above Australian Height Datum must be used to determine whether the building falls into an *alpine area* region.

Explanatory Information

Alpine areas are located in New South Wales, Victoria and Tasmania.

Alpine areas are areas 1200 m or more above Australian Height Datum (AHD) for New South Wales, Australian Capital Territory and Victoria, and 900 m or more above AHD for Tasmania, as shown in Figure 1.

Alpine areas are considered to receive significant snowfalls (snowfalls that result in an average snow accumulation on

Definitions

the ground of 175 mm or greater). Regions in New South Wales, the Australian Capital Territory and Victoria between 600 – 1200 m AHD are considered to be sub-alpine areas and may receive significant snowfalls, however unlike alpine areas the snow is unlikely to accumulate.

It is recommended that the *appropriate authority* be consulted to determine whether the building is located in an alpine area. AS/NZS 1170.3 also contains further detail in the identification of alpine areas and the altitude of the alpine regions of Australia.

In the Australian Capital Territory, Canberra is not designated as an alpine area as snow loads are not considered significant.

Alteration: In relation to a building, includes an addition or extension to a building.

Aluminium Composite Panel (ACP): Flat or profiled aluminium sheet material in composite with any type of materials.

Amenity: An attribute which contributes to the health, physical independence, comfort and well-being of people.

Ancillary components: A component of the building that is not required to ensure the stability of the building or structure as a whole (that is, not part of the primary structure), but which must still withstand all actions.

Ancillary element: An element that is secondary to and not an integral part of another element to which it is attached.

Annual exceedance probability: The probability that a given rainfall total accumulated over a given duration will be exceeded in any one year.

Annual greenhouse gas emissions: The theoretical amount of greenhouse gas emissions attributable to the energy used annually by a building's *services*, excluding kitchen exhaust and the like.

Appropriate authority: For the purposes of the Fire Safety Verification Method, means the relevant authority with the statutory responsibility to determine the particular matter satisfies the relevant *Performance Requirement*.

Explanatory Information

The *Appropriate Authority* is typically the building surveyor or building certifier charged with the statutory responsibility to determine building compliance and issue the building permit / approval and occupancy certificate / approval.

NSW Appropriate authority

Appropriate authority: The relevant authority with the statutory responsibility to determine the particular matter.

Appropriately qualified person: A person recognised by the *appropriate authority* as having qualifications and/or experience in the relevant discipline in question.

Approved disposal system: A system for the disposal of sewage, sullage or stormwater approved by an authority having jurisdiction.

Articulated masonry: Masonry construction in which special provisions have been made for movement by articulation.

NSW Assembly building

SA Assembly building

Assembly building: A building where people may assemble for—

- (a) civic, theatrical, social, political or religious purposes including a library, theatre, public hall or place of worship; or
- (b) educational purposes in a *school*, *early childhood centre*, preschool, or the like; or
- (c) entertainment, recreational or sporting purposes including—
 - (i) a discotheque, nightclub or a bar area of a hotel or motel providing live entertainment or containing a dance floor; or
 - (ii) a cinema; or
 - (iii) a sports stadium, sporting or other club; or
- (d) transit purposes including a bus station, railway station, airport or ferry terminal.

Assessment Method: A method that can be used for determining that a *Performance Solution* or *Deemed-to-Satisfy Solution* complies with the *Performance Requirements*.

Assumed cooling thermostat set point: The cooling thermostat set point used to calculate *cooling degree hours*, and equal to $17.8 + 0.31T_m$, where T_m is the mean January outdoor air temperature measured in degrees Celsius.

Definitions

Atrium: A space within a building that connects 2 or more *storeys* and—

- (a) is enclosed at the top by a floor or roof (including a glazed roof structure); and
- (b) includes any adjacent part of the building not separated by an appropriate barrier to fire; but
- (c) does not include a stairwell, rampwell or the space within a *shaft*; and
- (d) for the purposes of (a) a space is considered enclosed if the area of the enclosing floor or roof is greater than 50% of the area of the space, measured in plan, of any of the *storeys* connected by the space.

Atrium well: A space in an *atrium* bounded by the perimeter of the openings in the floors or by the perimeter of the floors and the *external walls*.

NSW Auditorium

Automatic: Designed to operate when activated by a heat, smoke or fire sensing device.

Available safe egress time (ASET)

- (1) The time between ignition of a fire and the onset of untenable conditions in a specific part of a building.
- (2) The time referred to in (1) is the calculated interval between the time of ignition of a fire and the time at which conditions become such that the occupant is unable to take effective action to escape to a place of safety.

Average daylight factor: The ratio of the illumination level within a room provided by daylight to the level of daylight outside the building during overcast conditions.

Average specific extinction area: The average specific extinction area for smoke as determined by AS 5637.1.

Backflow prevention device: An air gap, break tank or mechanical device that is designed to prevent the unplanned reversal of flow of water or *contaminants* into the water service or a *Network Utility Operator's* water supply.

Backpressure: A reversal of water flow caused by the downstream pressure becoming greater than the supply pressure.

Backsiphonage: A reversal of flow of water caused by negative pressure in the distributing pipes of a water service or supply.

Backstage: A space associated with, and adjacent to, a *stage* in a Class 9b building for scenery, props, equipment, dressing rooms, or the like.

Battery system: One or more chemical cells connected in series, parallel or a combination of the two for the purpose of electrical energy storage.

Blockage: An obstruction within a water service or sanitary *plumbing* or *drainage* system.

Boiler: A vessel or an arrangement of vessels and interconnecting parts, wherein steam or other vapour is generated, or water or other liquid is heated at a pressure above that of the atmosphere, by the application of fire, the products of combustion, electrical power, or similar high temperature means, and—

- (a) includes superheaters, reheaters, economisers, boiler piping, supports, mountings, valves, gauges, fittings, controls, the boiler settings and directly associated equipment; but
- (b) excludes a fully flooded or pressurised system where water or other liquid is heated to a temperature lower than the normal atmospheric boiling temperature of the liquid.

Bond breaker: A material used as part of a *waterproofing system* that prevents the *membrane* bonding to the substrate, bedding or lining.

Breaking surf: Any area of salt water in which waves break on an average of at least 4 days per week but does not include white caps or choppy water.

Explanatory Information

Breaking surf normally occurs in areas exposed to the open sea. Breaking surf does not normally occur in sheltered areas, such as that which occurs around Port Phillip Bay, Sydney Harbour, Swan River, Derwent River and similar locations.

Building complexity criteria: Are used to determine the building complexity level of all or part of a building in accordance with Table 2, where building complexity criteria are as follows:

- (a) Attributes — the building is designed or constructed with any of the following sub-criteria:
 - (i) An *effective height* of more than 25 m.
 - (ii) One or more *Performance Solutions* are used to demonstrate compliance with the *Performance*

Definitions

Requirements relating to material and systems for structural safety.

(iii) One or more *Performance Solutions* are used to demonstrate compliance with the *Performance Requirements* relating to material and systems for fire safety.

(iv) Is located in an area prone to natural disaster or adverse environmental conditions.

(b) Class 2 — all or part of the building is Class 2 of three or more *storeys*.

(c) Occupant numbers — the building is to be occupied by more than 100 people determined in accordance with D2D18.

(d) Occupant characteristics — the building is to be occupied by more than 10 people who will require assistance to evacuate the building in an emergency.

(e) Importance Level — the building is determined to be Importance Level 4 or 5.

Notes

The NCC currently does not include corresponding technical requirements relating to the defined term 'building complexity criteria' and the various building complexity levels. It is intended that these terms will be integrated into future editions of the NCC.

Table 2: Building complexity level

Building complexity level	Criteria
Low	The building meets only one of the following <i>building complexity criteria</i> : (a) (Attributes), (b) (Class 2), (c) (Occupant numbers) or (d) (Occupant characteristics)
Medium	The building meets two of the following <i>building complexity criteria</i> : (a) (Attributes), (b) (Class 2), (c) (Occupant numbers) or (d) (Occupant characteristics)
High	The building meets three of the following <i>building complexity criteria</i> : (a) (Attributes), (b) (Class 2), (c) (Occupant numbers) or (d) (Occupant characteristics)
Very high	The building meets all of the following <i>building complexity criteria</i> : (a) (Attributes), (b) (Class 2), (c) (Occupant numbers) and (d) (Occupant characteristics); or (e) (Building Importance Level 4 or 5)

Buried rainwater tank: A rainwater tank that is set into and completely covered by earth.

Burnout: Exposure to fire for a time that includes *fire growth*, full development, and decay in the absence of intervention or automatic suppression, beyond which the fire is no longer a threat to building elements intended to perform *loadbearing* or fire separation functions, or both.

SA Brush fence

SA Bulk grain storage facility

Carpark: A building that is used for the parking of motor vehicles but is neither a *private garage* nor used for the servicing of vehicles, other than washing, cleaning or polishing.

Cavity: A void between 2 leaves of masonry, or a void between the cladding and the supporting frame, the *primary insulation layer* or the outermost *control layer*.

Cavity wall: For the purposes of F3V1 and H2V1, a wall that incorporates a drained cavity.

SA Cell type silo

TAS Centre-based care class 4 facility

TAS Centre-based care class 5 facility

Certificate of Accreditation: A certificate issued by a State or Territory accreditation authority stating that the properties and performance of a building material or method of construction or design fulfil specific requirements of the NCC.

Certificate of Conformity: A certificate issued under the ABCB scheme for products and systems certification stating that the properties and performance of a building material or method of construction or design fulfil specific requirements of the NCC.

Definitions

Certification body: A person or organisation operating in the field of material, product, form of construction or design certification that has been accredited by the Joint Accreditation System of Australia and New Zealand (JAS-ANZ), and is accredited for a purpose other than as part of the CodeMark Australia Certification Scheme or *WaterMark Certification Scheme*.

Characteristic: The occupant data to be used in the modelling of access solutions which define how an occupant interacts with a building, i.e. occupant movement speeds, turning ability, reach capability, perception of luminance contrast and hearing threshold.

VIC Children's service

Clad frame: Timber or metal frame construction with exterior timber or sheet wall cladding that is not sensitive to minor movement and includes substructure masonry walls up to 1.5 m high.

Climate specific part load value: A metric for the efficiency of a connected group of chillers that accounts for the Energy Efficiency Ratio of the chillers operating to meet the design load and specified part-load ratios.

Climate zone: An area defined in [Figure 2](#) and in [Table 3](#) for specific locations, having energy efficiency provisions based on a range of similar climatic characteristics.

Table 3: Climate zones for thermal design

State	Location	Climate zone
ACT	Canberra	7
NSW	Albury	4
NSW	Armidale	7
NSW	Batemans Bay	6
NSW	Bathurst	7
NSW	Bega	6
NSW	Bellingen Shire - Dorrigo Plateau	7
NSW	Bellingen Shire - Valley & seaboard	2
NSW	Bourke	4
NSW	Broken Hill	4
NSW	Byron Bay	2
NSW	Cobar	4
NSW	Coffs Harbour	2
NSW	Dubbo	4
NSW	Goulburn	7
NSW	Grafton	2
NSW	Griffith	4
NSW	Ivanhoe	4
NSW	Lismore	2
NSW	Lord Howe Island	2
NSW	Moree	4
NSW	Newcastle	5
NSW	Nowra	6
NSW	Orange	7
NSW	Perisher - Smiggins	8
NSW	Port Macquarie	5
NSW	Sydney East	5
NSW	Sydney West	6
NSW	Tamworth	4
NSW	Thredbo	8

Definitions

State	Location	Climate zone
NSW	Wagga Wagga	4
NSW	Williamstown	5
NSW	Wollongong	5
NSW	Yass	6
NT	Alice Springs	3
NT	Darwin	1
NT	Elliot	3
NT	Katherine	1
NT	Renner Springs	3
NT	Tennant Creek	3
QLD	Birdsville	3
QLD	Brisbane	2
QLD	Bundaberg	2
QLD	Cairns	1
QLD	Cooktown	1
QLD	Cunnamulla	3
QLD	Gladstone	2
QLD	Hervey Bay	2
QLD	Hughenden	3
QLD	Longreach	3
QLD	Mackay	2
QLD	Mount Isa	3
QLD	Normanton	1
QLD	Rockhampton	2
QLD	Roma	3
QLD	Southport	2
QLD	Toowoomba	5
QLD	Townsville	1
QLD	Warwick	5
QLD	Weipa	1
SA	Adelaide	5
SA	Bordertown	6
SA	Ceduna	5
SA	Cook	4
SA	Elliston	5
SA	Kingscote	6
SA	Leigh Creek	5
SA	Lobethal	6
SA	Loxton	5
SA	Naracoorte	6
SA	Marree	4
SA	Mount Gambier	6
SA	Murray Bridge	6
SA	Oodnadatta	4

Definitions

State	Location	Climate zone
SA	Port Augusta	4
SA	Port Lincoln	5
SA	Renmark	5
SA	Tarcoola	4
SA	Victor Harbour	6
SA	Whyalla	4
TAS	Burnie	7
TAS	Bicheno	7
TAS	Deloraine	7
TAS	Devonport	7
TAS	Flinders Island	7
TAS	Hobart	7
TAS	Huonville	7
TAS	King Island	7
TAS	Launceston	7
TAS	New Norfolk	7
TAS	Oatlands	7
TAS	Orford	7
TAS	Rossarden	7
TAS	Smithton	7
TAS	St Marys	7
TAS	Zeehan	7
VIC	Anglesea	6
VIC	Ararat	7
VIC	Bairnsdale	6
VIC	Ballarat	7
VIC	Benalla	6
VIC	Bendigo	6
VIC	Bright	7
VIC	Colac	6
VIC	Dandenong	6
VIC	Echuca	4
VIC	Geelong	6
VIC	Hamilton	7
VIC	Horsham	6
VIC	Melbourne	6
VIC	Mildura	4
VIC	Portland	6
VIC	Sale	6
VIC	Shepparton	4
VIC	Swan Hill	4
VIC	Traralgon	6
VIC	Wangaratta	7
VIC	Warrnambool	6

Definitions

State	Location	Climate zone
VIC	Wodonga	6
WA	Albany	6
WA	Balladonia	4
WA	Broome	1
WA	Bunbury	5
WA	Carnarvon	3
WA	Christmas Island	1
WA	Cocos Island	1
WA	Derby	1
WA	Esperance	5
WA	Exmouth	1
WA	Geraldton	5
WA	Halls Creek	3
WA	Kalgoorlie-Boulder	4
WA	Karratha	1
WA	Meekatharra	4
WA	Northam	4
WA	Pemberton	6
WA	Perth	5
WA	Port Hedland	1
WA	Wagin	4
WA	Wyndham	1

Figure 2: Climate zones for thermal design

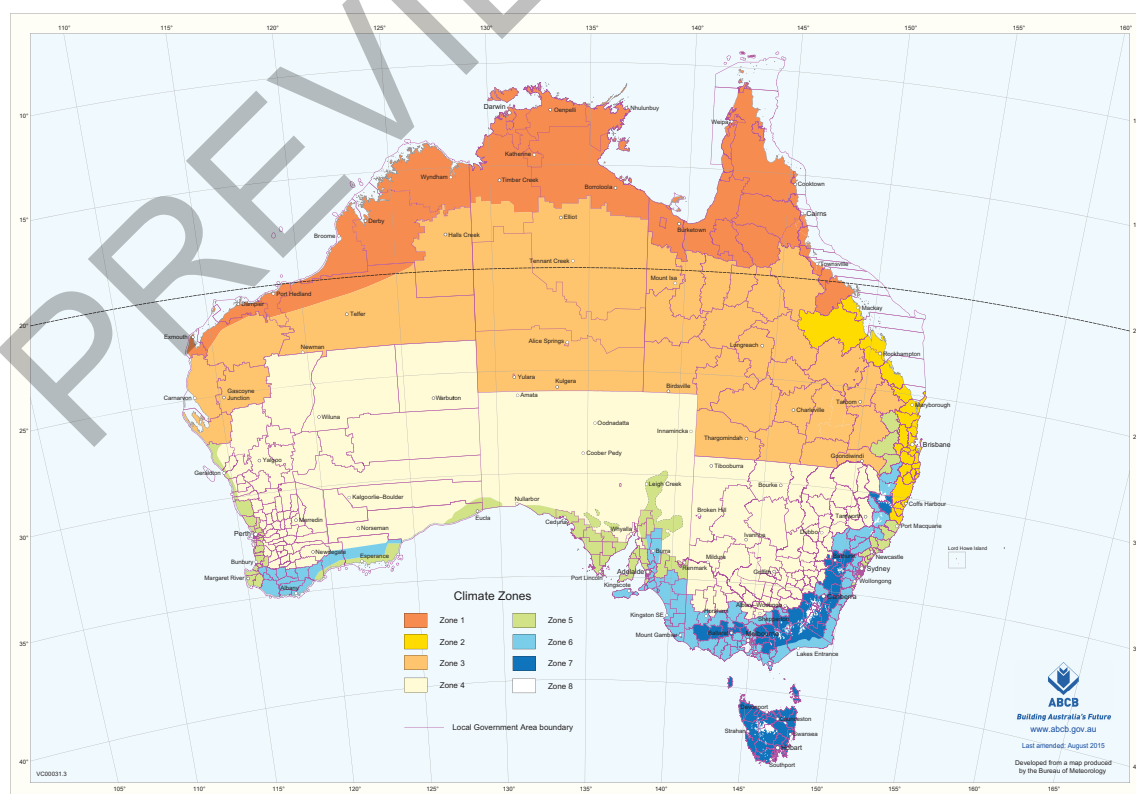


Figure Notes

- (1) This map can be viewed in enlargeable form on the ABCB website at abcb.gov.au.
- (2) A Zone 4 area in South Australia, other than a council area, at an altitude greater than 300 m above the Australian Height Datum is to be considered as Zone 5.
- (3) The areas referred to in (2) have been defined in an enlarged format on the following maps produced by the Department of Planning, Transport and Infrastructure (these maps can be viewed on the Government of South Australia website at www.sa.gov.au):
 - (a) Adelaide Hills Climate Zone Map.
 - (b) Barossa Council Climate Zone Map.
 - (c) Regional Council of Goyder Climate Zone Map.
- (4) Locations in [climate zone 8](#) are in [alpine areas](#).

Collected: For the purposes of Section F in NCC Volume One, the interception of [water](#)—

- (a) on the surface or sub-surface of a building element; or
- (b) on an [allotment](#); or
- (c) on a [site](#); or
- (d) resulting from [sitework](#).

Combustible: Applied to—

- (a) a material — means combustible as determined by an [Accredited Testing Laboratory](#) in accordance with AS 1530.1; and
- (b) construction or part of a building — means constructed wholly or in part of combustible materials.

Notes

Until the adoption of the next edition of the NCC determination need not be undertaken by an [Accredited Testing Laboratory](#).

[VIC Combustible cladding product](#)

Common wall: For the purposes of—

- (a) Volume One, a wall that is common to adjoining buildings.
- (b) Volume Two and the ABCB Housing Provisions, a wall that is common to adjoining buildings other than Class 1 buildings.

Condensation: The formation of liquid water on the surface of a building element or material as a result of moist air coming into contact with a surface which is at a lower temperature.

Conditioned space: For the purposes of—

- (a) Volume One, a space within a building, including a ceiling or under-floor supply air plenum or return air plenum, where the environment is likely, by the intended use of the space, to have its temperature controlled by [air-conditioning](#); or
- (b) Volume Two and the ABCB Housing Provisions, a space within a building that is heated or cooled by the building's [domestic services](#), excluding a non-[habitable room](#) in which a heater with a capacity of not more than 1.2 kW or 4.3 MJ/hour is installed.

Construction activity actions: Actions due to stacking of building materials or the use of equipment, including cranes and trucks, during construction or actions which may be induced by floor to floor propping.

Containment protection: The installation of a [backflow prevention device](#) at the [point of connection](#) of a [Network Utility Operator's](#) water supply to a site.

Contaminant: Any substance (including gases, liquids, solids or micro-organisms), energy (excluding noise) or heat, that either by itself or in combination with the same, similar or other substances, energy or heat, changes or is likely to change the physical, chemical or biological condition of water.

[NSW Continental seating](#)

Control layer: Any continuous layer that is installed for one or more of the purposes of air, water, vapour or thermal

Definitions

control, including *pliable building membrane* and *sarking-type material* but excluding waterproofing membranes or the like complying with AS/NZS 4858.

Controlled fill: Material that has been placed and compacted in layers with compaction equipment (such as a vibrating plate) within a defined moisture range to a defined density requirement.

Cooling degree hours: For any one hour when the mean outdoor air temperature is above the *assumed cooling thermostat set point*, the degree Celsius air temperature difference between the mean outdoor air temperature and the *assumed cooling thermostat set point*.

Cooling load: The calculated amount of energy removed from the cooled spaces of the building annually by artificial means to maintain the desired temperatures in those spaces.

Critical radiant flux (CRF): The critical heat flux at extinguishment (CHF in kW/m²) as determined by an *Accredited Testing Laboratory* in accordance with AS ISO 9239.1.

Notes

Until the adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

Cross-connection: Any actual or potential connection between a water supply and any *contaminant*.

NSW Cross-over

Curtain wall: A non-*loadbearing external wall* that is not a *panel wall*.

Daily outdoor temperature range: The difference between the maximum and minimum temperatures that occur in a day.

Damp-proof course (DPC): A continuous layer of impervious material placed in a masonry wall or pier, or between a wall or pier and a floor, to prevent the upward or downward migration of water.


Deemed-to-Satisfy Provisions: Provisions which are deemed to satisfy the *Performance Requirements*.

Deemed-to-Satisfy Solution: A method of satisfying the *Deemed-to-Satisfy Provisions*.

Defined flood event (DFE): The flood event selected for the management of flood hazard for the location of specific development as determined by the *appropriate authority*.

Defined flood level (DFL): The flood level associated with a *defined flood event* relative to a specified datum (see Figure 3).

Figure 3: Identification of defined flood level, flood hazard level and freeboard

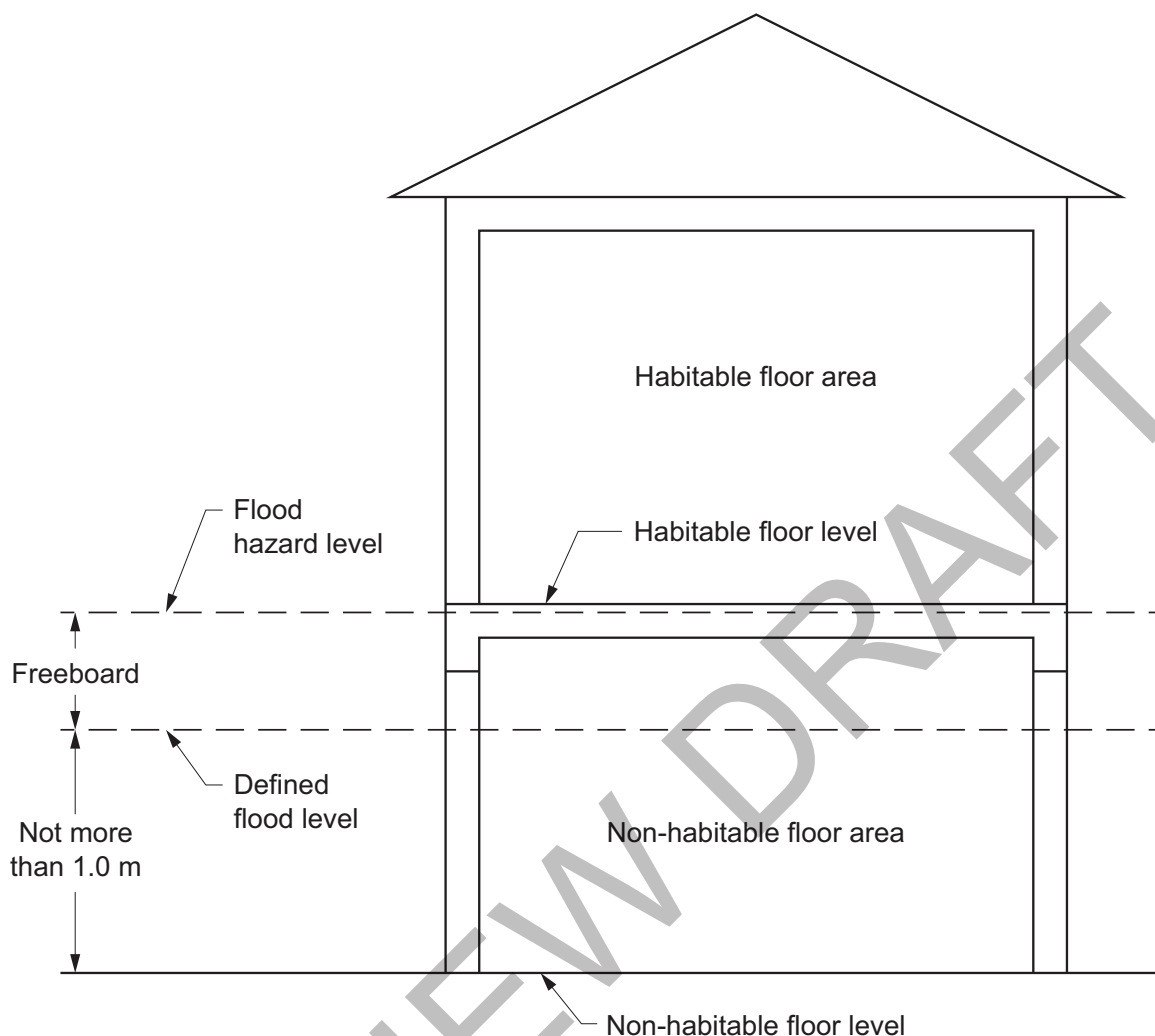

Dehumidification gram hours: For any one hour when the mean humidity is more than 15.7g/kg, the grams per kilogram of absolute humidity difference between the mean outdoor absolute humidity and 15.7g/kg.

NSW Designated bushfire prone area

Designated bushfire prone area: Land which has been designated under a power of legislation as being subject, or likely to be subject, to bushfires.

Design bushfire: The characteristics of a bushfire, its initiation, spread and development, which arises from weather conditions, topography and fuel (vegetation) in a given setting, used to determine *fire actions*.

Design fire: The quantitative description of a representation of a fire within the *design scenario*.

Design scenario: The specific scenario of which the sequence of events is quantified and a *fire safety engineering* analysis is conducted against.

WA Design wind speed

Design wind speed: The design gust wind speed for the area where the building is located, calculated in accordance with AS/NZS 1170.2 or AS 4055 (see [Table 4](#) for wind classes).

Table 4: Wind classes

Non-cyclonic Region A and B1	Cyclonic Region B2, C and D
N1, N2, N3	C1
N4, N5, N6 (these wind classes are covered in the ABCB Housing Provisions Part 2.2).	C2, C3, C4 (these wind classes are covered in the ABCB Housing Provisions Part 2.2).

Table Notes

- (1) Wind classification map identifying wind regions is contained in ABCB Housing Provisions Part 2.2 (see Figure 2.2.3).
- (2) Information on wind classes for particular areas may be available from the *appropriate authority*.
- (3) "N" = non-cyclonic winds and "C" = cyclonic winds.

Detention centre: A building in which persons are securely detained by means of the built structure including a prison, remand centre, juvenile detention centre, holding cells or psychiatric detention centre.

NSW Development consent

Direct fix cladding wall: For the purposes of F3V1 and H2V1, means a wall with cladding attached directly to the wall framing without the use of a drained cavity.

Discontinuous construction: Means—

- (a) a wall having a minimum 20 mm cavity between 2 separate leaves, and—
 - (i) for masonry, where wall ties are used to connect leaves, the ties are of the resilient type; and
 - (ii) for other than masonry, there is no mechanical linkage between the leaves, except at the periphery; and
- (b) a staggered stud wall is not deemed to be discontinuous construction.

Display glazing: *Glazing* used to display retail goods in a shop or showroom directly adjacent to a walkway or footpath, but not including that used in a café or restaurant.

Domestic services: The basic engineering systems that use energy or control the use of energy; and—

- (a) includes—
 - (i) heating, *air-conditioning*, mechanical ventilation and artificial lighting; and
 - (ii) pumps and heaters for *swimming pools* and spa pools; and
 - (iii) heated water systems; and
 - (iv) on-site *renewable energy* equipment; but
- (b) excludes cooking facilities and portable appliances.

Drainage: Any part of—

- (a) a sanitary drainage system, including any liquid trade waste drainage; or
- (b) a stormwater drainage system.

Drainage flange: A flange connected to a waste pipe, at the point at which it passes through the floor substrate, to prevent leakage and which enables tile bed drainage into the waste pipe.

Drainage riser: A waste pipe between the floor waste and the drainage system.

Drainage system: A system that—

- (a) conveys *water* by gravity, mechanical means, or evaporation to a point of discharge or evaporative surface; or
- (b) channels *water* by pipes, overflows, and overland flow paths to a point of discharge.

Explanatory Information

The definition for 'drainage system' is used only for the purposes of Volume One Section F.

Drained: For the purposes of Section F in NCC Volume One, the removal to a *drainage system*, *water* that has been *collected* and *redirected*.

Drinking water: Water intended primarily for human consumption but which has other domestic uses.

Explanatory Information

See also the Australian Drinking Water Guidelines produced by the National Health and Medical Research Council.

TAS Early childhood centre

VIC Early childhood centre

Early childhood centre: Any premises or part thereof providing or intending to provide a centre-based education and care service within the meaning of the Education and Care Services National Law Act 2010 (Vic), the Education and Care Services National Regulations and centre-based services that are licensed or approved under State and Territory children's services law, but excludes education and care primarily provided to school aged children in outside school hours settings.

Effective height: The vertical distance between the floor of the lowest *storey* included in the calculation of *rise in storeys* and the floor of the topmost *storey* (excluding the topmost *storey* if it contains only heating, ventilating, lift or other equipment, water tanks or similar service units).

Efficacy: The degree to which a system achieves a design objective given that it performs to a level consistent with the system specification during the relevant fire scenario.

Electricity network substation: A building in which high voltage supply is converted or transformed and which is controlled by a licensed network service provider designated under a power of legislation.

Electric passenger lift: A power-operated lift for raising or lowering people in a car in which the motion of the car is obtained from an electric motor mechanically coupled to the hoisting mechanism.

Electrohydraulic passenger lift: A power-operated lift for raising or lowering people in a car in which the motion of the car is obtained from the action of liquid under pressure acting on a piston or ram, the pressure being generated by a pump driven by an individual electric motor.

Energy value: The net cost to society including, but not limited to, costs to the building user, the environment and energy networks.

Engaged pier: A pier bonded to a masonry wall by course bonding of masonry units or by masonry ties.

NSW Entertainment venue

Envelope: For the purposes of—

- (a) Section J and Part F8 in NCC Volume One, the parts of a building's *fabric* that separate a *conditioned space* or *habitable room* from—
 - (i) the exterior of the building; or
 - (ii) an internal non-*conditioned space* where the temperature is primarily determined by external ambient conditions and thermal loads are not addressed by the *air-conditioning* and ventilation *services*.
- (b) Part H6 in NCC Volume Two and Section 10 and Section 13 of the ABCB Housing Provisions, the parts of a building's *fabric* that separate artificially heated or cooled spaces from—
 - (i) the exterior of the building; or
 - (ii) other spaces that are not artificially heated or cooled.

Equivalent: Equivalent to the level of health, safety and amenity provided by the *Deemed-to-Satisfy Provisions*.

Evacuation route: The continuous path of travel (including *exits*, *public corridors* and the like) from any part of a building, including within a *sole-occupancy unit* in a Class 2 or 3 building or Class 4 part, to a *safe place*.

Evacuation time: The time calculated from when the emergency starts for the occupants of the building to evacuate to a *safe place*.

Exit: Means—

- (a) Any, or any combination of the following if they provide egress to a road or *open space*:
 - (i) An internal or external stairway.
 - (ii) A ramp.
 - (iii) A *fire-isolated passageway*.
 - (iv) A doorway opening to a road or *open space*; or
- (b) A *horizontal exit* or a *fire-isolated passageway* leading to a *horizontal exit*.

TAS Expert judgement

Expert judgement: The judgement of an expert who has the qualifications and experience to determine whether a *Performance Solution* or *Deemed-to-Satisfy Solution* complies with the *Performance Requirements*.

Explanatory Information

Contemporary and relevant qualifications and/or experience are necessary to determine whether a *Performance Solution* complies with the *Performance Requirements*. The level of qualification and/or experience may differ depending on the complexity of the proposal and the requirements of the regulatory authority. Practitioners should seek advice from the authority having jurisdiction or *appropriate authority* for clarification as to what will be accepted.

External wall: For the purposes of—

- (a) Volume One, an outer wall of a building which is not a *common wall*; or
- (b) Volume Two, an outer wall of a building which is not a *separating wall*.

Extra-low voltage: A *voltage* not exceeding 50 V AC or 120 V ripple-free DC.

Fabric: The basic building structural elements and components of a building including the roof, ceilings, walls, glazing and floors.

SA Farm building

Farm building: A Class 7 or 8 building located on land primarily used for *farming*—

- (a) that is—
 - (i) used in connection with *farming*; or
 - (ii) used primarily to store one or more *farm vehicles*; or
 - (iii) a combination of (i) and (ii); and
- (b) in which the total number of persons accommodated at any time does not exceed one person per 200 m² of floor area or part thereof, up to a maximum of 8 persons; and
- (c) with a total *floor area* of not more than 3500 m².

Farming: Includes—

- (a) cultivating, propagating and harvesting plants or fungi or their products or parts, including seeds, spores, bulbs or the like, but does not include forestry; or
- (b) maintaining animals in any physical environment for the purposes of—
 - (i) breeding them; or
 - (ii) selling them; or
 - (iii) acquiring and selling their bodily produce such as milk, wool, eggs or the like; or
- (c) a combination of (a) and (b),

but does not include forestry or maintaining animals for sport or recreational purposes.

Farm shed: A single *storey* Class 7 or 8 building located on land primarily used for *farming*—

- (a) that is—
 - (i) used in connection with *farming*; or
 - (ii) used primarily to store one or more *farm vehicles*; or
 - (iii) a combination of (i) and (ii); and
- (b) occupied neither frequently nor for extended periods by people; and
- (c) in which the total number of persons accommodated at any time does not exceed 2; and
- (d) with a total *floor area* of more than 500 m² but not more than 2000 m².

Farm vehicle: A vehicle used in connection with *farming*.

NSW Film

Finished ground level: The ground level adjacent to footing systems at the completion of construction and landscaping.

Fire actions: Each of the following:

- (a) airborne embers; and
- (b) burning debris and/or accumulated embers adjacent to building elements; and
- (c) heat transfer from combustible materials within the site; and

- (d) radiant heat from a bushfire front; and
- (e) flame contact from a bushfire front; and
- (f) the period of time post fire front subject to collapsing vegetation due to persistent combustion.

Fire brigade: A statutory authority constituted under an Act of Parliament having as one of its functions, the protection of life and property from fire and other emergencies.

Fire brigade station: For the purposes of E1D2(1)(b) and I3D9, means a state or territory government operated premises which is a station for a *fire brigade*.

Fire compartment: Either—

- (a) the total space of a building; or
- (b) when referred to in—
 - (i) the *Performance Requirements* — any part of a building separated from the remainder by barriers to fire such as walls and/or floors having an appropriate resistance to the spread of fire with any openings adequately protected; or
 - (ii) the *Deemed-to-Satisfy Provisions* — any part of a building separated from the remainder by walls and/or floors each having an FRL not less than that *required* for a *fire wall* for that type of construction and where all openings in the separating construction are protected in accordance with the *Deemed-to-Satisfy Provisions* of the relevant Part.

Fire growth: The stage of fire development during which the *heat release rate* and the temperature of the fire are generally increasing.

Fire hazard: The danger in terms of potential harm and degree of exposure arising from the start and spread of fire and the smoke and gases that are thereby generated.

Fire hazard properties: The following properties of a material or assembly that indicate how they behave under specific fire test conditions:

- (a) *Critical radiant flux* and *smoke development rate*, determined in accordance with AS ISO 9239.1.
- (b) *Smoke-Developed Index* and *Spread-of-Flame Index*, determined in accordance with AS/NZS 1530.3.
- (c) *Group number*, *average specific extinction area* and *Smoke growth rate index* (SMOGR_{RC}), determined in accordance with AS 5637.1.

Fire intensity: The rate of release of calorific energy in watts, determined either theoretically or empirically, as applicable.

Fire-isolated passageway: A corridor, hallway or the like, of *fire-resisting construction*, which provides egress to or from a *fire-isolated stairway* or *fire-isolated ramp* or to a road or *open space*.

Fire-isolated ramp: A ramp within a *fire-resisting* enclosure which provides egress from a *storey*.

Fire-isolated stairway: A stairway within a *fire-resisting shaft* and includes the floor and roof or top enclosing structure.

Fire load: The sum of the net calorific values of the *combustible* contents which can reasonably be expected to burn within a *fire compartment*, including furnishings, built-in and removable materials, and building elements.

Notes

The calorific values must be determined at the ambient moisture content or humidity (the unit of measurement is MJ).

Fire-protected timber: *Fire-resisting* timber building elements that comply with *Specification 10*.

Fire-protective covering: Any one or more of the following:

- (a) 13 mm fire-protective grade plasterboard.
- (b) 12 mm cellulose cement flat sheeting complying with AS/NZS 2908.2 or ISO 8336.
- (c) 12 mm fibrous plaster reinforced with 13 mm x 13 mm x 0.7 mm galvanised steel wire mesh located not more than 6 mm from the exposed face.
- (d) Other material not less fire-protective than 13 mm fire-protective grade plasterboard, fixed in accordance with the normal trade practice for a fire-protective covering.

Fire-protected steel: *Loadbearing wall* construction comprising hot rolled or cold formed steel members protected with a *fire-protective covering* that consists of—

- (a) not less than 2 layers of 13 mm fire-protective grade plasterboard applied to each side of the wall; and

Definitions

- (b) additional *fire-protective covering* to that *required* by (a) where necessary to achieve the *FRL required* for the wall.

Fire-resistance level (FRL): The grading periods in minutes determined in accordance with *Specifications 1 and 2*, for the following criteria—

- (a) *structural adequacy*; and
 - (b) *integrity*; and
 - (c) *insulation*,
- and expressed in that order.

Notes

A dash means there is no requirement for that criterion. For example, 90/—/— means there is no requirement for an FRL for *integrity* and *insulation*, and —/—/— means there is no requirement for an FRL.

Fire-resisting construction: For the purposes of Volume One, means one of the Types of construction referred to in *Part C2* of Volume One.

Fire-resisting: For the purposes of—

- (a) Volume One, applied to a building element, having an FRL appropriate for that element; or
- (b) Volume Two, applied to a *structural member* or other part of a building, having the FRL *required* for that *structural member* or other part.

Fire safety engineering: Application of engineering principles, rules and *expert judgement* based on a scientific appreciation of the fire phenomenon, often using specific *design scenario*, of the effects of fire and of the reaction and behaviour of people in order to—

- (a) save life, protect property and preserve the environment and heritage from destructive fire; and
- (b) quantify the hazards and risk of fire and its effects; and
- (c) mitigate fire damage by proper design, construction, arrangement and use of buildings, materials, structures, industrial processes and transportation systems; and
- (d) evaluate analytically the optimum protective and preventive measures, including design, installation and maintenance of active and passive fire and life safety systems, necessary to limit, within prescribed levels, the consequences of fire.

Fire safety system: One or any combination of the methods used in a building to—

- (a) warn people of an emergency; or
- (b) provide for safe evacuation; or
- (c) restrict the spread of fire; or
- (d) extinguish a fire,

and includes both active and passive systems.

Fire-source feature: Any one or more of the following:

- (a) The far boundary of a road, river, lake or the like adjoining the allotment.
- (b) A side or rear boundary of the allotment.
- (c) An *external wall* of another building on the allotment which is not a Class 10 building.
- (d) The construction edge or perimeter of another building on the allotment which is not a Class 10 building and which has a use that constitutes a *fire load*.

Fire wall: A wall with an appropriate resistance to the spread of fire that divides a *storey* or building into *fire compartments*.

Fixed wired: For the purposes of *Specification 23*, a system of electrical wiring (either AC or DC), in which cables are fixed or supported in position.

Flammability Index: The index number as determined by an *Accredited Testing Laboratory* in accordance with AS 1530.2.

Notes

Until the adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

VIC Flashing

Flashing: A strip or sleeve of impervious material dressed, fitted or built-in to provide a barrier to water movement, or to divert the travel of water, or to cover a joint where water would otherwise penetrate to the interior of a building, and includes the following:

- Perimeter flashing: a flashing used at the floor-wall junction.
- Vertical flashing: a flashing used at wall junctions within *shower areas*.

Flashover: In relation to *fire hazard properties*, means a *heat release rate* of 1 MW.

Flight: That part of a stair that has a continuous series of *risers*, including *risers* of *winders*, not interrupted by a *landing* or floor.


Explanatory Information

A *flight* is the part of a stair that has a continuous slope created by the nosing line of treads. The length of a *flight* is limited to restrict the distance a person could fall down a stair.

Quarter *landings*, as shown in *Explanatory Figure 1*, are considered sufficient to halt a person's fall and therefore are considered for the purposes of NCC Volume Two and the ABCB Housing Provisions not to be part of the *flight*.

Figure 1 (explanatory):

Identification of stair flights — Plan view

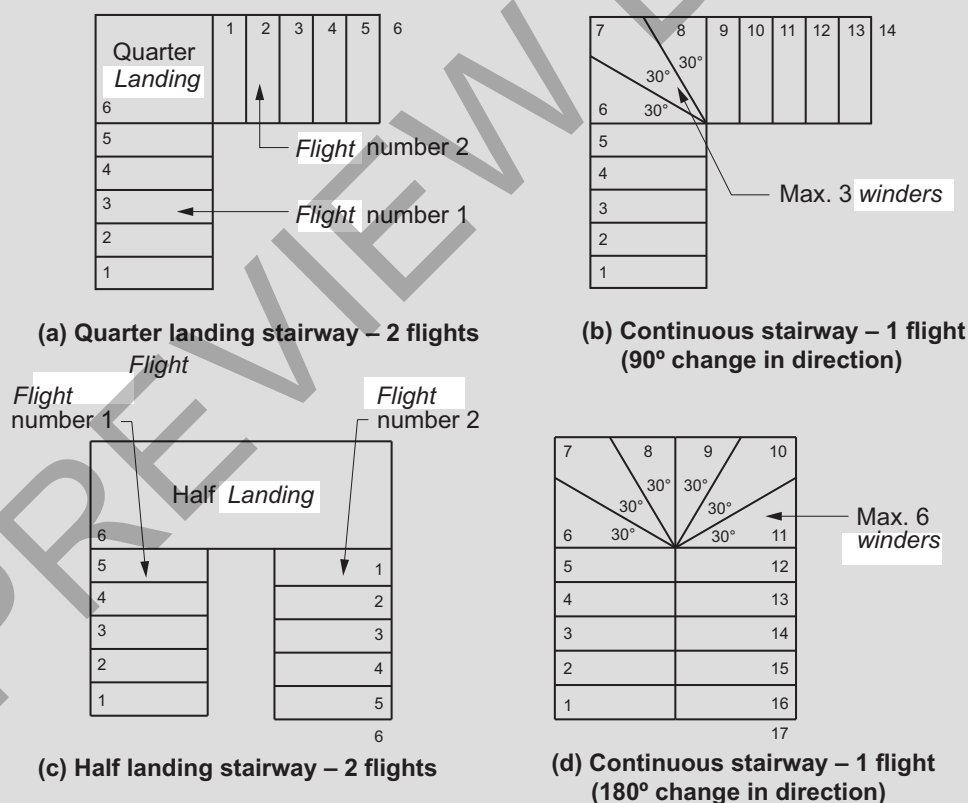

VIC Flood hazard area

Flood hazard area: The *site* (whether or not mapped) encompassing land lower than the *flood hazard level* which has been determined by the *appropriate authority*.

Flood hazard level (FHL): The flood level used to determine the height of floors in a building and represents the *defined flood level* plus the *freeboard* (see *Figure 3*).


Floor area: For the purposes of—

- Volume One—

Definitions

- (a) in relation to a building — the total area of all *storeys*; and
 - (b) in relation to a *storey* — the area of all floors of that *storey* measured over the enclosing walls, and includes—
 - (i) the area of a *mezzanine* within the *storey*, measured within the finished surfaces of any *external walls*; and
 - (ii) the area occupied by any *internal wall* or partitions, any cupboard, or other built-in furniture, fixture or fitting; and
 - (iii) if there is no enclosing wall, an area which has a use that contributes to the *fire load* or impacts on the safety, health or amenity of the occupants in relation to the provisions of the BCA; and
 - (c) in relation to a room — the area of the room measured within the internal finished surfaces of the walls, and includes the area occupied by any cupboard or other built-in furniture, fixture or fitting; and
 - (d) in relation to a *fire compartment* — the total area of all floors within the *fire compartment* measured within the finished internal surfaces of the bounding construction, and if there is no bounding construction, includes an area which has a use which contributes to the *fire load*; and
 - (e) in relation to an *atrium* — the total area of all floors within the *atrium* measured within the finished surfaces of the bounding construction and if no bounding construction, within the *external walls*.
- (2) Volume Two and the ABCB Housing Provisions, in relation to a room, the area of the room measured within the finished surfaces of the walls, and includes the area occupied by any cupboard or other built-in furniture, fixture or fitting (see Figure 4).

Figure 4: Identification of floor area of a room

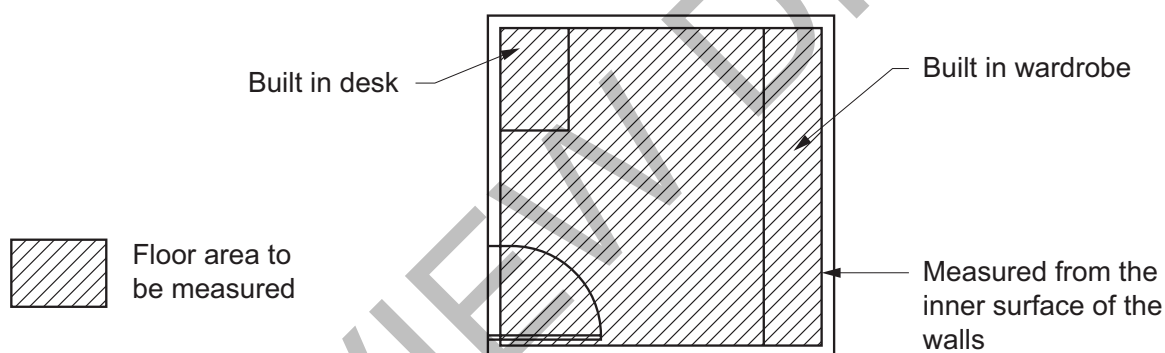


Floor waste: A grated inlet within a graded floor intended to drain the floor surface.

NSW Flying scenery

Foundation: The ground which supports the building (see Figure 5).

Figure 5: Identification of foundation

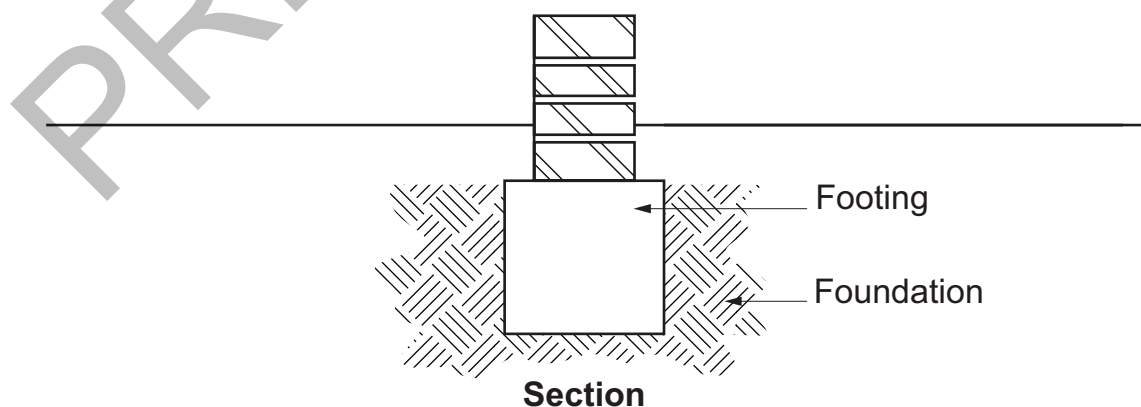

Fractional effective dose (FED): The fraction of the dose (of thermal effects) that would render a person of average susceptibility incapable of escape.

Explanatory Information

The definition for FED has been modified from the ISO definition to be made specific for the Fire Safety *Verification*

Definitions

Method. The use of CO or CO₂ as part of FED is not part of that *Verification Method*. This is because the ability to measure CO in a repeatable test varies by two orders of magnitude for common cellulosic fuel.

VIC Freeboard

Freeboard: The height above the *defined flood level* as determined by the *appropriate authority*, used to compensate for effects such as wave action and localised hydraulic behaviour.

Fully developed fire: The state of total involvement of the majority of available combustible materials in a fire.

NSW Garage top dwelling

Glazing: For the purposes of—

- (a) Section J of Volume One, except for a *sole-occupancy unit* of a Class 2 building or a Class 4 part of a building—
 - (i) a transparent or translucent element and its supporting frame located in the *envelope*; and
 - (ii) includes a *window* other than a *roof light*; or
- (b) Section J of NCC Volume One, for a *sole-occupancy unit* of a Class 2 building or a Class 4 part of a building—
 - (i) a translucent element and its supporting frame located in the external *fabric* of the building; and
 - (ii) includes a *window* other than a *roof light*; or
- (c) Part H6 of NCC Volume Two and Section 13 of the ABCB Housing Provisions—
 - (i) a transparent or translucent element and its supporting frame located in the external *fabric* of the building; and
 - (ii) includes a *window* other than a *roof light*.

Going: The horizontal dimension from the front to the back of a tread less any overhang from the next tread or *landing* above (see Figure 11.2.2f in the ABCB Housing Provisions).

Green Star: The building sustainability rating scheme managed by the Green Building Council of Australia.

NSW Grid

Group number: The number of one of 4 groups of materials used in the regulation of *fire hazard properties* and applied to materials used as a finish, surface, lining, or attachment to a wall or ceiling.

Habitable room: A room used for normal domestic activities, and—

- (a) includes a bedroom, living room, lounge room, music room, television room, kitchen, dining room, sewing room, study, playroom, family room, home theatre and sunroom; but
- (b) excludes a bathroom, laundry, water closet, pantry, walk-in wardrobe, corridor, hallway, lobby, photographic darkroom, clothes-drying room, and other spaces of a specialised nature occupied neither frequently nor for extended periods.

Hazard Rating: A level of potential toxicity that may cause contamination in a *drinking water* system, having a rating of *Low Hazard*, *Medium Hazard* or *High Hazard*, determined in accordance with NCC Volume Three.

Health-care building: A building whose occupants or patients undergoing medical treatment generally need physical assistance to evacuate the building during an emergency and includes—

- (a) a public or private hospital; or
- (b) a nursing home or similar facility for sick or disabled persons needing full-time care; or
- (c) a clinic, day surgery or procedure unit where the effects of the predominant treatment administered involve patients becoming non-ambulatory and requiring supervised medical care on the premises for some time after the treatment.

Heated water: Water that has been intentionally heated; normally referred to as hot water or warm water.

Heating degree hours: For any one hour when the mean outdoor air temperature is less than 15°C, the degrees Celsius temperature difference between the mean outdoor air temperature and 15°C.

Heating load: The calculated amount of energy delivered to the heated spaces of the building annually by artificial means to maintain the desired temperatures in those spaces.

Heat release: The thermal energy produced by combustion (measured in kJ).

Heat release rate (HRR): The rate of thermal energy production generated by combustion, measured in kW (preferred) or MW.

High Hazard: Any condition, device or practice which, in connection with a water supply, has the potential to cause death.

High wind area: A region that is subject to *design wind speed* more than N3 or C1 (see Table 4).

Hob: The upstand at the perimeter of a *shower area*.

Horizontal exit: A *required* doorway between 2 parts of a building separated from each other by a *fire wall*.

VIC Hotel offering shared accommodation

Hours of operation: The number of hours when the occupancy of the building is at least 20% of the peak occupancy.

House energy rating software: For the purposes of—

- (a) Volume One, applied to J3D3 or J3D15 — software accredited under the Nationwide House Energy Rating Scheme (NatHERS); or—
- (b) Volume Two—
 - (i) applied to H6V2 — software accredited or previously accredited under the Nationwide House Energy Rating Scheme (NatHERS) and the additional functionality provided in non-regulatory mode; and
 - (ii) applied to Specification 42 — software accredited under the Nationwide House Energy Rating Scheme (NatHERS).

Explanatory Information

The Nationwide House Energy Rating Scheme (NatHERS) refers to the Australian Governments' scheme that facilitates consistent energy ratings from software tools which are used to assess the potential thermal efficiency of dwelling envelopes.

Illuminance: The luminous flux falling onto a unit area of surface.

Illumination power density: The total of the power that will be consumed by the lights in a space, including any lamps, ballasts, current regulators and control devices other than those that are plugged into socket outlets for intermittent use such as floor standing lamps, desk lamps or work station lamps, divided by the area of the space, and expressed in W/m².

Explanatory Information

Illumination power density relates to the power consumed by the lighting system and includes the light source or luminaire and any control device. The power for the lighting system is the illumination power load. This approach is more complicated than the *lamp power density* approach but provides more flexibility for a dwelling with sophisticated control systems.

The area of the space refers to the area the lights serve. This could be considered a single room, open plan space, verandah, balcony or the like, or the total area of all these spaces.

Inclined lift: A power-operated device for raising or lowering people within a carriage that has one or more rigid guides on an inclined plane.

Individual protection: The installation of a *backflow prevention device* at the point where a water service connects to a single fixture or appliance.

NSW Information and education facility

Insulation: In relation to an FRL, the ability to maintain a temperature on the surface not exposed to the furnace below the limits specified in AS 1530.4.

Integrity: In relation to an FRL, the ability to resist the passage of flames and hot gases specified in AS 1530.4.

Internal wall: For the purposes of—

- (a) Volume One, excludes a *common wall* or a party wall; or
- (b) Volume Two, excludes a *separating wall*, *common wall* or party wall.

Interstitial condensation: The *condensation* of moisture on surfaces between material layers inside the building component.

Irrigation system: An irrigation system of the following types:

- (a) Type A— all permanently open outlets and piping more than 150 mm above finished surface level, not subject to ponding or *backpressure* and not involving injection systems.

Definitions

- (b) Type B— irrigation systems in domestic or residential buildings with piping or outlets installed less than 150 mm above finished surface level and not involving injection systems.
- (c) Type C— irrigation systems in other than domestic or residential buildings with piping outlets less than 150 mm above finished surface level and not involving injection systems.
- (d) Type D— irrigation systems where fertilizers, herbicides, nematicides or the like are injected or siphoned into the system.

JASANZ: The Joint Accreditation System of Australia and New Zealand.

Kerb ramp: A ramp incorporated in a kerb.

Lamp power density: The total of the maximum power rating of the lamps in a space, other than those that are plugged into socket outlets for intermittent use such as floor standing lamps, desk lamps or work station lamps, divided by the area of the space, and expressed in W/m².

Explanatory Information

Lamp power density is a simple means of setting energy consumption at an efficient level for Class 1 and associated Class 10a buildings.

Lamp refers to the globe or globes that are to be installed in a permanently wired light fitting. The maximum power of a lamp is usually marked on the fitting as the maximum allowable wattage.

The area of the space refers to the area the lights serve. This could be considered a single room, open plan space, verandah, balcony or the like, or the total area of all these spaces.

Landing: An area at the top or bottom of a *flight* or between two *flights*.

Latent heat gain: The heat gained by the vapourising of liquid without change of temperature.

Lateral support: A support (including a footing, buttress, cross wall, beam, floor or braced roof structure) that effectively restrains a wall or pier at right angles to the face of the wall or pier.

Lead free: Where a plumbing product or material in contact with *drinking water* has a *weighted average* lead content of not more than 0.25%.

NSW Licensed premises

WA Licensed premises

Lightweight construction: Construction which incorporates or comprises—

- (a) sheet or board material, plaster, render, sprayed application, or other material similarly susceptible to damage by impact, pressure or abrasion; or
- (b) concrete and concrete products containing pumice, perlite, vermiculite, or other soft material similarly susceptible to damage by impact, pressure or abrasion; or
- (c) masonry having a width of less than 70 mm.

Loadbearing: Intended to resist vertical forces additional to those due to its own weight.

Loadbearing wall: For the purposes of H1D4 and H2D3 of NCC Volume Two and Section 4 of the ABCB Housing Provisions, means any wall imposing on the footing a load greater than 10 kN/m.

Loss: Physical damage, financial loss or loss of *amenity*.

Low Hazard: Any condition, device or practice which, in connection with a water supply, would constitute a nuisance by colour, odour or taste but does not have the potential to injure or endanger health.

Low rainfall intensity area: An area with a 5 minute rainfall intensity for an *annual exceedance probability* of 5% of not more than 125 mm/hour.

Explanatory Information

Rainfall intensity figures can be obtained from Table 7.4.3d in the ABCB Housing Provisions.

Low-rise, low-speed constant pressure lift: A power-operated low-rise, low-speed device for raising or lowering people with limited mobility on a carriage that is controlled by the application of constant pressure to a control.

Low-rise platform lift: A power-operated device for raising or lowering people with limited mobility on a platform, that is controlled automatically or by the application of constant pressure to a control.

Definitions

Low voltage: A *voltage* exceeding *extra-low voltage*, but not exceeding 1000 V AC or 1500 V DC.

Luminance contrast: The light reflected from one surface or component, compared to the light reflected from another surface or component.

Main water heater: The domestic hot water unit in a dwelling that is connected to at least one shower and the largest number of hot water outlets.

Main space conditioning: Either—

- (a) the heating or cooling equipment that serves at least 70% of the *conditioned space* of a dwelling; or
- (b) if no one heating or cooling equipment serves at least 70% of the *conditioned space* of the dwelling, the equipment that results in the highest net equivalent energy usage when calculated in accordance with J3D14(1)(a) of NCC Volume One or 13.6.2(1)(a) of the ABCB Housing Provisions.

Notes

- (1) If a multi-split *air-conditioning* unit is installed, it is considered to be a single heating or cooling *service*.
- (2) A series of separate heaters or coolers of the one type can be considered a single heater or cooler type with a performance level of that of the unit with the lowest efficiency.

Explanatory Information

The purpose of defining for main space conditioning is to provide criteria upon which the heating or cooling equipment should be selected when showing compliance with J3D14(1)(a) of NCC Volume One and 13.6.2(1)(a) of the ABCB Housing Provisions when more than one type and efficiency of equipment is present. In J3D14(1)(a) the formula that determines E_R allows the selection of only one heating or cooling system. This definition requires that if any one system serves at least 70% of the *floor area* that is heated or cooled it should be used as the basis of determining E_R . If, however, no one system serves at least 70% of the *floor area*, then the appliance that results in the highest net equivalent energy usage, when calculated in accordance with J3D14(1)(a)/13.6.2(1)(a), should be selected.

Massive timber: An element not less than 75 mm thick as measured in each direction formed from solid and laminated timber.

Maximum retained water level: The point where surface water will start to overflow out of the *shower area*.

Medium Hazard: Any condition, device or practice which, in connection with a water supply, has the potential to injure or endanger health.

Membrane: A barrier impervious to moisture.

Explanatory Information

A barrier may be a single or multi-part system.

Mezzanine: An intermediate floor within a room, that is not separated from that room by walls.

Explanatory Information

For the purposes of this provision, a solid balustrade does not constitute a wall.

Minimum Energy Performance Standards (MEPS): The Minimum Energy Performance Standards for equipment and appliances established through the Greenhouse and Energy Minimum Standards Act 2012.

NSW Minimum lateral clearance

Mixed construction: A building consisting of more than one form of construction, particularly in double-storey buildings.

Mould: A fungal growth that can be produced from conditions such as dampness, darkness, or poor ventilation.

NABERS Energy: The National Australian Built Environment Rating Systems for energy efficiency, which is managed by the New South Wales Government.

Network Utility Operator: A person who—

- (a) undertakes the piped distribution of *drinking water* or *non-drinking water* for supply; or
- (b) is the operator of a sewerage system or a stormwater *drainage* system.

Explanatory Information

A Network Utility Operator in most States and Territories is the water and sewerage authority licensed to supply water and receive sewage and/or stormwater. The authority operates or proposes to operate a network that undertakes the distribution of water for supply and undertakes to receive sewage and/or stormwater drainage. This authority may be a licensed utility, local government body or council.

Non-combustible: Applied to—

- (a) a material — means not deemed *combustible* as determined by an *Accredited Testing Laboratory* in accordance with AS 1530.1 — Combustibility Tests for Materials; or
- (b) construction or part of a building — means constructed wholly of materials that are not deemed *combustible*.

Notes

Until the adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

Non-drinking water: Water which is not intended primarily for human consumption.

Occupant traits: For the purposes of—

- (a) Volume One, the features, needs and profile of the occupants in a *habitable room* or space; or
- (b) Volume Two, the features, needs and profile of the occupants in a room or space.

Explanatory Information

For the purpose of Volume Two, this term is used to describe the characteristics of the occupants and their associated requirements in relation to a room or space.

For example, in relation to a bedroom, the following occupant characteristics and associated requirements should be considered:

- Characteristics: height, mobility and how often the space will be used.
- Requirements: a sleeping space and a space to undertake leisure activities.

Occupiable outdoor area: A space on a roof, balcony or similar part of a building—

- (a) that is open to the sky; and
- (b) to which access is provided, other than access only for maintenance; and
- (c) that is not *open space* or directly connected with *open space*.

Explanatory Information

For the purposes of this definition, a minor roof covering that is open sided, such as an awning provided at a doorway, does not prevent an area from being considered 'open to the sky'.

VIC On-site wastewater management system

On-site wastewater management system: A system that receives and/or treats wastewater generated and discharges the resulting effluent to an *approved disposal system* or re-use system.

Open-deck carpark: A carpark in which all parts of the parking *storeys* are cross-ventilated by permanent unobstructed openings in not fewer than 2 opposite or approximately opposite sides, and—

- (a) each side that provides ventilation is not less than $\frac{1}{6}$ of the area of any other side; and
- (b) the openings are not less than $\frac{1}{2}$ of the wall area of the side concerned.

Open space: A space on the allotment, or a roof or similar part of a building adequately protected from fire, open to the sky and connected directly with a public road.

Open spectator stand: A tiered stand substantially open at the front.

Other property: All or any of the following—

- (a) any building on the same or an adjoining allotment; and

- (b) any adjoining allotment; and
- (c) a road.

Outdoor air: Air outside the building.

Outdoor air economy cycle: A mode of operation of an *air-conditioning* system that, when the *outdoor air* thermodynamic properties are favourable, increases the quantity of *outdoor air* used to condition the space.

Outfall: That part of the disposal system receiving *surface water* from the *drainage* system and may include a natural water course, kerb and channel, or soakage system.

Overflow device: A device that provides relief to a water service, sanitary *plumbing* and *drainage* system, *rainwater service* or stormwater system to avoid the likelihood of *uncontrolled discharge*.

Panel wall: A non-*loadbearing external wall*, in frame or similar construction, that is wholly supported at each *storey*.

Partially buried rainwater tank: A rainwater tank that is not completely covered by earth but is partially set into the ground.

Patient care area: A part of a *health-care building* normally used for the treatment, care, accommodation, recreation, dining and holding of patients including a *ward area* and *treatment area*.

Performance-based design brief (PBDB): The report that defines the scope of work for the performance-based analysis, the technical basis for analysis, and the criteria for acceptance of any relevant *Performance Solution* as agreed by stakeholders.

Performance Requirement: A requirement which states the level of performance which a *Performance Solution* or *Deemed-to-Satisfy Solution* must meet.

Performance Solution: A method of complying with the *Performance Requirements* other than by a *Deemed-to-Satisfy Solution*.

Perimeter of building: For the purposes of Section 8 of the Housing Provisions, means the external envelope of a building.

TAS Permit Authority

Personal care services: Any of the following:

- (a) The provision of nursing care.
- (b) Assistance or supervision in—
 - (i) bathing, showering or personal hygiene; or
 - (ii) toileting or continence management; or
 - (iii) dressing or undressing; or
 - (iv) consuming food.
- (c) The provision of direct physical assistance to a person with mobility problems.
- (d) The management of medication.
- (e) The provision of substantial rehabilitative or development assistance.

Piping: For the purposes of Section J in Volume One or Part H6 in Volume Two, and Section 13 of the Housing Provisions, means an assembly of pipes, with or without valves or other fittings, connected together for the conveyance of liquids and gases.

NSW Planning for Bush Fire Protection

Pliable building membrane: A water barrier as classified by AS 4200.1.

VIC Plumbing

Plumbing: Any water service plumbing or sanitary plumbing system.

Plumbing or Drainage Solution: A solution which complies with the *Performance Requirement* and is a—

- (a) *Performance Solution*; or
- (b) *Deemed-to-Satisfy Solution*; or
- (c) combination of (a) and (b).

Point of connection: Any of the following:

- (a) For a cold water service, means the point where the cold water service connects to—

Definitions

- (i) the *Network Utility Operator's* water supply system; or
- (ii) the point of isolation to an alternative water source where there is no *Network Utility Operator's* water supply available or is not utilised.
- (b) For a *heated water* service, means the point where the water heater connects to the cold water service downstream of the isolation valve.
- (c) For sanitary *drainage*, means the point where the on-site sanitary *drainage* system connects to—
 - (i) the *Network Utility Operator's* sewerage system; or
 - (ii) an *on-site wastewater management system*.
- (d) For sanitary *plumbing*, means the point where the sanitary *plumbing* system connects to the sanitary *drainage* system.
- (e) For a *rainwater service*, means the point where the *rainwater service*—
 - (i) connects to the point of isolation for the *rainwater storage*; or
 - (ii) draws water from the *rainwater storage*.
- (f) For *stormwater* disposal, means the point where the on-site *stormwater drainage* system connects to—
 - (i) the *Network Utility Operator's stormwater* system; or
 - (ii) an approved on-site disposal system.
- (a) For a fire-fighting water service, means the point where the service connects to—
 - (i) a cold water service, downstream of a *backflow prevention device*; or
 - (ii) the *Network Utility Operator's* water supply system; or
 - (iii) the point of isolation to an alternative water source.
- (b) For *rainwater storage*, means the point of *rainwater* entry to the *rainwater storage*.

Notes

A domestic fire sprinkler service conforming to FPAA101D is considered part of the cold water service.

Explanatory Information

The *point of connection* is usually determined by the *Network Utility Operator* according to the water and sewerage Acts, Regulations and codes that apply within the *Network Utility Operator's* licensed area and/or jurisdiction.

WA

Predicted Mean Vote (PMV): The Predicted Mean Vote of the thermal perception of building occupants determined in accordance with ANSI/ASHRAE Standard 55.

Preformed shower base: A preformed, prefinished *vessel* installed as the finished floor of a shower compartment, and which is provided with a connection point to a sanitary *drainage* system.

Explanatory Information

Preformed shower bases are commonly made of plastics, composite materials, vitreous enamelled pressed steel, or stainless steel.

Pressure vessel: A vessel subject to internal or external pressure, including interconnected parts and components, valves, gauges and other fittings up to the first point of connection to connecting piping, and—

- (a) includes fire heaters and gas cylinders; but
- (b) excludes—
 - (i) any vessel that falls within the definition of a *boiler*; and
 - (ii) storage tanks and equipment tanks intended for storing liquids where the pressure at the top of the tank is not exceeding 1.4 kPa above or 0.06 kPa below atmospheric pressure; and
 - (iii) domestic-type hot water supply heaters and tanks; and
 - (iv) pressure vessels installed for the purposes of fire suppression or which serve a fire suppression system.

QLD Primary building element

Primary building element: For the purposes of—

- (a) Volume One, a member of a building designed specifically to take part of the loads specified in B1D3 and includes roof, ceiling, floor, stairway or ramp and wall framing members including bracing members designed for the specific purpose of acting as a brace to those members; or
- (b) Part 3.4 of the ABCB Housing Provisions, a member of a building designed specifically to take part of the building loads and includes roof, ceiling, floor, stairway or ramp and wall framing members including bracing members designed for the specific purpose of acting as a brace to those members.

Explanatory Information

The loads to which a building may be subjected are dead, live, wind, snow and earthquake loads. Further information on building loads can be found in the AS 1170 series of Standards.

Primary insulation layer: The most interior insulation layer of a wall or roof construction.

Private bushfire shelter: A structure associated with, but not attached to, or part of a Class 1a dwelling that may, as a last resort, provide shelter for occupants from immediate life threatening effects of a bushfire.

Private garage: For the purposes of—

- (a) Volume One—
 - (i) any garage associated with a Class 1 building; or
 - (ii) any single *storey* of a building of another Class containing not more than 3 vehicle spaces, if there is only one such *storey* in the building; or
 - (iii) any separate single *storey* garage associated with another building where such garage contains not more than 3 vehicle spaces; or
- (b) Volume Two—
 - (i) any garage associated with a Class 1 building; or
 - (ii) any separate single *storey* garage associated with another building where such garage contains not more than 3 vehicle spaces.

Product: *Plumbing* and *drainage* items within the scope of Volume Three including but not limited to—

- (a) materials, fixtures and components used in a *plumbing* or *drainage* installation; and
- (b) appliances and equipment connected to a *plumbing* or *drainage* system.

Product Technical Statement: A form of documentary evidence stating that the properties and performance of a building material, product or form of construction fulfil specific requirements of the NCC, and describes—

- (a) the application and intended use of the building material, product or form of construction; and
- (b) how the use of the building material, product or form of construction complies with the requirements of the NCC Volume One and Volume Two; and
- (c) any limitations and conditions of the use of the building material, product or form of construction relevant to (b).

Professional engineer: A person who is—

- (a) if legislation is applicable — a registered professional engineer in the relevant discipline who has appropriate experience and competence in the relevant field; or
- (b) if legislation is not applicable—
 - (i) registered in the relevant discipline on the National Engineering Register (NER) of the Institution of Engineers Australia (which trades as 'Engineers Australia'); or
 - (ii) eligible to become registered on the Institution of Engineers Australia's NER and has appropriate experience and competence in the relevant field.

NSW Projection suite

TAS Public

WA WA Public building

Public corridor: An enclosed corridor, hallway or the like which—

Definitions

- (a) serves as a means of egress from 2 or more *sole-occupancy units* to a *required exit* from the *storey* concerned; or
- (b) is *required* to be provided as a means of egress from any part of a *storey* to a *required exit*.

Rainwater: Naturally occurring *water* generated by a rain or storm event.

Rainwater service: A water service which distributes water from the isolation valve of the rainwater storage to the rainwater points of discharge for purposes such as for clothes washing, urinal and water closet flushing and external hose cocks.

Rainwater storage: Any storage of rainwater collected from a roof catchment area which is used to supply water for the primary purposes of drinking, personal hygiene or other uses.

Explanatory Information

Generally this applies to alternative water sources not supplied by a *Network Utility Operator*. This does not include *rainwater storage* for non-drinking purposes.

SA Rainwater tank

Rapid roller door: A door that opens and closes at a speed of not less than 0.5 m/s.

Recognised expert: A person with qualifications and experience in the area of *plumbing* or *drainage* in question recognised by the authority having jurisdiction.

Explanatory Information

A *recognised expert* is a person recognised by the authority having jurisdiction as qualified to provide evidence under A5G4(5). Generally, this means a hydraulic consultant or engineer, however the specific requirements are determined by the authority having jurisdiction.

Under A5G4(5), a report from a *recognised expert* may be used as evidence of suitability that a *product* listed on the *WaterMark Schedule of Excluded Products*, or a *plumbing* or *drainage* system, complies with a *Performance Requirement* or *Deemed-to-Satisfy Provisions*.

Redirected: For the purposes of Section F in NCC Volume One, the changing of direction of *collected water* to a *drainage system*.

Reference building: For the purposes of—

- (a) Volume One, a hypothetical building that is used to calculate the maximum allowable—
 - (i) *annual greenhouse gas emissions* for the common area of a Class 2 building or a Class 3 to 9 building; or
 - (ii) *heating load*, *cooling load* and *energy value* for a *sole-occupancy unit* of a Class 2 building or a Class 4 part of a building; or
- (b) Volume Two, a hypothetical building that is used to determine the maximum allowable *heating load* and *cooling load* for the proposed building.

Reflective insulation: A building membrane with a reflective surface such as a reflective foil laminate, reflective barrier, foil batt or the like capable of reducing radiant heat flow.

Explanatory Information

For Volume Two:

- Typical *R-Values* achieved by adding *reflective insulation* are given in the explanatory information accompanying Section 13 of the ABCB Housing Provisions. Information on specific products may be obtained from *reflective insulation* manufacturers.
- The surface of *reflective insulation* may be described in terms of its emittance (or infra-red emittance) or in terms of its reflectance (or solar reflectance). Generally, for the surface of a particular *reflective insulation*: emittance + reflectance = 1.
- Some types of *reflective insulation* may also serve the purposes of waterproofing or vapour proofing.

Regulated energy: The energy consumed by a building's *services* minus the amount of *renewable energy* generated and used on *site*.

Definitions

Reinforced masonry: Masonry reinforced with steel reinforcement that is placed in a bed joint or grouted into a core to strengthen the masonry.

Reliability: The probability that a system performs to a level consistent with the system specification.

Renewable energy: Energy that is derived from sources that are regenerated, replenished, or for all practical purposes cannot be depleted and the energy sources include, but are not limited to, solar, wind, hydroelectric, wave action and geothermal.

Required: Required to satisfy a *Performance Requirement* or a *Deemed-to-Satisfy Provision* of the NCC as appropriate.

Required safe egress time (RSET): The time required for safe evacuation of occupants to a place of safety prior to the onset of untenable conditions.

Residential aged care building: A Class 3 or 9a building whose residents, due to their incapacity associated with the ageing process, are provided with physical assistance in conducting their daily activities and to evacuate the building during an emergency.

Residential care building: A Class 3, 9a or 9c building which is a place of residence where 10% or more of persons who reside there need physical assistance in conducting their daily activities and to evacuate the building during an emergency (including any *aged care building* or *residential aged care building*) but does not include a hospital.

VIC Residential care building (Vic)

Resident use area: Part of a Class 9c building normally used by residents, and—

- (a) includes *sole-occupancy units*, lounges, dining areas, activity rooms and the like; but
- (b) excludes offices, storage areas, commercial kitchens, commercial laundries and other spaces not for the use of residents.

Resistance to the incipient spread of fire: In relation to a ceiling membrane, means the ability of the membrane to insulate the space between the ceiling and roof, or ceiling and floor above, so as to limit the temperature rise of materials in this space to a level which will not permit the rapid and general spread of fire throughout the space.

Explanatory Information

Resistance to the incipient spread of fire refers to the ability of a ceiling to prevent the spread of fire and thermally insulate the space between the ceiling and the roof or floor above. “Resistance to the incipient spread of fire” is superior to “fire-resistance” because it requires a higher standard of heat insulation.

The definition is used in Volume Two for separating floors/ceilings for a Class 1a dwelling located above a non-appurtenant *private garage*.

Rise in storeys: The greatest number of *storeys* calculated in accordance with C2D3 of Volume One.

Riser: The height between consecutive treads and between each *landing* and continuous tread.

Rising damp: *Water* absorbed from the ground into a building element.

VIC Restricted children's service

Rolled fill: Material placed in layers and compacted by repeated rolling by an excavator.

SA Roof catchment area

Roof light: For the purposes of Section J and Part F6 in NCC Volume One, Part H6 in NCC Volume Two, and Part 10.5 and Section 13 of the ABCB Housing Provisions, a skylight, *window* or the like installed in a roof—

- (a) to permit natural light to enter the room below; and
- (b) at an angle between 0 and 70 degrees measured from the horizontal plane.

NSW Row

R-Value: The thermal resistance of a component calculated by dividing its thickness by its thermal conductivity, expressed in m².K/W.

Safe place: Either—

- (a) a place of safety within a building—
 - (i) which is not under threat from a fire; and
 - (ii) from which people must be able to safely disperse after escaping the effects of an emergency to a road or *open space*; or

(b) a road or *open space*.

Sanitary compartment: A room or space containing a closet pan or urinal (see Figures 6a and 6b).

Figure 6a: Identification of a sanitary compartment (diagram a)


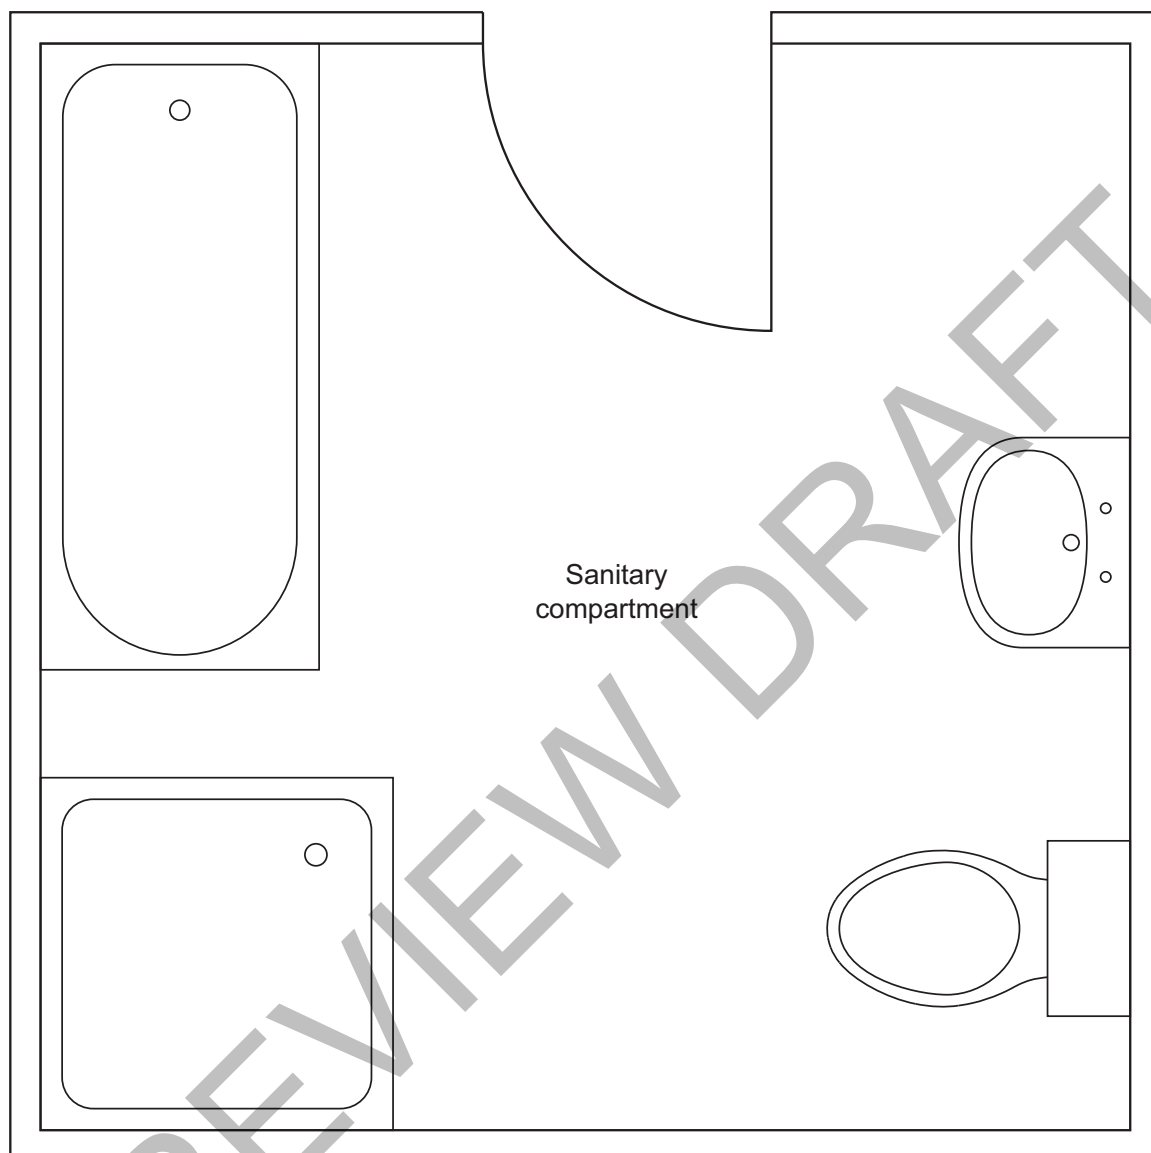


Figure 6b: Identification of a sanitary compartment (diagram b)

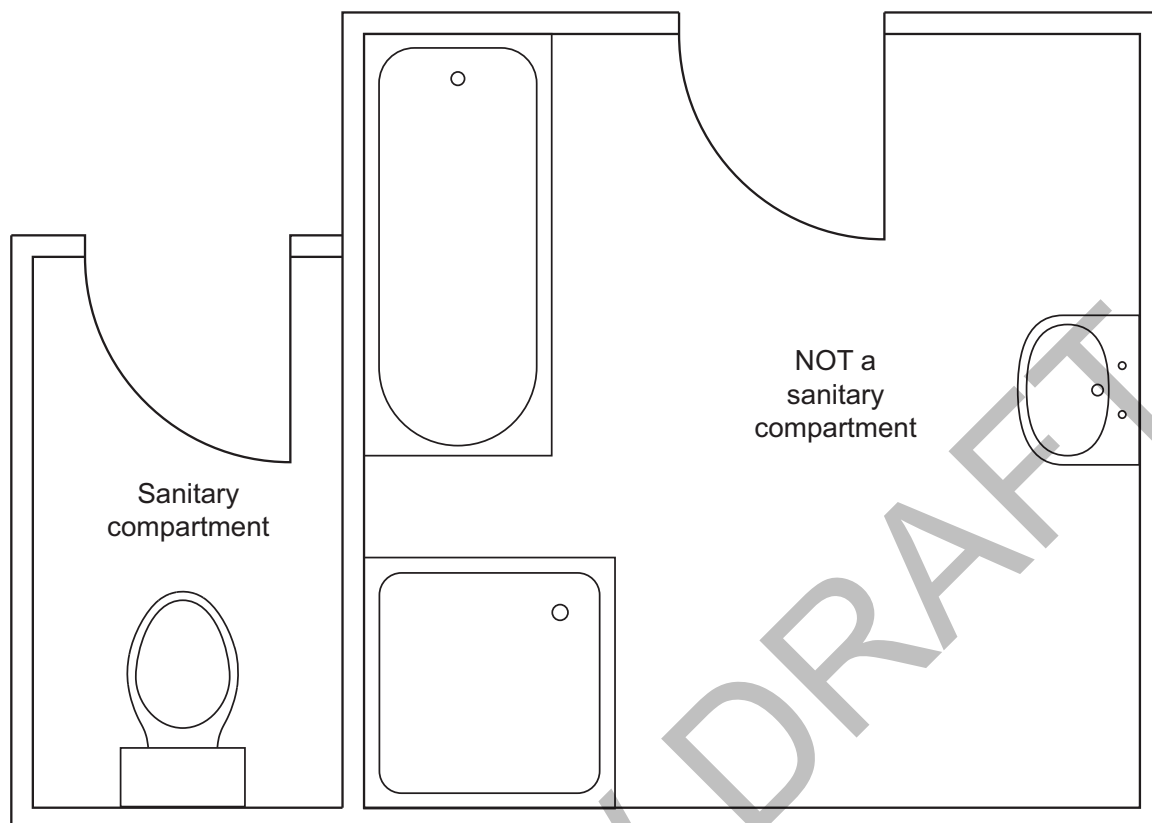

Sarking-type material: A material such as a *reflective insulation* or other flexible membrane of a type normally used for a purpose such as waterproofing, vapour management or thermal reflectance.

School: Includes a primary or secondary school, college, university or similar educational establishment.

TAS School age care facility

Screed: A layer of material (usually cement based) which sets in situ between a structural base and the finished floor material.

Self-closing: For the purposes of—

- (a) Volume One, applied to a door, means equipped with a device which returns the door to the fully closed position immediately after each opening; or
- (b) Volume Two, applied to a door or *window*, means equipped with a device which returns the door or *window* to the fully closed and latched position immediately after each manual opening.

Self-draining: A *surface finish* allowing *water* to be conveyed by gravity from the finished surface level to the membrane on the top surface of the *structural substrate*.

Sensible heat gain: The heat gained which causes a change in temperature.

Separating element: A barrier that exhibits fire *integrity*, *structural adequacy*, *insulation*, or a combination of these for a period of time under specified conditions (often in accordance with AS 1530.4).

Separating wall: A wall that is common to adjoining Class 1 buildings (see [Figure 7](#)).

Figure 7: Separating wall

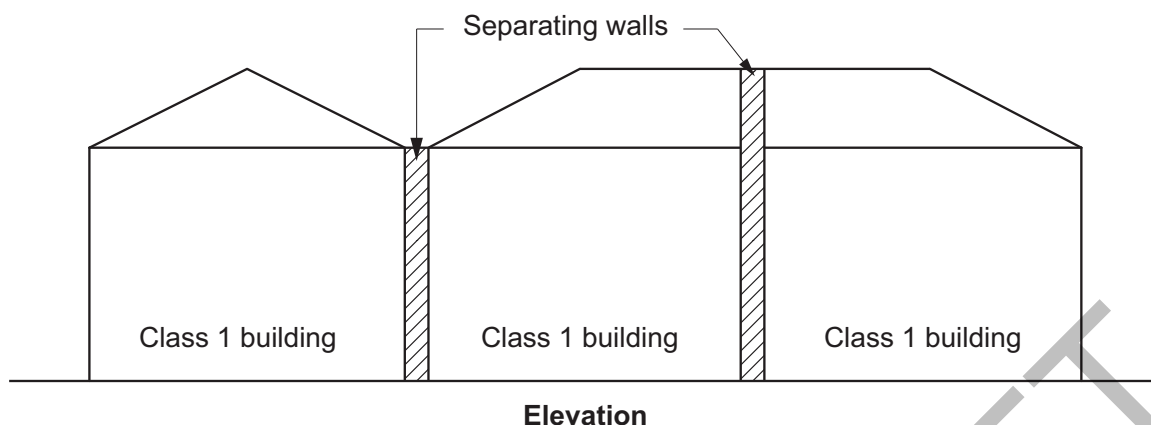


Figure Notes

In Volume Two a separating wall may also be known as a party wall and typically is *required* to be *fire-resisting* construction (see ABCB Housing Provisions Parts 9.2 and 9.3).

Service: For the purposes of Section J in Volume One, means a mechanical or electrical system that uses energy to provide *air-conditioning*, mechanical ventilation, heated water supply, artificial lighting, vertical transport and the like within a building, but which does not include—

- (a) systems used solely for emergency purposes; and
- (b) cooking facilities; and
- (c) portable appliances.

Service station: A garage which is not a *private garage* and is for the servicing of vehicles, other than only washing, cleaning or polishing.

Shaft: The walls and other parts of a building bounding—

- (a) a well, other than an *atrium well*; or
- (b) a vertical chute, duct or similar passage, but not a chimney or flue.

VIC Shared accommodation building

Shower area: The area affected by water from a shower, including a shower over a bath and for a shower area that is—

- (a) Enclosed – the area enclosed by walls or screens including hinged or sliding doors that contain the spread of water to within that space; or
- (b) Unenclosed – the area where, under normal use, water from the shower rose is not contained within the shower area.

Shower screen: The panels, doors or windows enclosing or partially enclosing a *shower area*.

Single leaf masonry: Outer walls constructed with a single thickness of masonry unit.

Site: The part of the allotment of land on which a building stands or is to be erected.

Sitework: Work on or around a *site*, including earthworks, preparatory to or associated with the construction, *alteration*, demolition or removal of a building.

NSW Small live music or arts venue

SA Small arts venue

Small-scale Technology Certificate: A certificate issued under the Commonwealth Government's Small-scale Renewable Energy Scheme.

Smoke-and-heat vent: A vent, located in or near the roof for smoke and hot gases to escape if there is a fire in the building.

Smoke-Developed Index: The index number for smoke as determined by an *Accredited Testing Laboratory* in accordance with AS/NZS 1530.3.

Notes

Until the adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

Smoke development rate: The development rate for smoke as determined by an *Accredited Testing Laboratory* testing flooring materials in accordance with AS ISO 9239.1.

Notes

Until the adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

Smoke growth rate index (SMOGR_{RC}): The index number for smoke used in the regulation of *fire hazard properties* and applied to materials used as a finish, surface, lining or attachment to a wall or ceiling.

Solar admittance: The fraction of incident irradiance on a *wall-glazing construction* that adds heat to a building's space.

Solar Reflectance Index: The solar reflectance index calculated in accordance with ASTM E1980-11(2019).

Sole-occupancy unit: A room or other part of a building for occupation by one or joint owner, lessee, tenant, or other occupier to the exclusion of any other owner, lessee, tenant, or other occupier and includes—

- (a) a dwelling; or
- (b) a room or suite of rooms in a Class 3 building which includes sleeping facilities; or
- (c) a room or suite of associated rooms in a Class 5, 6, 7, 8 or 9 building; or
- (d) a room or suite of associated rooms in a Class 9c building, which includes sleeping facilities and any area for the exclusive use of a resident.

NSW Spa pool

Spandrel panel: For the purposes of Section J, means the opaque part of a façade in curtain wall construction which is commonly adjacent to, and integrated with, *glazing*.

NSW Special fire protection purpose

Spiral stairway: A stairway with a circular plan, winding around a central post with steps that radiate from a common centre or several radii (see Figures 11.2.2d and 11.2.2e in the ABCB Housing Provisions).

Spread-of-Flame Index: The index number for spread of flame as determined by an *Accredited Testing Laboratory* in accordance with AS/NZS 1530.3.

Notes

Until the adoption of the next edition of the NCC determination need not be undertaken by an *Accredited Testing Laboratory*.

Sprinkler alarm switch: For the purposes of *Specification 23*, a device capable of sending an electrical signal to activate an alarm when a residential sprinkler head is activated (e.g. a flow switch).

Stack bonded pier: A pier where the overlap of a masonry unit is not more than 25% of the length of the masonry unit below.

Stage: A floor or platform in a Class 9b building on which performances are presented before an audience.

Stairway platform lift: A power-operated device for raising or lowering people with limited mobility on a platform (with or without a chair) in the direction of a stairway.

Standard Fire Test: The Fire-resistance Tests of Elements of Building Construction as described in AS 1530.4.

Step ramp: A ramp, other than a *kerb ramp*, not exceeding 190 mm in height.

Stormwater: *Water* accumulated or discharged as a result of a rain event.

Explanatory Information

The definition for 'stormwater' is used only for the purposes of Volume One Section F.

SA Storage shed

Storey: A space within a building which is situated between one floor level and the floor level next above, or if there is no floor above, the ceiling or roof above, but not—

- (a) a space that contains only—
 - (i) a lift *shaft*, stairway or meter room; or
 - (ii) a bathroom, shower room, laundry, water closet, or other *sanitary compartment*; or
 - (iii) accommodation intended for not more than 3 vehicles; or
 - (iv) a combination of the above; or
- (b) a *mezzanine*.

Structural adequacy: In relation to an FRL, means the ability to maintain stability and adequate *loadbearing* capacity as determined by AS 1530.4.

Structural member: A component or part of an assembly which provides vertical or lateral support to a building or structure.

Structural substrate: The surface of a *structural member* to be waterproofed as *required* by Part F1 or F2D2(2)(a).

Sub-surface water: Includes—

- (a) all naturally occurring *water*, other than *surface water*, which is either groundwater or *water* which results from rainfall infiltration on the *site* or other infiltration from another *water* source; and
- (b) *water* beneath the surface of a building element, other structure, or the ground.

Surface finish: For the purposes of Section F of Volume One, is a material or flooring system directly fixed to or supported above a *structural substrate*.

Surface water: All naturally occurring water, other than *sub-surface water*, which results from rainfall on or around the *site* or water flowing onto the *site*, including *water* that results from rainfall on the external *fabric* of the building and any other water that falls or flows onto the *fabric* from other sources.

Surface water seepage: *Water* escaping through the surface of the ground or a building element.

Swimming pool: Any excavation or structure containing water and principally used, or that is designed, manufactured or adapted to be principally used for swimming, wading, paddling, or the like, including a bathing or wading pool, or spa.

Tapered tread: A stair tread with a walking area that grows smaller towards one end.

NSW Temporary structure

TAS Temporary structure

Thermal comfort level: The level of thermal comfort in a building expressed as a *PMV* sensation scale.

Thermal energy load: The sum of the *heating load* and the *cooling load*.

Threshold ramp: A ramp located within or at a threshold.

Total R-Value: The sum of the *R-Values* of the individual component layers in a composite element including any building material, insulating material, airspace, thermal bridging and associated surface resistances, expressed in m².K/W.

Total Solar Reflectance (TSR): The complement of the solar absorptance.

Total System Solar Heat Gain Coefficient (SHGC): For the purposes of—

- (a) Volume One, the fraction of incident irradiance on a *wall-glazing construction* or a *roof light* that adds heat to a building's space; or
- (b) Volume Two, the fraction of incident irradiance on *glazing* or a *roof light* that adds heat to a building's space.

Total System U-Value: The thermal transmittance of the composite element allowing for the effect of any airspaces, thermal bridging and associated surface resistances, expressed in Wm⁻²K⁻¹.

Treatment area: An area within a *patient care area* such as an operating theatre and rooms used for recovery, minor procedures, resuscitation, intensive care and coronary care from which a patient may not be readily moved.

Uncontrolled discharge: Any unintentional release of fluid from a *plumbing* and *drainage* system and includes leakage and seepage.

Unique wall: For the purposes of F3V1 in Volume One and H2V1 in Volume Two, a wall which is neither a *cavity wall* nor a *direct fix cladding wall*.

Unobstructed opening: For the purposes of Section 8 of the ABCB Housing Provisions, a glazed area that a person

could mistake for an open doorway or clearway and walk into the glazed panel.

Unprotected water service: Unprotected water service means that the water service may be contaminated from a surrounding hazard.

Unreinforced masonry: Masonry that is not reinforced.

Vapour permeance: The degree that water vapour is able to diffuse through a material, measured in $\mu\text{g}/\text{N.s}$ and tested in accordance with the ASTM-E96 Procedure B – Water Method at 23°C 50% relative humidity.

Vapour pressure: The pressure at which water vapour is in thermodynamic equilibrium with its condensed state.

Ventilation opening: An opening in the *external wall*, floor or roof of a building designed to allow air movement into or out of the building by natural means including a permanent opening, an openable part of a *window*, a door or other device which can be held open.

Verification Method: A test, inspection, calculation or other method that determines whether a *Performance Solution* complies with the relevant *Performance Requirements*.

Vessel: For the purposes of Volume One and Part 10.2 of the ABCB Housing Provisions, an open, pre-formed, pre-finished concave receptacle capable of holding water, usually for the purpose of washing, including a basin, sink, bath, laundry tub and the like.

Visibility: The maximum distance at which an object of defined size, brightness and contrast can be seen and recognised.

Voltage: A difference of potential, measured in Volts (V) and includes *extra-low voltage* and *low voltage*.

Volume: In relation to—

- (a) a building — the volume of the total space of the building measured above the lowest floor (including, for a suspended floor, any subfloor space), over the enclosing walls, and to the underside of the roof covering; or
- (b) a *fire compartment* — the volume of the total space of the *fire compartment* measured within the inner finished surfaces of the enclosing *fire-resisting* walls and/or floors, and—
 - (i) if there is no *fire-resisting* floor at the base of the *fire compartment*, measured above the finished surface of the lowest floor in the *fire compartment*; and
 - (ii) if there is no *fire-resisting* floor at the top of the *fire compartment*, measured to the underside of the roof covering of the *fire compartment*; and
 - (iii) if there is no *fire-resisting* wall, measured over the enclosing wall and if there is no enclosing wall, includes any space within the *fire compartment* that has a use which contributes to the *fire load*; or
- (c) an *atrium* — the volume of the total space of the *atrium* measured within the finished surfaces of the bounding construction and if there is no bounding construction, within the *external walls*.

Waffle raft: A stiffened raft with closely spaced ribs constructed on the ground and with slab panels supported between ribs.

Wall-glazing construction: For the purposes of Section J in Volume One, the combination of wall and *glazing* components comprising the *envelope* of a building, excluding—

- (a) *display glazing*; and
- (b) opaque non-glazed openings such as doors, vents, penetrations and shutters.

Ward area: That part of a *patient care area* for resident patients and may contain areas for accommodation, sleeping, associated living and nursing facilities.

Water: For the purposes of Section F of Volume One, includes—

- (a) *surface water*; and
- (b) *sub-surface water*; and
- (c) *rainwater*; and
- (d) *stormwater*; and
- (e) *rising damp*; and
- (f) *water services overflow*; and
- (g) *surface water seepage*.

Water control layer: A *pliable building membrane* or the exterior cladding when no *pliable building membrane* is present.

Water services overflow: Water discharged from water service referred to in the Plumbing Code of Australia not primarily

Definitions

drained by a sanitary drainage system or sanitary plumbing system.

WaterMark Certification Scheme: The ABCB scheme for certifying and authorising *plumbing* and *drainage products*.

WaterMark Conformity Assessment Body (WMCAB): A conformity assessment body registered with and accredited by the *JAS-ANZ* to conduct evaluations leading to *product* certification and contracted with the *administering body* to issue the *WaterMark Licence*.

WaterMark Licence: A licence issued by a *WaterMark Conformity Assessment Body*.

WaterMark Schedule of Excluded Products: The list maintained by the *administering body* of *products* excluded from the *WaterMark Certification Scheme*.

WaterMark Schedule of Products: The list maintained by the *administering body* of *products* included in the *WaterMark Certification Scheme*, and the specifications to which the *products* can be certified.

Explanatory Information

The *WaterMark Schedule of Products* and the *WaterMark Schedule of Excluded Products* can be viewed on the ABCB website at www.abcb.gov.au.

Waterproof: The property of a material that does not allow water to penetrate through it.

Waterproofing system: A combination of elements that are *required* to achieve a *waterproof* barrier as *required* by H4D2 and H4D3 including substrate, *membrane*, bond breakers, sealants, finishes and the like.

Water resistant: The property of a system or material that restricts water movement and will not degrade under conditions of water.

Water sensitive materials: Materials that have an inherent capacity to absorb water vapour and include timber, plasterboard, plywood, oriented strand board and the like.

Waterstop: A vertical extension of the *waterproofing system* forming a barrier to prevent the passage of water in a floor or other horizontal surfaces.

Watertight: Will not allow water to pass from the inside to the outside of the component or joint and vice versa.

Weighted average: Is calculated across the *wetted surface area* of a pipe, pipe fitting or plumbing fixture.

WA WELS

Wet area: An area within a building supplied with water from a water supply system, which includes bathrooms, showers, laundries and *sanitary compartments* and excludes kitchens, bar areas, kitchenettes or domestic food and beverage preparation areas.

Wetted surface area: Is calculated by the total sum of diameter (D) in contact with *drinking water*.

Winders: Treads within a straight *flight* that are used to change direction of the stair (see Explanatory Figure 1).

Window: Includes a *roof light*, glass panel, glass block or brick, glass louvre, glazed sash, glazed door, or other device which transmits natural light directly from outside a building to the room concerned when in the closed position.

Yield: The mass of a combustion product generated during combustion divided by the mass loss of the test specimen as specified in the *design fire*.

Zone protection: The installation of a *backflow prevention device* at the point where a water service is connected to multiple fixtures or appliances, with no *backflow prevention device* installed as *individual protection* downstream of this point.

Schedule 2

Referenced documents

Referenced documents

PREVIEW DRAFT

Referenced documents

The Standards and other documents listed in this Schedule are referenced in the NCC.

PREVIEW DRAFT

Table 1: Schedule of referenced documents

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS ISO 717 Part 1	2024	Acoustics — Rating of sound insulation in buildings and of building elements — Airborne sound insulation. (See Note 1)	F7V1, F7V2, F7V3, F7V4, F7D3	H4V4	10.7.2	N/A
AS ISO 717 Part 2	2024	Acoustics — Rating of sound insulation in buildings and of building elements — Impact sound insulation	F7V1, F7V3, F7D4	N/A	N/A	N/A
AS 1056 Part 1	1991	Storage water heaters — General requirements (incorporating amendments 1, 2, 3, 4 and 5)	N/A	N/A	N/A	B2D2
AS/NZS 1170 Part 0	2002	Structural design actions — General principles (incorporating amendments 1, 3 and 4)	B1V1, B1D2, Spec 4	H1V1, H1D7	2.2.2	N/A
AS/NZS 1170 Part 1	2002	Structural design actions — Permanent, imposed and other actions (incorporating amendments 1 and 2)	B1D3	N/A	2.2.3, 2.2.4, 8.3.1, 11.2.2, 11.2.3, 11.3.4	N/A
AS/NZS 1170 Part 2	2021	Structural design actions — Wind actions (incorporating amendments 1 and 2)	B1D3, B1D4, Spec 4, F1V1, Schedule 1	H1D7, H2V1, Schedule 1	2.2.3, Schedule 1	Schedule 1
AS/NZS 1170 Part 3	2003	Structural design actions — Snow and ice actions (incorporating amendments 1 and 2)	B1D3	N/A	2.2.3	
AS 1170 Part 4	2024	Structural design actions — Earthquake actions in Australia	B1D3	H1D4, H1D5, H1D6, H1D9	2.2.3	N/A
AS 1191	2002	Acoustics — Method for laboratory measurement of airborne sound transmission insulation of building elements	Spec 29	N/A	N/A	N/A
AS 1273	1991	Unplasticized PVC (UPVC) downpipe and fittings for rainwater	N/A	N/A	7.4.2	N/A
AS 1288	2021	Glass in buildings — Selection and installation	B1D4, Spec 11, Spec 12	H1D8	8.3.1	N/A
AS 1289.6.3.3	1997	Methods of testing soils for engineering purposes — Method 6.3.3: Soil strength and consolidation tests — Determination of the penetration resistance of a soil — Perth sand penetrometer test (incorporating amendment 1)	N/A	N/A	4.2.4	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS 1397	2021	Continuous hot-dip metallic coated steel sheet and strip — Coatings of zinc and zinc alloyed with aluminium and magnesium	N/A	N/A	7.2.2	N/A
AS 1428 Part 1	2021	Design for access and mobility — General requirements for access — New building work	D3D11, D3D16, D3D22, D4D2, D4D3, D4D4, D4D7, D4D10, D4D11, D4D13, Spec 16, E3D10, F4D5, G4D5, Schedule 1	Schedule 1	Schedule 1	Schedule 1, E1D2
AS 1428 Part 1	2001	Design for access and mobility — General requirements for access — New building work	I2D7, I2D8, I2D10, I2D15	N/A	N/A	E1D2
AS 1428 Part 1 (Supplement 1)	1993	Design for access and mobility — General requirements for access — Buildings — Commentary	I2D2	N/A	N/A	N/A
AS 1428 Part 2	1992	Design for access and mobility — Enhanced and additional requirements — Buildings and facilities	I2D2, I2D3, I2D4, I2D5, I2D7, I2D10, I2D11, I2D12, I2D13, I2D14	N/A	N/A	E1D2
AS 1428 Part 4	1992	Design for access and mobility — Tactile ground surface indicators for the orientation of people with vision impairment	I2D11	N/A	N/A	N/A
AS/NZS 1428 Part 4.1	2009	Design for access and mobility — Means to assist the orientation of people with vision impairment — Tactile ground surface indicators (incorporating amendments 1 and 2)	D4D9	N/A	N/A	N/A
AS 1530 Part 1	2024	Methods for fire tests on building materials, components and structures — Combustibility test for materials (ISO 1182:2020, NEQ) (See Note 2)	A5G6, Schedule 1	A5G6, Schedule 1	Schedule 1	A5G6, Schedule 1
AS 1530 Part 2	1993	Methods for fire tests on building materials, components and structures — Test for flammability of materials (incorporating amendment 1)	A5G6, Schedule 1	A5G6, Schedule 1	Schedule 1	A5G6, Schedule 1

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS/NZS 1530 Part 3	1999	Methods for fire tests on building materials, components and structures — Simultaneous determination of ignitability, flame propagation, heat release and smoke release	A5G6, Schedule 1, Spec 3	A5G6, Schedule 1, Spec 3	Schedule 1	A5G6, Schedule 1, Spec 3
AS 1530 Part 4	2014	Methods for fire tests on building materials, components and structures — Fire resistance tests for elements of construction	C4D15, C4D16, Spec 9, Spec 10, Spec 13, Spec 14, Schedule 1, Spec 3	9.3.2, Schedule 1, Spec 3	Schedule 1	Schedule 1, Spec 3
AS 1530 Part 8.1	2018	Methods for fire tests on building materials, components and structures — Tests on elements of construction for buildings exposed to simulated bushfire attack — Radiant heat and small flaming sources (incorporating amendment 1) (See Note 3)	Spec 43	N/A	N/A	N/A
AS/NZS 1546 Part 1	2008	On-site domestic wastewater treatment units - Septic tanks	N/A	N/A	N/A	C3D2
AS/NZS 1546 Part 2	2008	On-site domestic wastewater treatment units - Waterless composting toilets	N/A	N/A	N/A	C3D3
AS 1546 Part 3	2017	On-site domestic wastewater treatment units - Secondary treatment systems (incorporating amendment 1)	N/A	N/A	N/A	C3D4
AS 1546 Part 4	2016	On-site domestic wastewater treatment units - Domestic greywater treatment systems	N/A	N/A	N/A	C3D5
AS/NZS 1547	2012	On-site domestic wastewater management	N/A	N/A	N/A	C3D6
AS 1562 Part 1	2018	Design and installation of sheet roof and wall cladding — Metal (See Note 4)	B1D4, F1D12, F1D15	H1D7	N/A	N/A
AS1562 Part 3	2006	Design and installation of sheet roof and wall cladding — Plastic	B1D4, F1D12	H1D7	N/A	N/A
AS 1657	2018	Fixed platforms, walkways, stairways and ladders — Design, construction and installation	D2D21, D2D22, D3D23, I1D6, I3D5	N/A	11.2.7, 11.3.3, 11.3.5	N/A
AS/NZS 1664 Part 1	1997	Aluminium structures — Limit state design (incorporating amendment 1)	B1D4	N/A	2.2.4	N/A
AS/NZS 1664 Part 2	1997	Aluminium structures — Allowable stress design (incorporating amendment 1)	B1D4	N/A	2.2.4	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS 1668 Part 1	2015	The use of ventilation and air conditioning in buildings — Fire and smoke control in buildings (incorporating amendment 1)	C3D13, C4D15, Spec 11, D2D12, Spec 19, E2D3, E2D4, E2D6, E2D7, E2D8, E2D9, E2D11, E2D12, E2D13, E2D16, E2D17, E2D19, F6D12, Spec 21, Spec 31	N/A	N/A	N/A
AS 1668 Part 2	2024	The use of ventilation and air conditioning in buildings — Mechanical ventilation in buildings	E2D12, F6V1, F6D6, F6D11, F6D12, F8D4, J6D4	H4V3, H4D7	10.8.2	N/A
AS 1668 Part 4	2024	The use of ventilation and air conditioning in buildings — Natural ventilation of buildings	F6D6, F6D11	H4D7	N/A	N/A
AS 1670 Part 1	2024	Fire detection, warning, control and intercom systems — System design, installation and commissioning — Fire (See Note 5)	C4D6, C4D7, C4D8, C4D9, C4D12, D3D26, E2D3, E2D10, G4D7, Spec 12, Spec 20, Spec 23, Spec 31	N/A	9.5.1	N/A
AS 1670 Part 3	2024	Fire detection, warning, control and intercom systems — System design, installation and commissioning — Fire alarm monitoring (See Note 5)	Spec 20, Spec 23	N/A	N/A	N/A
AS 1670 Part 4	2024	Fire detection, warning, control and intercom systems — System design, installation and commissioning — Emergency warning and intercom systems (See Note 5)	E3V2, E4D9, Spec 31	N/A	N/A	N/A
AS/NZS 1680 Part 0	2009	Interior lighting — Safe movement	F6D5	N/A	10.5.2	N/A
AS 1684 Part 2	2021	Residential timber-framed construction — Non-cyclonic areas (incorporating amendment 1)	B1D4, B1D5, F1D11	H1D6	2.2.5, 4.2.13, 5.6.6, 6.2.1, 6.3.6, 7.5.2, 7.5.3, 7.5.4, 10.2.19, 10.2.20	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS 1684 Part 3	2021	Residential timber-framed construction — Cyclonic areas (incorporating amendment 1)	B1D4, B1D5, F1D11	H1D6	2.2.5, 4.2.13, 5.6.6, 6.2.1, 6.3.6, 7.5.2, 7.5.3, 7.5.4, 10.2.19, 10.2.20	N/A
AS 1684 Part 4	2024	Residential timber-framed construction — Simplified — Non-cyclonic areas	B1D4, B1D5, F6D6, F1D11	H1D6	2.2.5, 4.2.13, 5.6.6, 6.2.1, 7.5.2, 7.5.3, 7.5.4, 10.2.19, 10.2.20	N/A
AS 1720 Part 1	2010	Timber structures — Design methods (incorporating amendments 1, 2 and 3)	B1V1, B1D4	H1D6	4.2.13, 5.3.3	N/A
AS/NZS 1720 Part 4	2019	Timber structures — Fire resistance of timber elements	Spec 1	Spec 1	N/A	Spec 1
AS 1720 Part 5	2015	Timber structures — Nailplated timber roof trusses (incorporating amendment 1)	B1D4	H1D6	N/A	N/A
AS 1735 Part 11	1986	Lifts, escalators and moving walks — Fire rated landing doors	C4D11	N/A	N/A	N/A
AS 1735 Part 12	1999	Lifts, escalators and moving walks — Facilities for persons with disabilities (incorporating amendment 1)	E3D8, I2D6	N/A	N/A	N/A
AS/NZS 1859 Part 4	2018	Reconstituted wood based panels — Specifications — Wet process fibreboard	N/A	N/A	7.5.3, 7.5.4	N/A
AS 1860 Part 2	2006	Particleboard flooring — Installation (incorporating amendment 1)	B1D4	H1D6	N/A	N/A
AS 1905 Part 1	2015	Components for the protection of openings in fire-resistant walls — Fire-resistant doorsets (incorporating amendment 1)	C4D7, Spec 12	N/A	N/A	N/A
AS 1905 Part 2	2005	Components for the protection of openings in fire-resistant walls — Fire-resistant roller shutters	Spec 12	N/A	N/A	N/A
AS 1926 Part 1	2024	Swimming pool safety — Safety barriers for swimming pools	G1D2, G1D4	H7D2	N/A	N/A
AS 1926 Part 2	2007	Swimming pool safety — Location of safety barriers for swimming pools (incorporating amendments 1 and 2)	G1D2	H7D2	N/A	N/A
AS 1926 Part 3	2010	Swimming pool safety — Water recirculation systems (incorporating amendment 1)	G1D2	H7D2	N/A	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS 2047	2014	Windows and external glazed doors in buildings (incorporating amendments 1 and 2) (See Note 6)	B1D4, F1V1, F1D14, J5D5	H1D8, H2V1	13.4.4	N/A
AS 2049	2002	Roof tiles (incorporating amendment 1)	F1D12	H1D7	N/A	N/A
AS 2050	2018	Installation of roof tiles	B1D4, F1D12	H1D7	7.3.2	N/A
AS 2118 Part 1	2017	Automatic fire sprinkler systems — General systems (incorporating amendments 1 and 2)	C1V3, Spec 17, Spec 18	N/A	N/A	N/A
AS 2118 Part 4	2012	Automatic fire sprinkler systems — Sprinkler protection for accommodation buildings not exceeding four storeys in height	Spec 17, Spec 18	N/A	N/A	B4D3
AS 2118 Part 5	2008 (R 2020)	Automatic fire sprinkler systems - Home fire sprinkler systems	N/A	N/A	N/A	B4D3
AS 2118 Part 6	2024	Automatic fire sprinkler systems — Combined sprinkler and hydrant systems in multistorey buildings	E1D2, Spec 17	N/A	N/A	B4D3
AS 2159	2009	Piling — Design and installation (incorporating amendment 1)	B1D4	H1D12	N/A	N/A
AS/NZS 2179 Part 1	2014	Specifications for rainwater goods, accessories and fasteners — Metal shape or sheet rainwater goods, and metal accessories and fasteners	N/A	N/A	7.4.2	N/A
AS 2200	2006	Design charts for water supply and sewerage (incorporating amendment 1)	N/A	N/A	N/A	C2V4
AS/NZS 2269 Part 0	2012	Plywood — Structural — Specifications (incorporating amendment 1)	N/A	N/A	7.5.4	N/A
AS/NZS 2293 Part 1	2018	Emergency lighting and exit signs for buildings — System design, installation and operation (incorporating amendment 1)	E4D4, E4D8, Spec 25, I3D15	N/A	N/A	N/A
AS 2312 Part 1	2014	Guide to the protection of structural steel against atmospheric corrosion by the use of protective coatings — Paint coatings	N/A	N/A	6.3.9	N/A
AS/NZS 2312 Part 2	2014	Guide to the protection of structural steel against atmospheric corrosion by the use of protective coatings — Hot dip galvanizing	N/A	N/A	6.3.9	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS/NZS 2327	2017	Composite structures — Composite steel-concrete construction in buildings (incorporating amendment 1)	B1D4, Spec 1	Spec 1	2.2.4	Spec 1
AS 2419 Part 1	2021	Fire hydrant installations — System design, installation and commissioning	C3D13, E1D2, Spec 18, I3D9	N/A	N/A	B4D4
AS 2441	2005	Installation of fire hose reels (incorporating amendment 1)	E1D3	N/A	N/A	B4D5
AS 2444	2001	Portable fire extinguishers and fire blankets — Selection and location	E1D3, E1D14, I3D11	N/A	N/A	N/A
AS 2665	2001	Smoke/heat venting systems — Design, installation and commissioning	Spec 22, Spec 31	N/A	N/A	N/A
AS 2699 Part 1	2020	Built-in components for masonry construction — Wall ties	C2D10	N/A	5.6.5	N/A
AS 2699 Part 3	2020	Built-in components for masonry construction — Lintels and shelf angles (durability requirements)	C2D10	N/A	5.6.7	N/A
AS 2870	2011	Residential slabs and footings	F1D7	H1D4, H1D5	3.4.2, 4.2.2, 4.2.6, 4.2.8, 4.2.11, 4.2.14, 4.2.15, 10.2.9	N/A
AS/NZS 2890 Part 6	2009	Parking facilities — Offstreet parking for people with disabilities	D4D6	N/A	N/A	N/A
AS/NZS 2904	1995	Damp-proof courses and flashings (incorporating amendments 1 and 2)	F1D6	N/A	5.7.3, 7.5.6, 12.3.3	N/A
AS/NZS 2908 Part 1	2000	Cellulose-cement products — Corrugated sheets	B1D4	N/A	N/A	N/A
AS/NZS 2908 Part 2	2000	Cellulose-cement products — Flat sheets	F1D5, Schedule 1	Schedule 1	7.5.3, 7.5.4, 7.5.5, 10.2.9, 10.2.10, Schedule 1	Schedule 1
AS/NZS 2918	2018	Domestic solid fuel burning appliances — Installation (See Note 9)	G2D2	H7D5	12.4.4, 12.4.5	N/A
AS/NZS 3013	2005	Electrical installations — Classification of the fire and mechanical performance of wiring system elements	C3D14	N/A	N/A	N/A
AS/NZS 3500 Part 0	2021	Plumbing and drainage — Glossary of terms	A1G4	A1G4	N/A	A1G4

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS/NZS 3500 Part 1	2018	Plumbing and drainage — Water services	N/A	N/A	N/A	B5D6
AS/NZS 3500 Part 1	2025	Plumbing and drainage — Water services	N/A	N/A	N/A	B1D3, B1D5, B1D6, B3D3, B5V1, B5D2, B5D3, B5D4, , B6D2, B6D3, B6D5, B6D6, B7D3, B7D6, B7D7
AS/NZS 3500 Part 2	2025	Plumbing and drainage — Sanitary plumbing and drainage	G1D5	H2D2	N/A	C1D3, C1V1, C1V2, C2V2, C2V4, C2D3, C2D4, C3D7
AS/NZS 3500 Part 3	2025	Plumbing and drainage — Stormwater drainage	F1D3	H2D2, H2D6	7.4.3	B7D4, B7D5
AS/NZS 3500 Part 4	2025	Plumbing and drainage — Heated water services	N/A	N/A	N/A	B2D2, B2D6, B2D7, B2D8, B2D9, B2D11
AS 3600	2018	Concrete structures (incorporating amendments 1 and 2)	B1V1, B1D4, Spec 1, F1D5	H1D4, Spec 1	3.4.2, 4.2.6, 4.2.10, 4.2.13, 5.3.3, 10.2.9	Spec 1
AS 3660 Part 1	2014	Termite management — New building work (incorporating amendment 1)	B1D4, F1D6	N/A	3.4.1, 3.4.2	N/A
AS 3660 Part 3	2014	Termite management — Assessment criteria for termite management systems	N/A	N/A	3.4.2	N/A
AS/NZS 3666 Part 1	2011	Air-handling and water systems of buildings — Microbial control — Design, installation and commissioning	F4D10, F6D6	N/A	N/A	N/A
AS 3700	2018	Masonry structures	B1D4, F1D15, Spec 1, Spec 2	H1D5, H2D4, Spec 1, Spec 2	5.3.3, 5.4.2, 5.6.3, 6.3.6, 10.2.9, 10.2.19, 10.2.20, 12.4.3	Spec 1, Spec 2
AS 3740	2021	Waterproofing of domestic wet areas	F2D2	H4D2, H4D3	10.2.20	N/A
AS 3786	2023	Smoke alarms using scattered light, transmitted light or ionization (See Note 7)	Spec 20	N/A	9.5.1	N/A
AS/NZS 3823 Part 1.2	2012	Performance of electrical appliances — Air conditioners and heat pumps — Ducted air conditioners and air-to-air heat pumps — Testing and rating for performance	Spec 33, J6D12, Spec 48	N/A	N/A	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS/NZS 3823 Part 1.4	2012	Performance of electrical appliances — Airconditioners and heat pumps	Spec 48	N/A	N/A	N/A
AS 3959	2018	Construction of buildings in bushfire-prone areas (incorporating amendments 1 and 2)	C2D14, F8D5, F8D6, G5D2, G5D3, Spec 43	H7D4	10.8.3, 10.8.4	B1D4, B2D10, B3D4, B6D7, C1D4, C2D5
AS/NZS 4020	2018	Testing of products for use in contact with drinking water (incorporating amendment 1)	A5G4	A5G4	N/A	A5G4
AS 4055	2024	Wind loads for housing	Schedule 1	H1D6, H1D8, Schedule 1	2.2.3, Schedule 1	Schedule 1
AS 4072 Part 1	2005	Components for the protection of openings in fire-resistant separating elements — Service penetrations and control joints (incorporating amendment 1)	C4D15, C4D16	N/A	9.3.2	N/A
AS 4100	2020	Steel structures	B1D4, Spec 1	H1D6, Spec 1	4.2.13, 5.6.7	Spec 1
AS 4200 Part 1	2017	Pliable building membranes and underlays — Materials (incorporating amendment 1)	F1D13, F8D3, Spec 36, Schedule 1	Schedule 1	7.3.4, 7.5.2, 7.5.8, 10.8.1, Schedule 1	Schedule 1
AS 4200 Part 2	2017	Pliable building membranes and underlays — Installation requirements (incorporating amendments 1 and 2)	F1D13, F8D3	N/A	10.8.1	N/A
AS/NZS 4234	2021	Heated water systems — Calculation of energy consumption	Spec 45	N/A	N/A	B2D2
AS 4254 Part 1	2021	Ductwork for air-handling systems in buildings — Flexible duct	Spec 7, J6D7	H3D2	13.7.4	N/A
AS 4254 Part 2	2012	Ductwork for air-handling systems in buildings — Rigid duct	Spec 7, J6D5, J6D7	N/A	13.7.4	N/A
AS/NZS 4284	2008	Testing of building facades	F1V1	H2V1	N/A	N/A
AS/NZS 4505	2012	Garage doors and other large access doors (incorporating amendment 1)	B1D4	N/A	2.2.4	N/A
AS 4552	2005	Gas fired water heaters for hot water supply and/or central heating	N/A	N/A	N/A	B2D2
AS 4586	2013	Slip resistance classification of new pedestrian surface materials (incorporating amendment 1) (See Note 8)	D3D11, D3D14, D3D15, Spec 27	N/A	11.2.4	N/A
AS 4597	1999	Installation of roof slates and shingles (Non-interlocking type)	B1D4, F1D12	H1D7	N/A	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS/NZS 4600	2018	Cold-formed steel structures	B1D4, Spec 1	H1D6, Spec 1	5.3.3, 6.3.6	Spec 1
AS 4654 Part 1	2012	Waterproofing membranes for external above-ground use — Materials	F1D7	H2D8	N/A	N/A
AS/NZS 4858	2004	Wet area membranes	N/A	N/A	10.2.8	N/A
AS 4654 Part 2	2012	Waterproofing membranes for external above-ground use — Design and installation	C2D14, F1D6, F1D5	H2D8	N/A	N/A
AS 4678	2002	Earth-retaining structures	N/A	H1D3	N/A	N/A
AS 4773 Part 1	2015	Masonry in small buildings — Design (incorporating amendment 1)	N/A	H1D5, H2D4	5.6.3, 12.4.3	N/A
AS 4773 Part 2	2015	Masonry in small buildings — Construction (incorporating amendment 1)	N/A	H1D5, H2D4	5.6.3, 12.4.3	N/A
AS/NZS 4858	2004	Wet area membranes	N/A	N/A	10.2.8	N/A
AS/NZS 4859 Part 1	2018	Thermal insulation materials for buildings — General criteria and technical provisions (incorporating amendment 1)	J4D3, J6D6, J6D9	N/A	13.2.2, 13.7.2, 13.7.4	N/A
AS/NZS 4859 Part 2	2018	Thermal insulation materials for buildings — Design	J3D8, J4D3, Spec 36, Spec 37	N/A	13.2.5, 13.2.6	N/A
AS 5113	2016	Classification of external walls of buildings based on reaction-to-fire performance (incorporating amendment 1)	C1V3	N/A	N/A	N/A
AS 5146 Part 1	2015	Reinforced autoclaved aerated concrete — Structures (incorporating amendment 1)	B1D4	H1D7	N/A	N/A
AS 5146 Part 3	2018	Reinforced autoclaved aerated concrete — Construction	B1D4, F1D15	N/A	N/A	N/A
AS 5216	2021	Design of post-installed and cast-in fastenings in concrete	B1D4	N/A	2.2.4	N/A
AS 5346	2023	Exterior finish and insulation systems	N/A	H1D7	N/A	N/A
AS/NZS 5601 Part 1	2022	Gas installations — General installations (incorporating amendments 1 and 2)	J1V4	H6V3	N/A	N/A
AS 5637 Part 1	2015	Determination of fire hazard properties — Wall and ceiling linings	A5G6, Spec 7, Schedule 1	A5G6, Schedule 1	Schedule 1	A5G6, Schedule 1
AS/NZS ISO 5151	2023	Non-ducted air conditioners and heat pumps — Testing and rating for performance	Spec 48	N/A	N/A	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
AS ISO 9239 Part 1	2003	Reaction to fire tests for floorings — Determination of the burning behaviour using a radiant heat source	A5G6, Schedule 1	A5G6, Schedule 1	Schedule 1	A5G6, Schedule 1
AS/NZS ISO 9972	2015	Thermal performance of buildings — Determination of air permeability of buildings — Fan pressurization method	J1V4	H6V3	N/A	N/A
AS/NZS ISO 13256.1	2023	Water source heat pumps — Testing and rating for performance — Water-to-air and brine-to-air heat pumps	J6D12	N/A	N/A	N/A
AIRAH-DA07	2021	Criteria for moisture control design analysis in buildings	F8V1	H4V5	N/A	N/A
AIRAH-DA09	1998	Air conditioning load estimation	Spec 35	N/A	N/A	N/A
AIRAH-DA28	2011	Building management and control systems	Spec 34	N/A	N/A	N/A
ANSI/ASHRAE Standard 55	2013	Thermal environmental conditions for human occupancy	Schedule 1	Schedule 1	Schedule 1	Schedule 1
ANSI/ASHRAE Standard 140	2007	Standard method of test for the evaluation of building energy analysis computer programs	J1V1, J1V2, J1V3	H6V2	N/A	N/A
ASTM E2073-10	2010	Standard Test Method for Photopic Luminance of Photoluminescent (Phosphorescent) Markings	Spec 25	N/A	N/A	N/A
ASTM E72-15	2015	Standard Test Methods of Conducting Strength Tests of Panels for Building Construction	Spec 6	N/A	N/A	N/A
ASTM E695-03	2003	Standard Test Method of Measuring Relative Resistance of Wall, Floor and Roof Construction to Impact Loading	Spec 6	N/A	N/A	N/A
ASTM E96	2016	Standard Test Methods for Water Vapor Transmission of Materials	Schedule 1	Schedule 1	10.8.1, Schedule 1	Schedule 1
ASTM-E1980-11	2019	Standard Practice for Calculating Solar Reflectance Index of Horizontal and Low Sloped Opaque Surfaces	Schedule 1	N/A	N/A	N/A
AHRI 460	2005	Performance rating of remote mechanical-draft air-cooled refrigerant condensers	J6D13	N/A	N/A	N/A
AHRI 551/591	2015	Performance rating of water-chilling and heat pump water-heating packages using the vapor compression cycle.	Spec 33, J6D10, J6D11, Spec 47	N/A	N/A	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
EN14511-2	2022	Air-conditioners, liquid chilling packages and heat pumps for space heating and cooling and process chillers, with electricity driven compressors — Test conditions	J6D10	N/A	N/A	N/A
EN14825	2022	Air conditioners, liquid chilling packages and heat pumps, with electrically driven compressors, for space heating and cooling, commercial and process cooling — Testing and rating at part load conditions and calculation of seasonal performance	J6D10	N/A	N/A	N/A
ABCB	2022	Fire Safety Verification Method	C1V4	N/A	N/A	N/A
ABCB	2022	Housing Provisions Standard	N/A	Throughout	Throughout	N/A
ABCB	2025	Livable Housing Design Standard	G7D2	H4D3, H8D2	3.3.3, 11.2.3	N/A
ABCB	2011	Protocol for Structural Software, Version 2011.2	B1D5	H1D6	2.2.5	N/A
ABCB	2012	Standard for Construction of Buildings in Flood Hazard Areas, Version 2012.3	B1D6	H1D10	N/A	N/A
ABCB	2022	Standard for NatHERS Heating and Cooling Load Limits, Version 2022.1	J3D3	Spec 42	N/A	N/A
ABCB	2022	Standard for Whole-of-Home Efficiency Factors	J3D14	N/A	13.6.2	N/A
CIBSE Guide A	2015	Environmental design	Spec 34, Spec 35, J4D3, J4D7	N/A	N/A	N/A
N/A	2002	Disability Standards for Accessible Public Transport	F4D12, I2D1	N/A	N/A	N/A
N/A	2010	Education and Care Services National Law Act (Vic)	Schedule 1	Schedule 1	Schedule 1	Schedule 1
European Union Commission Regulation 547/2012	2012	Eco-design requirements for water pumps	J6D8	N/A	N/A	N/A
European Union Commission Regulation 622/Annex II, point 2	2012	Eco-design requirements for glandless standalone circulators and glandless circulators integrated in products	J6D8	N/A	N/A	N/A

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
FPAA101D	2021	Automatic Fire Sprinkler System Design and Installation — Drinking Water Supply	C1V3, C2D6, C2D13, C3D2, C3D7, C3D8, C4D6, C4D7, C4D8, C4D9, C4D12, Spec 5, Spec 7, D2D4, D2D17, D3D26, D3D30, E2D8, E2D9, E2D13, E2D14, E2D15, E2D16, E2D17, E2D19, E2D20, Spec 17, Spec 18, Spec 20, G3D1, G3D6, Spec 31, I1D2, Schedule 1	Schedule 1	Schedule 1	B4D3, Schedule 1, B1D5
FPAA101H	2018	Automatic Fire Sprinkler System Design and Installation — Hydrant Water Supply (incorporating amendment 1)	C1V3, C2D6, C2D13, C3D2, C3D7, C3D8, Spec 5, Spec 7, Spec 17, Spec 18, E2D8, E2D9, E2D13, E2D14, E2D15, E2D16, E2D17, E2D19, E2D20, Spec 20, G3D1, G3D6, Spec 31, I1D2	N/A	N/A	B4D3
ISO 140 Part 6	1998E	Acoustics — Measurement of sound insulation in buildings and of building elements — Laboratory measurements of impact sound insulation of floors	Spec 29	N/A	N/A	N/A
ISO 540	2008	Hard coal and coke — Determination of ash fusibility	Spec 13	N/A	N/A	N/A
ISO 8336	1993E	Fibre-cement flat sheets	Schedule 1	Schedule 1	7.5.3, 7.5.4, 7.5.5, Schedule 1	Schedule 1

No.	Date	Title	Volume One	Volume Two	Housing Provisions	Volume Three
ISO 25745 Part 2	2015	Energy performance of lifts, escalators and moving walks: Energy calculation and classification for lifts (elevators)	J7D8	N/A	N/A	N/A
NASH Standard	2021	Steel Framed Construction in Bushfire Areas	N/A	H7D4	N/A	N/A
NASH Standard Part 1	2005	Residential and Low Rise Steel Framing — Design Criteria (incorporating amendments A, B and C)	B1D4	H1D6	N/A	N/A
NASH Standard Part 2	2014	Residential and Low Rise Steel Framing — Design Solutions (incorporating amendment A)	B1D4, B1D5, F1D11	H1D6	2.2.5, 6.2.1, 6.3.6, 7.5.2, 7.5.3, 7.5.4, 10.2.19, 10.2.20	N/A
NSF/ ANSI/ CAN 372	2024	Drinking Water System Components - Lead Content (See Note 10)	A5G4	A5G4	N/A	A5G4
N/A	N/A	Northern Territory Deemed to Comply Standards Manual	N/A	N/A	2.2.4	N/A
SA TS 5344	2019	Permanent labelling for Aluminium Composite Panel (ACP) products	A5G8	A5G8	N/A	A5G8
SA TS 5367	2021	Photoluminescent exit signage — Hybrid photoluminescent signage — Product specification, installation and operation	E4D8	N/A	N/A	N/A
TN 61	N/A	Cement Concrete and Aggregates Australia — Technical note — Articulated walling	N/A	H1D4	N/A	N/A
WMK NOD 2021/4	2021	WaterMark Notice of Direction 2021/4 Certification transition arrangements for Lead Free plumbing products	A5G4	A5G4	N/A	A5G4

Table Notes

(1) For AS ISO 717.1:

- (a) Test reports based on AS 1276—1979 and issued prior to AS/NZS 1276.1—1999 being referenced in the NCC remain valid.
- (b) The STC values in reports based on AS 1276—1979 must be considered to be equivalent to Rw values.
- (c) Test reports based on AS/NZS 1276.1 prepared after the NCC reference date for AS/NZS 1276.1—1999 must be based on that version.
- (d) Test reports based on ISO 717-1—1996 and issued prior to AS/NZS ISO 717.1—2004 being referenced in the NCC remain valid.
- (e) Test reports based on ISO 717.1—2004 and issued prior to AS ISO 717.1:2024 being referenced in the NCC remain valid.
- (f) Reports based on AS ISO 717.1 relating to tests carried out after the NCC reference date for AS ISO 717.1—2024 must relate to the amended Standard.

(2) For AS 1530.1, tests carried out based on AS 1530.1:1994 and issued prior to AS 1530.1:2024 being referenced in the NCC remain valid. Reports relating to tests carried out after the NCC reference date for AS 1530.1:2024 must relate to the revised Standard.

- (3) For AS 1530.8.1, tests carried out based on AS 1530.8.1:2018 and issued prior to AS 1530.8.1:2018 Amendment 1 being referenced in the NCC remain valid. Reports relating to tests carried out after the NCC reference date for AS 1530.8.1:2018 Amendment 1 must relate to the revised Standard.
- (4) For AS 1562.1, tests carried out based on AS 1562.1—1992 and issued prior to AS 1562.1—2018 being referenced in the NCC remain valid. Reports relating to tests carried out after the NCC reference date for AS 1562.1 must relate to the revised Standard.
- (5) For AS 1670.1, AS 1670.3 and AS 1670.4, notwithstanding A4G1(6), the editions of the documents listed in Table 1.8 of AS 1670.1, AS 1670.3 and AS 1670.4 may be used to meet the requirements of AS 1670.1, AS 1670.3 and AS 1670.4 as applicable.
- (6) For AS 2047:
- (a) Tests carried out under earlier editions of AS 2047 remain valid.
 - (b) Reports based on AS 2047 relating to tests carried out after the NCC reference date for AS 2047—2014 Amendment 2 must relate to the amended Standard.
- (7) For AS 3786:
- (a) Tests carried out under AS 3786—2014 Amendment 1 and Amendment 2 remain valid.
 - (b) Reports based on AS 3786—2014 Amendment 1 and issued prior to AS 3786—2014 Amendment 2 being referenced in the NCC remain valid.
 - (c) Reports based on AS 3786—2014 Amendment 2 and issued prior to AS 3786:2023 being referenced in the NCC remain valid.
 - (d) Reports based on AS 3786 relating to tests carried out after the NCC reference date for AS 3786:2023 must relate to the amended Standard.
- (8) For AS 4586:
- (a) Test reports based on the 2004 edition of AS/NZS 4586 and issued prior to the 2013 edition of AS 4586 being referenced in the NCC remain valid.
 - (b) Test reports prepared after the NCC reference date of the 2013 edition of AS 4586 must be based on that version.
 - (c) For the purposes of assessing compliance, the slip-resistance classifications of V, W and X in reports based on the 2004 edition of AS/NZS 4586 may be considered to be equivalent to slip-resistance classifications of P5, P4 and P3 respectively in the 2013 edition of AS 4586.
 - (d) Test reports based on Appendix D of AS 4586—2013 and issued prior to the NCC reference date for AS 4586—2013 (incorporating Amendment 1) remain valid.
 - (e) Test reports based on Appendix D of AS 4586—2013 and prepared after the NCC reference date for AS 4586—2013 (incorporating Amendment 1) must be based on that version.
- (9) Tests carried out based on AS/NZS 2918—2001 and issued prior to AS/NZS 2918—2018 being referenced in the NCC remain valid. Reports relating to tests carried out after the NCC reference date for AS/NZS 2918 must relate to the revised Standard.
- (10) For NSF/ANSI/CAN 372, tests carried out under the 2020 and 2022 editions of NSF/ANSI/CAN 372 remain valid.

NSW Table 1

NT Table 1

QLD Table 1

SA Table 1

TAS Table 1

VIC Table 1

WA Table 1

PREVIEW DRAFT

© Australian Building Codes Board 2026

The National Construction Code can be accessed
free online at ncc.abcb.gov.au by registration

abcb.gov.au